

Received August 13, 2019, accepted August 25, 2019, date of publication September 19, 2019, date of current version September 30, 2019.

Digital Object Identifier 10.1109/ACCESS.2019.2941551

An Ultra-Wideband Circularly Polarized Asymmetric-S Antenna With Enhanced Bandwidth and Beamwidth Performance

WEI HE¹, LONG ZHANG¹, (Member, IEEE), YEJUN HE¹, (Senior Member, IEEE), SAI-WAI WONG¹, (Senior Member, IEEE), CHUNXU MAO², (Member, IEEE), PENG CHU³, (Member, IEEE), LEI GE⁴, (Senior Member, IEEE), AND STEVEN GAO⁵, (Fellow, IEEE)

¹College of Electronics and Information Engineering, Shenzhen University, Shenzhen 518060, China

²Electrical Engineering Department, The Pennsylvania State University, University Park, PA 16802, USA

³College of Electronic and Optical Engineering, Nanjing University of Posts and Telecommunications, Nanjing 210023, China

⁴Institute of Microscale Optoelectronics (IMO), Shenzhen University, Shenzhen 518060, China

⁵School of Engineering and Digital Arts, University of Kent, Canterbury CT2 7NT, U.K.

Corresponding author: Long Zhang (long.zhang@szu.edu.cn)

This work was supported in part by the National Natural Science Foundation of China under Grant 61372077, Grant 61801299, and Grant 61871433, in part by the Shenzhen University Research Startup Project of New Staff under Grant 2019117, and in part by the Shenzhen Science and Technology Programs under Grant JCYJ 20170302150411789, Grant JCYJ 20170302142515949, Grant GCZX 2017040715180580, Grant GJHZ 20180418190529516, and Grant JSGG 20180507183215520.

ABSTRACT This paper introduces an ultra-wideband circularly polarized (CP) asymmetric-S antenna with wide axial ratio beamwidth (ARBW) for C-band applications. The proposed antenna is realized by bending a linearly polarized dipole into asymmetric-S shape with variable trace width, which achieves CP radiation. Unlike the reported symmetric-S antenna, the proposed antenna is constituted with two unequal curved arms to enhance the bandwidth and beamwidth performances. Compared with the symmetric-S antenna, the proposed antenna demonstrates much wider AR bandwidth and wider ARBW over broader frequency range. A prototype is fabricated to verify the design principle. The measured and simulated results are very consistent and both indicate that the proposed antenna has a wide impedance bandwidth (VSWR < 2) of 70.2% (3.58 to 7.46 GHz), and a wide 3-dB AR bandwidth of 84.8% (2.75 to 6.8 GHz). Moreover, maximum ARBW of 153° is achieved, and a 3-dB ARBW of more than 100° is maintained within a wide operation bandwidth of 46.3% (3.65-5.85 GHz).

INDEX TERMS Circularly polarized antenna, wide axial ratio beamwidth, ultra-wideband antenna.

I. INTRODUCTION

Due to the advantages of the mitigation of multipath fading and immunity of polarization mismatching, the circularly polarized (CP) antennas are widely used in wireless systems, such as the global positioning system (GPS) [1], radio frequency identification (RFID) [2] and wireless local network (WLAN) [3]. In recent decades, extensive research works on improving the axial ratio (AR) bandwidth of CP antennas were reported. Wideband cross-dipole antennas with good AR performance were proposed [4]–[6]. In [4], the width of the cross-dipole arms was properly widened to obtain

the wide 3-dB AR bandwidth. Further, by adding parasitic elements nearing the cross-dipole arms, a wider 3-dB AR bandwidth was obtained [5], [6]. Other antennas, such as the stacked patch antenna [7], the sequentially rotated microstrip patch antenna array [8], and the hybrid dielectric resonator antenna [9], [10], are also good candidates for wideband CP operation.

Apart from the wide CP operation bandwidth, CP antennas with wide axial ratio beamwidth (ARBW) are also preferred, especially for the global navigation satellite system (GNSS) to secure stable communication links [11], [12]. A circular microstrip patch antenna coupled by a microstrip feed-line through a modified L-shaped aperture slot could achieve a wide ARBW of 190° from 27.5 to 30.1 GHz (9%).

The associate editor coordinating the review of this manuscript and approving it for publication was Qammer Hussain Abbasi.

Nonetheless, its AR bandwidth was relatively narrow (12.2%) [13]. It was demonstrated that a wide ARBW of about 130° could be obtained by using a metallic cavity instead of the traditional planar ground plane [14]. In addition, combining magneto-electric dipole with crossed dipoles also led to a wide ARBW [15], [16]. In [15], a 3-dB ARBW of about 162° within the frequency range of 1.85 to 2.25 GHz (19.5%) was achieved, and a 3-dB ARBW of 165° was realized from 1.45 to 1.75 GHz (15.8%) in [16]. In [17], a wide-band magneto-electric dipole with 32.8% AR bandwidth was reported, and over 85° ARBW could be realized from 1.85 to 2.1 GHz (15.4%). Nevertheless, most of the aforementioned antennas maintain wide ARBW within a relatively narrow frequency range.

In this paper, we propose a novel asymmetric-S antenna, which has ultra wide AR bandwidth and wide ARBW simultaneously. The proposed asymmetric-S dipole antenna is designed with two unequal-length curved arms, which improves both the AR bandwidth and ARBW performance of the antenna. Compared with the symmetric-S dipole [18], [19], the 3-dB AR bandwidth of the proposed antenna is increased from 42% to 84.8%, while the proposed antenna can keep a broad ARBW ($>100^\circ$) over wider frequency range (from 35% to 46.3%). Moreover, maximum ARBW of 153° is achieved by the presented design while the symmetric-S antenna can realize 140° ARBW at most.

II. ANTENNA DESIGN AND ANALYSIS

A. ANTENNA GEOMETRY

Figure 1 shows the geometry of the proposed asymmetric-S antenna. As shown, the antenna consists of two unequal curved arms and is printed on the bottom layer of a Rogers RO4003C substrate with a size of $w_1 \times L_1$ and a thickness of 0.508 mm. Each arm of the proposed antenna can be obtained by subtracting a small ellipse from a bigger one. To feed the antenna, an integrated balun, which transforms the unbalanced microstrip feed to balanced slot line feed, is utilized. The balun is printed on both layers of a 0.813 mm thick Rogers RO4003C substrate which has a size of $w_1 \times H_1$. To obtain a unidirectional radiation pattern, a ground plane with $L_{rf} \times L_{rf}$ size is placed below the antenna at a distance of H_2 . Optimal antenna performance can be achieved by choosing the proper distance between the antenna and the ground plane. As shown in Fig. 1 (b), the major axis radius of the four ellipses are denoted by R_i ($i = 1, 2, 3, 4$) while the minor axis radius is denoted by R_i/a . In addition, b denotes the ratio of R_1/R_2 and R_3/R_4 . The two smaller ellipses are clockwise rotated along point O or O_1 with an angle of α and then are subtracted from the two bigger ellipses. Since the traveling wave current is excited along the curved arms, ultra-wideband CP radiation and wide ARBW can be realized. The detailed operating principle of CP radiation for such kind of antenna can be found in our previous work [18], [19] and is not presented here again for brevity. The optimal geometric dimensions of the proposed antenna are shown in Table 1.

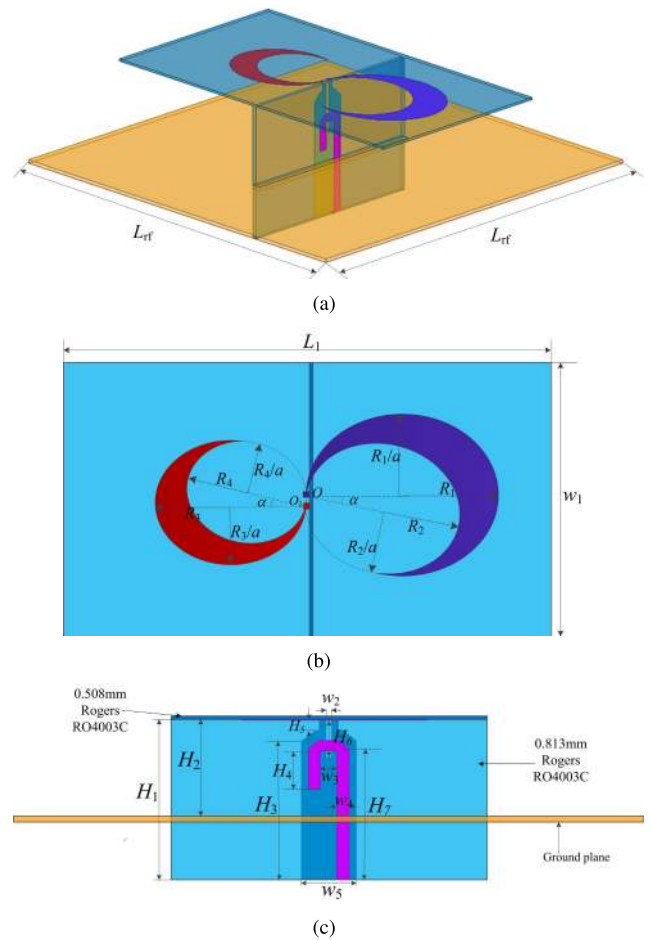


FIGURE 1. Geometry of the proposed antenna; (a) 3D view; (b) Top view of antenna radiator; (c) Side view.

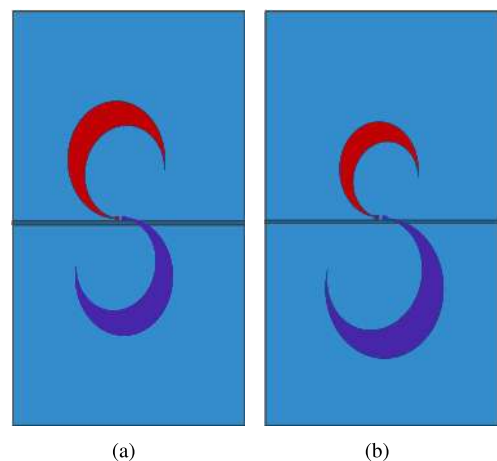


FIGURE 2. (a) The reference antenna; (b) The proposed antenna.

B. THE MECHANISM OF PERFORMANCE IMPROVEMENT

To illustrate the advantages of the proposed design approach, a comparison between the symmetric-S antenna mentioned in [18] and proposed antenna is conducted in terms of bandwidth and beamwidth performance. Fig. 2 shows

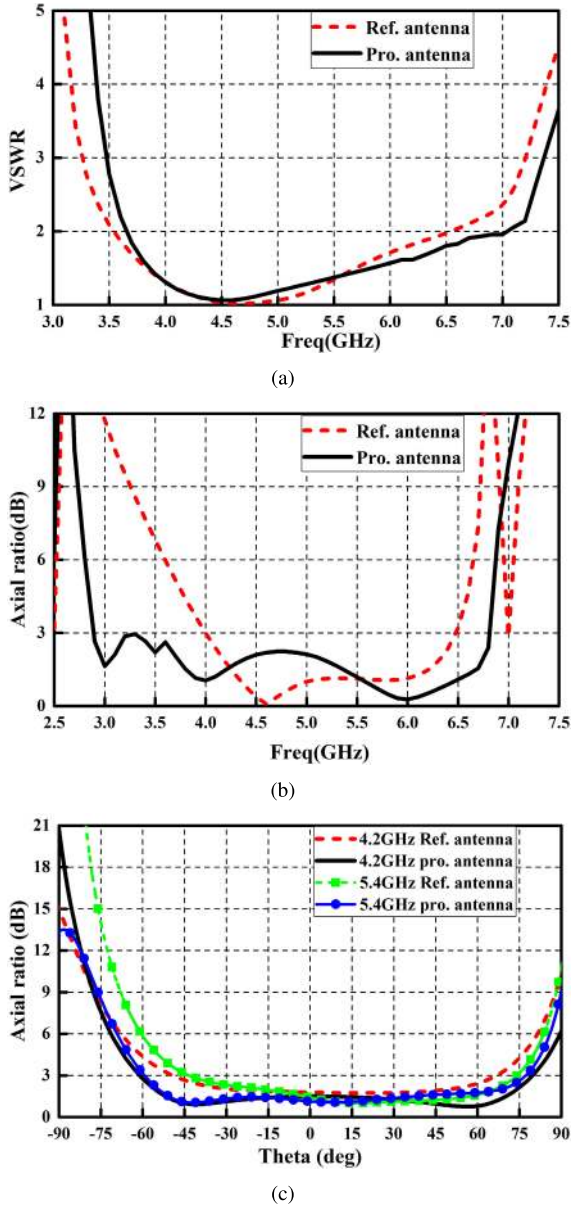


FIGURE 3. VSWR, AR and ARBW of the reference antenna and the proposed antenna. (a) VSWR, (b) AR, (c) ARBW.

TABLE 1. Antenna parameters (mm).

w_1	w_2	w_3	w_4	w_5	L_1	L_{rf}	R_1	R_2	α
45	0.8	2.46	1.8	8	80	90	16	10	10
a	b	H_1	H_2	H_3	H_4	H_5	H_6	H_7	
1.2	1.25	30	18	26	6.23	2	11.5	21.5	

the geometry comparison between the reference antenna (symmetric-S antenna) and the proposed antenna. As shown in Fig. 2, one arm of the proposed antenna is smaller than the arm of the reference antenna, while the other arm is larger than the reference antenna. The comparison between the reference antenna and the proposed

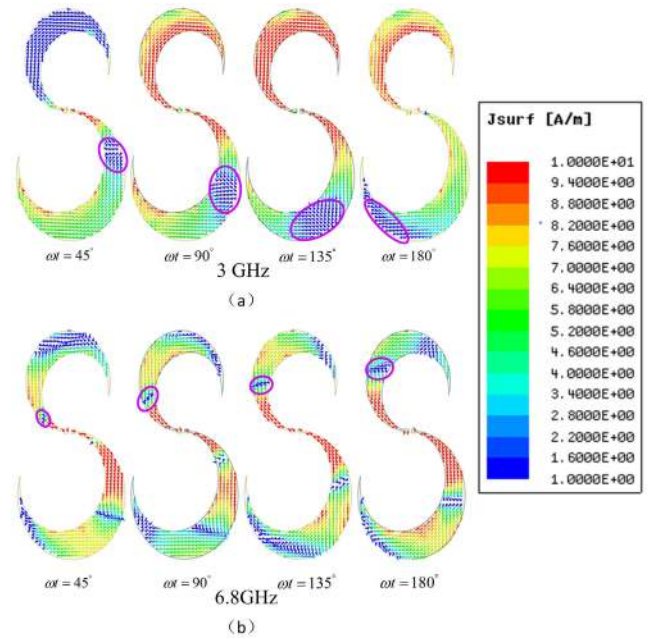


FIGURE 4. The surface current distribution on curved arms at different frequencies. (a) 3 GHz. (b) 6.8 GHz.



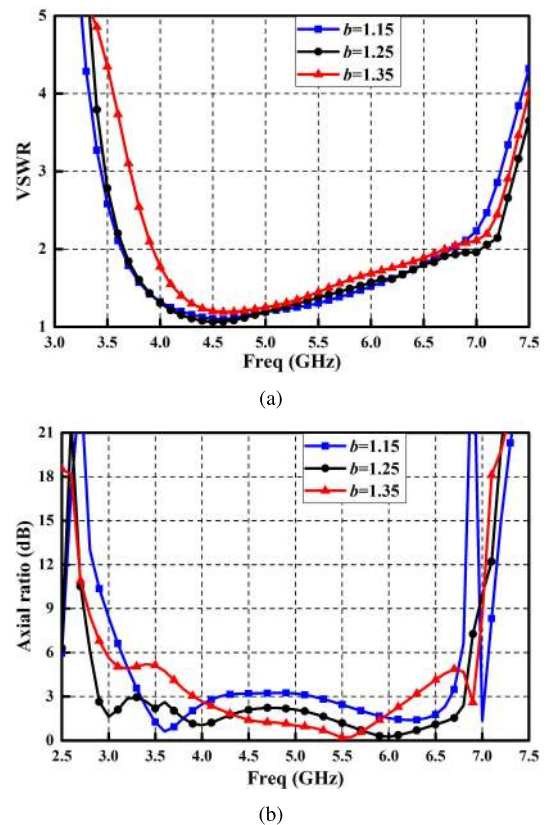


FIGURE 5. (a) VSWR and (b) AR with different values of b .

antenna in terms of VSWR, AR, and ARBW performance are shown in Fig.3 (a), (b), and (c), respectively. As shown in Fig. 3 (a) and (b), the impedance bandwidth (VSWR < 2)

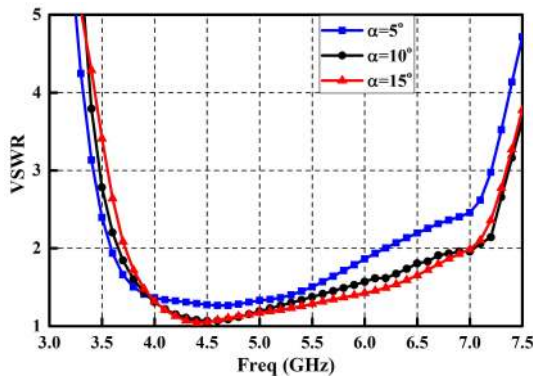

(a)

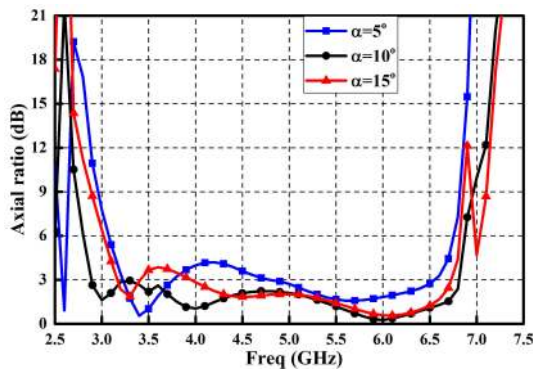


(b)


FIGURE 6. (a) VSWR and (b) AR with different values of α .

of the two antennas have slight differences, but the AR bandwidth of the proposed antenna is much wider. Considering that the smaller arm operates at higher frequency than the reference arm and the bigger arm operates at lower frequency than the reference arm, combining the two asymmetric arms together will extend the operating bandwidth towards higher frequency and lower frequency simultaneously.

To provide a more visualized explanation, the surface current distribution on the two unequal-length curved arms at 3 GHz and 6.8 GHz are plotted in Fig. 4. As illustrated in Fig. 4 (a), the null area of the surface current propagates along the bigger arm, indicating that a traveling-wave current is excited along the bigger arm at 3 GHz. According to [18], the excited traveling-wave current along a curved path is able to generate a CP radiation and thus the CP radiation can be achieved at 3 GHz. It is also noted that the traveling-wave current is not observed along the smaller arm at 3 GHz due to its insufficient electric length. As the electric lengths of the both arms of symmetric-S antenna are also insufficient to support the propagation of the traveling-wave current at 3 GHz, the symmetric-S antenna cannot radiate CP waves efficiently at 3 GHz. Similarly, at 6.8 GHz, the traveling-wave current is mainly excited on the smaller arm, and a good CP radiation is obtained. Without the aid of the smaller arm, traveling-wave current cannot be evoked by the symmetric-S antenna and thus poor CP radiation is realized at 6.8 GHz. The bandwidth of the proposed antenna can be increased

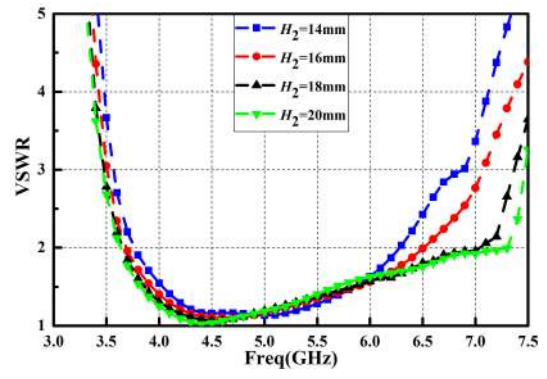

(a)

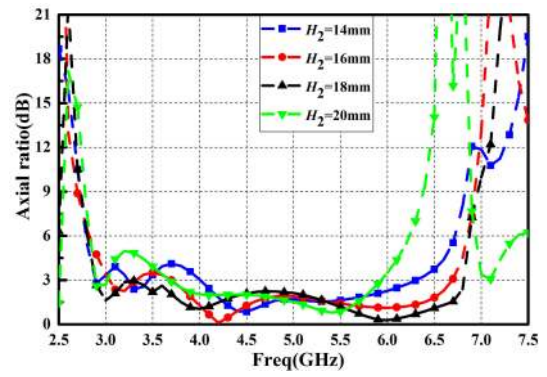

(b)

FIGURE 7. (a) VSWR and (b) AR with different values of H_2 .

by appropriately selecting the size of the two asymmetric arms. Furthermore, as shown in Fig. 3 (c), the ARBW of the proposed antenna is also larger than that of the reference antenna.

C. PARAMETRIC STUDIES TO THE PROPOSED ANTENNA

In order to obtain the optimum electrical performances of the proposed antenna, parametric studies are introduced into the design process. Considering the complexity of the antenna design, only several key parameters, such as the ratio b , the rotation angle α and the distance H_2 , are studied in this subsection. The variations of these three parameters mainly contribute to the impedance bandwidth and AR bandwidth. Only one parameter is changed each time while others are fixed with the values shown in Table 1.

The effects of ratio b on the impedance bandwidth and AR bandwidth are plotted in Fig. 5. As shown, when the ratio b is increased, both the impedance bandwidth and AR bandwidth are extended. further increasing of b larger than 1.25 results in deteriorated bandwidth. According to the parametric study, the suitable value of the ratio b is 1.25. Fig. 6 illustrates the effect of the rotation angle α on the impedance bandwidth and AR bandwidth. It can be found that when the value of the rotation angle α is increased, the impedance bandwidth can be extended towards high frequencies. Meanwhile, the AR varies significantly with the variation of the rotation angle α .

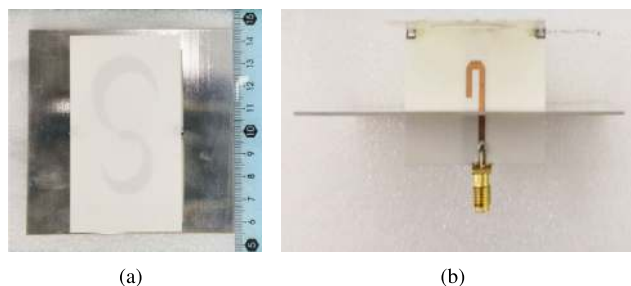


FIGURE 8. Prototype of the proposed antenna. (a) Top view, (b) side view.

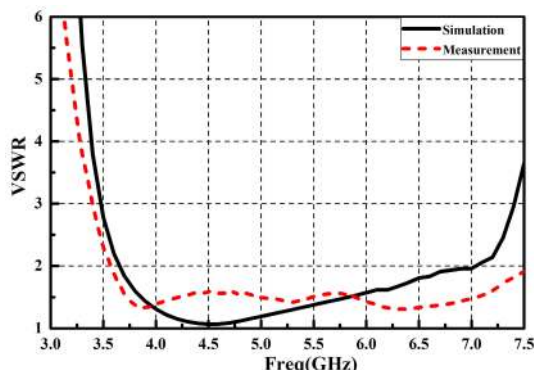


FIGURE 9. Simulated and measured VSWR of the proposed antenna.


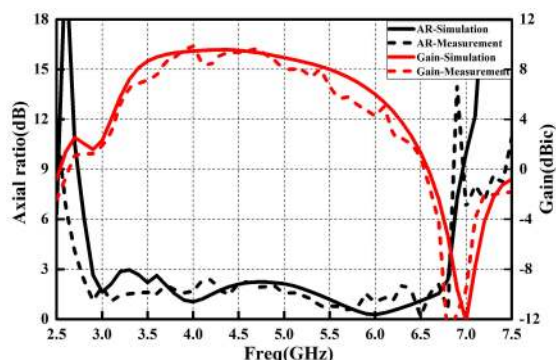


FIGURE 10. Simulated and measured AR and gain of the proposed antenna.


When $\alpha = 10^\circ$, the optimal AR performance can be obtained. Fig. 7 illustrates that as H_2 increases, the operating impedance bandwidth shifts upwardly. For AR, the optimal AR bandwidth is obtained when $H_2 = 18\text{mm}$. Further augment of H_2 leads to a degraded AR bandwidth.

III. RESULTS AND DISCUSSIONS


The proposed asymmetric-S antenna is fabricated and measured to verify the design principle. The fabricated prototype of the proposed antenna is shown in Fig. 8. The simulated and measured VSWRs of the proposed antenna are shown in Fig. 9. The measured impedance bandwidth is 70.2% for $\text{VSWR} < 2$, covering from 3.58 to 7.46 GHz. There is a certain deviation between the simulation results and

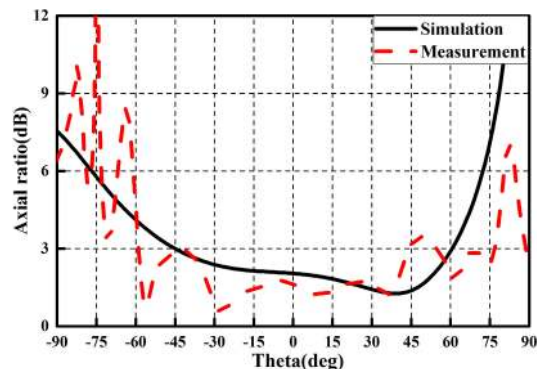

(a)

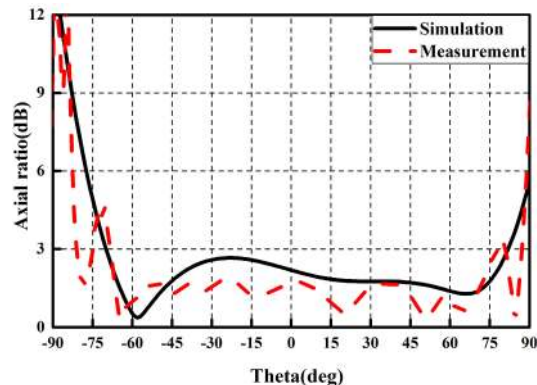

(b)

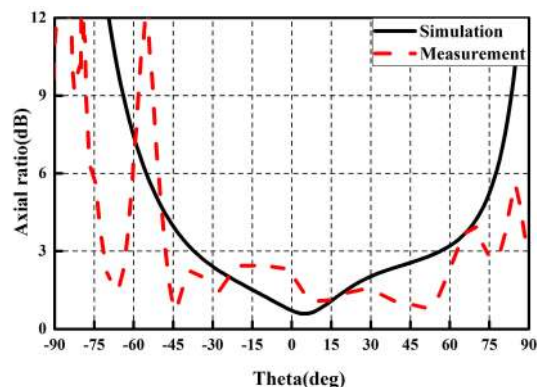

(c)

FIGURE 11. Simulated and measured ARBW in the xoz plane. (a) 3.7 GHz, (b) 4.6 GHz, (c) 5.7 GHz.

measurement results, which may attribute to the fabrication and measurement errors. The simulated and measured ARs and gains are presented in Fig. 10. The measured 3-dB AR bandwidth is about 84.8%, from 2.75 to 6.8 GHz, which is consistent with the simulated result. As shown in Fig. 10, the measured gain is in good agreement with the simulation result, and the peak gain is 9.55 dBic at 4.5 GHz. Fig. 11 shows the simulated and measured ARBW in the xoz plane at different frequency points. As shown, the measured ARBW in the xoz plane is 115° at 3.7 GHz, 153° at 4.6 GHz and 105° at 5.7 GHz, respectively, which confirms that the proposed antenna maintains wide ARBW across a

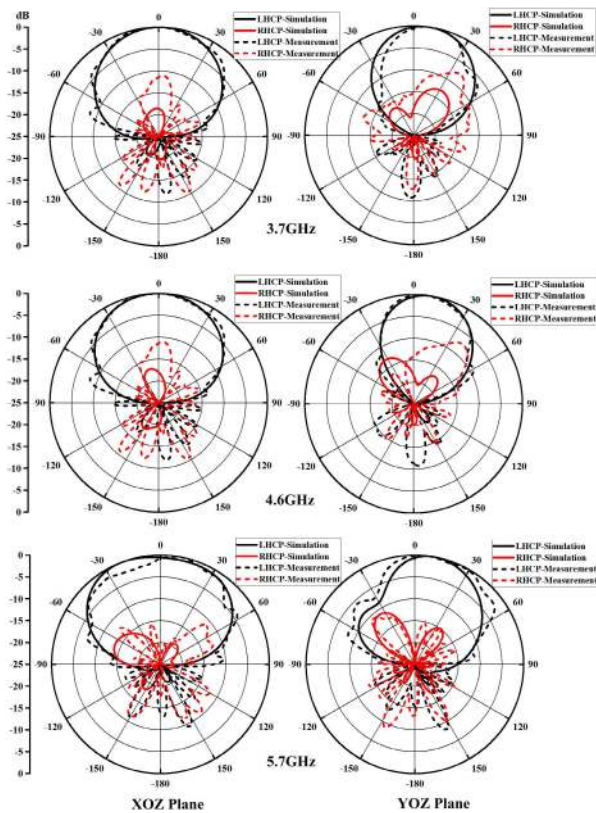


FIGURE 12. Simulated and measured radiation patterns of the proposed antenna in xoz plane and yoz plane.

TABLE 2. Comparison between the proposed antenna and other kinds of wideband and wide AR beamwidth CP antennas (λ_0 is the wavelength of center frequency).

Ref	Antenna Size (λ_0^3/mm^3)	Impedance bandwidth	AR bandwidth	Maximum ARBW (bandwidth)
[13]	$0.6\lambda_0 \times 0.6\lambda_0 \times 0.1\lambda_0$	13.8%	12.2%	190° (Beamwidth > 165°:9%) 27.5-30.1GHz
[15]	$0.64\lambda_0 \times 0.64\lambda_0 \times 1.16\lambda_0$	59.8%	26.8%	175° (Beamwidth > 165°:15.8%) 1.45-1.7GHz
[16]	$0.78\lambda_0 \times 0.78\lambda_0 \times 0.78\lambda_0$	72.1%	45.3%	237° (Beamwidth > 162°:19.5%) 1.85-2.25GHz
[17]	$1.0\lambda_0 \times 1.0\lambda_0 \times 0.25\lambda_0$	40.8%	32.8%	85° (15.4%) 1.8-2.1GHz
[18]	$1.52\lambda_0 \times 1.52\lambda_0 \times 0.31\lambda_0$	62.6%	42%	142° (Beamwidth > 100°:35.3%) 4.2-6GHz
This work	$1.44\lambda_0 \times 1.44\lambda_0 \times 0.29\lambda_0$	70.2%	84.8%	153° (Beamwidth > 100°:46.3%) 3.65-5.85GHz

wide frequency range. The radiation patterns of the proposed antenna in the xoz plane and $yozy$ plane at 3.7, 4.6 and 5.7 GHz are shown in Fig. 12. The results show that in the upper

hemisphere region, the measurement results agree well with the simulation results. The discrepancy in the back lobe is caused by the scattering and reflection of the cable, antenna holder and the positioner.

In order to demonstrate the advantages of the proposed antenna, a comparison with other reported wideband and wide ARBW CP antennas is conducted and shown in Table 2. It can be seen that the proposed antenna has a much wider AR bandwidth and overlapped bandwidth than its counterparts. Moreover, the proposed antenna can maintain a broad ARBW over much wider frequency range.

IV. CONCLUSION

An ultra-wideband asymmetric-S CP antenna with wide ARBW has been proposed, analyzed, and experimentally verified. The proposed antenna consists of two unequal curved arms, which helps enhance the AR bandwidth and ARBW performance. The proposed antenna achieves an impedance bandwidth (VSWR < 2) of 70.2% (3.58 GHz, 3.58-7.46 GHz), and 3-dB AR bandwidth of 84.8% (4 GHz, 2.75-6.8 GHz). Besides, a wide ARBW of more than 100° can be maintained within a very wide frequency band ranging from 3.65 to 5.85 GHz (46.3%) and maximum ARBW of 153° is achieved at 4.5 GHz. Due to the ultra-wide bandwidth, wide AR beamwidth and stable beamwidth feature over a wide frequency range, the proposed antenna is suitable for high-precision GNSS systems and other relevant applications.

REFERENCES


- [1] X. L. Bao, G. Ruvio, M. J. Ammann, and M. John, "A novel GPS patch antenna on a fractal hi-impedance surface substrate," *IEEE Antennas Wireless Propag. Lett.*, vol. 5, pp. 323-326, 2006.
- [2] J. Li, H. Liu, S. Zhang, M. Luo, Y. Zhang, and S. He, "A wideband single-fed, circularly-polarized patch antenna with enhanced axial ratio bandwidth for UHF RFID reader applications," *IEEE Access*, vol. 6, pp. 55883-55892, Oct. 2018.
- [3] K.-L. Wong, F.-R. Hsiao, and C.-L. Tang, "A low-profile omnidirectional circularly polarized antenna for WLAN access point," in *Proc. IEEE Antennas Propag. Soc. Symp.*, vol. 3, Jun. 2004, pp. 2580-2583.
- [4] Y. He, W. He, and H. Wong, "A wideband circularly polarized cross-dipole antenna," *IEEE Antennas Wireless Propag. Lett.*, vol. 13, pp. 67-70, Jan. 2014.
- [5] L. Wang, W.-X. Fang, Y.-F. En, Y. Huang, W.-H. Shao, and B. Yao, "Wideband circularly polarized cross-dipole antenna with parasitic elements," *IEEE Access*, vol. 7, pp. 35097-35102, 2019.
- [6] Z. Zhao, Y. Li, M. Xue, L. Wang, Z. Tang, and Y. Yin, "Design of wideband circularly polarized crossed-dipole antenna using parasitic modified patches," *IEEE Access*, vol. 7, pp. 75227-75234, 2019.
- [7] R. B. Waterhouse, "Stacked patches using high and low dielectric constant material combinations," *IEEE Trans. Antennas Propag.*, vol. 47, no. 12, pp. 1767-1771, Dec. 1999.
- [8] Z.-Y. Zhang, S. Zuo, Y. Zhao, L.-Y. Ji, and G. Fu, "Broadband circularly polarized bowtie antenna array using sequentially rotated technique," *IEEE Access*, vol. 6, pp. 12769-12774, 2018.
- [9] S. Gupta, A. Sharma, G. Das, R. K. Gangwar, and M. Khalily, "Wideband circularly polarized dielectric resonator antenna array with polarization diversity," *IEEE Access*, vol. 7, pp. 49069-49076, 2019.
- [10] R. Chowdhury, N. Mishra, M. M. Sani, and R. K. Chaudhary, "Analysis of a wideband circularly polarized cylindrical dielectric resonator antenna with broadside radiation coupled with simple microstrip feeding," *IEEE Access*, vol. 5, pp. 19478-19485, 2017.

- [11] Nasimuddin, X. Qing, and Z. N. Chen, "A compact circularly polarized slotted patch antenna for GNSS applications," *IEEE Trans. Antennas Propag.*, vol. 62, no. 12, pp. 6506–6509, Dec. 2014.
- [12] X. Chen, L. Yang, J.-Y. Zhao, and G. Fu, "High-efficiency compact circularly polarized microstrip antenna with wide beamwidth for airborne communication," *IEEE Antennas Wireless Propag. Lett.*, vol. 15, pp. 1518–1521, 2016.
- [13] H. Al-Saedi, W. M. Abdel-Wahab, S. Gigoyan, R. Mitra, and S. Safavi-Naeini, "Ka-band antenna with high circular polarization purity and wide AR beamwidth," *IEEE Antennas Wireless Propag. Lett.*, vol. 17, no. 9, pp. 1697–1701, Sep. 2018.
- [14] X. Bai, S.-W. Qu, S. Yang, J. Hu, and Z.-P. Nie, "Millimeter-wave circularly polarized tapered-elliptical cavity antenna with wide axial-ratio beamwidth," *IEEE Trans. Antennas Propag.*, vol. 64, no. 2, pp. 811–814, Feb. 2016.
- [15] H.-J. Zhang and F.-S. Zhang, "Circularly polarized crossed dipole with magnetoelectric dipole for wideband and broadbeam applications," in *Proc. Cross Strait Quad-Regional Radio Sci. Wireless Technol. Conf. (CSQRWC)*, Xuzhou, China, Jul. 2018, pp. 1–3.
- [16] S. X. Ta and I. Park, "Crossed dipole loaded with magneto-electric dipole for wideband and wide-beam circularly polarized radiation," *IEEE Antennas Wireless Propag. Lett.*, vol. 14, pp. 358–361, 2014.
- [17] K. M. Mak and K. M. Luk, "A circularly polarized antenna with wide axial ratio beamwidth," *IEEE Trans. Antennas Propag.*, vol. 57, no. 10, pp. 3309–3312, Oct. 2009.
- [18] L. Zhang, S. Gao, Q. Luo, P. R. Young, W. Li, and Q. Li, "Inverted-S antenna with wideband circular polarization and wide axial ratio beamwidth," *IEEE Trans. Antennas Propag.*, vol. 65, no. 4, pp. 1740–1748, Apr. 2017.
- [19] L. Zhang, S. Gao, Q. Luo, and W. Li, "Wideband circularly polarized wide-beamwidth antenna using S-shaped dipole," in *Proc. Int. Workshop Antenna Technol., Small Antennas, Innov. Struct., Appl. (iWAT)*, Athens, Greece, Mar. 2017, pp. 118–121.



YEJUN HE (SM'09) received the Ph.D. degree in information and communication engineering from the Huazhong University of Science and Technology, Wuhan, China, in 2005. From 2005 to 2006, he was a Research Associate with the Department of Electronic and Information Engineering, The Hong Kong Polytechnic University, Hong Kong. From 2006 to 2007, he was a Research Associate with the Department of Electronic Engineering, Faculty of Engineering, The Chinese University of

Hong Kong, Hong Kong. In 2012, he joined the Department of Electrical and Computer Engineering, University of Waterloo, Waterloo, ON, Canada, as a Visiting Professor. From 2013 to 2015, he was an Advanced Visiting Scholar (Visiting Professor) with the School of Electrical and Computer Engineering, Georgia Institute of Technology, Atlanta, GA, USA. Since 2011, he has been a Full Professor with the College of Information Engineering, Shenzhen University, Shenzhen, China, where he is currently the Director of the Guangdong Engineering Research Center of Base Station Antennas and Propagation and the Shenzhen Key Laboratory of Antennas and Propagation and the Vice Director of the Shenzhen Engineering Research Center of Base Station Antennas and Radio Frequency. He has authored or coauthored over 140 research articles and books (chapters). He holds about 20 patents. His current research interests include wireless mobile communication, antennas, and radio frequency. He is also a Fellow of the IET. He has served as a Technical Program Committee Member or the Session Chair for various conferences, including the IEEE Global Telecommunications Conference, the IEEE International Conference on Communications, the IEEE Wireless Communication Networking Conference, and the IEEE Vehicular Technology Conference. He is acting as the General Chair of the IEEE ComComAp2019. He has served as a Reviewer for various journals, such as the IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY, IEEE TRANSACTIONS ON COMMUNICATIONS, IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS, IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS, IEEE WIRELESS COMMUNICATIONS, IEEE COMMUNICATIONS LETTERS, IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, *International Journal of Communication Systems*, *Wireless Communications and Mobile Computing*, and *Wireless Personal Communications*. He has been serving as an Associate Editor for IEEE NETWORK, IEEE ACCESS, *International Journal of Communication Systems*.




WEI HE received the B.S. degree in electronic and information engineering from the Hunan University of Science and Technology, Xiangtan, Hunan, China, in 2010, and the M.S. degree in communication and information system from Shenzhen University, Shenzhen, China, in 2014, where he is currently pursuing the Ph.D. degree with the College of Electronics and Information Engineering. His current research interests include RFID tag antennas, circularly polarized antennas and arrays, and metantennas.



LONG ZHANG (M'18) received the B.S. and M.S. degrees in electrical engineering from the Huazhong University of Science and Technology (HUST), Wuhan, China, in 2009 and 2012, respectively, and the Ph.D. degree in electronic engineering from the University of Kent, Canterbury, U.K., in 2017.


He was a Postdoctoral Research Fellow with the Poly-Grames Research Center, Polytechnique Montréal, Canada, in 2018. He is currently an Assistant Professor with the College of Electronics and Information Engineering, Shenzhen University, Shenzhen, China. His current research interests include circularly polarized antennas and arrays, mm-wave antennas and arrays, phased arrays, tightly coupled arrays, and reflectarrays.

Dr. Zhang has served as a Reviewer for several technical journals, including the IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS, *IET Microwaves, Antennas and Propagation*, and *Electronics Letters*.




SAI-WAI WONG (S'06–M'09–SM'14) received the B.S. degree in electronic engineering from The Hong Kong University of Science and Technology, Hong Kong, in 2003, and the M.Sc. and Ph.D. degrees in communication engineering from Nanyang Technological University, Singapore, in 2006 and 2009, respectively. From 2003 to 2005, he was the Lead of the Engineering Department in China, with two manufacturing companies in Hong Kong. From 2009 to 2010, he was

a Research Fellow with the Institute for Infocomm Research, Singapore. Since 2010, he has been an Associate Professor with the School of Electronic and Information Engineering, South China University of Technology, Guangzhou, China, where he became a Full Professor. In 2016, he was a Visiting Professor with the City University of Hong Kong, Hong Kong. Since 2017, he has been a Full Professor with the College of Information, Shenzhen University, Shenzhen, China. His current research interests include RF/microwave circuit and antenna design. He was a recipient of the New Century Excellent Talents in University (NCET) Award, in 2013, and the Shenzhen Overseas High-Caliber Personnel Level C, in 2018. He is also a Reviewer for several top-tier journals.




CHUNXU MAO (M'18) received the B.S. degree in communication engineering from the Guilin University of Electronic Technology, Guilin, China, in 2010, the M.E. degree in RF and microwave engineering from the South China University of Technology, Guangzhou, China, in 2013, and the Ph.D. degree in electronic engineering from the University of Kent, Canterbury, U.K., in 2018. In 2018, he joined the Computational Electromagnetics and Antennas Research Laboratory (CEARL), The Pennsylvania State University, USA, as a Research Fellow. His research interests include filtering antenna integration, UWB antenna, circularly polarized antenna, satellite antenna array, millimeter-wave antenna, and wearable antenna. He was a recipient of the Outstanding Master Thesis Award of Guangdong Province, China, in 2014.

He is currently an Assistant Professor and the Associate Head of the Department of Electronic Engineering, Shenzhen University, Shenzhen, China. His current research interests include wideband antennas, patch antennas, base station antennas, reconfigurable antennas, antennas for cognitive radio, and filtering antennas. He was a TPC Member of the APCAP 2016. He was a recipient of the Honorable Mention at the Student Contest of the 2012 IEEE APS-URSI Conference and Exhibition held in Chicago, IL, USA, and the First Prize in the Student Innovation Competition of the 2014 IEEE International Workshop on Electromagnetics (IEEE IWEM) held in Sapporo, Japan, in 2014. He was the Session Chair of the IWEM 2017 and the ACES-China 2017.



LEI GE (S'11–M'15–SM'18) was born in Jiangsu, China. He received the B.S. degree in electronic engineering from the Nanjing University of Science and Technology, Nanjing, China, in 2009, and the Ph.D. degree in electronic engineering from the City University of Hong Kong, Hong Kong, in 2015, where he was a Research Assistant, from 2010 to 2011. In 2015, he was a Postdoctoral Research Fellow with the State Key Laboratory of Millimeter Waves, City University of Hong Kong.

He is currently an Assistant Professor and the Associate Head of the Department of Electronic Engineering, Shenzhen University, Shenzhen, China. His current research interests include wideband antennas, patch antennas, base station antennas, reconfigurable antennas, antennas for cognitive radio, and filtering antennas. He was a TPC Member of the APCAP 2016. He was a recipient of the Honorable Mention at the Student Contest of the 2012 IEEE APS-URSI Conference and Exhibition held in Chicago, IL, USA, and the First Prize in the Student Innovation Competition of the 2014 IEEE International Workshop on Electromagnetics (IEEE IWEM) held in Sapporo, Japan, in 2014. He was the Session Chair of the IWEM 2017 and the ACES-China 2017.



PENG CHU (S'10–M'14) was born in Anqing, China, in 1985. He received the B.S. and M.S. degrees from Xidian University, Xi'an, China, in 2006 and 2009, respectively, and the Ph.D. degree from the State Key Laboratory of Millimeter Waves, Southeast University, Nanjing, China, in 2014. He joined the College of Electronic and Optical Engineering, Nanjing University of Posts and Telecommunications, Nanjing, in 2014, where he is currently an Associate Professor. Since 2018, he has been a Postdoctoral Fellow with the Poly-Grames Research Center, Polytechnique Montréal, QC, Canada. His current research interests include microwave and millimeter-wave circuits and antennas and energy harvesting.

He is currently an Assistant Professor and the Associate Head of the Department of Electronic Engineering, Shenzhen University, Shenzhen, China. His current research interests include wideband antennas, patch antennas, base station antennas, reconfigurable antennas, antennas for cognitive radio, and filtering antennas. He was a TPC Member of the APCAP 2016. He was a recipient of the Honorable Mention at the Student Contest of the 2012 IEEE APS-URSI Conference and Exhibition held in Chicago, IL, USA, and the First Prize in the Student Innovation Competition of the 2014 IEEE International Workshop on Electromagnetics (IEEE IWEM) held in Sapporo, Japan, in 2014. He was the Session Chair of the IWEM 2017 and the ACES-China 2017.



STEVEN GAO (M'01–SM'16–F'19) received the Ph.D. degree in microwave engineering from Shanghai University, Shanghai, China. He is currently a Full Professor and the Chair of RF and microwave engineering and the Director of graduate studies with the School of Engineering and Digital Arts, University of Kent, Canterbury, U.K. He has coauthored/coedited three books, *Space Antenna Handbook* (Wiley, 2012), *Circularly Polarized Antennas* (IEEE-Wiley, 2014), and

Low-Cost Smart Antennas (Wiley, 2019), over 300 articles, and ten patents. His current research interests include smart antennas, phased arrays, MIMO, reconfigurable antennas, wideband/multiband antennas, satellite antennas, RF/microwave/mm-wave/terahertz circuits, mobile communications, satellite communications, UWB radars, synthetic-aperture radars, the IoT, and sensors for healthcare. He is also a Fellow of the Royal Aeronautical Society, U.K., and IET, U.K. He was the General Chair of the LAPC 2013 and an Invited Speaker at many conferences. He is currently an Associate Editor of the IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION and several other international journals, such as *Radio Science*, *IEEE ACCESS*, *Electronics Letters*, and *IET Circuits, Devices and Systems*, and the Editor-in-Chief of the John Wiley and Sons book series on microwave and wireless technologies. He was a Distinguished Lecturer of the IEEE AP Society.

...