

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

Beam test results of a 16 ps timing system based on ultra-fast silicon detectors

This is the author's manuscript

Original Citation:

Availability:

This version is available <http://hdl.handle.net/2318/1636957> since 2020-10-23T19:07:43Z

Published version:

DOI:10.1016/j.nima.2017.01.021

Terms of use:

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)

Beam test results of a 16 ps timing system based on ultra-fast silicon detectors

N. Cartiglia¹, A. Staiano, V. Sola
INFN, Torino, Italia

R. Arcidiacono
Università del Piemonte Orientale, Italia and INFN, Torino, Italia

R. Cirio, F. Cenna, M. Ferrero, V. Monaco, R. Mulargia, M. Obertino, F. Ravera, R. Sacchi
Università di Torino, Torino, Italia and INFN, Torino, Italia

A. Bellora, S. Durando
Università di Torino, Torino, Italia

M. Mandurrino
Politecnico di Torino, Torino, Italia

N. Minafra
University of Kansas, KS, USA

V. Fadeyev, P. Freeman, Z. Galloway, E. Gkougkousis, H. Grabas, B. Gruey, C.A. Labitan, R. Losakul,
Z. Luce, F. McKinney-Martinez, H. F.-W. Sadrozinski, A. Seiden, E. Spencer, M. Wilder, N. Woods,
A. Zatserklyaniy
SCIPP, Univ. of California Santa Cruz, CA 95064, USA

G.Pellegrini, S. Hidalgo, M. Carulla, D. Flores, A. Merlos, D. Quirion
Centro Nacional de Microelectrónica (IMB-CNM-CSIC), Barcelona, Spain

V. Cindro, G.Kramberger, I. Mandić, M. Mikuž, M. Zavrtanik
Jožef Stefan institute and Department of Physics, University of Ljubljana, Ljubljana, Slovenia

Abstract– In this paper we report on the timing resolution obtained in a beam test with pions of 180 GeV/c momentum at CERN for the first production of 45 μm thick Ultra-Fast Silicon Detectors (UFSD). UFSD are based on the Low-Gain Avalanche Detector (LGAD) design, employing n-on-p silicon sensors with internal charge multiplication due to the presence of a thin, low-resistivity diffusion layer below the junction. The UFSD used in this test had a pad area of 1.7 mm². The gain was measured to vary between 5 and 70 depending on the sensor bias voltage. The experimental setup included three UFSD and a fast trigger consisting of a quartz bar readout by a SiPM. The timing resolution was determined by comparing the time of arrival of the particle in one or more UFSD and the trigger counter. For a single UFSD the resolution was measured to be 34 ps for a bias voltage of 200 V, and 27 ps for a bias voltage of 230 V. For the combination of 3 UFSD the timing resolution was 20 ps for a bias voltage of 200 V, and 16 ps for a bias voltage of 230 V.

PACS: 29.40.Gx, 29.40.Wk, 78.47jc

Keywords: fast silicon sensors; charge multiplication; thin tracking sensors; silicon strip; pixel detectors.

¹ Corresponding author: cartiglia@to.infn.it

4 1 INTRODUCTION

5 We are developing an ultra-fast silicon detector (UFSD) that would establish a new paradigm for space-time
6 particle tracking [1]. The UFSD is a single device that ultimately will measure with high precision concurrently
7 the space ($\sim 10 \mu\text{m}$) and time ($\sim 10 \text{ps}$) coordinates of a particle.

8 First applications of UFSD are envisioned in upgrades of experiments at the High-Luminosity Large Hadron
9 Collider (HL-LHC [2]), in cases where the excellent time resolution coupled with good spatial resolution helps
0 to reduce drastically pile-up effects due to the large number of individual interaction vertices, as demonstrated
1 in [3]. ATLAS is proposing UFSD as one of the technical options for the High Granularity Timing Detector
2 (HGTD) located in front of the forward calorimeter (FCAL) [3]. CMS and TOTEM are considering UFSD to be
3 the timing detectors for the high momentum - high rapidity Precision Proton Spectrometer (CT-PPS) [4]. In
4 both cases, the UFSD would be of moderate segmentation (a few mm^2) with challenging radiation requirements
5 (several 10^{15}neq/cm^2).

6 UFSD are thin pixelated n-on-p silicon sensors - based on the LGAD design [5][6] developed by the Centro
7 Nacional de Microelectrónica (CNM)² Barcelona - whose geometry has been optimized for precision time
8 measurements [7]. The sensor exhibits moderate internal gain ($\sim 5\text{-}70$) due to a highly doped p^+ region just
9 below the n-type implants. Up to now, UFSD with a large gain range were only available with a thickness of
0 $300 \mu\text{m}$ and their performance has been established in several beam tests and with laser laboratory
1 measurements [1][8]. When these measurements were extrapolated to thin sensors using the simulation program
2 Weightfield2 (WF2) [9], a timing resolution of 30ps was predicted for a $50 \mu\text{m}$ thick sensor with gain 10 and a
3 capacitance of 2pF [1].

4 In this paper, we report on the first results of a beam test with thin UFSD. In Section 2 we will briefly describe
5 the characteristics of the $45 \mu\text{m}$ UFSD manufactured by CNM under the auspices of the RD50 collaboration
6 [10], including electrical characterization and charge collection study in a laboratory ^{90}Sr β -source . We will
7 then describe the development of a low-noise 2GHz amplifier in Section 3, and that of the fast Cerenkov trigger
8 counter in Section 4. Set-up and running conditions of the CERN H8 test beam area will be described in Section
9 5, followed by the results on the timing resolution and their interpretation in Section 6.

0 2 PROPERTIES OF THIN UFSD

1 The UFSD were manufactured by CNM within a “RD50 Common Project” [10]. Details of the design can be
2 found in Ref. [6]. They are produced on $4''$ Silicon-on-Insulator wafers with a $45 \mu\text{m}$ thick high resistivity float
3 zone (FZ) active layer on top of a $1 \mu\text{m}$ buried oxide and a $300 \mu\text{m}$ support wafer. The back-side contact is done
4 through wet-etched deep access holes through the insulator. The wafers contain a variety of pad structures, with

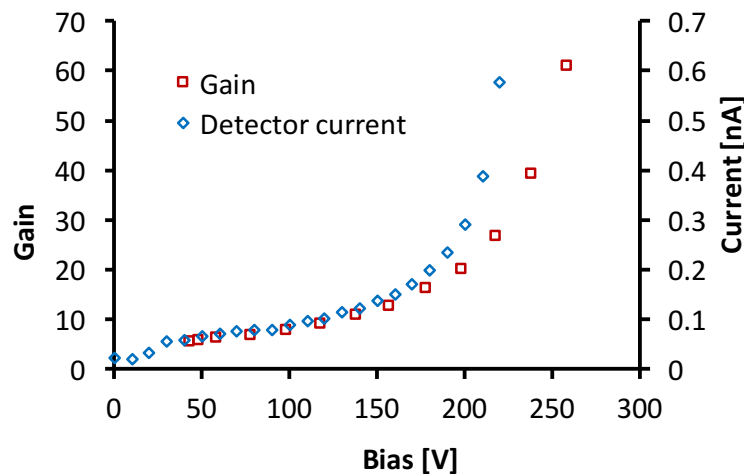


Figure 1 Bias dependence of the leakage current and the signal gain for a $45 \mu\text{m}$ -thick UFSD sensor with an area of 1.7mm^2 . The gain determination is subject to an overall scale uncertainty of 20%. The similar exponential behaviour of gain and sensor current below 200V bias is due to the common charge multiplication mechanism.

² Centro Nacional de Microelectrónica (IMB-CNM-CSIC), Barcelona, Spain

the pad area A varying from 1.7 mm^2 to 10.2 mm^2 . This test uses solely the 1.7 mm^2 pads. Three sets of wafers were produced, identical in the mask design but with a different p^+ dose of the gain layer to optimize the charge multiplication. The results presented in this article are obtained using the intermediate gain implant dose. Capacitance-voltage (C-V) and current-voltage (I-V) measurements were performed. The C-V measurements were done with grounded guard ring and resulted in a depletion voltage below 50 V. The detector capacitance was measured to be $C_{\text{UFSD}} = 3.9 \text{ pF}$, from which the active thickness of the UFSD w was derived to be $w = 45 \text{ }\mu\text{m}$ using the relationship $w = \epsilon * A / C$. The I-V measurements of the UFSD (Figure 1) revealed a bulk leakage current of below 1nA at 240V with a constant guard ring current of about 1 nA and a breakdown voltage of about $V_{\text{BD}} = 250 \text{ V}$.

The gain was measured in the laboratory using the read-out board described in Section 3 and β -particles from a ^{90}Sr source. The gain is computed by comparing the collected charge to the charge expected from a MIP in an equivalent sensor without gain, estimated to be 0.46 fC using Ref. [11]. The gain values determined varied from $M = 5$ to 70 for bias voltages between 70 V and 250 V, respectively (Figure 1), with a 20% systematic error due to the uncertainty in relating the collected charge to the area of the signal pulses.

As shown in Figure 1, the leakage current and the gain exhibit the same bias voltage dependence, as expected from the common charge multiplication mechanism. Above a bias of 200V, the current shows a faster increase with the bias voltage than the gain, which might be due to the start of breakdown in the periphery of the pad, instead of the central bulk where the signal is generated.

3 READ-OUT BOARD

For charge collection studies in both the β -source and the beam test, the UFSD are mounted on a $\sim 10 \text{ cm}$ square read-out board developed at the University of California Santa Cruz (UCSC). The board uses discrete components and contains several features which allow maintaining a wide bandwidth ($\sim 2 \text{ GHz}$) and a low noise even in noisy environments: (i) by-pass capacitors located right next to the sensor, (ii) large ground planes, (iii) low impedance connections among layers, (iv) very short parallel wire-bonds to limit the inductance, and (v) self-shielding packaging using lids which snap onto the boards on both sides. The inverting amplifier uses a high-speed SiGe transistor and it has a trans-impedance of about $470 \text{ }\Omega$. This amplifier is followed by an external commercial amplifier of gain 100 [12]. Figure 2 shows several aspects of the board: (left) the sensor with the wire bonds and the filtering capacitors, (center) the position of the sensor with respect of the amplifier and the large ground plane around it and (right) the shielding lid.

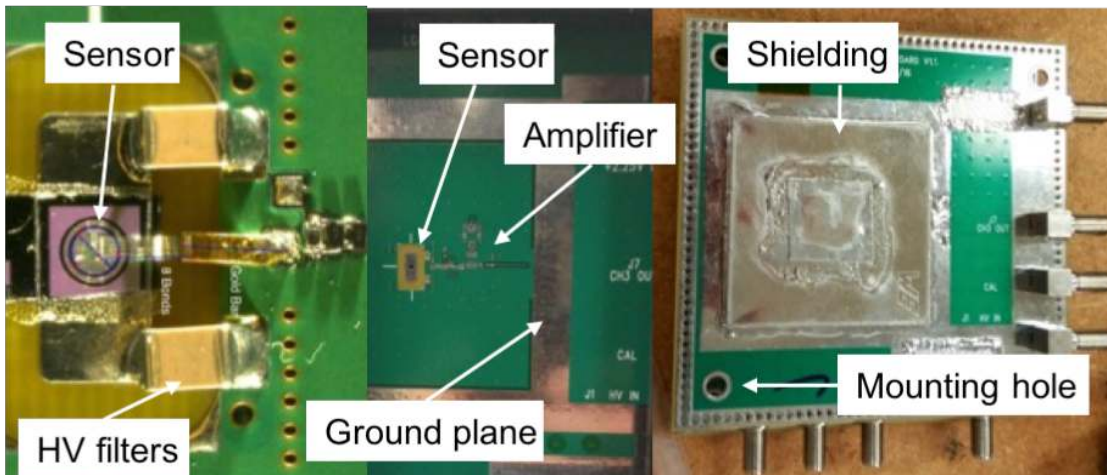


Figure 2 Read-out board: connections to the UFSD (left), board without shielding (centre), board with shielding (right)

4 CERENKOV TRIGGER COUNTER

For accurate triggering at beam tests and in the laboratory, a fast Cerenkov trigger counter, based on the concepts of M. Albrow et al. [13], was developed. As shown in Figure 3, it consists of a 10 mm long, 9 mm^2

3 wide quartz bar read out by a 9 mm² SensL SiPM incorporated in its evaluation board [14]. The SiPM signals
4 were boosted by an amplifier with gain 10 [15].
5 The UFSD – trigger counter combination was extensively tested in a β -source prior to the beam test, and a
6 biasing voltage range for the SiPM of 28 - 29 V was selected, at the upper limit of the recommended range, 24
7 to 29 V. The laboratory setup with ⁹⁰Sr β -source allows measuring triple coincidences between the Cherenkov
8 trigger counter and two UFSD detectors: for this set-up, the observed time resolution was limited by the low
9 photon yield of less than 10 due to the low-energy β -particles. No changes in either SiPM noise nor thermal
0 photo-electron spectrum were observed between operations in the β -source and the beam. During the beam test,

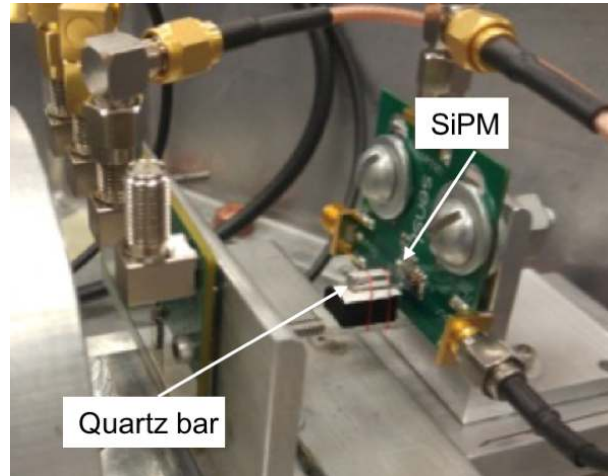


Figure 3 Trigger counter configuration shown in the β -source: the 10mm long quartz bar mounted on the SensL SiPM evaluation

1 based on the observed signal pulse height and the pulse height spectrum of background photo-electrons, the
2 number of photo-electrons was estimated to be in excess of 50. The trigger threshold was set at 4-5 photo-
3 electrons on a pulse rise time of about 800 ps, which necessitated a time walk correction in the analysis.

4 5 UFSD OPERATIONS AT THE CERN H8 TEST BEAM

5 The beam test was conducted in the CERN H8 beam test area with π -mesons with a momentum of 180 GeV/c.
6 The devices under test and the trigger counter were mounted in a frame, Figure 4, having slots for mechanical
7 stability and rough alignment. The SiPM trigger counter was mounted on a G10 plate matching the dimensions

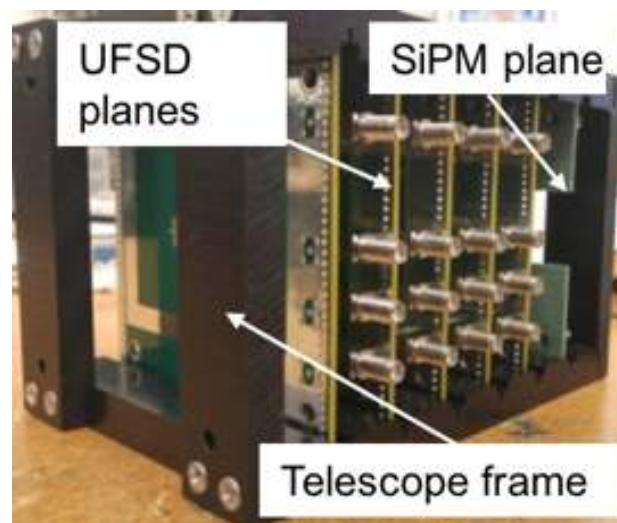


Figure 4 Beam Test frame showing four UFSD boards and the trigger counter. Alignment was assured with four rods (not shown) going through aligning holes in the four corners of the boards and the frame.

8 of the UFSD readout boards. The fine alignment was accomplished by four precision rods pushed through
9 machined holes at the four corners of the UFSD boards, trigger plate and frame. Limited by the four channels of

the digital scope used for the data acquisition, the standard running configuration was three 45 μm UFSD and the trigger counter.

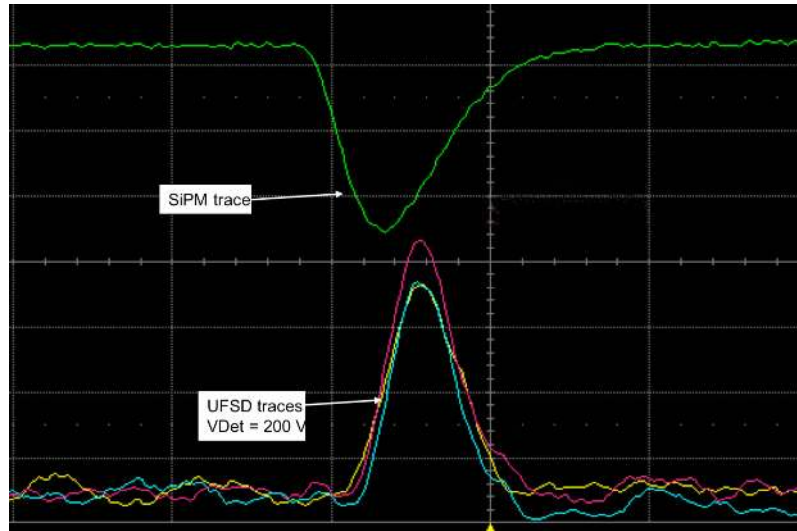


Figure 5 Screenshot of one event, showing the signals of 3 UFSD biased at 200 V and the SiPM at 28 V. Each horizontal division corresponds to 2 ns, while each vertical division is 100 mV.

The data were acquired with a 4 GHz – 8 bit vertical resolution LeCroy WaveRunner Zi digital scope, at a sampling rate of 20 GS/s, therefore with a time discretization of 50 ps. The impact of this time binning on the analysis has been cross-checked acquiring a subset of data with the enhanced data sampling of 40 GS/s and found to be negligible. Figure 5 shows an example of the quality of the data: 3 UFSD traces are visible as positive signals with about 400 ps leading edge time while the trigger counter, with about 600 ps leading edge time, is the negative trace on top. It should be noted that for the UFSD sensors, the observed signal-to-noise ratio S/N and rise time did not change when moving from the β -source in the laboratory to the beam test location. The traces shown in Figure 5 give an interesting indication about the achievable time resolution: as the signal time jitter can be approximated by $(\text{rise time})/(\text{S/N})$, given the very short leading edge time (~ 400 ps) even a moderate signal-to-noise ratio of $\text{S/N} = 20$ will yield a time jitter of 20 ps.

Data were collected in spills of 5 sec duration, and an instantaneous trigger rate between 1-20 Hz, depending on the beam conditions. The main objective of the beam test is the evaluation of the time resolution for minimum ionizing particles as a function of the sensor bias voltage. Most of the runs have been acquired with all three UFSD having the same voltage settings. After initial checkout, long data runs with fixed voltage configuration were taken, with typically between 20k and 100k events. Very stable running conditions were observed throughout the week-long test, with the sensors leakage current stable at around 5-10 nA and the SiPM current at 3 – 4 μA . The full dataset comprises of more than half million events.

6 BEAM TEST RESULTS

Analysis procedure

The digital oscilloscope records the full waveform of each channel in each event, so the complete event information is available to offline analysis. Even though the recorded data would allow an analysis based on multiple sampling techniques [8], the analysis presented here was performed using only the variables available to an hypothetical read-out chip, i.e. the time at threshold and the signal amplitude as in a constant-fraction-discriminator (CFD) chip, or the rising and falling time at a given threshold, as in a Time-over-Threshold (ToT) system. Therefore the results presented in the paper are not the best possible, but they reflect what can be achieved by a dedicated timing read-out system in a large detector.

The event selection is fairly straightforward: the signal amplitude for all 3 UFSD active in the data taking should be above five time the noise level (14 mV noise r.m.s), and not be saturated by either the scope or the read-out

2 chain. To eliminate the contributions from non-gain events, the time of the pulse maximum has to fall into a
 3 window of 1 ns. Typical amplitude ranges are shown in Figure 6.

4 *Gain and Landau distribution*

5 The initial energy deposition by impinging MIPs follows the Landau distribution, and these initial charges are
 6 subsequently amplified by the UFSD gain mechanism. The impulse response of the UFSD – amplifier board
 7 shown in Figure 2 has been measured in the laboratory using light pulsed from a 1064-nm picolaser, and it was
 8 found to be a gaussian curve with a sigma between 20 and 30 mV, with larger values at higher Vbias. During

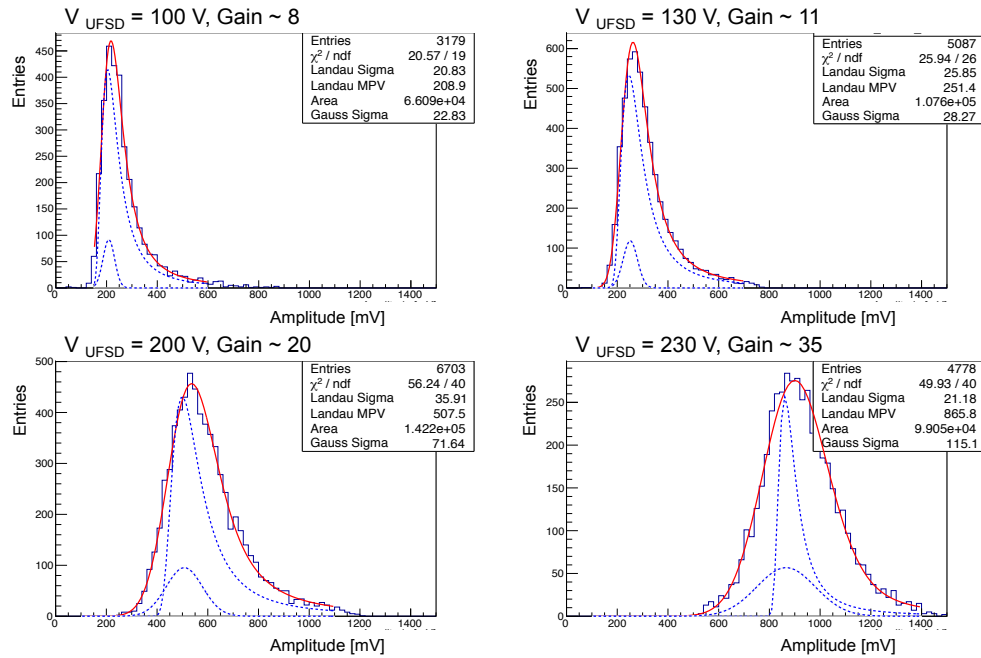


Figure 6 Distribution of the signal amplitude at four values of the detector Vbias: (100V,130V , 200V and 230V), with superposed the curves from a Landau-Gauss convolution fit (solid red curve). On each graph, the normalizations of the Landau and Gauss components are arbitrary as only their product is defined. Likewise, for explanation purposes only, the gaussian curve is arbitrarily aligned with the Landau MPV value.

9 this study it was also measured that the preamplifier becomes non linear for amplitudes above 8-900 mV,
 0 causing a reduction of the Landau high energy tail. Figure 6 shows the beam test measured amplitude
 1 distributions at 4 values of Vbias (100 V, 130 V, 200 V, and 230 V) with superposed the result from a Landau-
 2 Gauss convolution fit: at Vbias = 100 V and 130 V, the gaussian contribution to the convolution fit has an
 3 sigma of 22 mV and 28 mV respectively, consistent with the laboratory measurements, while for higher values
 4 of Vbias the Gaussian contribution becomes more important as a consequence of the electronics non linearity.
 5 At Vbias = 100 V and 130 V the ratio FWHM/MPV of the Landau component is ~ 0.4, somewhat lower than
 6 the expected values of ~ 0.6 from e-h pairs creation in thin sensors [11], while for higher Vbias this ratio
 7 becomes much smaller due the electronics non linearity.

8

9

0 *Timing resolution*

1 The time of passage of a particle in a sensor is evaluated using the constant fraction algorithm, which defines
 2 the time of arrival of a particle as the time at which the signal crosses a certain fraction of the total signal
 3 amplitude. This procedure eliminates the time-walk contribution to the time resolution [7]. The time of arrival at
 4 a specific fraction value was extracted from the recorded samples by means of a linear interpolation between the
 5 point above and below the requested value. By measuring the timing resolution as a function of the CFD
 6 fraction, it was concluded that the time resolution is separately minimized for values of CFD between 20% and
 7 30% for each of the UFSD. The same is true for the CFD fraction of the trigger, which was checked separately.

8

9 The time resolution of each UFSD and that of the SiPM has been obtained for each bias voltage from an overall
 0 fit to the Gaussian sigma's of the 10 distributions of a time difference in one event. There are three time
 1 differences between pairs of UFSD ($\Delta(t_{\text{UFSD}}-t_{\text{UFSD}})$), and 3 time differences between each UFSD and the SiPM
 2 ($\Delta(t_{\text{UFSD}}-t_{\text{SiPM}})$). These differences are based on single UFSD and are called “singlets”, In addition one can
 3 calculate the three time differences between the average time of two UFSD $\langle 2 \text{ UFSD} \rangle$ and the SiPM ($\Delta(t_{\langle 2 \text{ UFSD} \rangle}-t_{\text{SiPM}})$),
 4 called “doublets”, and finally the time difference between the average of 3 UFSD $\langle 3 \text{ UFSD} \rangle$ and
 5 the SiPM ($\Delta(t_{\langle 3 \text{ UFSD} \rangle}-t_{\text{SiPM}})$), the “triplet”. Figure 7 shows the time difference between one of the UFSD and
 6 the SiPM at a V_{bias} of 200 V and 230 V. Both curves show small non-gaussian tails, due to events with
 7 extreme variations of signal shape.

8

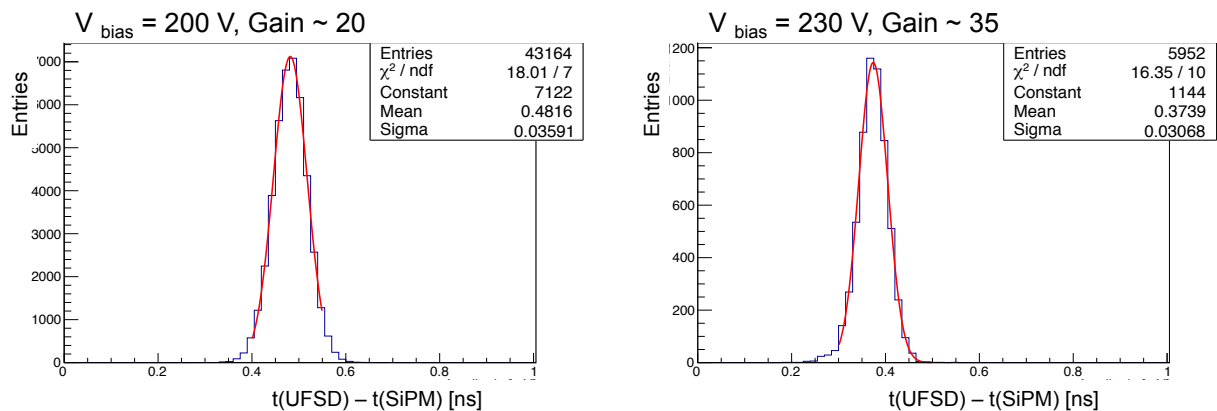


Figure 7 Time difference UFSD-SiPM at 2 different UFSD bias voltages: 200 V with sigma = 36 ps, and 230 V with sigma = 31 ps.

9

0

1 The results for the overall fits are shown in Table 1 and in Figure 8, where all measurements of the timing
 2 resolution for singlet, doublets and triplet of UFSD are shown (these values are without SiPM contribution).

3 The timing resolution of the trigger counter is evaluated to be 13.2 ps in the run at $V_{\text{bias}} = 200 \text{ V}$ and 14.9 ps in
 4 the run at $V_{\text{bias}} = 230 \text{ V}$.

5

6 The time resolution of a single UFSD is measured to decrease with increased gain M like $M^{-0.36}$.

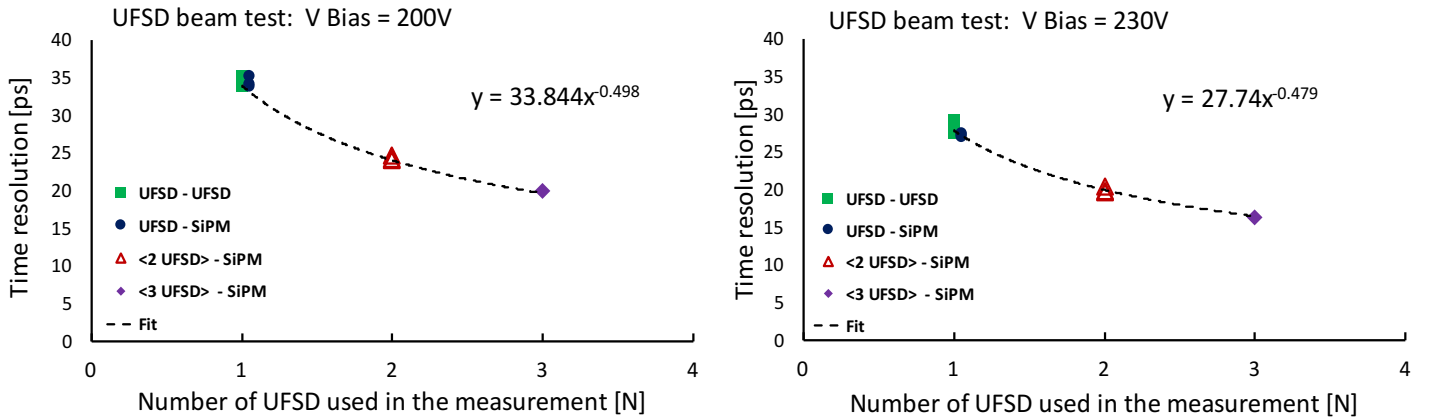


Figure 8 Timing resolution for: single UFSD (N=1) obtained from the UFSD-SiPM and UFSD-UFSD time differences; averaged pairs of UFSD (N=2) and average of 3 UFSD (N = 3) for bias voltages of (left) 200V and (right) 230V.

7 The scatter of the 6 singlet (N = 1) and 3 doublet (N=2) points in Figure 8 reflects the errors of the fits as well
 8 as the gain matching of the UFSD, which appears to be excellent. The scatter is slightly larger for the bias
 9 voltage of 230 V since at that voltage the gain is rising rapidly and a difference in gain among the sensors could
 0 be expected. Both data set of Figure 8 agree well with the expected $\sigma(N) = 1/\sqrt{N}$ behavior, demonstrating that
 1 the 3 sensors are of equal high quality. The timing resolution of a single UFSD is measured to be 34.1 ps for
 2 200 V bias and 27.4 ps for 230 V bias. A system of three UFSD has a measured timing resolution of 19.9 ps for
 3 a bias of 200 V, and 16.4 ps for a bias of 230 V.

5 Table 1 Averages of timing resolution for single UFSD (N=1), and for pairs of UFSD (N=2), and the timing resolution for the triplet UFSD (N=3) for
 6 two bias voltages. The trigger counter resolution has been subtracted in quadrature to obtain the quoted results.

| UFSD Timing resolution | | |
|------------------------|---------------|---------------|
| | Vbias = 200 V | Vbias = 230 V |
| N = 1 | 34.1 ps | 27.4 ps |
| N = 2 | 24.2 ps | 19.8 ps |
| N = 3 | 19.9 ps | 16.4 ps |

7 7 CONCLUSIONS

9 The result of the beam test with pions of momentum 180 GeV/c demonstrates that UFSD with an active
 0 thickness of 45 μm and 1.7 mm^2 pad size reaches a timing resolution of 34 ps at a bias voltage of 200 V and
 1 27.4 ps at 230 V. This result is in excellent agreement with what was predicted 3 years ago for thin UFSD by
 2 the Weightfield2 simulation program [1]. In the beam test, it was also proved that a telescope comprising 3
 3 planes of UFSD sensors reaches the expected performance improvement given by multiple measurements, i.e.
 4 the resolution improves like $1/\sqrt{N}$. For a triplet of UFSD, a timing resolution of 19.9 ps at a bias voltage of 200
 5 V was achieved, while at 230 V the timing resolution was measured to be 16.4 ps.

6 8 ACKNOWLEDGEMENTS

7 We acknowledge the expert contributions of the SCIPP technical staff. Part of this work has been performed
 8 within the framework of the CERN RD50 Collaboration. We thank Michael Albrow and Anatoly Ronzhin for
 9 supporting us in the construction of the trigger counters and the TOTEM experiment for the help in the beam
 0 test set-up.

2 The work was supported by the United States Department of Energy, grant DE-FG02-04ER41286. Part of this
3 work has been financed by the Spanish Ministry of Economy and Competitiveness through the Particle Physics
4 National Program (FPA2015-69260-C3-3-R and FPA2014-55295-C3-2-R), by the European Union's Horizon
5 2020 Research and Innovation funding program, under Grant Agreement no. 654168 (AIDA-2020) and Grant
6 Agreement no. 669529 (ERC UFSD669529), and by the Italian Ministero degli Affari Esteri and INFN Gruppo
7 V.

8 9 REFERENCES

- 9 [1] H.F.-W. Sadrozinski, et al., "Ultra-fast silicon detectors", Nucl. Instrum. Meth. A831 (2016) 18.
0 [2] HL-LHC, <http://dx.doi.org/10.5170/CERN-2015-005>
1 [3] D. Zerwas, ECFA 2016, High Luminosity LHC Experiments Workshop,
2 https://indico.cern.ch/event/524795/contributions/2237331/attachments/1349507/2036492/161006_AixL
3 [esBains.pdf](#)
4 [4] C. Royon, N. Cartiglia, "The AFP and CT-PPS projects", Int. J. Mod. Phys. A 29, 1446017 (2014)
5 [5] G. Pellegrini, et al., "Technology developments and first measurements of Low Gain Avalanche
6 Detectors (LGAD) for high energy physics applications", Nucl. Instrum. Meth. A765 (2014) 24.
7 [6] M. Carulla et al., "First 50 μm thick LGAD fabrication at CNM", 28th RD50 Workshop, Torino, June
8 7th 2016.
9 <https://agenda.infn.it/getFile.py/access?contribId=20&sessionId=8&resId=0&materialId=slides&confId>
0 [=11109](#)
1 [7] N. Cartiglia, "Design optimization of ultra-fast silicon detectors", NIMA 796 (2015) 141-148
2 [8] D. Breton, "Measurements of timing resolution of ultra-fast silicon detectors with the SAMPIC
3 waveform digitizer" Nucl.Instrum.Meth. A835 (2016) 51
4 [9] F. Cenna, et al., "Weightfield2: A fast simulator for silicon and diamond solid state detector", Nucl.
5 Instrum. Meth. A796 (2015) 149; <http://personalpages.to.infn.it/~cartigli/Weightfield2/Main.html>.
6 [10] RD50 collaboration, <http://rd50.web.cern.ch/rd50/>.
7 [11] S. Meroli et al, "Energy loss measurement for charged particles in very thin silicon layers", 2011 JINST
8 6 P06013, (2011).
9 [12] https://cividec.at/index.php?module=public.product_show&id=14&cat=0
0 [13] A. Ronzhin et al., "Development of a 10 ps level time of flight system in the Fermilab Test Beam
1 Facility" Nucl. Instrum. Meth. A 623 (2010) 931–941.
2 [14] <http://sensl.com/downloads/ds/DS-MicroCseries.pdf>
3 [15] <https://www.minicircuits.com/MCLStore/ModelInfoDisplay?14767372779180.9440301324064121>
4
5
6
7