



University
of Glasgow

Shah, S. A., Zhang, Z., Ren, A., Zhao, N., Yang, X., Zhao, W., Yang, J., Zhao, J., Sun, W. and Hao, Y. (2017) Buried object sensing considering curved pipeline. *IEEE Antennas and Wireless Propagation Letters*, 16, pp. 2771-2775.

There may be differences between this version and the published version. You are advised to consult the publisher's version if you wish to cite from it.

<http://eprints.gla.ac.uk/173907/>

Deposited on: 22 November 2018

Enlighten – Research publications by members of the University of Glasgow
<http://eprints.gla.ac.uk>

Buried Object Sensing Considering Curved Pipeline

Syed Aziz Shah, Zhiya Zhang, Aifeng Ren, Nan Zhao, Xiaodong Yang, Wei Zhao, Jie Yang, Jianxun Zhao, Wanrong Sun and Yang Hao, *Fellow, IEEE*

Abstract—This letter presents design and implementation of a system solution, where light-weight wireless devices are used to identify a moving object within underground pipeline for maintenance and inspection. The devices such as transceiver operating at S band are deployed for underground settings. Finer-grained Channel information in conjunction with leaky wave cable detects any moving entity. The processing of the measured data over time is analyzed and used for reporting the disturbances. Deploying a leaky wave cable as the receiver has benefits in terms of a wider coverage area, covering blind and semi blind zones. The system fully exploits the variances of both amplitude and phase information of Channel information as the performance indicators for motion detection. The experimental results demonstrate greater level of accuracy.

Index Terms—Channel information, Leaky Wave Cable (LWC), Access Point (AP).

I. INTRODUCTION

Underground object motion detection is one of the crucial problems for maintenance, repair and inspection of underground pipeline (coaxial or fiber optic cables). Several systems and methods have been designed to identify underground objects including microwave tomography based system for buried objects [1], a microwave imaging based system for underground targets [2] and radar based imaging system [3]. However, a technique that accurately identifies a moving object within a buried pipeline is still a posing challenge.

Recently, Channel information has drawn an increasing attention since it is a powerful indicator of electromagnetic (EM) propagation at multiple frequencies [4]. The rationale is any object in motion disturbs the wireless medium when present within the area of interest, and as a result induces multiple paths for signal propagation [5]. Leveraging channel information in conjunction with a leaky wave cable (LWC), we introduce a method based on small wireless devices that

The work was supported in part by the National Natural Science Foundation of China (Grant No. 61671349) and (Grant No. 61601338); project funded by China Postdoctoral Science Foundation and Postdoctoral Research Projects Funded in Shaanxi Province.

Syed Aziz Shah is with the School of International Education, Xidian University, Xi'an, Shaanxi, China, 710071.

Zhiya Zhang, Aifeng Ren, Nan Zhao, Xiaodong Yang, Jie Yang, Jianxun Zhao, Wanrong Sun are with the School of Electronic Engineering, Xidian University, Xi'an, Shaanxi, China, 710071. (Corresponding author: Xiaodong Yang; e-mail: xdyang@xidian.edu.cn)

Wei Zhao is with the School of Electro-Mechanical Engineering, Xidian University, Xi'an, Shaanxi, China, 710071.

Yang Hao is with the School of Electronic Engineering and Computer Science, Queen Mary University of London, London E1 4NS, U.K.

accurately detect a moving object inside a pipeline. In order to get precise and accurate results, we use the amplitude and phase information of channel information data as the two primary indicators for motion detection.

We also demonstrate the performance of LWC against the omni-directional antenna when deployed as a receiver. The experimental results show that LWC is highly sensitive to motion as compared to an omni-directional antenna particularly in the areas where turns or curves (blind and semi-blind zones) are encountered.

II. METHODOLOGY

This section gives a brief introduction to the background knowledge of channel information and LWC that lays the foundation for determining moving object inside a pipeline with bends.

A. Feature extraction from channel information data

To extract amplitude and phase information from channel information data, we leverage Intel NIC by slightly modifying the driver and got a group of 30 subcarriers known as CFR in the form of raw channel information data. Let channel information represent one received packet:

$$CSI_{packet} = \mathbf{H} = [h_1, h_2, h_3, \dots, h_{30}]. \quad (1)$$

Each channel information packet contains the amplitude and phase information as follows:

$$\mathbf{H}(f_i) = \|\mathbf{H}(f_i)\| e^{j\angle\mathbf{H}(f_i)}, \quad (2)$$

Here $\mathbf{H}(f_i)$ denotes the channel information data with central frequency f_i at subcarrier i , where $i \in [1 \text{ to } 30]$. $\|\mathbf{H}(f_i)\|$ represents the amplitude information and $\angle\mathbf{H}(f_i)$ describes the phase information.

The channel information data constantly recorded for m number of measurements within a particular time window form a channel information sequence to monitor an area of interest and serve as primary input for motion detection. The channel information sequence is described as:

$$\text{Channel information}_{\text{sequence}} = [\mathbf{H}_1, \mathbf{H}_2, \mathbf{H}_3, \dots, \mathbf{H}_m]. \quad (3)$$

B. Channel information useful phase information

Channel information has extensively been used for different applications by exploiting only the amplitude information. The reason for not considering the counterpart of channel information is due to the unavailability of useful phase information on wireless devices [6]. Due to the unsynchronized clock and random noise between the transmitter and receiver, the measured channel information phase data are largely random and are inapplicable for determining body motion. In

this letter, we fully explore the amplitude as well as sanitized (useful) phase information for object motion detection by applying a linear transformation on raw channel information data to mitigate the random phase offsets as in [7].

Considering the expression for measured channel information phase data Φ_i' for the i^{th} subcarrier:

$$\Phi_i' = \Phi_i - 2\pi \frac{S_i}{N} \sigma + \beta + M, \quad (4)$$

Here Φ_i indicates the true phase, σ is the time lag, β denotes the unknown phase offset, and M is the measurement noise. The term S_i is the subcarrier index of the i^{th} subcarrier and N is the FFT size. The subcarrier indices S_i (for $i = 1 - 30$) and FFT size N can be obtained from the IEEE 802.11n specification [8]. Due to the listed unknowns σ and β in equation - 4, it is not possible to obtain useful phase information solely. To mitigate the impact of random noises, we perform a linear transformation on the raw phases, as described in [7]. We consider phase values for the entire frequency bandwidth to eliminate σ and β values. First, we introduce y and z terms representing the slope of the phase and the offset for entire frequency band, respectively [9].

$$y = \frac{\Phi_n' - \Phi_1'}{S_n - S_1} = \frac{\Phi_n - \Phi_1}{S_n - S_1} - \frac{2\pi}{N} \sigma. \quad (5)$$

Note: $n=30$ indicates the total number of subcarriers.

$$z = \frac{1}{n} \sum_{j=1}^n \Phi_j'. \quad (6)$$

By substituting the measured phase data Φ_i' into the offset for entire frequency band, we get:

$$z = \frac{1}{n} \sum_{j=1}^n \Phi_j' - \frac{2\pi\sigma}{nN} \sum_{j=1}^n S_j + \beta + M. \quad (7)$$

The expression $\frac{2\pi\sigma}{nN} \sum_{j=1}^n S_j = 0$ because the indices for 30 subcarriers are symmetrical in accordance to IEEE 802.11n [9], where the term z can then be expressed as:

$$z = \frac{1}{n} \sum_{j=1}^n \Phi_j' + \beta + M, \quad (8)$$

By subtracting the linear term $yS_i + z$ from measured phase data Φ_i' , we obtain the sanitized phase information, expressed as:


$$\Phi_i^{\sim} = \Phi_i' - yS_i - z. \quad (9)$$

$$\Phi_i^{\sim} = \Phi_i' - \left[\frac{\Phi_n - \Phi_1}{S_n - S_1} - \frac{2\pi}{N} \sigma \right] S_i - \left[\frac{1}{n} \sum_{j=1}^n \Phi_j' + \beta + M \right]. \quad (10)$$

Putting equation - 4 in equation - 10 gives us:

$$\Phi_i^{\sim} = \Phi_i - \frac{2\pi}{N} \sigma S_i + \beta + M - \frac{\Phi_n - \Phi_1}{S_n - S_1} S_i + \frac{2\pi}{N} \sigma S_i - \frac{1}{n} \sum_{j=1}^n \Phi_j' - \beta - M. \quad (11)$$

$$\Phi_i^{\sim} = \Phi_i - \frac{\Phi_n - \Phi_1}{S_n - S_1} S_i - \frac{1}{n} \sum_{j=1}^n \Phi_j'. \quad (12)$$

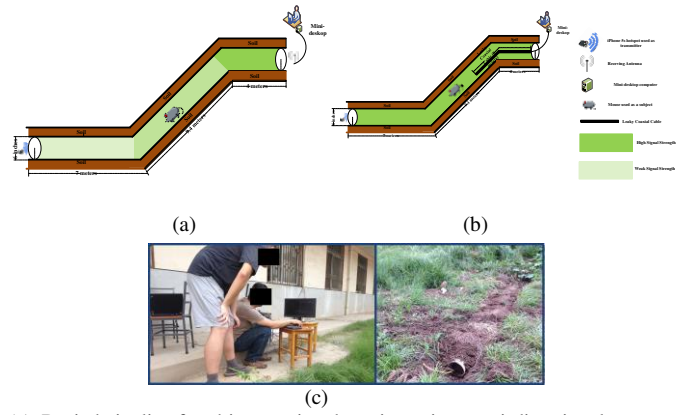

(a). Buried pipeline for object motion detection using omni-directional antenna. (b). Buried pipeline for object motion detection using LWC. (c). Picture of the test field

Figure 1 – Experimental setup for identifying an underground moving object

III. LEAKY WAVE CABLE VS OMNI-DIRECTIONAL ANTENNA

The leaky wave cable has been used for fire, rescue, and mobile phone radio communications in tunnels for subways, trains, underground shopping arcades, buildings and so on [10]. The LWC comprises of a coaxial cable with zigzag period slots and acts as an array antenna [11]. The LWC also provides a wider wireless range and covers blind and semi-blind zones created by an omni-directional antenna when an obstacle is encountered in the area.

The electric field around an LWC with periodic slots is given as [12]:

$$E(r, z) = -\frac{j}{4} \sum_{i=-\infty}^{\infty} \zeta_i M H_1^{(2)}(\zeta_i z) e^{-jk_i r}, \quad (13)$$

Here $H_1^{(2)}$ describes the Henkel function of the second order, M is the magnetic current, r is the radial direction and z is the axis of direction of periodic function. However, $\zeta_i = \sqrt{k_0^2 - k_i'^2}$ and $k_i'^2 = k'^2 + \frac{2\pi i}{P}$. The term $k' = 2\pi f \sqrt{\frac{\epsilon_r}{c}}$ and $k_0 = \frac{2\pi f}{c}$ is the wave number of the LWC in free space respectively. ϵ_r is the relative permittivity, c is the speed of light and P denotes the periodicity of the slots.

IV. EXPERIMENTAL SETUP


We have used three pieces of PVC pipe, 7 meters, 9.4 meters and 4 meters in length with bends at two points as shown in figure – 1(a) (b). Figure 1(c) shows picture of the test field and two people present at a distance of 3 meters from the buried pipeline for recording channel information data using host computer. During the process of obtaining data, the two persons avoided any movement. Grass was the only object closest to the pipeline. A rat (mouse) was selected as an object in motion inside the pipeline. We have used an HP desktop computer (CPU: Intel Core i5 3.30 GHz, RAM: 8 GB) with one external antenna (scenario I) and LWC (scenario II). A Samsung S5 mobile phone hotspot operating is used as the wireless access point (AP). AP and the receiver are deployed at each end as indicated in figure – 1(a)(b). To collect channel information measurements, the client pings the AP at 20 packets per second. A modified driver is used to collect client

side data [13].

V. EXPERIMENTAL RESULTS AND DISCUSSION

To identify any moving object inside the pipeline, we analyze both amplitude and phase information by exploiting equation - 3 and equation-12, respectively. We also compare the performance of the omni-directional antenna and LWC at the receiver side.

A. Object motion detection using the omni-directional antenna

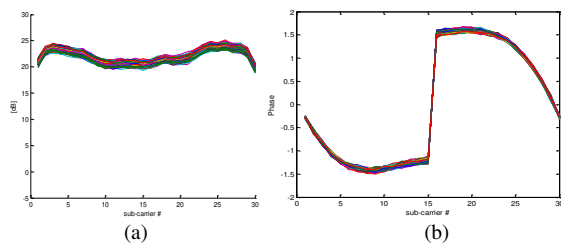

(a) The CFR traces obtained during experiment.
(b) The phase information after applying linear transformation.

Figure 2 –The CFR and phase values recorded when no moving object was present in the pipeline.

The constant values of the channel frequency response and phase information in figure - 2 obtained during the experiment reflects that no moving object was present. We further examine the phase information in figure - 3.





Figure 3 – The channel information phase information before and after linear transformation.

The random values in “green” indicate the phase information while a cluster of data in “red” shows the phase values after the applying linear transformation. The data are placed at one point and do not indicate any variation as a result of no moving object that is present in the area of interest. On the contrary, CFR values for all 30 subcarriers and phase information in figure - 4(a) and figure - 4(b), respectively, show significant variances as the subject moves inside of the pipeline.

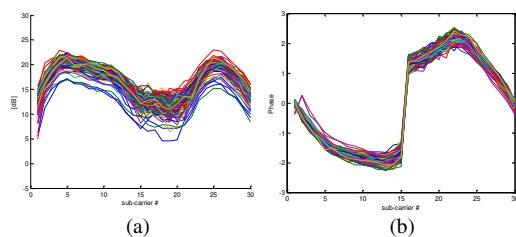

(a). Variances of CFR data due to subject motion.
(b). Variation in phase information.

Figure 4 –The CFR and phase information gathered when the subject was moving within the wireless range.




Figure 5 – The channel information phase data for the subject in motion

The object movement disturbs the wireless medium as a result of the sanitized phase information showing variances in figure - 5. To analyze the amplitude vs. time history for object motion detection, we consider figure - 6.

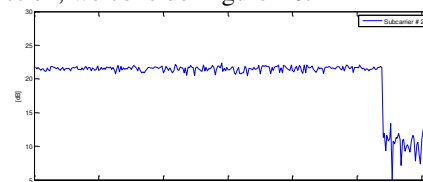


Figure 6 – The channel information time history for the individual subcarrier when the moving object was absent and present, respectively.


Figure-6 gives a good indication of the time history when the experiment was performed. In absence of any object in motion, the channel information amplitude for subcarrier # 20 is static till the 270th second. As the moving object was subjected within the wireless range, the channel information amplitudes started to vary significantly.

The time history indicates that the object was present for a period of nearly 45 seconds. Since we know the channel information data for different curved pipeline will be different. But considering this particular scenario, when the power level remains stationary around 22 dB it means no moving object was present but as it starts fluctuating around 5 dB and 12 dB as in figure - 6 it means moving object was there in the area of interest. The power level is strongly related to object movement.

Subcarrier selection strategy: A particular subcarrier against time was selected by examining CFR values of 30 subcarriers in figure - 2(a) and figure - 4(a) for no moving object and an object in motion, respectively, in the area of interest. In the former case, the CFR values are constant while in the latter the values vary significantly for all subcarriers. Thus, to analyze the time history, we can choose any subcarrier between 1 and 30.

B. Object motion detection using a leaky wave cable

We further analyze the results of object motion detection when leaky wave cable was used as a receiving antenna.

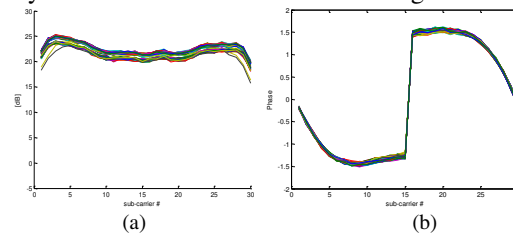

(a). The channel information data recorded using LWC
(b). The sanitized phase information obtained during the experiment

Figure 7 – The channel information data and phase information collected using LWC.

The CFR values obtained in the absence of any object motion in figure - 7(a) are marginally different from the data collected using an omni-directional antenna.


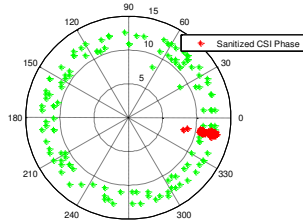


Figure 8 – Phase information obtained using LWC in the absence of any object in motion

Comparing the phase information obtained through LWC with using the omni-directional antenna when no object in motion is present, the values are slightly different. The difference in values is due to the longer length of the LWC wired into one end of the pipeline. On the other hand, we see more variations when the subject was moving within the pipeline as shown in figure - 9. The primary reason for having significantly large variances as compared to the omni-directional antenna is due to the fact that it covers the blind and semi blind zones due to the bends in the pipeline.

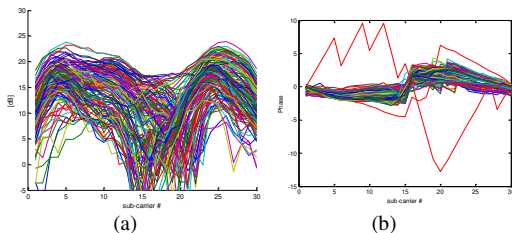

(a). Variances of CFR data due to subject motion.
(b). Variation in phase information.

Figure 9 – Variances in amplitude and phase information obtained using LWC in the presence of any object in motion

The channel information and phase data obtained using LWC are highly sensitive to object motion. More variation of amplitude and phase information can be observed as compared to omni-directional antenna.




Figure 10 - Raw phase and sanitized phase information

The sanitized phase information collected using a leaky wave cable shows more variations as a result of object identification.

VI. CONCLUSION

The underground object motion detection system using wireless channel information in conjunction with leaky wave

cable efficiently and reliably helps in identifying an entity in the premises. In our work, we presented channel information measurements for a period of nearly 5 minutes and observed the subject’s movements for a particular subcarrier. A wireless signal in an underground environment reaches the receiver through reflections. The radio signal scattering effects are captured and analyzed for making inferences. The signals via multiple paths are a superimposed signal that is averaged out over time. The experimental results showed that by deploying a leaky wave cable at the receiver side, high classification accuracy could be achieved since the results indicated more variations as compared to omni directional antenna and work better when curves are encountered.

VII. REFERENCES

- [1]. C. Dourthe, C. Pichot, J. Y. Dauvignac, and J.Cariou, “Inversion algorithm and measurement system for microwave tomography of buried object,” *Radio Science*, vol. 35, no. 5, pp. 1097–1108, 2000.
- [2]. B. Smith, “An approach to graphs of linear forms (Unpublished work style),” unpublished.
- [3]. C. Estatico, M. Pastorino, and A. Randazzo, “A novel microwave imaging approach based on regularization in LpBanach spaces,” *IEEE Transactions on Antennas and Propagation*, vol. 60, no. 7, pp. 3373–3381, Jul. 2012.
- [4]. J. Wang, “Fundamentals of erbium-doped fiber amplifiers arrays (Periodical style—Submitted for publication),” *IEEE J. Quantum Electron.*, submitted for publication.
- [5]. H. Jia, T. Takenaka, and T. Tanaka, “Time-domain inverse scattering method for cross-borehole radar imaging,” *IEEE Transactions on Geosciences and Remote Sensing*, vol. 40, no. 7, pp. 1640–1647, Jul. 2002.
- [6]. F. Viani, A. Polo, E. Giarola, M. Salucci, and A. Massa, “Principal component analysis of channel information for the robust wireless detection of passive targets,” *2017 International Applied Computational Electromagnetics Society Symposium, ACES 2017, Firenze, Italy, March 26-30, 2017*.
- [7]. C. Wu, Z. Yang, Z. Zhou, X. Liu, Y. Liu, and J. Cao, “Non-invasive detection of moving and stationary human with wifi,” *IEEE J. Sel. Areas Commun.*, vol. 33, no. 11, pp. 2329–2342, 2015.
- [8]. J. Xiao, K. Wu, Y. Yi, L. Wang, and L. M. Ni, “Pilot: Passive device-free indoor localization using channel state information,” in *Proceedings of IEEE ICDCS*. IEEE, 2013, pp. 236–245.
- [9]. M. Young, *The Technical Writers Handbook*. Mill Valley, CA: University Science, 1989.
- [10]. K. Qian, C. Wu, Z. Yang, Y. Liu and Z. Zhou, “PADS: Passive detection of moving targets with dynamic speed using PHY layer information,” *2014 20th IEEE International Conference on Parallel and Distributed Systems (ICPADS)*, Hsinchu, 2014, pp. 1-8.
- [11]. D. Halperin, W. J. Hu., A. Sheth., and D. Wetherall., “Predictable 802.11 packet delivery from wireless channel measurements,” in *Proc. ACM SIGCOMM’10*, New Delhi, India, Sept. 2010, pp. 159–170.
- [12]. X. Wang, L. Gao and S. Mao, “channel information Phase Fingerprinting for Indoor Localization With a Deep Learning Approach,” in *IEEE Internet of Things Journal*, vol. 3, no. 6, pp. 1113-1123, Dec. 2016.
- [13]. Sitaram Rampalli and Hugh R. Nudd, “RECENT ADVANCES IN THE DESIGNS OF RADIATING (LEAKY) COAXIAL CABLES,” *International Wire & Cable Symposium Proceedings*, pp. 66-77, 1991.
- [14]. Masayuki Nakamura, Hideaki Takagi, Kiyoshi Einaga, Toshiyuki Nishikawa, Naoshi Moriyama and Katsumi Wasaki, “Development of a 300 m 2.4 GHz frequency band leaky coaxial cable for wireless network access,” *2008 IEEE Radio and Wireless Symposium*, Orlando, FL, 2008, pp. 687-690.
- [15]. K. Inomata, W. Tsujita and T. Hirai, “Two-frequency surveillance technique for intrusion-detection sensor with Leaky Coaxial Cables,” *2014 IEEE Sensors Applications Symposium (SAS)*, Queenstown, 2014, pp. 103-106.
- [16]. D. Halperin, W. Hu, A. Sheth, and D. Wetherall. “Tool release: Gathering 802.11n traces with channel state information.” *ACM SIGCOMM CCR*, 41(1):53, Jan. 2011.