

# 5G New Radio Key Performance Indicators Evaluation for IMT-2020 Radio Interface Technology

A. PHANI KUMAR REDDY<sup>1</sup>, SHEEBA KUMARI M<sup>2</sup>, VISHAKHA DHANWANI<sup>3</sup>, AKHIL KALPESH BACHKANIWALA<sup>3</sup>, NAVIN KUMAR<sup>2</sup>, (Senior Member, IEEE), K. VASUEDVAN<sup>1</sup>, (Senior Member, IEEE), SRINIVASAN SELVAGANAPATHY<sup>4</sup>, SENDIL KUMAR DEVAR<sup>5</sup>, PUNIT RATHOD<sup>6</sup> (Member, IEEE) and VINOSH BABU JAMES.<sup>6</sup>, (Senior Member, IEEE)

<sup>1</sup>Department of EE, IIT Kanpur, 208016 Kanpur, India

<sup>2</sup>Department of ECE, Amrita School of Engineering, 560035 Bengaluru, Amrita Vishwa Vidyapeetham, India

<sup>3</sup>Department of ECE, LNMIIT, 302031 Jaipur, India

<sup>4</sup>Nokia Bell Labs, 560045 Bengaluru, India

<sup>5</sup>Ericsson India, 122002 Gurugram, India

<sup>6</sup>Qualcomm India, 560066 Bengaluru, India

Corresponding author: A. Phani Kumar Reddy (e-mail: [phani.iitk@gmail.com](mailto:phani.iitk@gmail.com)).

**ABSTRACT** The International Telecommunication Union (ITU) has recently announced the detailed 5G specifications for International Mobile Telecommunications (IMT-2020). A number of candidate Radio Interface Technologies (RITs) were being evaluated by the independent evaluation groups of the ITU. Meanwhile, the roll out of 5G is going on, and 5G is available in more than 160 MNO network. This paper presents the evaluation of the proponent technologies, including the ones specified as 3GPP 5G NR. The entire 3GPP specifications were examined and evaluated through simulation using Matlab and a custom simulator based on the Go-language. The simulator facilitated the comprehensive evaluation of the 5G NR performance by using the IMT-2020 evaluation framework. Some of the submitted technologies displayed certain discrepancies which were reported to ITU as well as discussed with proponents to improvise the shortcomings. The detailed results and observations are presented in this paper.

**INDEX TERMS** 5G, data rate, energy efficiency, IMT-2020 evaluation, latency, mobility, new radio, spectral efficiency.

## I. INTRODUCTION

THE international telecommunication union radio communication sector (ITU-R) has set the requirements for international mobile telecommunications-2020 (IMT-2020) which defined the emergence of the fifth generation (5G) mobile communication standards [1]. The IMT-2020 system requirements for the radio access technologies (RAT) were finalized and adopted in the ITU-R report M.2410 [2] way back in 2017. Following this acceptance, developers of RATs have been developing 5G technologies to meet these requirements. Accordingly, the 3rd generation partnership project (3GPP) developed the 5G New radio (NR) RAT to satisfy the 5G requirements. It also informed that along with Long term evolution-M (LTE-M) and Narrow band-Internet of Things (NB-IoT), they satisfy all the performance requirements of IMT-2020 (3GPP TR 38.913) as a set of RAT's [3]. Additionally, proponents such as China, Korea, ETSI-DECT Forum, and NuFront have also developed suitable technology and

submitted to ITU-R as candidate technology for IMT-2020.

The standardization of 5G technologies for IMT-2020 typically requires the verification of these submissions. The submission is then evaluated by independent evaluation groups (IEG) comprising researchers from academia and industry and, they should be registered to ITU. 5G India Forum (5GIF) is one of the IEGs who carried out the evaluation of 3GPP NR for NuFront, enhanced ultra high throughput (EUHT-5G) and many other proponents [4] [5]. Multiple levels of process like, inspection, analysis, simulation, experiments have been suggested by ITU. Complete guidelines, specifications to be evaluated, etc. are found in [2].

In the standardization process, every candidate technology is required to submit a self evaluation report to ITU-R. The IEGs evaluate the reports for the proposed radio interface technologies (RITs) and set of RITs (SRITs) by following the guidelines of evaluation process as listed by ITU-R in report M.2412 [6]. These evaluations are then submitted to ITU-R

and discussed in the working party (WP) 5D meetings. It is expected that after a couple of such meetings, the RITs and SRITs will be accepted as IMT 2020 (5G) standard.

The 5GIF IEG is one of the independent evaluation groups registered with ITU-R for IMT-2020 candidate radio technology evaluation. This group was formed to evaluate the IMT-2020 candidates from the perspective of Indian network deployments. This is a group of operators, OEM's, universities and individual experts participating in a collaborative manner, in the evaluation of candidate IMT-2020 technologies of interest. This is a contribution driven activity, with decisions made through a consensus seeking approach. The technology and standards working group of the 5GIF is involved in creating usage cases and specifications that are specifically designed for Indian adoption. This involves the assessment of core innovations coming from 5G standardisation bodies such as the 3GPP as well as integration concepts and migration paths.

The remainder of the paper is organised as follows. The technical aspects of 5G NR are briefly discussed in Section II. Section III discusses the 5G NR simulator, Section IV explains the evaluation process, and Section V presents and discusses the findings and outcomes. Finally, Section VI concludes the paper. Table 1 lists the acronyms used in the document.

## II. TECHNICAL DETAILS OF 5G NR

### A. NR NUMEROLOGY

In 5G NR, the term numerology defines a combination of subcarrier spacing (SCS) and cyclic prefix. The specifications [7] introduce the Greek letter  $\mu$  to represent a given numerology according to Table 2.

As can be seen from the Table 2, SCS as large as 240kHz is used. The reason for this is to transmit over a large bandwidth without increasing the number of subcarriers. This is important from the implementation standpoint because larger number of subcarriers implies large fast fourier transforms (FFTs) that are complex/costly to implement. The SCS has a direct impact in the orthogonal frequency division multiplexing (OFDM) symbol duration.

### B. CHANNEL BANDWIDTH

5G NR channel bandwidths [7] and resource block (RB) assignments enable higher spectrum usage as compared to LTE. For example: LTE 20 MHz channel vs. 5G NR 20 MHz channel using 15 kHz SCS. **LTE 20 MHz:**  $100 \text{ RB} \times 12 \times 15 \text{ kHz} = 18 \text{ MHz}$ , which translates to 90% of the 20 MHz channel being nominally occupied with OFDM subcarriers. **5G NR 20 MHz:**  $106 \text{ RB} \times 12 \times 15 \text{ kHz} = 19.1 \text{ MHz}$ , which translates to 95% of the 20 MHz channel being nominally occupied with OFDM subcarriers. It may be noted that 5G NR protocol does support arbitrary channel bandwidths with fewer RBs for applications requiring larger guard bands. For example, an operator could easily deploy 5G NR with only 100 RBs while using 15 kHz SCS over a 20 MHz spectrum

TABLE 1. List of acronyms.

3GPP	3 <sup>rd</sup> generation partnership project
BS	Base-station
BW	Bandwidth
CCE	Control channel element
CP	Control-plane or cyclic prefix
CPE	Consumer premises equipment
CSI	Channel state information
CSI-RS	Channel state information reference signal
DU	Dense urban
DL	Downlink
DM-RS	Demodulation reference signal
eMBB	Enhanced mobile broadband
FDM	Frequency division multiplexing
FWA	Fixed wireless access
gNB	g-NodeB
GoS	Grade-of-service
HARQ	Hybrid automatic repeat request
InH	Indoor hotspot
ITU	International telecommunication union
LDPC	Low-density parity code
LMLC	Low-mobility large-cell
LoS	Line-of-sight
MAC	Medium access control
MIMO	Multiple-input multiple-output
mMTC	Massive machine-type communications
NB-IoT	Narrowband-internet of things
NLoS	Non-line-of-sight
NR	New Radio
OFDM	Orthogonal frequency division multiplexing
PDCCH	Physical downlink control channel
PDSCH	Physical downlink shared channel
PDCP	Packet data convergence protocol
PRB	Physical resource block
PT-RS	Phase tracking reference signal
PUCCH	Physical uplink control channel
PUSCH	Physical uplink shared channel
QoS	Quality-of-service
RAN	Radio access network
RB	Resource block
RE	Resource element
RIT	Radio-interface technology
RLC	Radio link control
RU	Rural
SCS	Sub-carrier spacing
SDU	Service data unit
SINR	Signal-to-interference noise ratio
SNR	Signal-to-noise ratio
SR	Scheduling request
SRS	Sounding reference symbol
SSB	Synchronization signal block
SCM	Stochastic channel model
TBS	Transport block size
TRxP	Transmission and reception point
TRS	Tracking reference signal
TTI	Transmission time interval
UE	User equipment
UL	Uplink
UP	User-plane
URLLC	Ultra-reliable low-latency communications

TABLE 2. Supported Transmission Numerologies.

$\mu$	$\Delta f = 2^\mu \cdot 15$ [kHz]	Cyclic Prefix
0	15	Normal
1	30	Normal
2	60	Normal, Extended
3	120	Normal
4	240	Normal

TABLE 3. Number of slots per subframe.

SCS	$N_{\text{slot}}^{\text{subframe}, \mu}$
15	1
30	2
60	4
120	8
240	16

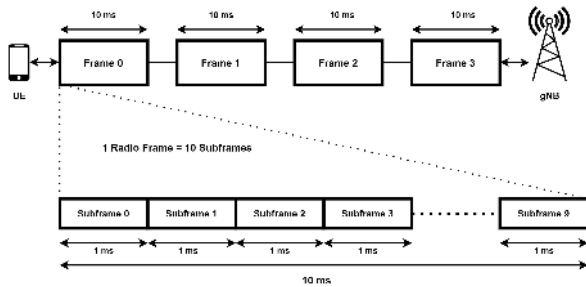


FIGURE 1. Frame and Sub-Frame.

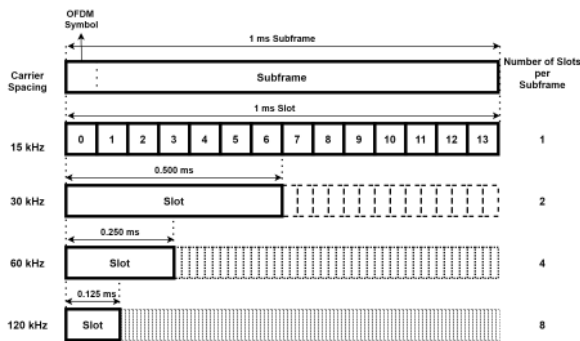


FIGURE 2. Slot.

block, resulting in an increased guard band as compared to that of the 5G NR example above.

**Resource block** is defined as 12 consecutive OFDM sub-carriers in frequency, irrespective of the numerology. Therefore, the resource block bandwidth changes with numerology.

### C. FRAME AND SUBFRAME STRUCTURE

In [7], the 5G NR frame structure is defined. One radio frame lasts 10 milliseconds and is divided into ten sub-frames of 1 millisecond each. The normal cyclic prefix slots have 14 OFDM symbols and the extended cyclic prefix slots have 12 OFDM symbols (supported only for the 60 kHz SCS). The total number of slots per sub-frame are shown in Table 3.

The subframes in the case of 15 kHz can be aligned with the LTE subframe. Mini-slots with 2, 4, or 7 OFDM symbols are also supported by the subframe structure which can start at any symbol relative to the symbol 0 of each subframe. One of the motivations for a mini-slot is to support very low latency URLLC traffic. The mini-slots may transmit overlapping slots while carrying eMBB data which can cause errors in the eMBB data reception. However, this can be

appropriately resolved with hybrid automatic repeat request (HARQ) retransmission [7]. Eventhough slots and mini-slots are the basic scheduling units, 5G NR also supports scheduling of a partial slot.

IMT-2020 is intended to extend and enable a variety of usage scenarios and applications that will proceed beyond IMT-Advanced, as specified in recommendation ITU-R M.2083 [8]. The following are three possible applications for IMT-2020 [6]:

- **Enhanced mobile broadband (eMBB):** In comparison to current mobile broadband applications, this usage scenario would introduce additional application areas and standards for better functionality and a more streamlined user interface. This usage scenario includes a variety of scenarios, such as wide-area coverage and hotspot, each of which has its own set of specifications.
- **Massive machine type communications (mMTC):** This use case is defined by a large number of linked machines exchanging a small amount of non-delay-sensitive data.
- **Ultra-reliable and low-latency communications (URLLC):** This use case has precise specifications for throughput, latency, and availability. Wireless management of industrial processing or development systems, remote medical surgery, delivery automation in a smart grid, transportation protection, and so on.

Standard is developed to work in different. IMT-2020 [6] is expected to work in different scenario and therefore, tested in the following environments:

- 1) **Indoor hotspot-eMBB:** An indoor isolated area focused on stationary and pedestrian users with a very large traffic level at offices and/or shopping malls.
- 2) **Dense urban-eMBB:** A dense urban area with large user intensity and traffic loads, with an emphasis on pedestrians and vehicular users.
- 3) **Rural-eMBB:** A rural community that supports pedestrian, vehicular, and high-speed vehicular users by providing a wider and consistent broad area coverage.
- 4) **Urban macro-mMTC:** An urban macro ecosystem that focuses on a large range of wired computer style devices and aims to have continuous coverage.
- 5) **Urban macro-URLLC:** An urban macro environment aimed at providing ultra-reliable and low-latency communications.

InH<sub>x</sub> (Indoor Hotspot), UMa<sub>x</sub> (Urban Macro), UMi<sub>x</sub> (Urban Micro), and RMa<sub>x</sub> (Rural Micro) are the channel

models in each setting. The test environment and corresponding channel model is given in Table 4. When a channel type is applied with `_x` suffix, I, in this paper, we refer to all versions of the model, e.g., `InH_x` means both, `InH_A` and `InH_B`. Similarly, if a version is referred to as "model A" or "model B," it refers to all instances of that variant, e.g., "model A" refers to all `InH_A`, `UMa_A`, `UMi_A`, and `RMa_A` variants.

TABLE 4. Mapping of Channel Models (reproduced from [6]).

Test environment	Indoor Hotspot -eMBS	Dense urban eMBS	Rural eMBS	Urban macro -mMTC	Urban macro -URLLC
Channel model	<code>InH_A</code> , <code>InH_B</code>	Macro layer: <code>UMa_A</code> , <code>UMa_B</code> Micro layer: <code>UMi_A</code> , <code>UMi_B</code>	<code>RMa_A</code> , <code>RMa_B</code>	<code>UMa_A</code> , <code>UMa_B</code>	<code>UMa_A</code> , <code>UMa_B</code>

### III. 5G NR SIMULATOR

5GIF has developed a simulator for analyzing, interpreting and visualizing the performance of the major key performance indexes of 5G NR. The simulator is based on an abstract modeling approach which separates the simulation into both system level and link level. The system level simulations involve network evaluations, the generated statistics of which is used by link level simulation to obtain statistics for individual BS-UE pair.

Simulator modules include configuration setting, network layout, pathloss, fading effect, channel model and frame generation. Figure 3 shows the configuration settings, processing and output arrangement for the 5GIF simulator. The configuration settings are categorized into those given by the proponent technology, customizable simulation parameters, and those specified by ITU-R for M.2412 [6] evaluation purposes. Processing involves randomly sampled realizations of a scenario that is generated according to the parameters specified by the configuration setting. The individual link quality is determined as per the network layout, pathloss and fading effects. The generate statistics are then utilized to infer performance. 5GIF simulator is calibrated based on the SINR and coupling loss CDF for 19 cell cluster. The input simulation configuration files can be found at GitHub repository<sup>1</sup>.

#### A. KEY FEATURES

- 1) The simulator is capable to simulate various environments and scenarios such as indoor hotspot environment, dense urban environment, rural macro environment, urban macro environment: URLLC scenario, urban macro environment: mMTC environment. Other environments and scenarios can also be simulated by setting the relevant parameters in the configuration files. Two network layouts are supported: Indoor

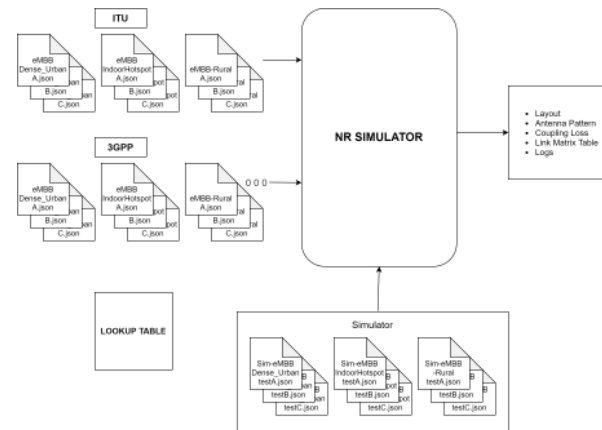


FIGURE 3. 5G New Radio Simulator Setup.

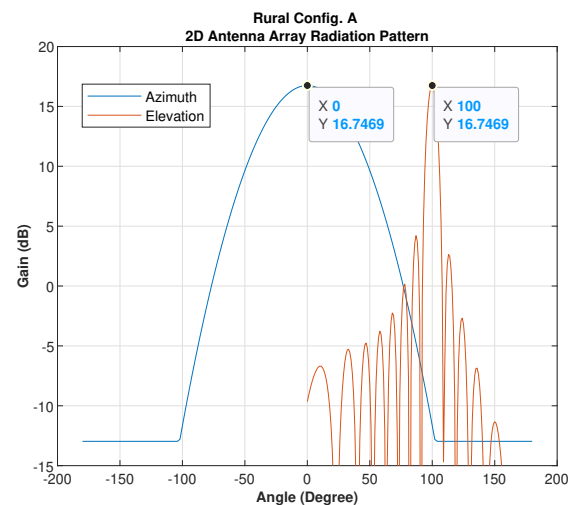


FIGURE 4. 2D Antenna array radiation pattern for rural eMBS config. A.

- hotspot - Rectangular network layout with 3 Sectors (TRxP) each; macros - hexagon network layout with 3 sectors (TRxP) each.
- 2) The simulator is capable to provide visual representation of the coverage of gain provided by a TxRU on each TRxP of a base station in horizontal and vertical direction. For any required configuration both 2D and 3D antenna radiation patterns can be obtained and analysed providing gain for all the azimuth and zenith combinations. Figure 4 shows a 2D plot of antenna array radiation pattern and Figure 5 shows a 3D plot of antenna array radiation pattern for rural eMBS configuration A showing that the beam is narrow along vertical direction and wide along horizontal direction which is required in rural environment. The plots demonstrate the benefit when the angle of azimuth is 0° and the height angle is 100°, which corresponds to the electric tilt and horizontal scan used for beamforming.
- 3) The simulator provides the primary metrics like cou-

<sup>1</sup><https://github.com/5gif>



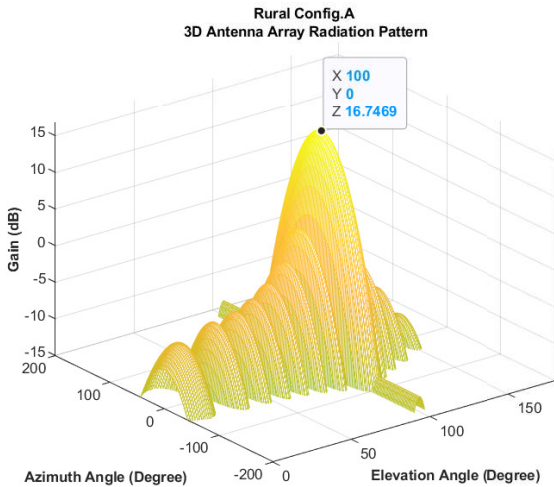


FIGURE 5. Antenna Array Radiation Pattern for 8x1 elements with Scan angle= 0° and Etilt angle = 100°.

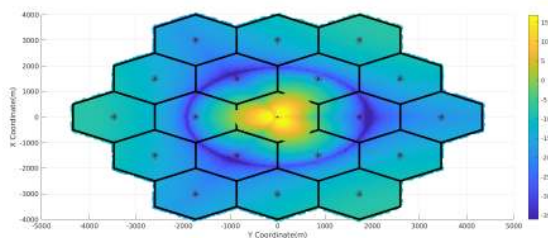


FIGURE 6. Antenna Sector plot for RMA Configuration A.

pling gain cumulative distribution function (CDF) plots, SINR CDF plots, BLER vs SINR plots etc.

- 4) Inside a cell, a visual representation of the SINR distribution and antenna gains distribution can be created. The beamforming capacity to expand the propagation range is visualised in Figure 6. Figure 6 shows positive results in areas outside of the base station with adequate coverage for nearby consumers and negative gains in locations farther from the base station with no coverage within the cell.
- 5) Pathloss and shadow fading (large-scale fading) metrics can be generated. Figure 7 shows pathloss vs distance for rural channel model A for LOS, NLOS and LMLC-NLOS scenario at 0.7 GHz frequency. Figure 8 shows pathloss vs distance for rural channel model A for LOS and NLOS at 0.7 GHz, 7.0 GHz and 27.0 GHz frequency.
- 6) The simulator supports warp around capability that is to have virtual base stations apart from the 19 base stations to remove the edge cell effect.

#### IV. EVALUATION METHODOLOGY

According to the guidelines described in M.2412 [6], the evaluation of candidate technologies consists of multiple

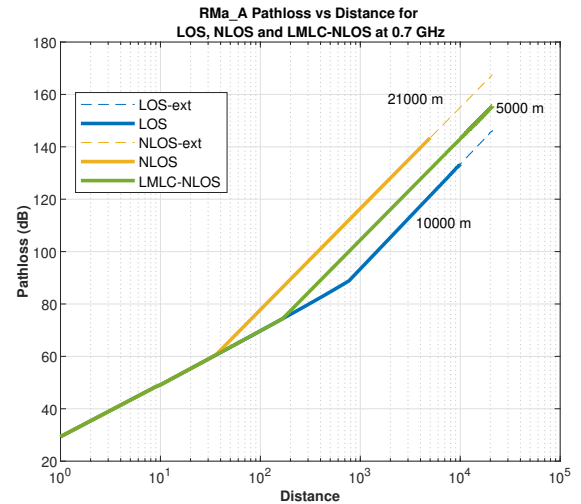


FIGURE 7. Pathloss vs Distance for channel model A.

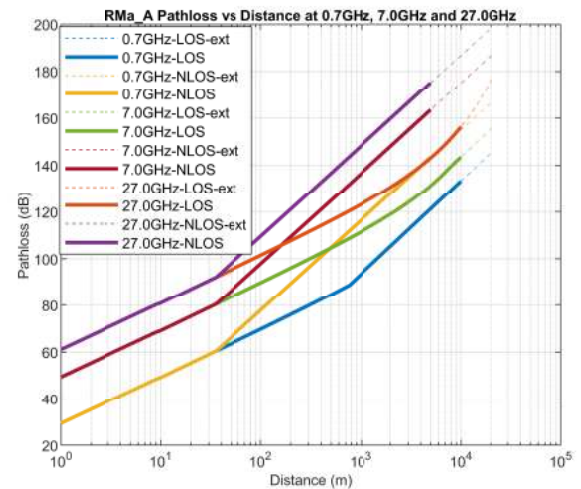


FIGURE 8. Pathloss vs Distance at 0.7GHz, 7.0GHz and 27.0GHz.

steps such as, inspection, analytical evaluation and experimental verification of their self-evaluation submissions. The system performance is evaluated by considering the following key parameters as per the specified evaluation methodology is given in Table 5.

#### V. RESULTS AND OBSERVATIONS

Our team has evaluated most of these parameters following the guideline as described above. In this section, we discuss them briefly including the results.

##### A. PEAK SPECTRAL EFFICIENCY:

Peak spectral efficiency is an important parameter in any wireless standard. It defines how many number of bits per second is sent in a given one Hz of bandwidth. It depends on many factors, such as, channel bandwidth, sub-carrier spacing, total number of subcarrier available in OFDM symbol,

**TABLE 5.** Summary of evaluation methodologies (reproduced from [6]).

KPI	High-level assessment method
Peak data rate	Analytical
Peak spectral efficiency	Analytical
User experienced data rate	Analytical for single band and single layer; Simulation for multilayer
5 <sup>th</sup> percentile user spectral efficiency	Simulation
Average spectral efficiency	Simulation
Area traffic capacity	Analytical
User plane latency <sup>†</sup>	Analytical
Control plane latency <sup>†</sup>	Analytical
Connection density	Simulation
Energy efficiency	Inspection
Reliability	Simulation
Mobility	Simulation
Mobility interruption time	Analytical
Bandwidth	Inspection
Support of wide range of services	Inspection
Supported spectrum band(s)/range(s)	Inspection

<sup>†</sup>Evaluation Completed in [9]

physical resource block (PRB) and so on [10]. Table 6 shows the maximum number of PRBs usable for a given SCS and the channel bandwidth as defined in 3GPP RAN4.

**TABLE 6.** Max. number of PRBs for FR1 and FR2.

SCS(kHz)	Channel Bandwidth(MHz)											
	5	10	15	20	25	40	50	60	80	100	200	400
For FR1 frequency range												
15	25	52	79	106	133	216	270					
30	11	24	38	51	65	106	133	162	217	273		
60		11	18	24	31	51	65	79	107	135		
For FR2 frequency ranges only (mmwave)												
60						66				132	264	
120						32				66	132	264

Each PRB can have 12 subcarriers and will span a bandwidth of  $12 \cdot \text{SCS}$ . For example in Table 6, for FR1 frequency range, row 2 has 273 PRBs. Each resource block has 12 carriers and each carrier in turn, is 30kHz, yielding a carrier bandwidth of  $273 \cdot 12 \cdot 30 = 98.28\text{MHz}$ . Similarly, row 3 yields a carrier bandwidth of  $135 \cdot 12 \cdot 60 = 97.20\text{MHz}$ .

In addition, NR can aggregate up to 16 such component carriers. The peak spectral efficiency for a particular component carrier ( $j^{\text{th}}$  CC) can be obtained from equation based on the specification and discussion in 3GPP [11].

$$SE_{p_j} = \frac{(1 - OH^{(j)})}{BW^{(j)}} \times \left( v_{\text{Layers}}^{(j)} \cdot Q_m^{(j)} \cdot f^{(j)} \cdot R_{\text{max}} \cdot \frac{N^{\text{BW}(j), \mu \cdot 12}}{T_s^\mu} \right) \quad (1)$$

where  $R_{\text{max}} = \frac{948}{1024}$ . For the  $j^{\text{th}}$  CC,  $v_{\text{Layers}}^{(j)}$  represents the maximum number of layers,  $Q_m^{(j)}$  is the maximum modulation order,  $f^{(j)}$  is the scaling factor which takes values

1 and 0.75 at least.  $f^{(j)}$  is signalled per band combination as per UE (User equipment) capability signalling,  $\mu$  is the numerology as defined in TS38.211 [7],  $T_s^\mu$  is the average OFDM symbol duration in a subframe for  $\mu$ , i.e.  $T_s^\mu = \frac{10^{-3}}{14 \cdot 2^\mu}$  where the normal cyclic prefix is assumed.  $N_{\text{PRB}}^{\text{BW}(j)}$  is the maximum PRB allocation in bandwidth with  $\mu$ , as given in section 4.5.1 of (TR 38.817-01) [12], where  $BW^{(j)}$  is the UE supported maximum bandwidth in the given band combination.  $OH^{(j)}$  is the overhead calculated as the average ratio of the number of resource elements (REs) occupied by L1/L2 control, synchronization signal, physical broadcast channel (PBCH) and reference signals, etc. with respect to the total number of REs in effective bandwidth time product  $\alpha^{(j)} \cdot BW^{(j)} \cdot (14 \times T_s^\mu)$ ,  $\alpha^{(j)}$  is the normalized scalar considering the DL/UL ratio; for FDD  $\alpha^{(j)} = 1$  for DL and UL; and for TDD and other duplexing  $\alpha^{(j)}$  for DL and UL is calculated based on the frame structure. 50 percent of GP symbols are called DL overhead, and 50 percent of GP symbols are considered UL overhead for guard period (GP). Given the maximum number of Tx/Rx elements in ITU-R configurations, the maximum number of TXRU allowed is upto 8 layers. Spectral efficiency is calculated for both, DL and UL.

#### 1) Downlink

For frequencies in FR1, e.g. the 3.5GHz band is considered for early IMT-2020 deployments. This band is TDD band. In FR2, 26GHz, 28GHz and 39GHz bands are supported in 3GPP NR specifications. 3GPP NR candidate supports various TDD slot patterns. Table 7 shows parameters for a DL centric configuration DDDSU (where D, S and U stand for downlink, special and uplink slots) (i.e. Five slots – 3 slots with all DL-only symbols, special slot and one slot with all UL-only symbols). The special slot (S) – has 11 DL symbols, 1 GP (Guard), 2 UL symbols.

Different SCS and bandwidth parameters for NR TDD DL peak spectral efficiency is shown in Table 8 where the DL dominant frame structure "DDDSU" (DL:UL=4:1) is chosen and the results are summarized.

#### 2) Uplink

Similarly, different SCS and bandwidth parameters for NR TDD UL peak spectral efficiency were evaluated for the same dominant frame structure "DDDSU" shown in Table 9.

The achievable peak spectral efficiency is shown Table 10 and, peak spectral efficiency is shown in Table 11.

### B. PEAK DATA RATE

5G specification defines peak data rate for DL and UL. Again it depends on various factors, such as bandwidth, number of resource elements, overhead, etc. Our evaluation for these parameters for both DL and UL is presented.

#### 1) Downlink

For DL peak data-rate, the overheads due to synchronization signal block (SSB), tracking reference signal (TRS),

**TABLE 7.** Assumptions for TDD DL peak spectral efficiency(DDDSU).

Parameter	Values	Remarks
$v_{Layers}^{(j)}$	FR1: 8, FR2: 6	NR supports upto 8 layers for a single user for DL in FR1 and 6 layers in FR2 when PTRS is transmitted
$\alpha_{DL}^{(j)}$	0.7643	Corresponds to DL:UL=4:1 where 3 DL slots 1 UL slot is configured in every 5 slots S slot includes 11 DL symbols, 1 symbol for GP and 2 UL symbol
$Q_m^{(j)}$	8	supports upto 256QAM for DL (TS38.306 [13] and [14])
$f^{(j)}$	1	The value of 1 is chosen as scaling factor for DL peak spectral efficiency evaluation.
$R_{max}$	948/1024 = 0.9258	NR supports highest coding rate as $R_{max} = 948/1024$ .
$\mu$	0, 1, 2, 3	SCS : $\Delta f = 2^\mu \cdot 15[\text{kHz}]$
$N_{PRB}^{BW(\mu),\mu}$	For FR1: • 270 for 50MHz with a 15kHz SCS • 273 for 100MHz with a 30kHz SCS • 135 for 100MHz with a 60kHz SCS	Section 5.3.2 of (TS 38.104 v0.5.0) [15]
$T_s^\mu$	$T_s^\mu = \frac{10^{-3}}{14 \cdot 2^\mu}$	SCS : $\Delta f = 2^\mu \cdot 15[\text{kHz}]$
$OH^{(j)}$	For FR1: • 0.121 for 50MHz with a 15kHz SCS • 0.118 for 100MHz with a 30kHz SCS • 0.124 for 100MHz with a 60kHz SCS For FR2: • 0.115 for 200MHz with a 60kHz SCS • 0.112 for 400MHz with a 120kHz SCS	Downlink overhead considered to be 50% of GP symbols For FR1: • CORESET of 24 PRBs (4 CCE) in every slot- 12 RE/PRB/slot • CORESET of 24 PRBs (4 CCE) in every slot - 12 RE/PRB/slot • TRS burst of 2 slots with periodicity of 20ms and occupies 52 PRBs- 12 RE/PRB/20ms • DMRS: 16 RE/PRB/slot in every slot and PRB • CSI-RS: 8 CSI-RS ports with 8 RE/PRB/slot with periodicity of 20ms in every PRB • 1 SS/PBCH blocks per 20ms; one SS/PBCH block occupies 960REs = 4 OFDM symbols $\times$ 20 PRB $\times$ 12 REs/PRB FR2: • CORESET of 24 PPRBs (4 CCE) in every slot- 12 RE/PRB/slot • TRS burst of 2 slots with periodicity of 10ms and occupies 52 PRBs- 12 RE/PRB/10ms • DMRS: 12 RE/PRB/slot in every slot and PRB • PTRS: 1 port, frequency density is 4 PRB and time domain density is 1 symbol • CSI-RS: 8 CSI-RS ports with 8 RE/PRB/slot with periodicity of 10ms in every PRB • CSI-RS for BM: 1 CSI-RS port with 2 RE/PRB/slot with periodicity of 10ms in every PRB • 8 SS/PBCH blocks per 20ms; one SS/PBCH block occupies 960REs = 4 OFDM symbols $\times$ 20 PRB $\times$ 12 REs/PRB
$BW^{(j)}$	5,10,15,20... 100, 200, 400 (FR1 and FR2, SCS)	Section 5.3.2 of TS38.104 [15]
$\mu$	0, 1, 2, 3	SCS : $\Delta f = 2^\mu \cdot 15[\text{kHz}]$

**TABLE 8.** TDD DL Peak spectral efficiency (bits/s/Hz).

SCS (kHz)	Channel Bandwidth (MHz)												Req.			
	5	10	15	20	25	30	40	50	60	80	90	100		200	400	
FR1	15	39.6	43.6	44.9	45.6	46.1	46.3	47.1	47.2							30
	30	31.7	38.4	42.1	43.1	44.4	44.6	45.9	46.3	47.1	47.5	47.7	47.9			30
	60		31.8	37.5	38.7	40.9	42.3	43.3	44.5	45.4	46.4	46.8	47.1			30
FR2	60							33.7					34.5	34.9		30
	120							31.7					34.0	34.7	35.0	30

physical downlink control channel (PDCCH), phase tracking reference signal (PT-RS), channel state information reference signal (CSI-RS), are considered. Typical values for these are shown in Table 12.

Bandwidths of the order of 400MHz are required to achieve peak data rates of 20Gbits/s. The peak data rate is evaluated as [16], [17] :

$$DR_{dl} = (\text{repmat}(N_{slots/s}, N_{rows}, \text{size}(BW_{SC}, 2))) \times (N_{RE/slot} * (1 - OH_{dl}) * N_{layers} * \text{Mod}_{format} * CR) \quad (2)$$

where  $DR_{dl}$  = data rate on the DL,  $B$  = repmat(A,m,n) produces a large matrix B with m-by-n tiling of copies of A,  $s$  = size(A) returns a row vector with elements containing the length of the corresponding dimension of A,  $N_{RE}$  = Number of resource elements,  $OH_{dl}$  = overhead on the DL.

For a 400MHz wide component carrier, the peak data rate is 17.49Gbits/s. Aggregating two such component carriers consume a bandwidth of 800MHz and gives a peak data-rate of about 35Gbits/s, well beyond the passing criterion of 20Gbits/s shown in Table 13.

The NR capability of maximum aggregated system bandwidth is presented in Table 8.1.1-1. of (TR 37.910) [18]. It is observed that the maximum aggregated bandwidth for FR1 is 800MHz to 1600 MHz and that of FR2 is 3200MHz to 6400MHz.

## 2) Uplink

The UL evaluation parameters are listed in Table 14. The overheads due to demodulation reference signal (DM-RS),





**TABLE 14.** Evaluation Assumptions for peak data-rate for uplink.

Parameter	Setting
DM-RS	1 complete symbol per slot
PT-RS	1 subcarrier every 4th PRB, every symbol
SRS	1 complete symbol every 10 ms
PUCCH	Long PUCCH with 2 PRB over slot in every slot
Number of layers	4
Modulation format	256QAM
Code rate	0.93

**TABLE 15.** Uplink peak data-rate in Gbps (per CC).

SCS \ BW	50MHZ	100MHZ	200MHZ	400MHZ	6400MHZ
60 kHz	1.16	2.35	4.74	-NA-	-NA-
120 kHz	1.08	2.31	4.71	9.50	16 CC each of 400 MHz required 16x9.50=152.0Gbps

3GPP self-evaluation report provides support for up to 16 CC aggregation and the user experienced data rate for maximum available bandwidth. This is provided in Table 18. User experienced data rate observations shown in Table 19.

Based on assessment of User experienced data rate, the following points can be observed:

- 1) Multiple carrier aggregation configurations are supported and can be used to improve spectrum utilization and hence user experienced data rate by using higher bandwidth carriers to reduce guard bands and overheads.
- 2) The maximum possible user experienced data rate for 3GPP for 16 CC configuration is 998.2Mbps in DL and 686.4Mbps in UL in FR1, for the given dense urban IMT-2020 evaluation configuration.

**TABLE 16.** Peak data rate observations.

KPI	Category	Required value	Observed Value	Comment
Peak data rate (Gbit/s)	eMBB	Downlink: 20	21.74-34.98	Using multiple CC for BW 500-800MHz
	Environment: No specific	Uplink: 10	11.81-19	By using multiple CC for aggregate BW of 500MHz-800MHz in FR2

**TABLE 17.** Spectral efficiency evaluation of TDD DL for different system bandwidths (FR1).

Dense Urban	Evaluation Configuration	1-CC Bandwidth		
		BW = 20MHz	BW=40MHz	BW=100MHz
DL	Config. A (30KHz SCS); 32T4R(5% SE)	0.375	0.437	0.479
	User Experience Calculation(Mbps)	14CC (280KHz)	6 CC (240 MHz)	3 CC (300 MHz)
		14x20x0.375=105	6x40x0.437=104.88	3x100x0.479=143.7
		0.485	0.568	0.624
UL	Config. A (30KHz SCS); 64T4R(5% SE)	0.386	0.401	0.429
	User Experience Calculation(Mbps)	11 CC (220 MHz)	5 CC (200 MHz)	3 CC (300 MHz)
		11x20x0.485=106.7	5x40x0.568=113.6	3x100x0.624=187.2
		0.3	0.312	0.334
UL	Config. A (30KHz SCS); 4T32R (5% SE)	0.386	0.401	0.429
	User Experience Calculation(Mbps)	9 CC (180 MHz)	4 CC (160 MHz)	2 CC (300 MHz)
		9x20x0.3=54	4x40x0.312=50	2x100x0.334=66.8
		0.386	0.401	0.429
UL	Config. A (30KHz SCS); 4T64R (5% SE)	0.386	0.401	0.429
	User Experience Calculation(Mbps)	7 CC (140 MHz)	3CC (120 MHz)	3 CC (300 MHz)
		7x20x0.486=54	3x40x0.401=48	3x100x0.429=128.7
		0.386	0.401	0.429


**TABLE 18.** Downlink - Maximum User Experienced Data Rate for different possible Aggregated Bandwidth.

Dense Urban	Evaluation Configuration	User Experienced Data Rate (Mbps)( > 50) = $N_{cc} \times W \times SE_5$	
		W=180MHz	W=1600MHz
DL	Config. A (30KHz SCS); 64T4R	3CC required 100x0.624 + 80x0.568 =107.84	16CC required 6x100x0.624 =998.4
		3CC required 100x0.429 + 80x0.401 =74.98	16CC required 16x100x0.429 =686.4

**TABLE 19.** User experienced data rate Observations.

KPI	Category	Required value	Observed Value	Comments
User experienced data rate	eMBB-Dense Urban	Downlink: 100	Downlink: 107.8-187.2	Corresponds to minimum aggregated bandwidth of 3CC 180MHz for Config. A(4GHz) and using 3CC (300MHz) in 4GHz band
		Uplink: 50	Uplink: 74.98-128.7	

Note: upto 16CC is supported in the technology for achieving higher user experienced data rate

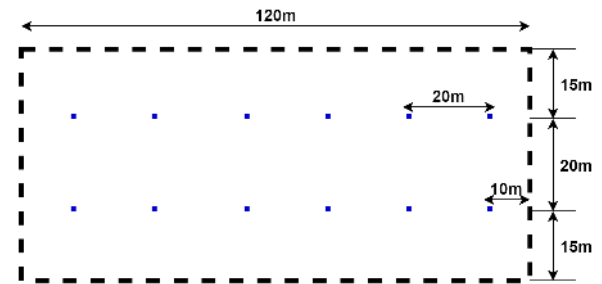

**FIGURE 9.** Indoor Hotspot site Layout.

- 3) By employing carrier aggregation, it can be seen that the minimum bandwidth required in case of DL can be approximated to 180MHz ( $100 \times 0.624 + 2 \times 40 \times 0.568 = 107.84$ Mbps) when using 64T4R with one 100MHz carrier and two 40MHz carrier which are available for use in the n77 band (3300-4200MHz).
- 4) In case of UL user experienced data rate, by using carrier aggregation it can be seen that the minimum bandwidth required can be approximated to 120MHz ( $100 \times 0.429 + 20 \times 0.386 = 50.62$ Mbps) when using 4T64R\* with one 100MHz carrier and one 20MHz carrier which are available for use in the n77 band (3300-4200 MHz).

This assures that Indian operators are well positioned to address the national digital communications policy NDCP [19] requirement using this candidate technology (IMT-2020/14), using a minimum bandwidth of 180MHz in n77 Band.

#### D. AREA TRAFFIC CAPACITY

Area traffic capacity in indoor hotspot eMBB for config. A, based on the average spectral efficiency is evaluated.

Indoor hotspot site layout is shown in Figure 9 as defined in [6], The TRxP density is calculated using (3) and the values: for 12 TRxP is 0.02 and 36 TRxP is 0.06

(Table 20), where the total area of the network layout is  $120 \times 50 = 6,000 m^2$ .

$$\rho(\text{TRxP}/m^2) = \frac{\text{Number of TRxP}}{\text{Total Area of the network layout}} \quad (3)$$

TABLE 20. TRxP density.

	12 TRxP	36 TRxP
$\rho(\text{TRxP}/m^2)$	0.02	0.06

For config. A Indoor hotspot-eMBB, the DL area traffic capacity (Mbit/s/m<sup>2</sup>) is shown in Table 21. Area traffic capacity observations shown in Table 22.

TABLE 21. Downlink area traffic capacity (Mbit/s/m<sup>2</sup>).

System Bandwidth W(MHz)	DL Average spectral efficiency SE <sub>avg</sub> [bps/Hz/TRxP]	Area Traffic Capacity DDDSU : 54 DL out of 70 Symbols	Remark
	TDD 100 MHz bandwidth per Carrier Component(CC) with 30 kHz SCS	SE <sub>eff</sub> = SE <sub>avg</sub> * (54/70) W * ρ + SE <sub>avg</sub>	
500	13.637	10.54	12TRxP
300	13.637	18.94	36TRxP

TABLE 22. Area traffic capacity Observations.

KPI	Category	Required value	Observed Value	Comments
Area traffic capacity	eMBB (Indoor-Hotspot)	10	12 TRxP - 10.54 Mbits/sec/m <sup>2</sup>	Target met using a Minimum Bandwidth of 300 MHz (FR1-4GHz)
			36 TRxP - 18.94 Mbits/sec/m <sup>2</sup>	

Based on Area traffic capacity assessment following points can be observed:

- 1) Three component carriers of 100MHz are needed to be aggregated in n77 from the Indian perspective to satisfy the dense indoor area traffic capacity requirement.
- 2) The available bandwidth in the Sub-6 mid band (3300-3600MHz) is less than the minimum required 300MHz threshold, but the requirements can be met by employing a higher density of TRxP per Cell.

### E. MOBILITY INTERRUPTION TIME

Mobility interruption time is defined according to [2] [6] as “The procedure of exchanging user plane packets with base stations during transitions shall be described based on the proposed technology including the functions and the timing involved”. Mobility interruption time observations shown in Table 23.

TABLE 23. Mobility interruption time Observations.

KPI	Category	Required value	Observed Value	Comment
Mobility interruption time (ms)	eMBB	0	0	Due to inherent support for Beam Mobility & CA mobility, make before break happens
	URLLC	0	0	

### F. SPECTRAL EFFICIENCY

For frequencies in FR1, the 4GHz band is considered for early IMT-2020 deployments, this band is a TDD band. In the FR2, 30GHz bands are considered for deployment.

#### 1) Downlink SE

The DL spectral efficiency evaluation results for NR are given in Tables 24- 25.

TABLE 24. DL spectral efficiency (FR1).

Test environment	Evaluation configuration	Average spectral efficiency (bit/s/Hz/TRxP)				5 <sup>th</sup> percentile spectral efficiency (bit/s/Hz)			
		BW=20 MHz	BW=40 MHz	BW=100 MHz	Req.	BW=20 MHz	BW=40 MHz	BW=100 MHz	Req.
Indoor Hotspot	Config. A (15KHz SCS) 32T4R	12.536	-	-	9	0.387	-	-	0.3
	Config. A (30KHz SCS) 32T4R	12.725	14.888	16.368		0.37	0.433	0.476	
Dense Urban	Config. A (30KHz SCS) 32T4R	12.8	14.904	16.346	7.8	0.375	0.437	0.479	0.225
	Config. A (30KHz SCS) 64T4R	15.8	18.489	20.328		0.485	0.568	0.624	
Rural	Config. A 8T2R	6.594	7.383	7.927	3.3	0.138	0.155	0.166	0.12
	Config. B (30KHz SCS) 32T4R	15.061	17.54	19.238		0.374	0.436	0.478	
	Config. C 8T4R	7.597	8.51	9.138		0.18	0.202	0.217	

TABLE 25. DL spectral efficiency (FR2).

Test environment	Evaluation configuration	Average spectral efficiency (bit/s/Hz/TRxP)				5 <sup>th</sup> percentile spectral efficiency (bit/s/Hz)			
		BW=80 MHz	BW=100 MHz	BW=200 MHz	Req.	BW=80 MHz	BW=100 MHz	BW=200 MHz	Req.
Indoor Hotspot	Config. B (60KHz SCS) 32T8R	11.384	11.984	12.998	9	0.302	0.318	0.345	0.3

TABLE 26. UL spectral efficiency (FR1).

Test environment	Evaluation configuration	Average spectral efficiency (bit/s/Hz/TRxP)				5 <sup>th</sup> percentile spectral efficiency (bit/s/Hz)			
		BW=20 MHz	BW=40 MHz	BW=100 MHz	Req.	BW=20 MHz	BW=40 MHz	BW=100 MHz	Req.
Indoor Hotspot	Config. A (15KHz SCS) 2T32R	7.545	-	-	6.75	0.419	-	-	0.21
	Config. A (15KHz SCS) 4T32R	8.279	-	-		0.459	-	-	
	Config. A (30KHz SCS) 2T32R	7.551	7.847	8.401		0.42	-	-	
	Config. A (30KHz SCS) 4T32R	8.234	-	-		0.471	0.436	0.467	
Dense Urban	Config. A (30KHz SCS) 2T32R	6.662	6.923	7.412	5.4	0.3	0.312	0.334	0.15
	Config. A (30KHz SCS) 2T64R	7.633	7.932	8.492		0.386	0.401	0.429	
Rural	Config. A 1T8R	4.17	4.250	4.414	1.6	0.134	0.137	0.142	0.045
	Config. B (30KHz SCS) 1T32R	3.457	3.593	3.846		0.123	0.128	0.137	
	Config. C 2T8R	4.038	4.116	4.274		0.081	0.083	0.086	

TABLE 27. UL spectral efficiency (FR2).

Test environment	Evaluation configuration	Average spectral efficiency (bit/s/Hz/TRxP)				5 <sup>th</sup> percentile spectral efficiency (bit/s/Hz)			
		BW=80 MHz	BW=100 MHz	BW=200 MHz	Req.	BW=80 MHz	BW=100 MHz	BW=200 MHz	Req.
Indoor Hotspot	Config. B (30KHz SCS) 8T32R	7.392	7.434	7.477	6.75	0.425	0.427	0.43	0.21
Hotspot	Config. B (60KHz SCS) 8T16R	6.382	6.418	6.455		0.245	0.246	0.248	

## 2) Uplink SE

The UL spectral efficiency evaluation results for NR are given in Tables 26- 27.

From Tables 24- 27 and assessment of spectral efficiency following points can be observed:

- 1) 5G NR meets the requirements of IMT-2020 since InH-eMBB Config. A, Config. B, DU-eMBB Config. A satisfy the Spectral Efficiency requirements.
- 2) InH Config. B (30GHz) UL Avg Spectral Efficiency meets requirements in case where the minimum number of TxRU at UE are 8 and that of BS are 32.
- 3) It has being observed from the SER of 3GPP that DU config. B DL & UL both do not meet the 5<sup>th</sup> Percentile Spectral Efficiency requirements due to higher losses in the mmWave (30 GHz) which not being able to cover the cell edge users at ISD 200m [3GPP TR 37.910] [18].

Spectral Efficiency observations are given in Table 28

**TABLE 28.** Spectral Efficiency Observations.


KPI	Category	Required value	Observed Value BW: 20MHz (TDD) & 10MHz (FDD)	
			FR1 (Channel A)	FR2 (Channel B)
Average Spectral efficiency (bit/s/Hz)	Indoor Hotspot-eMBB FR1-Config. A FR2-Config. B	DL: 9	12.725	11.384
		UL: 6.75	7.551	7.392
	Dense Urban-eMBB FR1-Config. A	DL: 7.8	12.8	
		UL: 5.4	6.662	
	Rural-eMBB Config. A, B, C	DL:3.3	6.594, 15.061, 7.597	
		UL:1.6	4.17, 3.457, 4.038	
5 <sup>th</sup> Percentile spectral efficiency (bit/s/Hz)	Indoor Hotspot-eMBB FR1-Config. A FR2-Config. B	DL: 0.3	0.37	0.302
		UL: 0.21	0.42	0.425
	Dense Urban-eMBB FR1-Config. A	DL: 0.225	0.375	
		UL: 0.15	0.3	
	Rural-eMBB Config. A, B, C	DL:0.12	0.138, 0.374, 0.18	
		UL:0.045	0.134, 0.123, 0.08	

## G. SPECTRAL EFFICIENCY- SUPPLEMENTARY EVALUATION

### 1) Fixed Wireless Access (FWA)

5G FWA can be used to offer an easy and affordable alternative to wired broadband in the lower bands of the wireless spectrum. FWA allows service companies to provide high-speed connectivity to suburban and remote areas where the expense of laying fibre is a limiting factor. It provides ultra-high-speed broadband services to both home and enterprise customers using standardised 3GPP technologies and Evolved packet core (EPC) networks. Option 3x gNBs that help FWA and other early 5G implementations run in NSA mode alongside the current 4G eNodeB. When applying 5G FWA for the first time, option 3 eliminates rollout uncertainties and variables.

5G FWA will have operation frequency capacities that are comparable to fibre optics at mmWave. 5G FWA will

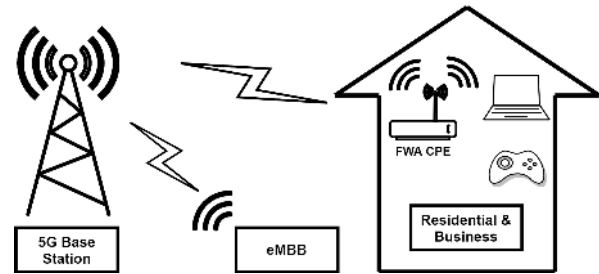

**FIGURE 10.** 3GPP gNodeB used for FWA applications.

be a cost-effective alternative to fixed-line DSL, wire, and fibre in all markets with NR in the mmWave. They have thin beams, which allows for a higher user density without competing and interfering with other users. This satisfies the last-mile requirement by supplying the bandwidth needed to accommodate high-definition television networks and high-speed Internet access for suburban and rural residents. This increases prospects for both emerging countries with poor broadband penetration and industrialised countries with slow DSL lines.

At millimetre wavelengths, 5G FWA would be able to have data bandwidth equal to fibre optics (mmWave). In all markets with NR in the mmWave, 5G FWA would provide a cost-effective option to fixed-line DSL, wire, and fibre.

It's worth mentioning that the IMT-2020 key performance indicators (KPI) are geared for wireless applications. The KPIs for wireline and wireless networks are vastly different. Fixed line networks aim for fixed data speeds, while wireless systems aim for spectral quality values. This puts an unfair pressure on the wireless scheduler to service if an FWA targets those usage cases. WP5D was given a performance comparison using a WDSL (Wireless DSL [20]) scheduler attributed to telecom centres of excellence (TCoE) India during the IMT-Advanced standardisation process. It used a rather basic modification to the proportionally fair (PF) scheduler, changing the fairness exponent ( $\beta$ ) from 1 to 5. Since, there are no follow-up research about whether this has to be a comparative method, this method gives little insight into how the wireless device performs as timing limits are placed on the same IMT assessment process. The relation with various fairness coefficients ( $\beta$ ) as seen in Figure 11.

### a: Scheduler Description

In this segment, we include a quick overview of the scheduler so that interested readers can catch up on our explanation. The MAC employs the following scheduling algorithm:

- 1) The gNodeB obtains input on the instantaneous Channel quality state (CQI) for each UE- $k$  in time slot  $t$  in terms of a requested data rate  $R_{k,n}(t)$  for any PRB- $n$ .
- 2) The gNodeB monitors the moving average throughput  $T_{k,n}(t)$  for UE- $k$ .
- 3) UE- $k^*$  and PRB- $n$  that fulfil the optimal relative channel quality condition are prioritised in the  $t^{\text{th}}$  time slot

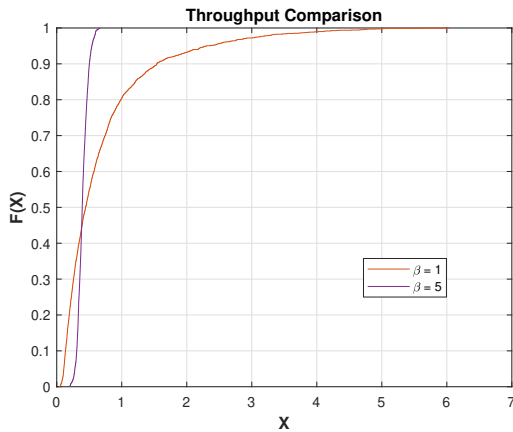


FIGURE 11. Throughput comparison of PF and WDSL.

by the scheduling process:

$$k^* = \arg \max_{k=1,2,\dots,K} \frac{[R_{k,n}(t)]^\alpha}{[T_{k,n}(t)]^\beta}$$

- 4) The choice of values for  $\alpha$  and  $\beta$  decide the nature of the scheduler.
  - $\alpha=1$  and  $\beta=0$ , represents a max-rate scheduler.
  - $\alpha=0$  and  $\beta=1$ , represents a round-robin scheduler.
  - $\alpha=1$  and  $\beta=1$ , represents a proportionally fair scheduler.
- 5) For the WDSL scheduler, we employ  $\alpha=1$  and  $\beta=5$ .
- 6) The gNodeB updates  $T_{k,n}(t)$  of the  $k^{\text{th}}$ - UE in the  $t^{\text{th}}$  slot using the exponential moving average filter:

$$T_{k,n}(t+1) = \begin{cases} \left(1 - \frac{1}{t_c}\right) T_{k,n}(t) + \frac{1}{t_c} R_{k,n}(t), & k^* = k \\ \left(1 - \frac{1}{t_c}\right) T_{k,n}(t) & \dots, k^* \neq k \end{cases}$$

- 7) Individual PRBs are treated as separate entities by the scheduling algorithms, which update the system after each time slot.

While the PF scheduler aims for a combination of fairness and total device throughput, the WDSL scheduler aims to give users admitted to the system a minimum rate guarantee.

#### b: Performance Comparison

The simulation setup follows the rural config. C scenario in V-F. The only tweak to the analysis is in rerunning the simulation with the new value for  $\beta$  for the PF scheduler. The cell capacity with different values of  $\beta$  is listed in Table 29.

If the simulation were a real deployment scenario, then with the WDSL scheduler about 8 Mbps data rate per user can be guaranteed. However, from the operator perspective, it only achieved about half of the call capacity.

TABLE 29. Cell capacity (Mbps) with different  $\beta$  values.

	PF ( $\beta = 1$ )	WDSL ( $\beta = 5$ )
Cell capacity (Mbps) 700 Mhz, with 20 MHz in rural config. C	151.94	84.31

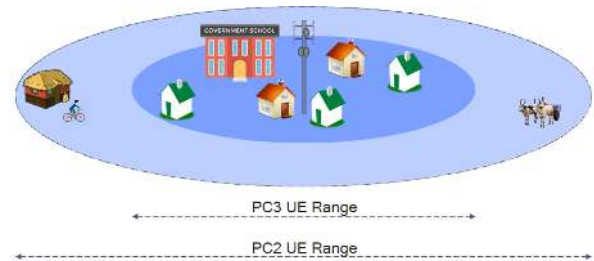


FIGURE 12. Extended coverage of PC2 devices over PC3.

#### 2) Uplink Performance with High Power UE

Higher frequency signals can't travel far, so cellular carriers like Sprint worked within 3GPP on means to achieve higher output power, specifically in the uplink (uplink defines the cell range). Devices supporting a new power class, Power class 2 (PC2) were chosen. PC2 was originally developed to develop high-performance user equipment (HPUE) and improve the 2.5 GHz LTE TDD coverage. With 3GPP NR standardization, this functionality is being extended to several more frequency bands in Rel-15 specifications. PC2 allows for output power levels of 26 dBm which is twice the previous maximum output power of PC3 (23 dBm). The higher output power to PC2, compensates for higher propagation losses at higher TDD frequencies, allowing carriers to retain cell coverage without investing in costly infrastructure. PC2 devices could use the same architecture as PC3 UEs, but with different PAs and filters. Due to the additional power headroom available with the higher uplink transmit power, such devices help increase cell-edge spectral efficiency by using higher order modulation and transport block size (Figure 12, 13). It can also help improve overall cell-edge efficiency, especially where downlink performance is constrained by uplink acknowledgement speed. Given that there will be some connection imbalance during 5G NSA deployments, PC2 for dual connectivity UE (one LTE band + one NR band) would be the most realistic and suitable choice for improving uplink coverage for 5G NR NSA deployments. When compared to legacy systems, HPUE improves out of service (OoS) and radio link failures (RLF) dramatically with expanded coverage.

#### a: Scheduler Description

To understand the value proposition of HPUE to devices, we devise a simple modification to the existing IMT-2020 rural low-mobility large-cell (LMLC) test scenario. We assume that the UE's are capable of PC2 and allow the UE's reporting below a certain MCS value to employ PC2 (Figure 14).



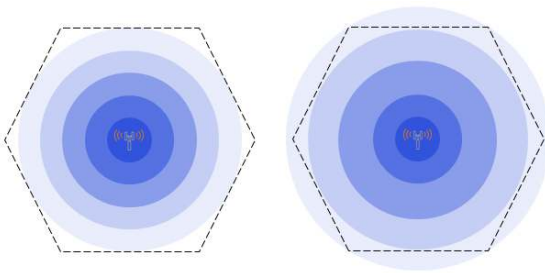


FIGURE 13. A typical cell coverage using PC3 and PC2 devices.

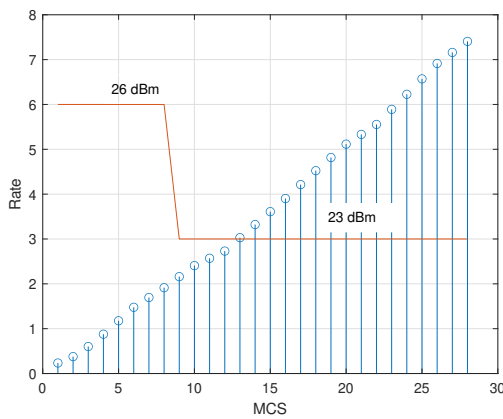


FIGURE 14. UE's reporting below MCS8 employing PC2 mode.

#### b: Performance Comparison

The simulation setup follows the same rural config. C scenario in V-F. The only tweak to the analysis is in rerunning the simulation with the link adaptation, where UE's reporting below a certain MCS index were changed from PC3 (without HPUE) capability to PC2 (with HPUE). The CDF of spectral efficiency values seen under these scenarios is plotted below for reference.

It can be inferred from the plots that the SE of those UE's with very low MCS increase, whereas those with higher rates did not change by much. This is one move in the right direction by 3GPP whereby the operators now have a chance to deploy PC2 (HPUE) devices in their network to improve cell edge or outage issues, without focusing on the need for additional infrastructure.

Out of some supplementary studies on features supported by the 3GPP technologies and their application to networks, two of the studies sound promising.

- 1) The WDSL scheduler provided an insight into understanding a KPI not currently covered in IMT-2020. If the operator were to trade off individual user performance for cell capacity, then there is a huge trade off.
- 2) Similarly, a feature called HPUE defined in 3GPP allows for UEs deployed in certain TDD configurations to employ 26 dBm power amplifiers (PC2). HPUE becomes an additional tool in the hands of operators in

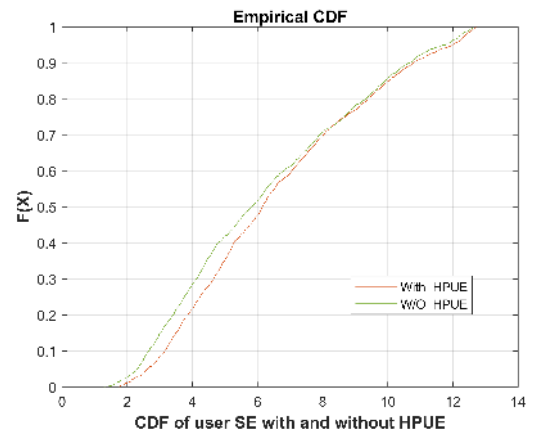


FIGURE 15. CDF of User SE with and without HPUE.

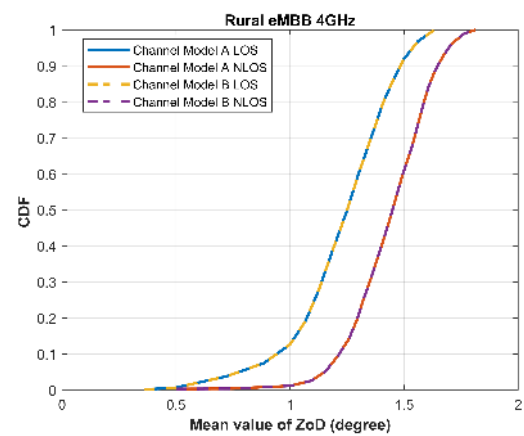


FIGURE 16. Rural (4 GHz) ZoD (degree) Mean value.

addressing the coverage problem, without adding new infrastructure.

#### H. MOBILITY

Mobility is defined as “The maximum mobile station speed at which a defined Quality-of-service (QoS) can be achieved (in km/h)” [2] [6].

##### 1) Mean Value of ZoD Spread

The mean value of ZoD in degree is shown in Table 30, The CDF of mean value of ZoD spread for LOS and NLOS for Rural and Dense Urban test environment are plotted from Figure 16 to Figure 18, respectively.

##### 2) SINR Distribution

The pre-processing SINR CDFs for eMBB test environment are shown in Figures 19-22. From the Figures 19-22, different test environments 50 percentile point of the CDF are listed in Table 31.

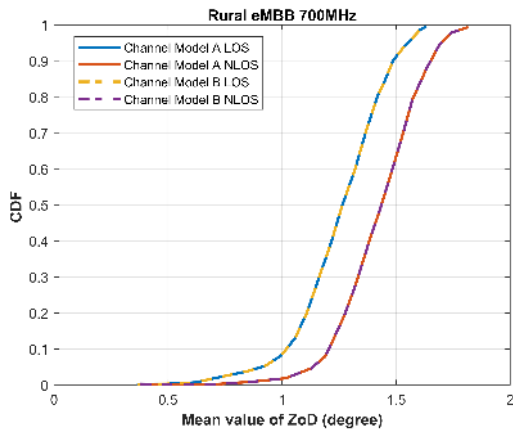


FIGURE 17. Rural (700 MHz) ZoD (degree) Mean value.

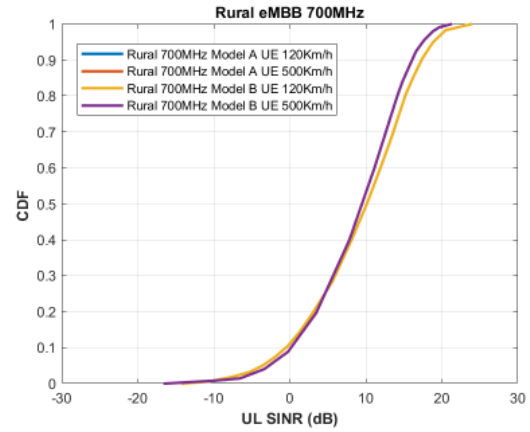


FIGURE 19. Rural-eMBB (700 MHz) UL SINR distribution test environment.

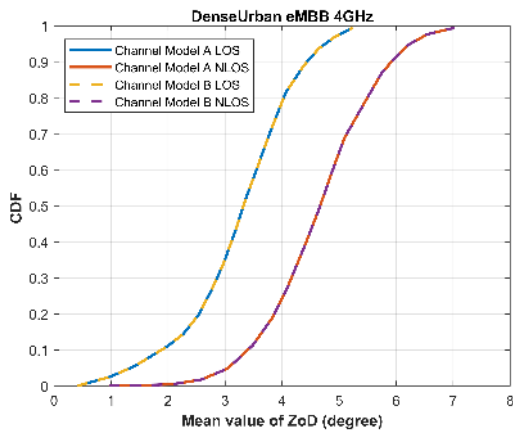


FIGURE 18. Dense Urban (4 GHz) ZoD (degree) Mean value.

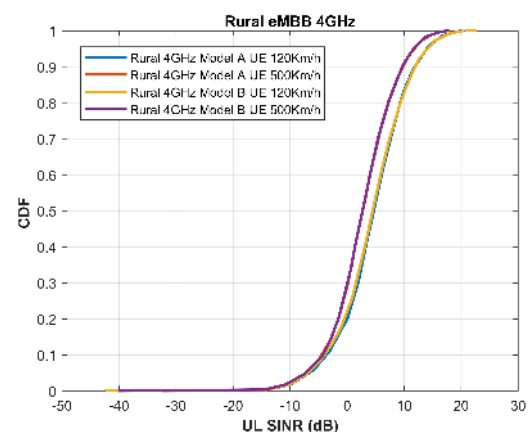


FIGURE 20. Rural-eMBB (4 GHz) UL SINR distribution test environment.

### 3) Link Properties

The results of NR's link-level mobility assessment for various test environments are described in Table 32. Table 33 displays the mobility observations depending on the evaluation.

#### I. RELIABILITY

##### 1) System Level Simulations

The system-level simulations (SLS) assumptions given in Table 34 are the results for the two test-configurations A and B (4 GHz and 700 MHz respectively; detailed specifications of these test configurations can be found in [6].

TABLE 30. Mean value of ZoD spread.

Parameters	Dense Urban-eMBB				Rural-eMBB	
	Config. A (4GHz)		Config. A (30 GHz)		Config. A/B (700 MHz/4 GHz)	
Link-level Channel Model	LOS: CDL/TDL v	NLOS: CDL/TDL iii	LOS: CDL/TDL v	NLOS: CDL/TDL iii	LOS: CDL/TDL v	NLOS: CDL/TDL iii
ZoD angular spreads scaling parameter $\Delta S_{desired}$ (degree)	3.3	4.6	TBD from 50% tile point of CDF of ZoD spread	TBD from 50% tile point of CDF of ZoD spread	1.25	1.44

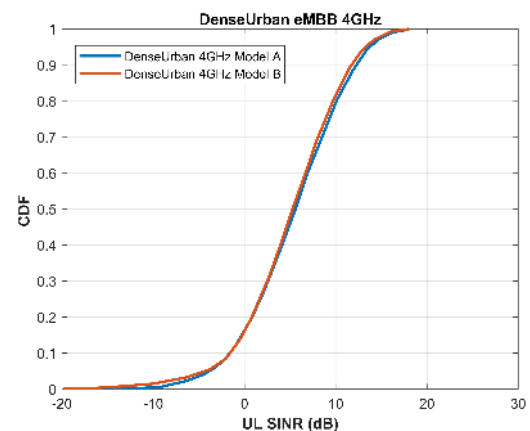


FIGURE 21. Dense Urban-eMBB (4 GHz) UL SINR distribution test environment.

For config. A, the total gain (including antenna gain) is presented in Figure 23 for UMa channel models A and B. The resulting SINR (cell utilization 1) illustrated in Figure 24 is at full load. The cell-edge (5<sup>th</sup> percentile) SINR is found

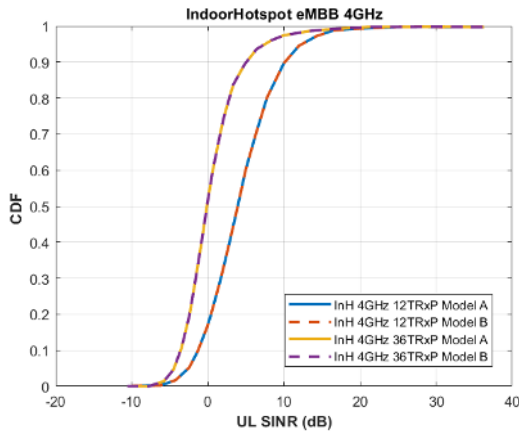


FIGURE 22. Indoor Hotspot - eMBB (4 GHz) UL SINR distribution test environment.

TABLE 31. SINR CDF 50%-tile point.

Test environment	Evaluation configuration	UE Mobility	50% tile point of SINR CDF(dB)	
			Channel Model A	Channel Model B
Rural - eMBB	Config. A (700 MHz)	120 km/h	10.21	10.14
		500 km/h	9.67	9.65
Rural - eMBB	Config. B (4 GHz)	120 km/h	4.66	4.50
		500 km/h	2.90	2.72
Dense Urban - eMBB	Config. A (4 GHz)	30 km/h	5.52	5.32
Indoor Hotspot - eMBB (12 TRxP)	Config. A (4 GHz)	10 km/h	3.90	3.95
Indoor Hotspot - eMBB (36 TRxP)	Config. A (4 GHz)	10 km/h	-0.21	-0.07

to be 1.98 dB (on the DL) and 0.81 dB (on the UL) for channel model UMa A, and 1.98 dB (DL) and 1.77 dB (UL) for channel model UMa B as shown in Figure 25.

For config. B, the total gain (including antenna gain) is given in Figure 26. for UMa models A and B. The resulting SINR at full load (cell utilization 1) is given in Figure 27. The cell-edge (5<sup>th</sup> percentile) SINR is found to be 0.16 dB (on the DL) and 0.83 dB (on the UL) for channel model UMa A and -0.06 dB (DL) and 0.65 dB (UL) for channel model UMa B as shown in Figure 28.

TABLE 32. UL Link level evaluation results.

Test environment	ITU requirement (bit/s/Hz)	Evaluation configuration	Channel Model	50%-tile point of SINR CDF (dB)	Uplink SE (bit/s/Hz)			
					FDD		TDD	
					NLOS	LOS	NLOS	LOS
Indoor Hotspot - eMBB (12 TRxP)	1.5	Config. A (4 GHz)	Channel model A	3.90	1.75	2.05	1.59	1.94
			Channel model B	3.95	1.75	2.07	1.60	1.95
Dense urban - eMBB	1.12	Config. A (4 GHz)	Channel model A	5.52	1.92	2.22	1.82	2.17
			Channel model B	5.32	1.89	2.19	1.79	2.06
Rural - eMBB (120 Km/h)	0.8	Config. A (700 MHz)	Channel model A	10.21	2.32	2.90	2.10	2.63
			Channel model B	10.14	2.31	2.90	2.09	2.63
		Config. B (700 MHz)	Channel model A	4.66	1.30	1.74	1.18	1.57
			Channel model B	4.50	1.28	1.68	1.16	1.52
Rural - eMBB (500 Km/h)	0.45	Config. A (700 MHz)	Channel model A	9.67	2.07	2.64	1.88	2.39
			Channel model B	9.65	2.07	2.64	1.87	2.39
		Config. B (700 MHz)	Channel model A	2.90	0.92	1.33	0.84	1.22
			Channel model B	2.72	0.91	1.33	0.83	1.22

TABLE 33. Mobility Observations.

KPI	Category	Required value		Value (Bits/s/Hz)
		Normalized traffic channel link data rate(Bit/s/Hz)	Mobility (km/h)	
Mobility	Indoor Hotspot - eMBB	1.5	10	1.59-2.07
	Dense Urban - eMBB	1.12	30	1.79-2.17
	Rural - eMBB	0.8	120	1.28-2.90
		0.45	500	0.83-2.64

TABLE 34. Assumptions of the system-level simulations.

Configuration Parameters	URLLC Configuration A	URLLC Configuration B
Carrier frequency	4 GHz	700 MHz
Base station Antenna Height	25 m	25 m
Inter-site distance	500 m	500 m
Bandwidth	20 MHz	20 MHz
Device deployment	80% outdoor, 20% indoor	80% outdoor, 20% indoor
Number of UE antenna elements	4	4
UE noise figure	7	7
UE power	23 dBm	23 dBm
Path loss model	UMa A/B with SCM (for ZOD)	UMa A/B with SCM (for ZOD)
BS antenna VxH (vs x Hs x P)	4 x8 (2x1x2)	4 x4 (2x1x2)
BS Transmit power	49 dBm	49 dBm
BS noise figure	5	5
Electrical down tilt	9 degrees	9 degrees
Traffic model	Full buffer	Full buffer
UL power control	Alpha=1, P0=-106dBm	Alpha=1, P0=-106dBm
UL allocation	5PRB (10UEs sharing 50PRBs)	5PRB (10UEs sharing 50PRBs)

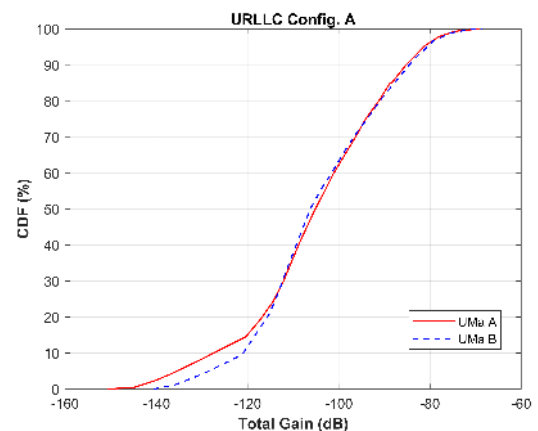


FIGURE 23. URLLC configuration A Total gain.

## 2) Link Level Simulations

The assumptions for link-level simulations (LLS) are described in Table 35. For the data and control channels, two separate datasets are used. For PDCCH, a DCI of 40 bits is presumed, without the CRC. PUCCH format 0 carries a 1-bit UCI with a length of 2 OS (symbols) and frequency hopping

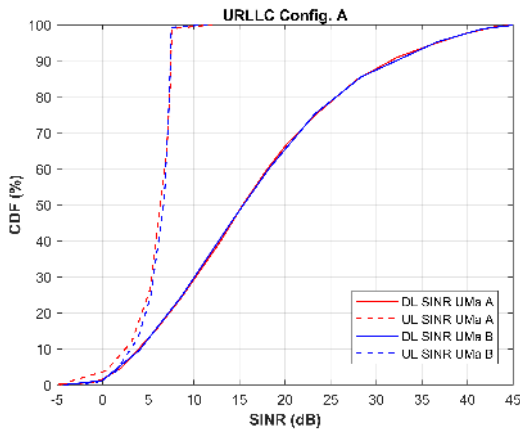


FIGURE 24. URLLC configuration A SINR distribution.

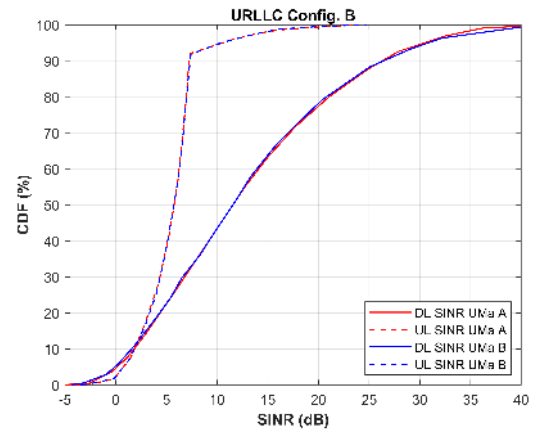


FIGURE 27. URLLC configuration B SINR distribution .

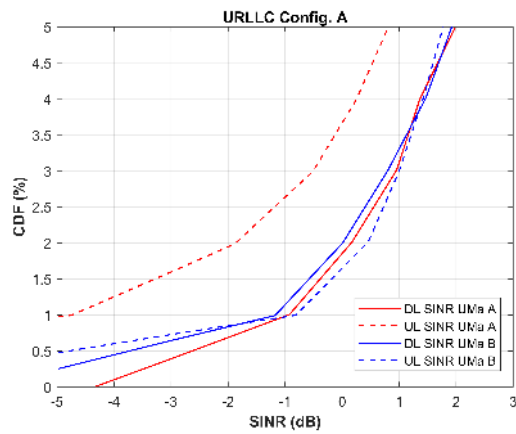


FIGURE 25. 5<sup>th</sup> percentile SINR distribution for URLLC configuration A.

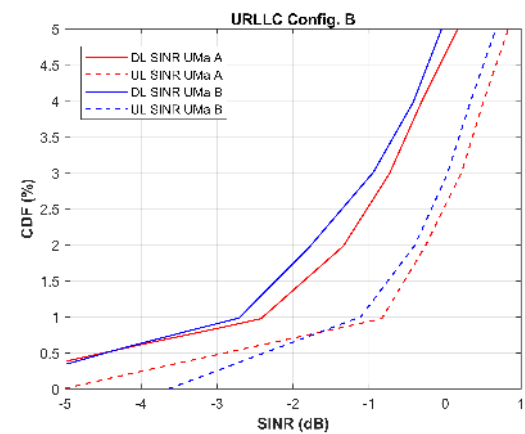


FIGURE 28. 5<sup>th</sup> percentile SINR distribution for URLLC configuration B.

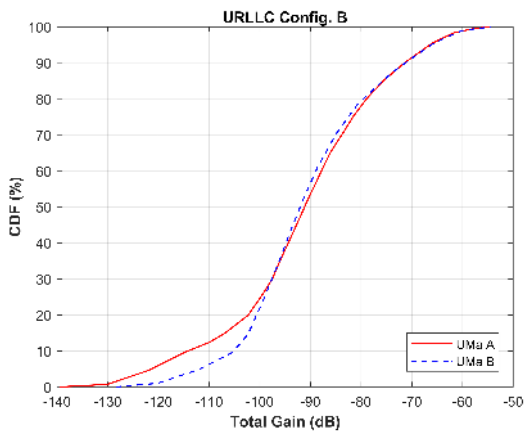


FIGURE 26. URLLC configuration B Total gain.

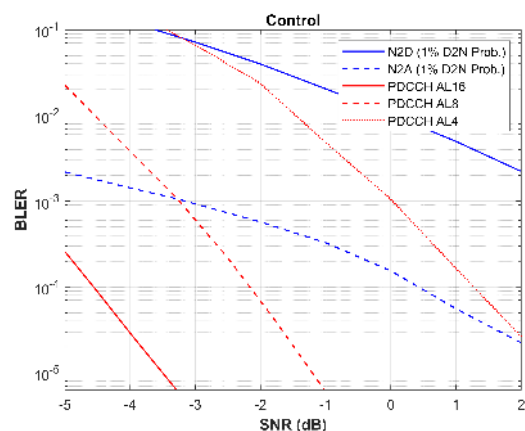


FIGURE 29. Short PDCCH and PUCCH Sequence selection BLER as a function of SNR.

for PUCCH. Figure 29 shows the BLER for the control channels as a function of SNR, while Figure 30 and Figure 31 display the BLER for the data channels as a function of SNR.


## J. TOTAL RELIABILITY

1) Reliability Estimate URLLC Configuration B, UMa B  
By observing at the lower percentiles of the SINR distributions for URLLC config. B, UMa B, the channel BLER can




**TABLE 35.** Assumptions on the link-level simulations.


Parameter	Assumption
Channel model	TDL-C with 300ns delay spread
Carrier	700MHz
Bandwidth	20 MHz
Subcarrier spacing	30 kHz
Antenna setting	2TX 2RX (data), 1TX 2RX (control)
Tx diversity	Rank 1 (TX diversity precoding based on CSI reports with 5 slots periodicity).
Speed	3km/h
Channel estimation	Practical: 4os mini-slot - 1os front-loaded DMRS type 2 7os mini-slot - 2os front-loaded DMRS type 2
Frequency allocation	type 1 (contiguous)
Time allocation	4os and 7os allocations type B
PUCCH	1 A/N bit, PUCCH format 0 with 2- symbol duration and frequency hopping between band edges
PDCCH	Polar codes, 40b payload excl. CRC. Distributed CCEs
Data	LDPC, BG2, 256b

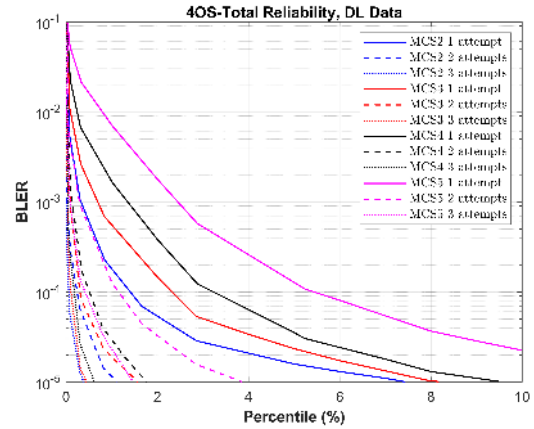


**FIGURE 32.** 4 OS – DL data Total reliability with 1-3 HARQ transmissions.

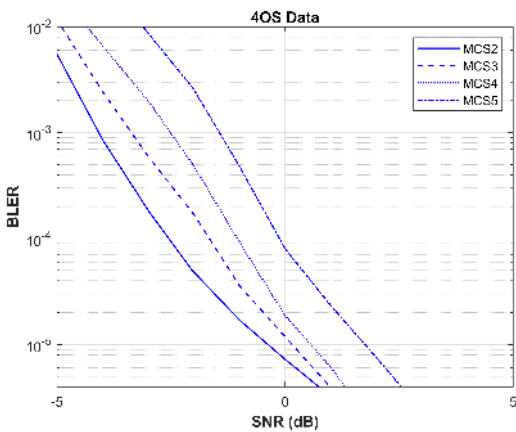


**FIGURE 30.** LDPC BLER 4 OS-Data for QPSK (1st attempt) .

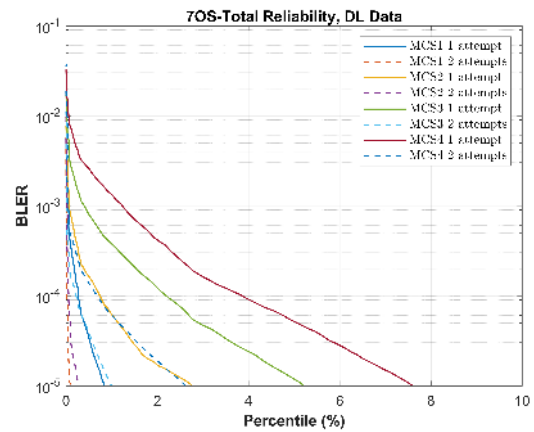

**FIGURE 33.** 7 OS – DL data Total reliability with 1-3 HARQ transmissions.

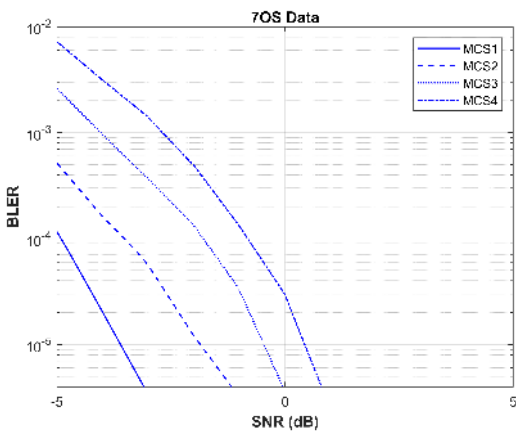

**FIGURE 31.** LDPC BLER 7 OS-Data for QPSK (1st attempt).

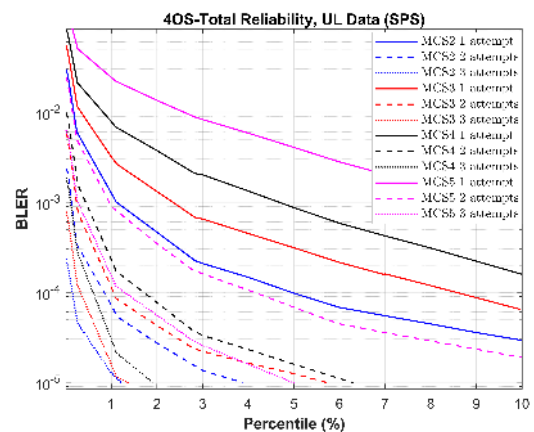

**FIGURE 34.** 4 OS UL data Total reliability with 1-2 HARQ transmissions.

be found at the corresponding DL and UL SINR points. The total error rates for DL and UL data respectively can then be computed. The results are shown in Figure 32 - 34.

AL16 is assumed for PDCCH and 1% D2A level for PUCCH. On the UL, SPS is assumed with a configured

resource every TTI. For both DL and UL, 1-3 transmission attempts (including HARQ retransmissions) are considered. The data transmissions are assumed to be correlated and are soft-combined.

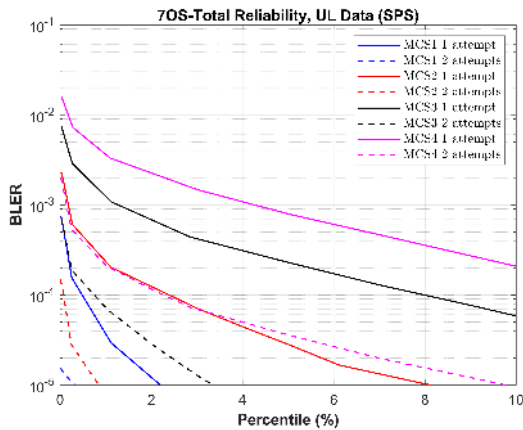


FIGURE 35. 7 OS UL Data Total reliability with 1-2 HARQ Transmissions.

#### a: Packet Size

The ITU specifies a packet size of 32 bytes to meet the latency and reliability targets. With QPSK modulation and a coding rate from MCS1 to MCS5, along with one OFDM symbol overhead, the required number of PRBs is given in 36. Here, the CRC is not considered and TBS is 32B.

TABLE 36. Required #PRBs for 32B packet and 1 OFDM symbol overhead, at different coding rates.

#PRBs	14 OS TTI	7 OS TTI	4 OS TTI	2 OS TTI
Code rate MCS1	22	46	92	274
Code rate MCS2	17	37	73	219
Code rate MCS3	14	29	57	171
Code rate MCS4	11	24	47	141
Code rate MCS5	9	19	37	111

#### b: Total Latency

UP latency was evaluated in [9] for a sequence of transmissions. It was found that DL and configured-grant UL transmissions with 7 OS and 30 kHz SCS are possible within the latency bound of 1ms, as shown in Table 37. Thus, the ITU reliability of  $10^{-5}$  error within 1 ms can be met.

Reliability observations are shown in Table 38. Based on the assessment of Reliability following points can be observed.

- 1) The cell-edge SINR for URLLC config. A is approximately 1.98 dB (DL) and 0.81 dB (UL) for channel model UMa A and 1.93 dB (DL) and 1.77 dB (UL) for channel model UMa B.
- 2) The cell-edge SINR for URLLC config. B is approximately 0.16 dB (DL) and 0.83 dB (UL) for channel model UMa A and -0.06 dB (DL) and 0.65 dB (UL) for channel model UMa B.
- 3) With 1 transmission using MCS1, the reliability target of  $10^{-5}$  error can be met on the DL and the UL (with a configured grant).

- 4) With MCS1 and a 7 OS mini-slot, 46 PRBs are required for a 32B packet.
- 5) With 30 kHz SCS and 7 OS mini-slot, 1 transmission can be made in FDD mode within 1 ms.

#### K. BANDWIDTH

Based on the (Section 5.3.2) [15] bandwidth evaluation and observations were tabulated in Tables 39-40.

#### VI. CONCLUSION

Key performance metrics corresponding to the evaluation of the 3GPP 5G NR IMT-2020 radio interface technology as well as their related findings are discussed in this paper. The core criteria for IMT-2020 technological efficiency specifications were fulfilled by the 5G NR technology, according to our findings. However, certain small variations are found in certain situations such as, peak spectral efficiency, peak data rate, user experienced data rate, and area traffic capacity, though still meeting the requirements. This is most certainly due to such biases or the lack of adequate information in the proponents self-evaluation paper. We were able to recommend that the 3GPP 5G NR technology be accepted as a valid IMT-2020 technology based on these assessments. Summary of all KPI's with requirement met status is given in Table 41.

#### ACKNOWLEDGMENT

We would like to express our gratitude to Mr. Vikram, Ms. Vertika, other office bearers of Cellular Operators Association of India (COAI) and the industry mentors who supported us during the 5GIF IMT-2020 independent evaluation group activity.

#### REFERENCES

- [1] ITU-R, "IMT for 2020 and beyond," International Telecommunication Union Radiocommunication sector (ITU-R), Article, Jul. 2020. [Online]. Available: <https://www.itu.int/en/ITU-R/study-groups/rsg5/rwp5d/imt-2020/Pages/default.aspx>
- [2] —, "Minimum requirements related to technical performance for IMT-2020 radio interface(s)," International Telecommunication Union Radiocommunication sector (ITU-R), Report M.2410, Nov. 2017. [Online]. Available: <https://www.itu.int/pub/R-REP-M.2410-2017>
- [3] 3GPP, "Study on scenarios and requirements for next generation access technologies," 3rd Generation Partnership Project (3GPP), Technical Report (TR) 38.913, Jul. 2020, version 16.0.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=2996>
- [4] A. K. Bachkaniwala, V. Dhanwani, S. S. Charan, D. Rawal, and S. K. Devar, "Imt-2020 evaluation of euh radio interface technology," in 2020 IEEE 3rd 5G World Forum (5GWF), 2020, pp. 631–636.
- [5] V. Dhanwani, N. Kumar, A. K. Bachkaniwala, D. Rawal, and S. Kumar, "Assessment of candidate technology etsi: Dect-2020 new radio," in 2020 IEEE 3rd 5G World Forum (5GWF), 2020, pp. 625–630.
- [6] ITU-R, "Guidelines for evaluation of radio interface technologies for IMT-2020," International Telecommunication Union Radiocommunication sector (ITU-R), Report M.2412, Nov. 2017. [Online]. Available: <https://www.itu.int/pub/R-REP-M.2412>
- [7] 3GPP, "NR; Physical channels and modulation," 3rd Generation Partnership Project (3GPP), Technical Specification (TS) 38.211, Jul. 2020, version 16.2.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=3213>
- [8] ITU-R, "Framework and overall objectives of the future development of IMT for 2020 and beyond," International Telecommunication Union Radiocommunication sector (ITU-R), Report M.2083, Sep.

**TABLE 37.** Maximum number of transmissions including re-transmissions in FDD within 1ms.

# TX within 1ms	15kHz SCS				30kHz SCS				120kHz SCS			
	14os TTI	7os TTI	4os TTI	2os TTI	14os TTI	7os TTI	4os TTI	2os TTI	14os TTI	7os TTI	4os TTI	2os TTI
DL data	0	0	0	1	0	1	1	2	1	2	2	3
UL data (SPS)	0	0	0	1	0	1	1	2	1	1	1	2

**TABLE 38.** Reliability Observations.

KPI	Category	Required value	Obtained Value
Reliability	Urban Macro-URLLC	10 <sup>-5</sup> probability of successfully transmitting a 32-byte layer 2 PDU (protocol data unit) within 1 millisecond	With 1 transmission using MCS1, the reliability target of 10 <sup>-5</sup> error can be met on the DL and the UL

**TABLE 39.** Bandwidth.

	SCS [kHz]	Maximum bandwidth for one component carrier (MHz)	Maximum number of component carriers for carrier aggregation	Maximum aggregated bandwidth (MHz)	Minimum Requirement as per ITU-R
FR1	15	50	16	800	100
	30	100	16	1600	
	60	100	16	1600	
FR2	60	200	16	3200	> 1GHz
	120	400	16	6400	

**TABLE 40.** Bandwidth Observations.

KPI	Usage Scenario	Required value	Value
Bandwidth and Scalability	-NA-	Atleast 100MHz	FR1: Upto 1600MHz
		upto 1GHz	FR2: upto 6400MHz
		support of multiple different bandwidth values	5MHz to 400MHz (in various bands)

2015. [Online]. Available: [https://www.itu.int/dms\\_pubrec/itu-r/rec/m/R-REC-M.2083-0-201509-1!!PDF-E.pdf](https://www.itu.int/dms_pubrec/itu-r/rec/m/R-REC-M.2083-0-201509-1!!PDF-E.pdf)

[9] A. P. K. Reddy, N. Kumar, S. S. A. Tirumalasetty, S. Srinivasan, and J. Vinosh Babu James, "Latency analysis for imt-2020 radio interface technology evaluation," in 2020 IEEE 3rd 5G World Forum (5GWF), 2020, pp. 613–618.

[10] Ericsson, "TS 38.104 Combined updates (NSA) from RAN4 #86bis and RAN4 #87," 3rd Generation Partnership Project (3GPP), discussion R4-1806932, Jun. 2018. [Online]. Available: <https://portal.3gpp.org/ngppapp/CreateTDoc.aspx?mode=view&contributionUId=R4-1806932>

[11] RAN1, Ericsson, and Intel, "Reply to LS on NR UE Category," 3rd Generation Partnership Project (3GPP), discussion R1-1721732, Dec. 2017. [Online]. Available: [https://www.3gpp.org/ftp/TSG\\_RAN/WG1\\_RL1/TSGR1\\_91/Docs/R1-1721732.zip](https://www.3gpp.org/ftp/TSG_RAN/WG1_RL1/TSGR1_91/Docs/R1-1721732.zip)

[12] 3GPP, "General aspects for User Equipment (UE) Radio Frequency (RF) for NR," 3rd Generation Partnership Project (3GPP), Technical report (TR) 38.817-01, Sep. 2019, version 16.1.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=3359>

[13] —, "NR; User Equipment (UE) radio access capabilities," 3rd Generation Partnership Project (3GPP), Technical Specification (TS) 38.306, Jul. 2020, version 16.1.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=3193>

[14] —, "NR; Radio Resource Control (RRC); Protocol specification," 3rd Generation Partnership Project (3GPP), Technical Specification (TS) 38.331, Jul. 2020, version 16.1.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=3197>

[15] —, "NR; Base Station (BS) radio transmission and reception," 3rd Generation Partnership Project (3GPP), Technical

Specification (TS) 38.104, Jul. 2020, version 16.4.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=3202>

[16] Huawei and HiSilicon, "Summary on discussion on IMT-2020 evaluation for peak data rate and peak spectral efficiency," 3rd Generation Partnership Project (3GPP), discussion R1-1809934, Aug. 2018. [Online]. Available: [https://www.3gpp.org/ftp/TSG\\_RAN/WG1\\_RL1/TSGR1\\_94/Docs/R1-1809934.zip](https://www.3gpp.org/ftp/TSG_RAN/WG1_RL1/TSGR1_94/Docs/R1-1809934.zip)

[17] Intel, Samsung, MediaTek, Huawei, HiSilicon, Apple, Vivo, and OPPO, "Way Forward on NR peak data rate formula," 3rd Generation Partnership Project (3GPP), discussion R1-1805641, Apr. 2018. [Online]. Available: [https://www.3gpp.org/ftp/TSG\\_RAN/WG1\\_RL1/TSGR1\\_92b/Docs/R1-1805641.zip](https://www.3gpp.org/ftp/TSG_RAN/WG1_RL1/TSGR1_92b/Docs/R1-1805641.zip)

[18] 3GPP, "Study on self evaluation towards IMT-2020 submission," 3rd Generation Partnership Project (3GPP), Technical report (TR) 37.910, Oct. 2019, version 16.1.0. [Online]. Available: <https://portal.3gpp.org/desktopmodules/Specifications/SpecificationDetails.aspx?specificationId=3190>

[19] DoT, "National Digital Communications Policy 2018," Department of Telecommunications, Ministry of Communication, Gov (Government of India), Poicy, 2018. [Online]. Available: <https://dot.gov.in/sites/default/files/EnglishPolicy-NDCP.pdf>

[20] TCOE, "Evaluation of IMT-Advanced candidate technology submissions in Documents IMT-ADV/4 and IMT-ADV/8 by TCOE India," Telecom Centres of Excellence (TCOE), Document Doc. IMT-ADV/16, Jul. 2010. [Online]. Available: <https://www.itu.int/md/R07-IMT-ADV-C-0016/en>



A. PHANI KUMAR REDDY received the B.Tech. degree in Electronics and Communication engineering from Yogi Vemana University (YVU), Kadapa, India, in 2015. He is currently pursuing integrated M.Tech. and Ph.D. degrees with the Department of Electrical Engineering, Indian Institute of Technology Kanpur (IITK), Kanpur, India. His research interests are within the areas of wireless communications systems, signal processing, massive MIMO, 3GPP standardization. He received the University Gold Medal from YVU for his outstanding academic performance while pursuing the B.Tech. engineering degree.



SHEEBA KUMARI M received the B.E degree in Electronics and Communication Engineering from NMAM Institute of Technology, Mangalore in 2000, and M.Tech. degree in Digital Electronics and Communication from Dayanand Sagar College of Engineering, Bangalore in 2007. She has over 14 years of academic experience and 5 years of research experience. She is currently working towards the PhD degree in millimeter wave channel modeling for 5G networks. Her current research interests include 5G cellular communications, mmWave technology, wireless channel modeling, machine learning applications in communication systems.

TABLE 41. Summary of all the Key Performance Indicators.

KPI	Category		Downlink or uplink	Required value	Observed Value	Requirement met Status
	Usage scenario	Test environment				
Peak data rate (Gbit/s)	eMBB	Not applicable	Downlink	20	21.74 – 34.98	✓ Yes
			Uplink	10	11.8 – 19.0	✓ Yes
Peak spectral efficiency (bit/s/Hz)	eMBB	Not applicable	Downlink	30	31.7 – 47.9	✓ Yes
			Uplink	15	18.2 – 22.8	✓ Yes
User experienced data rate (Mbit/s)	eMBB	Dense Urban – eMBB	Downlink	100	107.8 – 187.2	✓ Yes
			Uplink	50	74.08 – 128.7	✓ Yes
			Downlink	0.20	0.37 (FR1) 0.302 (FR2)	✓ Yes
5 <sup>th</sup> percentile user spectral efficiency (bit/s/Hz)	eMBB	Indoor Hotspot – eMBB	Downlink	0.20	0.37 (FR1) 0.302 (FR2)	✓ Yes
			Uplink	0.21	0.41 (FR1) 0.425 (FR2)	✓ Yes
	eMBB	Dense Urban – eMBB	Downlink	0.225	0.375	✓ Yes
			Uplink	0.15	0.1	✓ Yes
	eMBB	Rural – eMBB (Required to meet for Config. A or B)	Downlink	0.12	NA 0.138 (Config. A) 0.134 (Config. B)	✓ Yes
			Uplink	0.075	NA 0.134 (Config. A) 0.124 (Config. B)	✓ Yes
Average spectral efficiency (bit/s/Hz) (RxF)	eMHB	Indoor Hotspot – eMBB	Downlink	9	12.25 (FR1) 11.584 (FR2)	✓ Yes
			Uplink	6.75	7.551 (FR1) 7.392 (FR2)	✓ Yes
	eMHB	Dense Urban – eMBB	Downlink	7.8	12.8	✓ Yes
			Uplink	5.4	6.652	✓ Yes
	eMHB	Rural – eMBB	Downlink	3.3	7.90 (Config. A) 6.594 (Config. B)	✓ Yes
			Uplink	1.6	4.033 (Config. C) 4.17 (Config. A) 3.457 (Config. B)	✓ Yes
Area traffic capacity (Mbit/s/m <sup>2</sup> )	eMBB	Indoor Hotspot – eMBB	Downlink	10	10.51 – 18.9	✓ Yes
User plane latency (ms) [17]	URLLC	Not applicable	Uplink and Downlink	4	0.86 – 1.9	✓ Yes
			Uplink and Downlink	1	0.31 – 0.96	✓ Yes
Control plane latency (ms) [12]	eMHB	Not applicable	Not applicable	20	6.5 – 20	✓ Yes
			Not applicable	70	6.5 – 10	✓ Yes
			Not applicable	70	6.5 – 10	✓ Yes
Connection density (devices/km <sup>2</sup> )	mMTC	Urban Macro – mMTC	Uplink	1,000,000	NR R13: 2000/13 1,465,000 – 35,000,000 NR R14: 1M/13 2,567,000 – 43,846,000	✓ Yes
			Uplink	1,000,000	NR R13: 2000/13 1,465,000 – 35,000,000 NR R14: 1M/13 2,567,000 – 43,846,000	✓ Yes
Energy efficiency	eMBB	Not applicable	Not applicable	Capability to support a high sleep ratio and long sleep duration	Yes	✓ Yes
Reliability	URLLC	Urban Macro – URLLC	Uplink or Downlink	1-10 <sup>-5</sup> success probability of transmitting a layer 2 PDU (protocol data unit) of size 32 bytes, within 1 ms in channel quality of coverage edge	Yes	✓ Yes
Mobility classes	eMHB	Indoor Hotspot – eMBB	Uplink	Stationary, Pedestrian	Yes	✓ Yes
			Uplink	Stationary, Pedestrian, Vehicular (up to 30 km/h)	Yes	✓ Yes
			Uplink	Stationary, Pedestrian, Vehicular, High speed vehicular	Yes	✓ Yes
Monthly Traffic channel link data rate (bit/s/Hz)	eMBB	Indoor Hotspot – eMBB	Uplink	1.5 (1.0 km/h)	1.59 (1.94)	✓ Yes
			Uplink	1.12 (30 km/h)	1.82 (2.17)	✓ Yes
			Uplink	0.8 (1.20 km/h)	2.32 (2.90)	✓ Yes
Mobility interruption time (ms)	eMHB and URLLC	Not applicable	Not applicable	0	0	✓ Yes
			Not applicable	0	0	✓ Yes
Bandwidth and Scalability	Not applicable	Not applicable	Not applicable	At least 100 MHz	100 MHz and more	✓ Yes
			Not applicable	Up to 1 GHz	1 GHz and more	✓ Yes
				Support of multiple different bandwidth values [4]	Supported	✓ Yes



VISHAKHA DHANWANI received her B.Tech. degree in Electronics and Communication engineering from The LNM Institute of Information Technology (LNMIIT), Jaipur, Rajasthan, India, in 2020. She is currently working as 5G NR L1 DSP Firmware Engineer at Marvell. Prior to joining Marvell, she worked on analysis of submissions by 3GPP NR and DECT-2020 NR candidate technology for IMT-2020 with the Cellular Operators Association of India as a member of 5G India Forum Independent Evaluation Group. Her research interest includes Antenna Beamforming, Massive MIMO, L1 signal processing and 3GPP standardization.

AKHIL KALPESH BACHKANIWALA received his B.Tech. degree in Communication and Computer engineering from The LNM Institute of Information Technology (LNMIIT), Jaipur, Rajasthan, India, in 2020. He is currently working as Junior Design Engineer at BigCat Wireless Pvt Ltd. Prior to joining BigCat Wireless Pvt Ltd., he worked on analysis of 3GPP NR and EUHT candidate technology for IMT-2020 as a member of 5G India Forum Independent Evaluation Group. Current research interest is wireless systems engineering.



NAVIN KUMAR (M'06-SM'13) has obtained his Ph.D. in telecommunication engineering from the university of Minho, Aveiro and Porto of Portugal, Europe in 2011. He has over 24 yrs of working experience in govt. IT and academia. He is currently Associate professor in the electronics and communication dept. of Amrita School of Engineering Bangalore, Amrita Vishwa Vidyapeetham, India. He has published over 90 peer review journals and IEEE conference proceedings. His current research is 5G mmWave, THz technology and Optical wireless communication.

K. VASUDEVAN (SM'12) received the Bachelor of Technology (Hons.) degree from the Department of Electronics and Electrical Communication Engineering, IIT Kharagpur, Kharagpur, India, in 1991, and the M.S. and Ph.D. degrees from the Department of Electrical Engineering, IIT Madras, in 1996 and 2000, respectively. From 1991 to 1992, he was with Indian Telephone Industries Ltd., Bangalore, India. He was a Postdoctoral Fellow at the Mobile Communications Lab, EPFL, Switzerland, between December 1999 and December 2000, and an Engineer at Texas Instruments, Bangalore, between January 2001 and June 2001. Since July 2001, he has been a faculty at the Electrical Department, IIT Kanpur, where he is currently a Professor. His research interests include the area of communications and signal processing.



K. VASUDEVAN (SM'12) received the Bachelor of Technology (Hons.) degree from the Department of Electronics and Electrical Communication Engineering, IIT Kharagpur, Kharagpur, India, in 1991, and the M.S. and Ph.D. degrees from the Department of Electrical Engineering, IIT Madras, in 1996 and 2000, respectively. From 1991 to 1992, he was with Indian Telephone Industries Ltd., Bangalore, India. He was a Postdoctoral Fellow at the Mobile Communications Lab, EPFL, Switzerland, between December 1999 and December 2000, and an Engineer at Texas Instruments, Bangalore, between January 2001 and June 2001. Since July 2001, he has been a faculty at the Electrical Department, IIT Kanpur, where he is currently a Professor. His research interests include the area of communications and signal processing.



K. VASUDEVAN (SM'12) received the Bachelor of Technology (Hons.) degree from the Department of Electronics and Electrical Communication Engineering, IIT Kharagpur, Kharagpur, India, in 1991, and the M.S. and Ph.D. degrees from the Department of Electrical Engineering, IIT Madras, in 1996 and 2000, respectively. From 1991 to 1992, he was with Indian Telephone Industries Ltd., Bangalore, India. He was a Postdoctoral Fellow at the Mobile Communications Lab, EPFL, Switzerland, between December 1999 and December 2000, and an Engineer at Texas Instruments, Bangalore, between January 2001 and June 2001. Since July 2001, he has been a faculty at the Electrical Department, IIT Kanpur, where he is currently a Professor. His research interests include the area of communications and signal processing.





**SRINIVASAN SELVAGANAPATHY** received the M.S degree from Bits Pilani In Software Systems. He has overall 20 years of experience in cellular technology with expertise spanning across product development, system engineering and standardisation research. He joined Nokia in 2009 and has specialized in the design of cellular systems for machine type communications and the Internet of Things. Srinivasan Selvaganapathy is senior standardisation specialist at Nokia. He has

over the years actively contributed to the standardisation work related to massive mtc communications, small-cells, multi-connectivity and mobility enhancement topics in 3GPP. He is also RAN2 delegate with focus on radio protocol aspects of 5G and IoT topics in 3GPP.



**SENDIL KUMAR DEVAR** was awarded Ph.D. degree in Electrical Engineering from Indian Institute of Technology Madras, India. He has over 12 yrs of working experience in wireless standards. He currently leads the standardization and spectrum for Ericsson in India. He actively contributed in the IMT-2020 Evaluation process and in the development of rural test environment requirements in IMT-2020. He also contributes to spectrum studies for the World Radio Conference.

Prior to Ericsson, he worked with research organizations including Samsung Research, Centre of Excellence of Wireless Technology and Telecom Centre of Excellence. He had contributed to standardization development in both 3GPP2 and 3GPP for HRPD, HSDPA, LTE and 5G.



**PUNIT RATHOD** a Ph.D. from Indian Institute of Technology Bombay, India with a 15+ years of wireless R&D experience. He has a diverse experience of working as an academic researcher, co-founder of a startup with deployed equipment in public-safety agencies in India and multinational companies. He has contributed to national and international standardization efforts at 3GPP, IEEE, and ITU-R. His recent work has been focused on spectrum and standardization as a Lead-Technical

Standards with Qualcomm Standards and Industry Organization.



**VINOSH BABU JAMES** (M'08-SM'12) has obtained his Ph.D. in Electrical Engineering from Indian Institute of Technology Madras, India. He has over 18 yrs of working experience in wireless systems engineering. He currently leads the standards engagement for Qualcomm in India.

...