



## **WestminsterResearch**

<http://www.wmin.ac.uk/westminsterresearch>

### **Novel periodically loaded E-plane filters.**

**George Goussetis**  
**Djuradj Budimir**

School of Informatics

Copyright © [2003] IEEE. Reprinted from IEEE Microwave and Wireless Components Letters, 13 (6). pp. 193-195.

This material is posted here with permission of the IEEE. Such permission of the IEEE does not in any way imply IEEE endorsement of any of the University of Westminster's products or services. Internal or personal use of this material is permitted. However, permission to reprint/republish this material for advertising or promotional purposes or for creating new collective works for resale or redistribution must be obtained from the IEEE by writing to [pubs-permissions@ieee.org](mailto:pubs-permissions@ieee.org). By choosing to view this document, you agree to all provisions of the copyright laws protecting it.

---

The WestminsterResearch online digital archive at the University of Westminster aims to make the research output of the University available to a wider audience. Copyright and Moral Rights remain with the authors and/or copyright owners. Users are permitted to download and/or print one copy for non-commercial private study or research. Further distribution and any use of material from within this archive for profit-making enterprises or for commercial gain is strictly forbidden.

---

Whilst further distribution of specific materials from within this archive is forbidden, you may freely distribute the URL of the University of Westminster Eprints (<http://www.wmin.ac.uk/westminsterresearch>).

In case of abuse or copyright appearing without permission e-mail [wattsn@wmin.ac.uk](mailto:wattsn@wmin.ac.uk).

# Novel Periodically Loaded E-Plane Filters

George Goussetis, *Student Member, IEEE*, and Djuradj Budimir, *Senior Member, IEEE*

**Abstract**—Novel E-plane waveguide filters with periodically loaded resonators are proposed. The proposed filters make use of the slow wave effect in order to achieve improved stopband performance and size reduction of roughly 50% without introducing any complexity in the fabrication process. Numerical and experimental results are presented to validate the argument.

**Index Terms**—E-plane, filters, half wavelength resonators, periodic structure, ridge waveguide.

## I. INTRODUCTION

ALL METAL inserts mounted in the E-plane of a split block waveguide housing is a well established technique for realizing lowcost and mass producible microwave configurations, such as bandpass filters [1]. However, despite their favorable characteristics, E-plane filters suffer from bulky size and stopband performance that may often be too low and too narrow for many applications, such as multiplexers [2]. This letter therefore proposes novel E-plane filter configurations with reduced size and improved selectivity. The improvement is achieved incorporating periodic waveguide structure in the resonator of an E-plane filter.

Periodic structures of various types have been a favorite topic of researchers and are currently enjoying renewed interest in the microwave field for their applications in the microwave and millimeter-wave regime [3]. In filter applications periodic structures have been reported to offer reduced physical size and improved stopband performance [4]–[6]. This is due to the slow-wave effect; the phase velocity and the guided wavelength of the slow wave are significantly reduced relative to those of a wave propagating in a comparable homogeneous line. Hence, the length of a half wavelength resonator is accordingly reduced [7]. Furthermore, due to the dispersion relation of slow waves, improved stopband performance can be achieved [5].

E-plane technology together with ridge waveguide offer a very convenient way of realizing a periodic waveguide structure, by periodically loading the waveguide with reactive obstacles in form of ridges. This letter therefore proposes to replace the homogeneous section of rectangular waveguide in the resonators of E-plane filters with a periodic structure, consisting of a cascade of ridge waveguides with different gaps. The layout of the proposed configuration for a two-resonator filter is shown on Fig. 1. The configuration is similar to standard E-plane resonators, but instead of having a homogeneous waveguide of length  $Lr$  between the two septa of length  $Ls$ , a cascade of

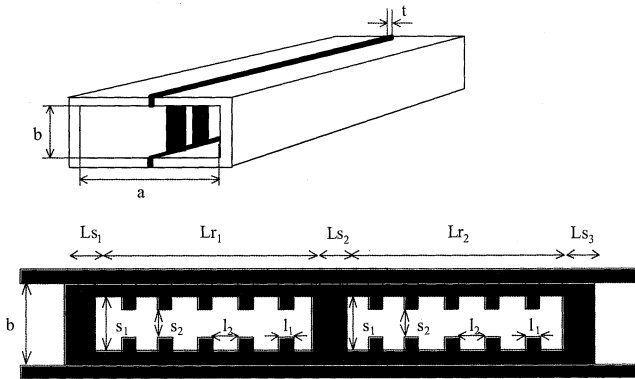


Fig. 1. Layout of the proposed 2 resonator filter.

equal lengths of ridge waveguides with different gaps is the resonant section. The proposed structure maintains the low-cost and mass producible characteristics of E-plane filters and achieves improved stopband performance and size reduction up to 50%.

## II. ANALYSIS AND DESIGN

The analysis of the proposed structure is conveniently based on a combination of the transverse resonance field matching technique with the mode matching method [8]. Transverse resonance field matching is applied for solving the propagation in ridge waveguide, in order to obtain the cutoff frequency and the field distribution for the fundamental and higher order modes [1]. These can then be used for the application of the mode matching method, including higher order modes, in order to obtain the electromagnetic performance of the proposed structure. Both methods are well-established and therefore expressions are not given here. Note that more higher order modes need to be taken into account for shorter lengths  $l_1$  and  $l_2$ . This is because for shorter  $l_1$  and  $l_2$ , higher order modes between adjacent cells of the periodic structure can increasingly interact.

The design procedure developed by Rhodes [9] for inductively coupled half wavelength filters is directly applicable to the proposed filter structures. The metal septa of length  $Ls$  act as  $K$ -inverters, provided an appropriate (usually negative) length of transmission line is allowed at each end [10]. The resonator length is then equal to half guided wavelength plus or minus the required length for the adjacent metal septum to act as a  $K$ -inverter. Hence in order to apply this design procedure the propagation characteristics of the slow wave, mainly the guided wavelength, need to be determined. These in turn are determined by geometrical parameters, namely the gaps  $s_1$  and  $s_2$  and the lengths  $l_1$  and  $l_2$ . The gaps  $s_1$  and  $s_2$  can be chosen arbitrarily. The periodicity of the structure will be more evident for larger difference between  $s_1$  and  $s_2$ , either of which can be chosen equal to the waveguide housing  $b$ . The periodicity lengths  $l_1$  and

Manuscript received July 19, 2002; revised October 14, 2002. The review of this letter was arranged by Associate Editor Dr. Shigeo Kawasaki.

The authors are with the Wireless Communications Research Group, Department of Electronic Systems, University of Westminster, London, W1W 6UW, U.K.

Digital Object Identifier 10.1109/LMWC.2003.811046

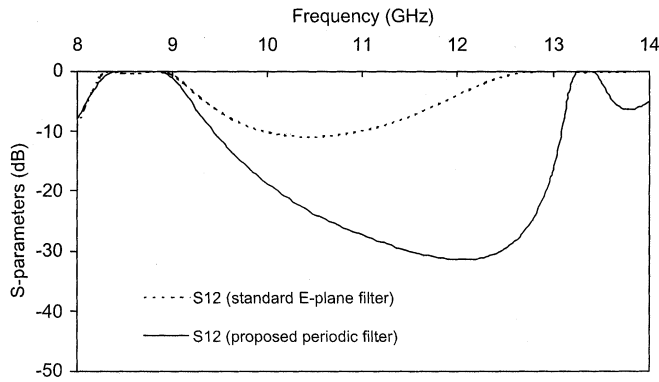


Fig. 2. Comparison between the performance of a two resonator periodic E-plane filter with a standard E-plane filter.

TABLE I  
DIMENSIONS (IN MILLIMETERS) OF FILTERS COMPARED IN FIG. 2

	Conventional	Periodic	
A	22.86	22.86	
B	10.16	10.16	
T	0.10	0.10	
Ls1=Ls3	0.31	1.20	
Ls2	1.68	4.00	
Lr1=Lr2	20.10	8.00	$s_1 = b = 10.16$
			$s_2 = 1.00$
			$l_1 = 1.00$
			$l_2 = 0.50$
Total Length	42.50	22.40	

$l_2$ , together with the chosen gaps  $s_1$  and  $s_2$  will effectively determine the slow wave wavelength; this in term should determine the length  $Lr$ , as this is (almost) equal to half wavelength.

### III. NUMERICAL AND EXPERIMENTAL RESULTS

In order to demonstrate the improvement in both physical dimensions and stopband performance, a two-resonator periodic filter has been designed and its performance and size is compared with a standard E-plane filter of the same passband. The insertion loss for the two designed filter is shown on Fig. 2. The dimensions of both designed filters are shown on Table I. Mode matching method with 30 TE and 20 TM odd modes has been used for the simulation of the periodic filter while 20 odd TE modes have been used for the simulation of the standard E-plane filter. The improved stopband performance of the proposed periodic filter is evident from Fig. 2. The proposed filter has better selectivity and wider stopband than its standard E-plane counterpart. Table I furthermore reveals the major size reduction of the proposed filter. As shown on this table, the resonator length is more than halved, corresponding to wavelength reduction of the slow wave. The overall periodic filter is 47% shorter than the standard E-plane filter.

In order to experimentally validate the improvement, a periodic filter prototype has been fabricated and measured. The

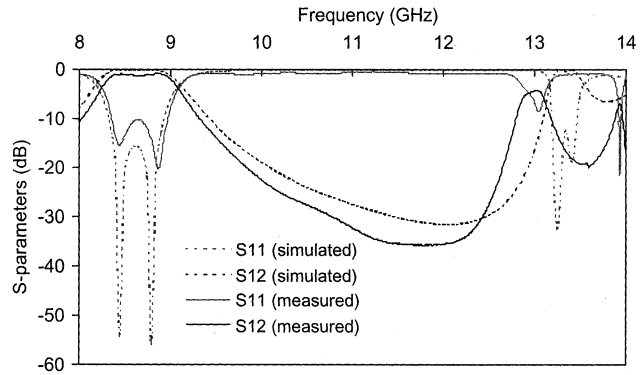


Fig. 3. Comparison between simulated and measured response for the fabricated filter prototype.

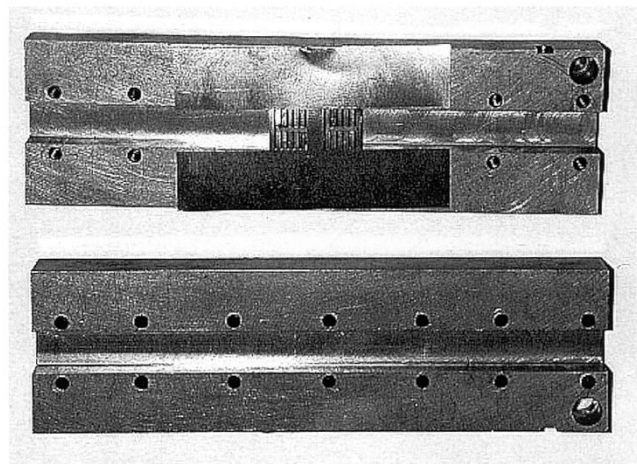


Fig. 4. Photograph of fabricated prototype.

comparison of the simulated with the experimental result is shown on Fig. 3. A picture of the fabricated prototype is shown on Fig. 4. Good agreement is observed. Any disagreement is attributed to mechanical tolerances but most importantly to the requirement for increased number of modes, that arises due to the short distances  $l_1$  and  $l_2$ ; this allows increased higher order mode interaction.

### IV. CONCLUSION

A novel compact and stopband improved E-plane filter configuration is proposed. Improvement is achieved upon periodically loading the resonators of standard E-plane filters with ridges. A size reduction of roughly 50% is observed together with improved stopband performance. The structure is compatible with the split block housing and metal insert E-plane technology, thus maintaining the low cost and mass-producible characteristics. Numerical and experimental results are presented to validate the argument.

### REFERENCES

- [1] G. Goussetis and D. Budimir, "Waveguide filters with improved stopband performance," in *Proc. 30th Eur. Microwave Conf.*, Paris, France, Oct. 2–6, 2000.
- [2] —, "E-plane manifold multiplexers with improved bandwidth," in *Proc. 31st Eur. Microwave Conf.*, London, U.K., Sept. 24–27, 2001.

- [3] J. Sor, Y. Qian, and T. Itoh, "Miniature Low-loss CPW periodic structures for filter applications," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-49, pp. 2336–2341, Dec. 2001.
- [4] Y.-K. Kuo, C.-H. Wang, and C. H. Chen, "Novel reduced-size coplanar-waveguide bandpass filters," *IEEE Microwave Wireless Components Lett.*, vol. 11, pp. 65–67, Feb. 2001.
- [5] J.-S. Hong and M. Lancaster, "Theory and experiment of novel microstrip slow-wave open loop resonator filters," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-45, pp. 2358–2365, Dec. 1997.
- [6] A. Alphones and N. Goswami, "Edge coupled microstrip resonators with periodical slot loading," in *IEEE Asia Pacific Microwave Conf. Dig. 1999*, vol. 1, pp. 9–12.
- [7] R. Collin, *Foundations of Microwave Engineering*, 2nd ed. New York: IEEE Press, 2001.
- [8] Uher, Bornemann, and Rosenberg, *Waveguide Components for Antenna Feed Systems: Theory and CAD*. Norwood, MA: Artech House, 1993.
- [9] J. D. Rhodes, "Microwave circuit realizations," in *Microwave Solid State Devices and Applications*, D. V. Morgan and M. J. Howes, Eds. London, U.K.: Peregrinus, 1980, pp. 49–57.
- [10] R. Levy, "A generalized design technique for practical distributed reciprocal networks," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-21, pp. 519–526, Aug. 1973.