

Pattern Reconfigurable Dielectric Resonator Antenna Using Parasitic Feed Elements for LTE Femtocell Base Stations

Aymen Dheyaa Khaleel, Mohd Fais Mansor, Norbahiah Misran, and Mohammad Tariqul Islam
Centre of Advanced Electronic and Communication Engineering, Faculty of Engineering and Built Environment,
Universiti Kebangsaan Malaysia, Selangor, Malaysia

Email: aymendheyaa@yahoo.com, m.mansor@ukm.edu.my, bahiah@ukm.edu.my, tariqul@ukm.edu.my

Abstract—An initial cuboid shape dielectric resonator antenna is made from a ceramic compound with a high dielectric constant of 30. A feeding mechanism that consists of a coaxial probe in the middle of the antenna is installed underneath. Parasitic feed elements are used to guide the flow of the surface current into the desired direction. Each parasitic feed possesses a switch to control the surface current flow and obtain a reconfigurable pattern. The impedance bandwidth of the proposed antenna is 320 MHz from 2.45–2.72 GHz with a total efficiency exceeding 96%, which is suitable for long-term evolution (LTE) of bands 7 (2,500–2,570 MHz, 2,620–2,690 MHz) and 38 (2.57–2.62 GHz) femtocell base stations. The proposed antenna is fabricated, and results indicate satisfactory agreement between simulated and fabricated antennas.

Index Terms—pattern reconfigurable, dielectric resonator antenna, LTE, Femtocell base stations

I. INTRODUCTION

For the past two decades, dielectric resonator antennas (DRAs) have received considerable interest owing to their multiple advantages, such as low loss, compact size, and high degree of flexibility [1]. Moreover, present wireless communication devices require reconfigurable antennas because of various features in terms of frequency, polarization, and radiation pattern that these antennas can provide to improve the overall system performance [2]. However, a significant interest in the study of reconfigurable radiation patterns is noted in the field of reconfigurable antennas because the radiation pattern of an antenna can prevent interference and noise source. Moreover, reconfigurable antennas can also improve security and save power by directing signals to the desired direction [3], thus resulting in a large demand for pattern-reconfigurable antennas in the field of wireless communication.

Reconfigurable pattern is defined as any change in radiation pattern without changes in operating frequency. Researchers have developed numerous techniques to achieve reconfigurable pattern; one such pattern is the phased array antenna, which has been used for pattern reconfiguration in dielectric resonator antennas [4]. The phased array antenna is sometimes too large and complex and thus may not be suitable in meeting the requirements of simple applications. A reconfigurable pattern is

obtained by using electrical changes, such as reconfigurable feeding network using electronic components, such as switches [5], using mechanical changes, such as material change [6], or by multi-feed techniques [7]. In such cases, different methods are used to reconfigure the radiation pattern

The basic shapes of DRA can be hemispherical, cylindrical, or rectangular. For this study, the researchers used a cuboid shape antenna because of its simplicity, flexibility, and single degree of freedom. However, cylindrical and hemispherical antennas may yield more radiation patterns because all sides are symmetric.

The authors presented the simulation results of the prop feed cuboid shape of dielectric resonator antenna in an earlier conference paper [8].

The present research study has successfully achieved pattern-reconfigurable cuboid-shaped dielectric resonator antenna which is suitable for long-term evolution (LTE) femtocell base stations. The design uses a high dielectric constant of $\epsilon_r = 30$ based on FR-4 substrate with a dielectric constant of 4.3. The antenna is centered by coaxial probe feeding, which is matched with 50Ω and present four parasitic feed elements touching the four sides of the cuboid. Meanwhile, the parasitic feed elements use grounded switch technique.

This paper is organized as follows. Section 2 describes the theoretical analysis of the antenna design. Section 3 describes the configurations of the antenna. The results and discussions are detailed in Section 4, followed by the conclusion in Section 5.

II. THEORETICAL ANALYSIS

The rectangular geometry of the DRA presents a significantly complex electromagnetic field problem in the analysis of the operation. Numerous methods for analysis, such as method of moments (MoM) and finite difference time domain (FDTD), can be used to analyze these fields. However, these methods require time and memory and are unsuitable for design and optimization. For avoiding these issues, simple models, such as dielectric waveguide model (DWM), have been developed to approximate resonant frequency.

The DWM of the TE_{111} mode is used to obtain resonant frequency [9] based on the equations below:

$$K_z \tan\left(\frac{K_x H}{2}\right) = \sqrt{(\epsilon_r - 1)K_o^2 + K_z^2} \quad (1)$$

$$K_x^2 + K_y^2 + K_z^2 = \epsilon_r K_0^2, \quad (2)$$

where K_0 is the free space wavenumber; the wavenumbers are $K_x = \pi/L$ at X -direction, $K_y = \pi/W$ at Y -direction, and K_z at Z -direction. $W, L,$ and H denote the width, length, and height of dielectric resonator, respectively. The DWM equations of the TE_{111} mode are used.

III. ANTENNA CONFIGURATIONS

Fig. 1 and Fig. 2 illustrate the proposed cuboid-shaped DRA, which was made of a high-dielectric-constant ceramic ($\epsilon_r=30$). The dimensions of the cuboid shape of the antenna were as follows: the width and length were of the same dimension of $W=L=24$, and height $H=16$. The DRA is fed with a $50\text{-}\Omega$ probe feed, and the height of the probe is $H_f=4$ mm. The height of the parasitic feed elements was $H_p=5$. Each parasitic feed possessed a grounded switch for four cases as listed in Table I. The DRA was placed on a 1.6 mm FR4 board with $35\text{ }\mu\text{m}$ of single-sided copper. The dielectric constant of the substrate was 4.3 , and the dimensions of substrate board were $60\text{ mm} \times 60\text{ mm}$.

TABLE I: SWITCH CONFIGURATION FOR ANTENNA

Cases	Switch Up	Switch Down	Switch Right	Switch Left
Case 0	Off	off	off	off
Case 1	On	off	off	Off
Case 2	Off	on	off	off
Case 3	Off	off	on	Off
Case 4	Off	off	off	On




Fig. 1. Structure of cuboid DRA 3D model

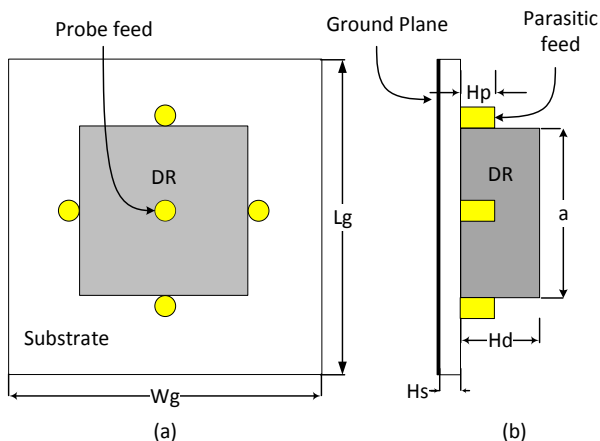


Fig. 2. Structure of cuboid DRA, (a) top view, (b) side view ($a=24$, $H_d=16$, $H_f=5$, $H_p=6$, and $W_g=L_g=60$ mm)

IV. RESULTS AND DISCUSSIONS

The proposed antenna was simulated using CST Microwave Studio with the optimized parameters. The simulated return losses for all cases mentioned in Table 1 are shown in Fig. 3. The -10 dB impedance bandwidth exceeds 200 MHz and the ranges from 2.45 GHz to 2.72 GHz, which is suitable for the LTE band 7 and 38. Fig. 4 shows the surface current distribution for Case 1. The surface current flows toward the on switch, meaning that the maximum radiation pattern is toward the current flow. Fig. 5 shows the polar linear scale of gain radiation pattern for the five cases (Figs. 5a, 5b, 5c, 5d, and 5e indicate Cases 0, 1, 2, 3, and 4, respectively). In Fig. 6, the 3D radiation pattern with the structure observed at 2.6 GHz for all cases shows that the main lobe is in the same direction as the on switch. The maximum gain at 2.6 GHz is 0.74 dB for Case 0 and 1.447 dB for Cases 1 to 4 (Fig. 7).

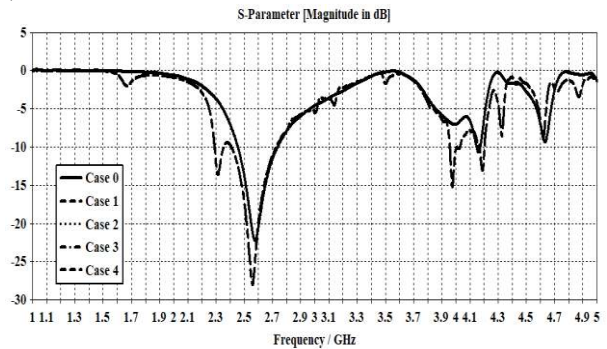


Fig. 3. S-Parameter for all cases


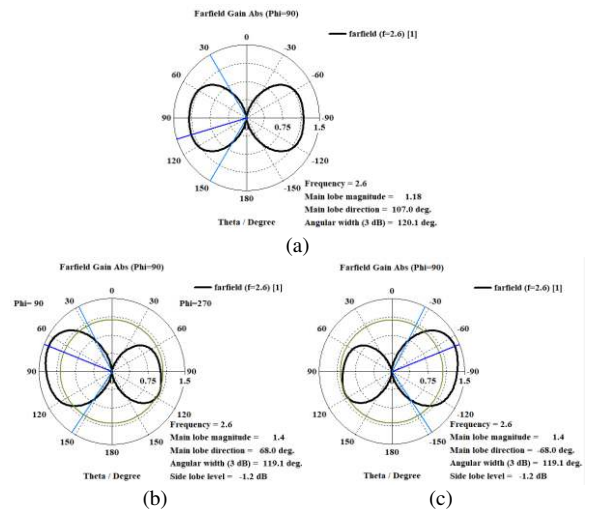


Fig. 4. Surface current distribution for Case 1



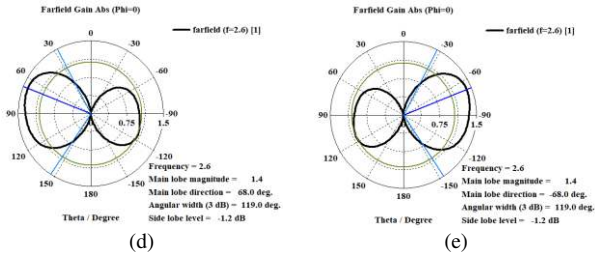


Fig. 5. Linear scale gain pattern of the proposed antenna at 2.6 GHz, (a) Theta of Case 0 at phi=90°, (b) Theta of Case 1 at phi=90°, (c) theta of Case 2 at phi=90°, (d) theta of Case 3 at phi=0°, and (e) theta of Case 4 at phi=0°.

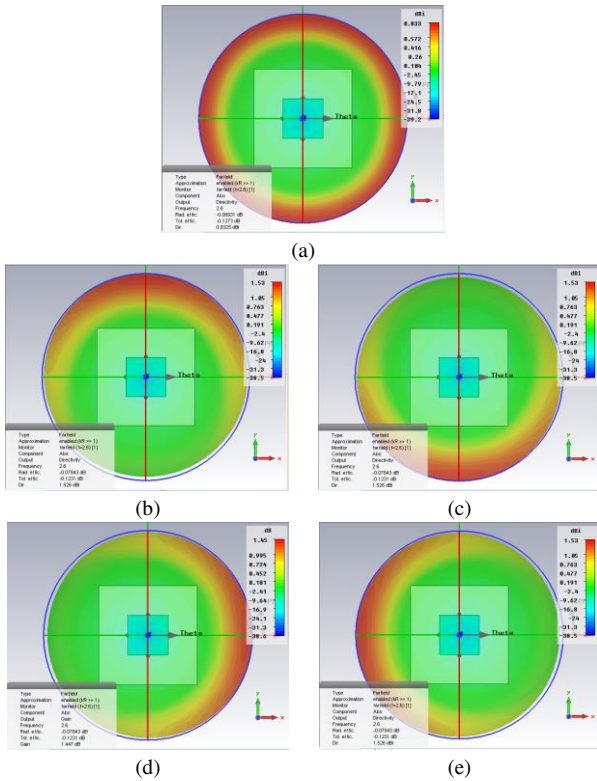


Fig. 6. 3D radiation pattern with structure shown at 2.6 GHz for (a) Case 0, (b) Case 1, (c) Case 2, (d) Case 3, and (e) Case 4.

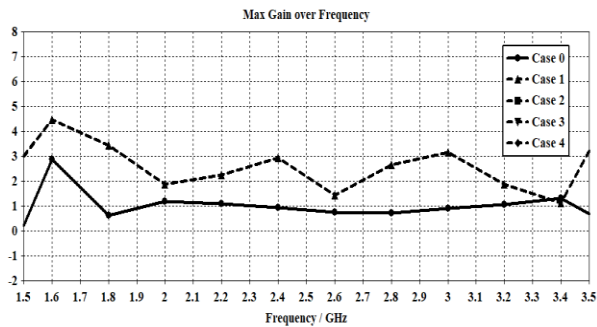


Fig. 7. Maximum gain over frequency

Agilent N5227A PNA network analyzer was used to carry out the measured S parameters results. Fig. 8 shows the measured and simulated return loss for Case 1. The simulated and measured results indicate good agreement.

Satimo near field wave measurement system was used to carry out the measured radiation pattern and gain. Fig. 9 shows the measured and simulated radiation pattern for Case 1 of the polar plot for theta while phi=90 at 2.6 GHz

in dB. Fig. 10 shows the measured and simulated gain over frequency. Fig. 11 shows the measured and simulated total efficiency over frequency. Fig. 12 shows the proposed antenna in the measurement laboratory.

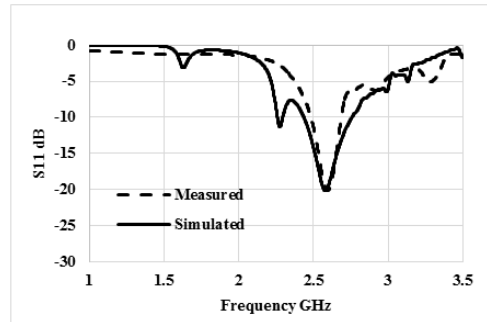


Fig. 8. Measured and simulated return loss of the antenna for Case 1

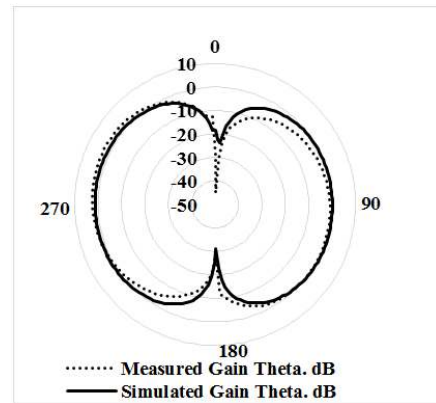


Fig. 9. Measured and simulated gain pattern of theta in Case 1 at phi=90°

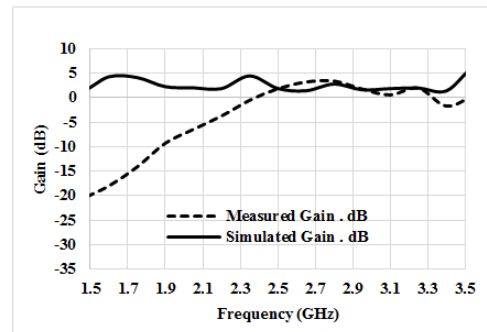


Fig. 10. Measured and simulated gain over frequency

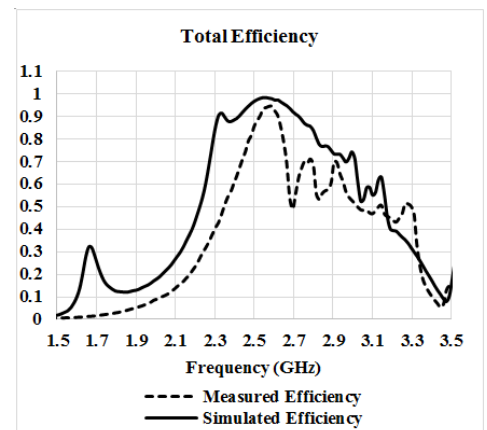


Fig. 11. Measured and simulated total efficiency over frequency

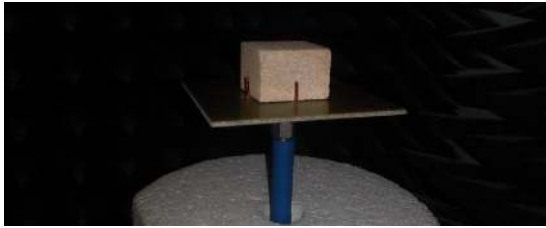


Fig. 12. Image of the fabricated antenna

Table II shows the number of elements, the number of radiation pattern, the frequency band (bandwidth), the antenna size and the techniques that used to obtain pattern reconfigurable for the proposed antenna compared with those in selected publications. The criteria for selecting

the published papers are reconfigurable radiation pattern DRA, use of switch technique, and IEEE standard for S-band [10]. The proposed antenna presents one feed and one element. Moreover, the proposed antenna is smaller in size than the others. However, the gain for this technique is minimal compared with those of other DRAs. Finally, the comparison between all cases as described in Table III at 2.6 GHz for main lobe direction, Side Lobe Level (SLL), antenna gain, directivity and total efficiency. The directivity for Case 0 is 0.8278 dBi at 2.6 GHz, whereas the directivity for Cases 1 to 4 is 1.466 dBi at 2.6 GHz. Case 0 is different from other cases.

TABLE II: COMPARISON BETWEEN THIS WORK AND PUBLISHED WORKS REGARDING RECONFIGURABLE RADIATION PATTERN IN DRAs USING SWITCHES

Ref.	No. Ele.	No. pat.	F(BW)	Gain	Size mm	Technique
[11]	4	6	1.95 GHz (500 MHz)	7 dB	292 × 184	4 grounded switches on parasitic patch and feed switches
[5]	4	4	2 GHz (700 MHz)	6.96 dB	130 × 130	20 grounded switches on parasitic patch and feed switches
This Work	1	5	2.6 GHz (320 MHz)	1.44 dB	60 × 60	4 grounded switches in parasitic feed

TABLE III: COMPARISON BETWEEN ALL CASES AT 2.6 GHz (THETA AT PHI=90° FOR CASES 1 AND 2 AND THETA AT PHI=0° FOR CASES 3 AND 4)

Cases	Main Lobe Direction	Side Lobe Level (SLL)	Gain	Directivity	Total Efficiency
Case 0	107°	N/A	0.74 dB	0.832 dBi	96.6%
Case 1	68°	1.2 dB	1.447 dB	1.526 dBi	96.7%
Case 2	-68°	1.2 dB	1.447 dB	1.526 dBi	96.7%
Case 3	68°	1.2 dB	1.447 dB	1.526 dBi	96.7%
Case 4	-68°	1.2 dB	1.447 dB	1.526 dBi	96.7%

V. CONCLUSION

This study investigated the reconfigurable pattern of cuboid dielectric resonator antenna by using four parasitic feeding elements touching one small-size dielectric resonator element. The finding return loss indicates that the proposed antenna is suitable for LTE bands 7 and 38 because of the impedance bandwidth of 320 MHz, which is from 2.43–2.75 GHz. The proposed antenna is based on the low-order mode DWM of TE₁₁₁. In addition, the feeding mechanism of the proposed antenna is excited by the probe feed. For obtaining four reconfigurable patterns, the use of grounded switches on each parasitic feed element is necessary. This research studied the effects of using parasitic feeding elements. The results show that this technique exerts marginal effect on the radiation pattern. The directivity increases from 0.83 dBi for Case 0 to 1.52 dBi for Cases 1 to 4. The gain increases from 0.74 dB for Case 0 to 1.526 dBi for Cases 1 to 4.

ACKNOWLEDGEMENT

All researchers involved in this study would like to express their utmost appreciation to UKM Research Grant with project code GUP-2016-050 in support of this research study.

REFERENCES

- [1] Y. X. Sun, K. W. Leung, and J. F. Mao, "Dualfunction dielectric resonator as antenna and phase-delay-line load: Designs of compact circularly polarized/differential antennas," *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 1, pp. 414-419, 2018.
- [2] B. J. Liu, J. H. Qiu, C. L. Wang, and G. Q. Li, "Pattern-reconfigurable cylindrical dielectric resonator antenna based on parasitic elements," *IEEE Access*, no. 99, p. 1, 2017.
- [3] N. Shahadan, *et al.*, "Steerable higher-order mode dielectric resonator antenna with parasitic elements for 5G applications," *IEEE Access*, 2017.
- [4] M. Nikfalazar, *et al.*, "Steerable dielectric resonator phased array antenna based on inkjet-printed tunable phase shifter with BST metal-insulator-metal varactors," *Antennas and Wireless Propagation Letters*, vol. PP, no. 99, pp. 1-1, 2015.
- [5] M. K. Saleem, M. A. S. Alkanhal, and A. F. Sheta, "Switch beam dielectric resonator antenna array with four reconfigurable radiation patterns," *Microwave and Optical Technology Letters*, vol. 58, no. 1, pp. 86-92, 2016.
- [6] Z. Chen and H. Wong, "Wideband glass and liquid cylindrical dielectric resonator antenna for pattern

reconfigurable design,” *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 5, pp. 2157-2164, 2017.

- [7] M. K. Saleem, H. Vettikaladi, M. A. Alkanhal, and M. Himdi, “Lens antenna for wide angle beam scanning at 79 GHz for automotive short range radar applications,” *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 4, pp. 2041-2046, 2017.
- [8] A. D. Khaleel, M. Fais bin Mansor, N. Misran, and M. T. Islam, “Omnidirectional dielectric resonator antenna for LTE femtocell base stations,” in *Proc. International Conference on Space Science and Communication*, 2015, pp. 509-512.
- [9] R. K. Mongia and A. Ittipiboon, “Theoretical and experimental investigations on rectangular dielectric resonator antennas,” *IEEE Transactions on Antennas and Propagation*, vol. 45, no. 9, pp. 1348-1356, 1997.
- [10] J. A. Bruder, “IEEE radar standards and the radar systems panel,” *IEEE Aerospace and Electronic Systems Magazine*, vol. 28, no. 7, pp. 19-22, 2013.
- [11] M. K. Saleem, M. A. Alkanhal, and A. F. Sheta, “Switched beam dielectric resonator antenna array with six reconfigurable radiation patterns,” *International Journal of RF and Microwave Computer - Aided Engineering*, vol. 26, no. 6, pp. 519-530, 2016.



Aymen Dheyaa Khaleel is a Ph. D candidate at Universiti Kebangsaan Malaysia, Faculty of Engineering and Built Environment, Department of Electrical, Electronics, and Systems Engineering. He received his B.S in Department of Computer

Communication Engineering from Al-Rafidain University College, Baghdad, Iraq in 2009 and M. Sc. in Electrical Engineering from Universiti Tenaga Nasional, Kajang, Malaysia in 2012. His current research interests include antenna, propagation, and wireless networks.



Mohd Fais Mansor was born in Selangor in 1981. He received his B. Eng. (Computer and Communication) from Universiti Kebangsaan Malaysia (UKM) in 2005 and Ph. D. (Antenna and Propagation) from University of Surrey, UK in 2012. He has been with UKM since 2005 where he is currently a senior

lecturer at the Centre of Advanced Electronic and Communication Engineering and the coordinator of UKM International Office at University of Duisburg–Essen UDE. He was a visiting researcher at the Institute of Digital Signal Processing, UDE, Germany from August 2017 to October 2017 in the MARIE project sponsored by the German Research Foundation. Since 2008, he has been involved in MIMO antenna design and evaluation, with special focus on Satellite MIMO system. His main areas of research include MIMO

antenna design and evaluation, reconfigurable antennas and mm-wave antennas and RF circuits.



Norbahiah Misran received her B. Eng. in Electrical, Electronic, & System Engineering from Universiti Kebangsaan Malaysia (UKM) in 1999. She completed her Ph.D. degree at the Queen’s University of Belfast, Northern Ireland, UK in 2004. She started her career as a tutor in 1999 at the Department of Electrical, Electronic, and System Engineering, UKM. She was eventually appointed as a lecturer in 2004 and an associate professor in 2009 in the same department. At present, she is a professor and the Chair for Centre of Advanced Electronic and Communication Engineering, Faculty of Engineering and Built Environment, UKM. Her research interest includes microwave device and system, particularly in broadband microstrip, reconfigurable, and reflectarray antennas. She also conducts certain studies in the engineering education field.



Mohammad Tariqul Islam (M’08–SM’13) is currently a professor at the Department of Electrical, Electronic, and Systems Engineering, Universiti Kebangsaan Malaysia (UKM) and a visiting professor at the Kyushu Institute of Technology, Japan. He has authored more than 350 research journal articles,

over 165 conference articles, four research level books, and a several book chapters on various topics related to antennas, microwaves, and electromagnetic radiation analysis, with 13 inventory patents filed. Thus far, his publications have been cited 3,416 times, and his H-index is 30 (Source: Scopus). His Google scholar citation is 9993, and H-index is 35. He is currently involved in numerous research projects through the Malaysian Ministry of Science, Technology, and Innovation and Ministry of Education. His research interests include communication antenna design, radio astronomy antennas, satellite antennas, and electromagnetic radiation analysis. He received several international gold medal awards, the Best Invention in Telecommunication award, a special award from Vietnam for his research and innovation, and the Best Researcher award in 2010 and 2011 at UKM. He also received the Best Innovation award in 2011 and the Best Research Group in ICT niche in 2014 from UKM. He was the recipient of Publication Award from Malaysian Space Agency in 2014, 2013, 2010, and 2009 and the Best Paper Presentation Award during the 2012 International Symposium on Antennas and Propagation, Nagoya, Japan and in Icon Space in 2015. He is a Chartered Professional Engineer-CEng, Member of IET (UK) and member of IEICE, Japan. He currently serves as editor-in-chief for the International Journal of Electronics and Informatics and associate editor for the International Journal of Antenna and Propagation and Electronics Letter.