



**Queensland University of Technology**  
Brisbane Australia

This may be the author's version of a work that was submitted/accepted for publication in the following source:

Cortes, Patricio, Kazmierkowski, Marian P., Kennel, Ralph M., [Quevedo, Daniel E.](#), & Rodriguez, Jose  
(2008)  
Predictive control in power electronics and drives.  
*IEEE Transactions on Industrial Electronics*, 55(12), pp. 4312-4324.

This file was downloaded from: <https://eprints.qut.edu.au/201028/>

#### © IEEE

This work is covered by copyright. Unless the document is being made available under a Creative Commons Licence, you must assume that re-use is limited to personal use and that permission from the copyright owner must be obtained for all other uses. If the document is available under a Creative Commons License (or other specified license) then refer to the Licence for details of permitted re-use. It is a condition of access that users recognise and abide by the legal requirements associated with these rights. If you believe that this work infringes copyright please provide details by email to [qut.copyright@qut.edu.au](mailto:qut.copyright@qut.edu.au)

**Notice:** *Please note that this document may not be the Version of Record (i.e. published version) of the work. Author manuscript versions (as Submitted for peer review or as Accepted for publication after peer review) can be identified by an absence of publisher branding and/or typeset appearance. If there is any doubt, please refer to the published source.*

<https://doi.org/10.1109/TIE.2008.2007480>

# Predictive Control in Power Electronics and Drives

Patricio Cortés, *Member, IEEE*, Marian P. Kazmierkowski, *Fellow Member, IEEE*, Ralph Kennel, *Senior Member, IEEE*, Daniel E. Quevedo, *Member, IEEE*, and José Rodríguez, *Senior Member, IEEE*

**Abstract**—Predictive control is a very wide class of controllers that have found rather recent application in the control of power converters. Research on this topic has been increased in the last years due to the possibilities of the today's microprocessors used for the control. This paper presents the application of different predictive control methods to power electronics and drives. A simple classification of the most important types of predictive control is introduced, and each one of them is explained including some application examples.

Predictive control presents several advantages that make it suitable for the control of power converters and drives. The different control schemes and applications presented in this paper illustrate the effectiveness and flexibility of predictive control.

## I. INTRODUCTION

The use of power converters has become very popular in the last decades for a wide range of applications, including drives, energy conversion, traction and distributed generation. The control of power converters has been extensively studied and new control schemes are presented every year.

Several control schemes have been proposed for the control of power converters and drives. Some of them are shown in Fig. 1. From these, hysteresis control and linear control with pulse width modulation are the most established in the literature [1]–[3]. However, with the development of faster and more powerful microprocessors, the implementation of new and more complex control schemes is possible. Some of these new control schemes for power converters include fuzzy logic, sliding mode control, and predictive control. Fuzzy logic is suitable for applications where the controlled system or some of its parameters are unknown. Sliding mode presents robustness and takes into account the switching nature of the power converters. Other control schemes found in the literature include neural networks, neuro-fuzzy and other advanced control techniques.

Predictive control presents several advantages that make it suitable for the control of power converters: concepts are intuitive and easy to understand, it can be applied to a variety of systems, constraints and nonlinearities can be easily included, multivariable case can be considered, and the resulting




Fig. 1. Basic methods of converter control.

controller is easy to implement. It requires a high amount of calculations, compared to a classic control scheme, however the fast microprocessors available today make possible the implementation of predictive control. Generally, the quality of the controller depends on the quality of the model.

This paper presents a survey of the most important types of predictive control applied in power electronics and drives. A classification of them is proposed in Section II and each type of predictive control is explained in the following sections, including some application examples. Hysteresis-based predictive control is presented in Section III, trajectory-based predictive control in Section IV, deadbeat control in V, model predictive control in VI, model predictive control with finite control set in VII, and finally some conclusions are presented.

## II. PREDICTIVE CONTROL METHODS

Predictive control is a very wide class of controllers that have found rather recent application in power converters. The classification proposed in this paper for different predictive control methods is shown in Fig. 2.

The main characteristic of predictive control is the use of the model of the system for prediction of the future behavior of the controlled variables. This information is used by the controller in order to obtain the optimal actuation, according to a predefined optimization criterion.

The optimization criterion in the hysteresis-based predictive control is to keep the controlled variable within a boundaries of a hysteresis area, while in the trajectory-based based the variables are forced to follow a predefined trajectory. In deadbeat control, the optimal actuation is the one that makes the error equal to zero in the next sampling instant. A more flexible criterion is used in model predictive control (MPC), expressed as a cost function to be minimized.

The difference between these groups of controllers is that deadbeat control and MPC with continuous control set need a modulator, in order to generate the required voltage. This will result in having fixed switching frequency. The other controllers directly generate the switching signals for the converter, do not need a modulator and will present a variable switching frequency.

One advantage of predictive control is that concepts are very simple and intuitive. Depending on the type of predictive

Copyright (c) 2008 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending a request to pubs-permissions@ieee.org.

This work was supported by the Chilean National Fund of Scientific and Technological Development (FONDECYT) under grant 1080443 and the Universidad Técnica Federico Santa María.

Patricio Cortés and José Rodríguez are with the Electronics Engineering Department, Universidad Técnica Federico Santa María, Valparaíso, Chile (e-mail: patricio.cortes@usm.cl).

Marian P. Kazmierkowski is with the Institute of Control and Industrial Electronics (ICIE), Warsaw University of Technology, Warsaw, Poland.

Ralph Kennel is with the Technical University of Munich, Germany.

Daniel E. Quevedo is with the School of Electrical Engineering Computer Science, The University of Newcastle, Australia.

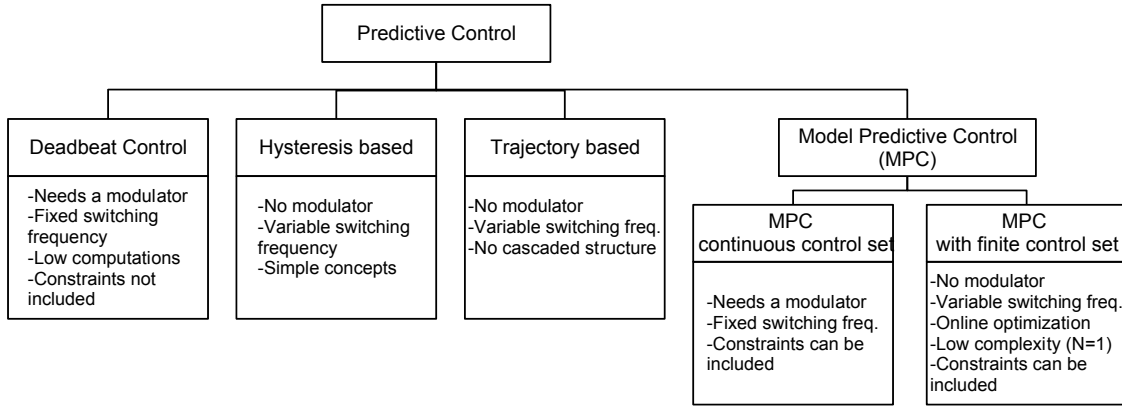


Fig. 2. Classification of predictive control methods used in power electronics.

control, implementation can also be simple, as with deadbeat control and finite control set MPC (especially, for two-level converter with horizon  $N = 1$ ). However, some implementations of MPC can be more complex if the continuous control set is considered. Variations of the basic deadbeat control, in order to make it more robust, can also become very complex and difficult to understand.

Using predictive control it is possible to avoid the cascaded structure, which is typically used in a linear control scheme, obtaining very fast transient responses. An example of this is the speed control using trajectory-based predictive control.

Nonlinearities of the system can be included in the model, avoiding the need of linearizing the model for a given operating point, improving the operation of the system for all conditions. It is also possible to include restrictions to some variables when designing the controller. These advantages can be very easily implemented in some control schemes as MPC, but it is very difficult in schemes as deadbeat control.

A more detailed description of each type of predictive control is shown in the next sections.

### III. HYSTERESIS-BASED PREDICTIVE CONTROL

Hysteresis based predictive control strategies try to keep the controlled system variables between the boundaries of a hysteresis area or space. The most simple form of this principle is a so called “bang-bang-controller”. Though bang-bang controllers usually are not considered as predictive controllers in literature, they clearly show the characteristics of a typical predictive controller. An improved form of a bang-bang controller is the predictive current controller proposed by Holtz and Stadtfeld [4]. The block diagram of the hysteresis-based predictive control is shown in Fig. 3.

Using predictive current control, the switching instants are determined by suitable error boundaries. As an example, Fig. 4 shows a circular boundary, the location of which is controlled by the current reference vector  $i_s^*$ . When the current vector  $i_s$  touches the boundary line, the next switching state vector is determined by prediction and optimization.

The trajectories of the current vector for each possible switching state are computed, and predictions are made of the respective time intervals required to reach the error boundary

again. These events also depend on the location of the error boundary, which is considered moving in the complex plane as commanded by the predicted current reference. The movement is indicated by the dotted circle in Fig. 4. The predictions of the switching instants are based on mathematical equations of the machine. The switching state vector that produces the maximum on-time is finally selected. This corresponds to minimizing the switching frequency.

The maximum possible switching frequency is limited by the computing time of the algorithms which determines the optimal switching state vector. Higher frequencies can be handled by employing the double prediction method: well before the boundary is reached, the actual current trajectory is predicted in order to identify the time instant at which the boundary transition is likely to occur. The back emf vector at this time instant is predicted then. It is used for the optimal selection of the future switching state vector using the earlier described procedure.

A further reduction of the switching frequency, which may be needed in very high-power applications, can be achieved by defining a current error boundary of rectangular shape, having the rectangle aligned with the rotor flux vector of the machine. Using field-oriented predictive current control, the switching frequency can be reduced more than with a circular boundary area in stator coordinates [5].

Holtz and Stadtfeld optimized their predictive controller for minimum switching frequency. Today different optimizing criteria are considered, e.g. low current distortion or low electromagnetic interferences (EMI). Modifications of the predictive current control are consequently under consideration.

### IV. TRAJECTORY-BASED PREDICTIVE CONTROL

The principle of trajectory based predictive control strategies is to force the system’s variables onto precalculated trajectories. Control algorithms according to this strategy are Direct Self Control (DSC) by Depenbrock [6] or Direct Mean Torque Control (DMTC) by Flach, Hoffmann and Mutschler [7]. Some additional methods like Sliding Mode Control [8] or Direct Torque Control (DTC) [9] are a combination

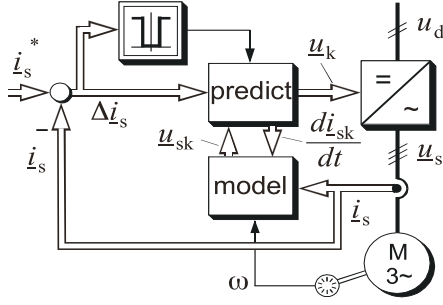


Fig. 3. Hysteresis-based predictive control [4].

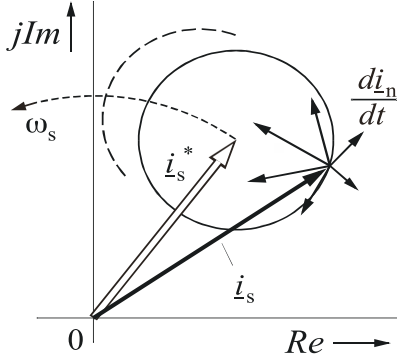


Fig. 4. Predictive current control, boundary circle and space vector [4].

of hysteresis- and trajectory-based strategies, whereas Direct Speed Control (DSPC) by Mutschler [10] can be identified as a trajectory-based control system, though it also has a few hysteresis-based aspects. DSPC will be further explained as an example of trajectory-based predictive controllers.

In contrast to cascade controllers, predictive algorithms offer the possibility to control the desired system values directly. Most predictive control methods published so far only deal with stator currents, torque or flux (linear) directly, the drive speed is controlled by a superimposed control loop. Direct Speed Control (DSPC), shown in Fig. 5, in contrast, has no control loop of this type; the switching events in the inverter are calculated in a way, that speed is directly controlled in a

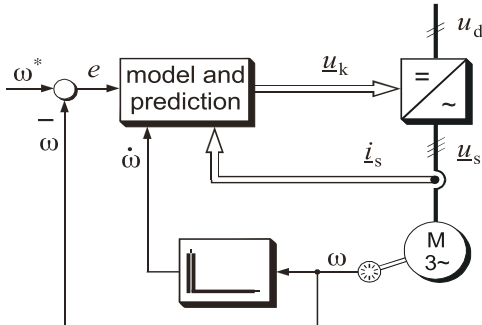


Fig. 5. Direct Speed Control (DSPC).

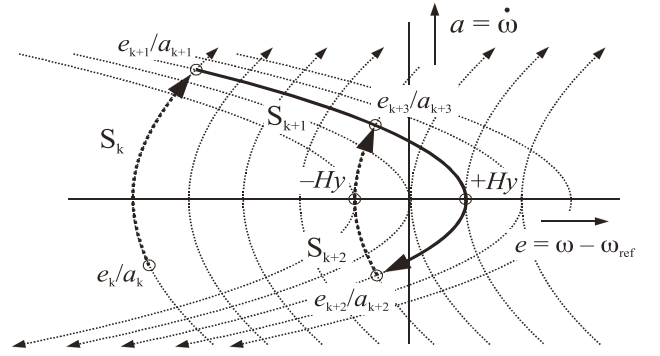


Fig. 6. DSPC: Trajectories in the  $e/a$ -state plane.

time-optimal manner.

Similar to the methods of Depenbrock [6] and Takahashi/Nogushi [9], the switching states of the inverter are classified as “torque increasing”, “slowly torque decreasing” or “rapidly torque decreasing”. For small time intervals the inertia of the system and the derivatives of machine torque and load torque are assumed as constant values. The behaviour of the system leads to a set of parabolas in the speed error vs. acceleration area as shown in Fig. 6.

The initial state of the system is assumed being  $e_k/a_k$ . In this state, a “torque increasing” voltage vector has to be produced by the inverter and therefore the switching state  $S_k$  is chosen. The state now travels along the dotted parabola until the point  $e_{k+1}/a_{k+1}$  is reached. This is the intersection with another parabola for a “torque decreasing” switching state  $S_{k+1}$ , which will pass through the point “+Hy”. The intersection  $e_{k+1}/a_{k+1}$  has been precalculated as the optimal switching instant to reach the desired state point “+Hy” as fast as possible. So, in  $e_{k+1}/a_{k+1}$  the inverter is commutated into the switching state  $S_{k+1}$ . Then the state of the system travels along the new parabola until the point  $e_{k+2}/a_{k+2}$  is reached. At this point the inverter is switched again into a “torque increasing” state,  $S_{k+2}$ . The corresponding trajectory passes the point “-Hy”. In steady state, the state moves along the path  $+Hy - e_{k+2}/a_{k+2} - Hy - e_{k+3}/a_{k+3} - Hy$ . Hence the speed error  $e$  is kept in the hysteresis band between  $-Hy$  and  $+Hy$ . This is the hysteresis aspect of this strategy mentioned above. Of course, the optimal steady-state point would be the point of origin. Since the switching frequency of the inverter is limited, the drive state cannot be fixed to that point. So the hysteresis band is defined to keep the switching frequency in an acceptable range.

The algorithm of DSPC clearly shows the main principle of predictive control, that foreknowledge of the drive system is used to precalculate the optimal switching states instead of trying to linearize the nonlinear parts of the system and then control them by PI-controllers. The speed can be controlled directly without a cascade structure.

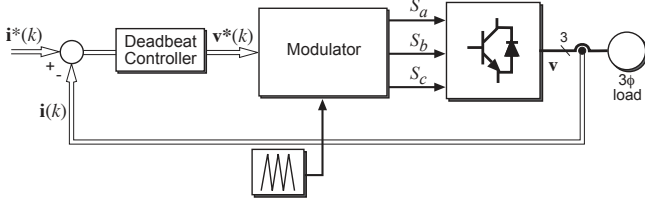


Fig. 7. Deadbeat current control.




Fig. 8. Illustration of deadbeat current controller operation.

## V. DEADBEAT-BASED PREDICTIVE CONTROL

A well known type of predictive controller is the deadbeat controller. This approach uses the model of the system to calculate, once every sampling period, the required reference voltage in order to reach the reference value in the next sampling instant. Then, this voltage is applied using a modulator. It has been applied for current control in three-phase inverters [11]–[21], rectifiers [22], [23], active filters [24], [25], power factor correctors [26], power factor preregulators [27], [28], uninterruptible power supplies (UPS) [29]–[31], dc-dc converters [32], torque control of induction machines [33]. This method has been used when a fast dynamic response is required. However, errors in the parameter values of the model, unmodelled delays and other errors in the model deteriorate the performance of the system and may become unstable. Another disadvantage is that non-linearities and constraints of the system are difficult to consider in a deadbeat control scheme.

### A. Deadbeat current control

A typical deadbeat current control scheme is shown in Fig. 7. It can be noted that compared to a classic current control scheme the PI controller has been replaced by the deadbeat controller. The reference voltage is applied using a modulator.

The load model for a generic RLE load is described by the following space vector equation

$$\mathbf{v} = R\mathbf{i} + L \frac{d\mathbf{i}}{dt} + \mathbf{e} \quad (1)$$

where  $\mathbf{v}$  is the voltage space vector,  $\mathbf{i}$  is the current space vector and  $\mathbf{e}$  is the EMF voltage space vector.

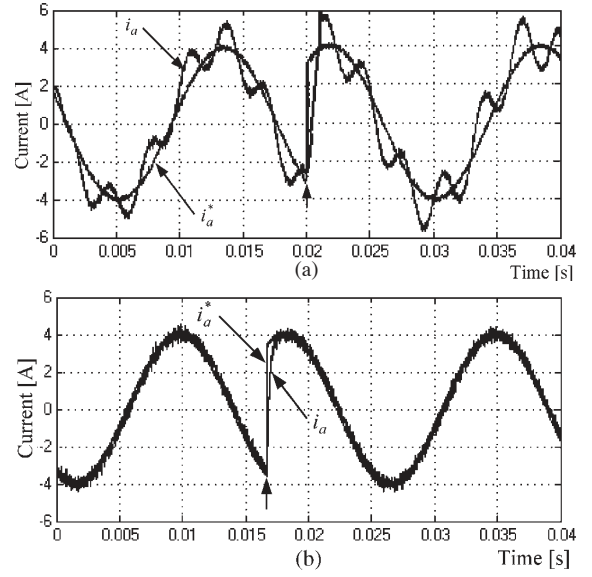


Fig. 9. Experimental results for the deadbeat current control. (a) Conventional deadbeat current controller implemented in a full digital system (without any compensation). (b) Modified deadbeat current controller proposed in [34].

The following discrete-time equation can be obtained from (1) for a sampling time  $T_s$

$$\frac{1}{\delta} \mathbf{i}(k+1) - \chi \mathbf{i}(k) = \mathbf{v}(k) - \mathbf{e}(k) \quad (2)$$

where  $\delta = e^{-T_s R/L}$  and  $\chi = \frac{1}{R}(1 - e^{-T_s R/L})$ .

Based on the discrete-time model (2), the reference voltage vector is obtained as

$$\mathbf{v}^*(k) = \frac{1}{\delta} [\mathbf{i}^*(k+1) - \chi \mathbf{i}(k)] + \mathbf{e}(k) \quad (3)$$

Reference voltage  $\mathbf{v}^*$  is applied in the converter using a modulator.

The basic operating principle of deadbeat current control is illustrated in Fig. 8. Here, the load current  $i$  at time  $k$  is different to the reference current  $i^*$  and this error is used for calculation of the reference voltage  $v^*$ . This voltage is applied to the load at time  $k$  and the load current at time  $k+1$  will be equal to the reference current.

### B. Modifications to the basic algorithm

When implemented in a real system, several problems may appear and deteriorate the performance of a deadbeat controller. One of them is the delay introduced by calculation time and modulation. This problem has been solved in [17], [18], [20] by considering this delay in the model.

Another important issue is the sensitivity to plant uncertainties and errors in the model parameter values. This problem has been studied and several solutions have been proposed, including the use of an adaptive self-tuning scheme [34], predictive internal model [35] and neural networks [36]. Some results comparing the implementation of the conventional deadbeat current controller, i.e. using equation (3), implemented in a full digital system without any compensation of the calculation

delay, and the modified deadbeat controller proposed in [34], are shown in Fig. 9.

In some applications, information about the disturbances is needed by the controller and these include variables which are not measured. In these cases, the use of disturbance observers has been proposed [28], [30]. Other specific applications can require a modified algorithm for reduced switching frequency, as proposed in [37].

## VI. MODEL PREDICTIVE CONTROL

Model predictive control (MPC), also referred to as *receding horizon control*, is the only one among the so-called advanced control techniques (usually understood as techniques more advanced than a standard PID control) which has been extremely successful in practical applications in recent decades, exerting a great influence on research and developments directions of industrial control systems. Applications and theoretical results abound, see, e.g., the books [38]–[40] and survey papers [41]–[44]. An attractive feature of MPC is that it can handle general constrained nonlinear systems with multiple inputs and outputs in a unified and clear manner.

In the present section, we will focus on MPC formulations where a continuous control set is considered and controller outputs are first passed through modulators, which then provide the switch positions. A survey on finite control set MPC formulations which control the states of the converter switches directly, i.e., without any intermediate modulators, will be given later, in Section VII.

### A. System Model

Most model predictive control strategies are formulated in a discrete-time setting with a fixed sampling interval, say  $h > 0$ . Here system inputs are restricted to change their values only at the discrete sampling instants, i.e., at times  $t = kh$ , where  $k \in \{0, 1, 2, \dots\}$  denotes the sampling instants.

Since power electronics applications are often governed by nonlinear dynamic relations, it is convenient to represent the system to be controlled in discrete-time state space form via:

$$x(k+1) = f(x(k), u(k)), \quad k \in \{0, 1, 2, \dots\}, \quad (4)$$

where  $x(k)$  denotes the state value at time  $k$ , whereas  $u(k)$  is the plant input.

As mentioned above, in the present section we will study configurations where the controller output feeds into a modulator stage which then provides the switch positions. Consequently, we will restrict the system inputs  $\{u(k)\}$  in (4) according to:

$$u(k) \in \mathbb{U} \subseteq \mathbb{R}^p, \quad k \in \{0, 1, 2, \dots\}, \quad (5)$$

where  $\mathbb{U}$  is a polytope and  $p$  denotes the number of switches. For example, the components of  $u(k)$  could correspond to duty cycles or PWM reference signals, in which case  $\mathbb{U}$  is formed of intervals, namely  $\mathbb{U} = [0, 1]^p$ . Clearly, the above model can only approximate switching effects, see also [45]. Nevertheless, as we will see, several interesting proposals for

power electronics and drives have been developed by using this simple setting.

In addition to constraints on the system inputs, MPC also allows one to incorporate state constraints, say:

$$x(k) \in \mathbb{X} \subseteq \mathbb{R}^n, \quad k \in \{0, 1, 2, \dots\}. \quad (6)$$

State constraints can, for example, correspond to constraints on capacitor voltages in flying capacitor converters or neutral point clamped converters. Constraints on inductive load currents can also be modeled as state constraints.

### B. Cost Function

In MPC, at each time instant  $k$  and for a given (measured or estimated) plant state  $x(k)$ , a cost function over a finite horizon of length  $N$  is minimized. The following choice encompasses many alternatives documented in the literature:

$$V(x(k), \vec{u}'(k)) \triangleq F(x'(k+N)) + \sum_{\ell=k}^{k+N-1} L(x'(\ell), u'(\ell)). \quad (7)$$

Here,  $L(\cdot, \cdot)$  and  $F(\cdot)$  are weighting functions which serve to penalize predicted system behaviour, e.g., differences between voltage references and predicted values, see Section VI-D. Predicted plant state values are formed according to:

$$x'(\ell+1) = f(x'(\ell), u'(\ell)), \quad \ell \in \{k, k+1, \dots, k+N-1\} \quad (8)$$

where

$$u'(\ell) \in \mathbb{U}, \quad \ell \in \{k, k+1, \dots, k+N-1\} \quad (9)$$

refers to tentative plant inputs. The recursion (8) is initialized with the current plant state measurement, i.e.:

$$x'(k) \leftarrow x(k). \quad (10)$$

Thus, (8) refers to predictions of the plant states which would result if the plant input at the time instants  $\{k, k+1, \dots, k+N-1\}$  was set equal to the corresponding values in<sup>1</sup>

$$\vec{u}'(k) \triangleq \{u'(k), u'(k+1), \dots, u'(k+N-1)\}. \quad (11)$$

Both, the predicted plant state trajectory and the plant inputs are constrained in accordance with (5), i.e., we have:

$$u'(\ell) \in \mathbb{U}, \quad x'(\ell) \in \mathbb{X}, \quad \forall \ell \in \{k, k+1, \dots, k+N-1\}. \quad (12)$$

In addition,  $x'(k+N)$  is typically required to satisfy a given terminal state constraint, say:

$$x'(k+N) \in \mathbb{X}_f \subseteq \mathbb{X}. \quad (13)$$

Constrained minimization of  $V(\cdot, \cdot)$  as in (7) gives the optimizing control sequence at time  $k$  and for state  $x(k)$ :

$$\vec{u}(k) \triangleq \{u(k; k), u(k+1; k), \dots, u(k+N-1; k)\}. \quad (14)$$

<sup>1</sup>It is worth emphasizing here that, in general, plant state predictions will differ from actual plant state trajectories.

### C. Moving Horizon Optimization

Despite the fact that  $\vec{u}(k)$  contains feasible plant inputs over the entire horizon, in standard MPC, only the first element is used, i.e., the system input is set to

$$u(k) \leftarrow u(k; k). \quad (15)$$

At the next sampling step, i.e., at time  $k+1$ , the system state  $x(k+1)$  is measured (or estimated), the horizon is shifted by one step, and another optimization is carried out. This yields  $\vec{u}(k+1)$  and  $u(k+1) = u(k+1; k+1)$ , etc. As illustrated in Fig. 10 for a horizon length  $N=3$ , the horizon taken into account in the minimization of  $V$  slides forward as  $k$  increases. Thus, MPC amounts to an *open-loop-optimal* feedback control method; see, e.g., [46]. Note that the past is propagated forward in time via the plant state sequence  $\{x(k)\}$ .

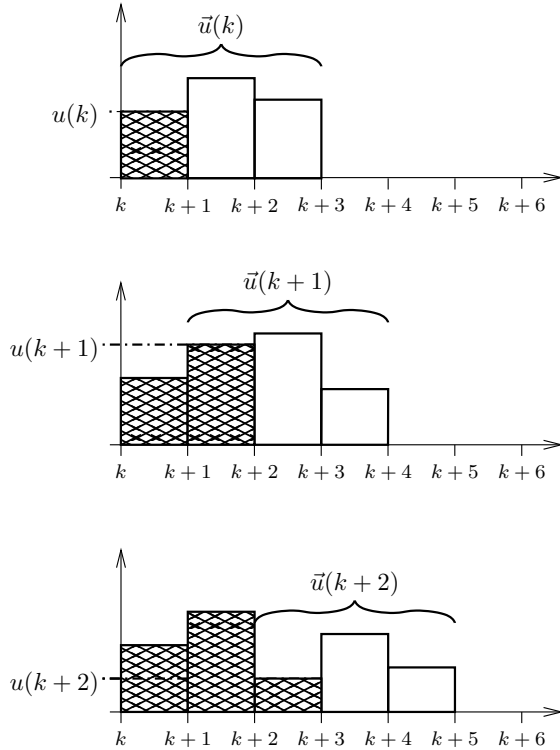


Fig. 10. Moving horizon principle,  $N=3$ .

### D. Design Parameters

As seen above, MPC allows one to treat multi-variable nonlinear systems in an, at least conceptually, simple way. In addition to choosing the sampling interval  $h$  (which determines the system model (4)), MPC design essentially amounts to selecting the cost function, i.e., the weighting functions  $F(\cdot)$  and  $L(\cdot, \cdot)$ , the horizon length  $N$ , and, possibly, the state constraint sets  $\mathbb{X}$  and  $\mathbb{X}_f$ .

1) *Weighting Functions*: The design of the weighting functions  $F(\cdot)$  and  $L(\cdot, \cdot)$  is related to the actual control objectives.<sup>2</sup> For example, tracking of desired output and internal voltages and currents can be accommodated into the MPC framework by choosing weights which penalize a measure of the difference between predicted and reference values.

In [47] it was shown how spectral characteristics of voltage and current tracking errors can be controlled through the use of frequency selective weighting. More details on this approach will be given in Section VII.

2) *Horizon length*: For a given sampling frequency  $1/h$  and, especially for system with non-minimum phase dynamics, larger values for the horizon length  $N$ , will in general, provide better performance, as quantified by the weighting functions  $F(\cdot)$  and  $L(\cdot, \cdot)$ . Indeed, one can expect that, for large enough  $N$ , the effect of  $u(k)$  on  $x'(\ell)$  for  $\ell > k+N$  will be negligible and, consequently, MPC will approximate the performance of an infinite horizon optimal controller. On the other hand, the constrained optimization problem which needs to be solved on-line to find the controller output, has computational complexity which, in general, increases with the horizon length. As a consequence, the optimization horizon parameter  $N$  allows the designer to trade-off performance versus on-line computational effort. Fortunately, excellent performance can often be achieved with relatively small horizons.

Interestingly, in some situations, stability of the closed loop model  $x(k+1) = f(x(k), u(k; k))$  can be ensured through choice of the MPC design parameters, see, e.g., [40], [42], [48]. For power electronics applications controlled via MPC, establishing stability results remains, to date, an open problem. However, there is a significant repository of tools in the control community that merit an investigation of their applicability in power electronics applications (see [49], [50]).

### E. The Linear Quadratic Case

A particularly simple case of (4)–(7) arises when the system model is linear and the cost function is quadratic, i.e.:

$$\begin{aligned} x(k+1) &= Ax(k) + Bu(k), \\ V(x(k), \vec{u}'(k)) &= x'(k+N)^T P x'(k+N) \\ &\quad + \sum_{\ell=k}^{k+N-1} \left\{ x'(\ell)^T Q x'(\ell) + u'(\ell)^T R u'(\ell) \right\}, \end{aligned} \quad (16)$$

where  $A$ ,  $B$ ,  $P$ ,  $Q$  and  $R$  are given matrices of appropriate dimensions.

If the system inputs and states in (16) are unconstrained, then the moving horizon optimization of the above cost function leads to a linear time invariant controller. This simple approach was investigated in [51], [52] for use in drive applications.

On the other hand, if the inputs and states are constrained to belong to polytopes, then minimizing the cost function amounts to solving a convex quadratic programme. In this case, semi-explicit solutions to the MPC optimization problem

<sup>2</sup>Note that the weighting functions should be chosen such that  $V(\cdot, \cdot)$  depends on the decision variables contained in  $\vec{u}'(k)$ , see (11).



can be found. In the associated *Explicit MPC* schemes, some of the computations can be carried out off-line, thus, alleviating on-line computational burden, see [53], [54]. Several works, including [44], [51], have studied constrained linear quadratic MPC in the context of power electronics and drives applications. We will next revise the approach taken in [44].

#### F. Explicit MPC for Drive Control

The work [44] illustrates the advantages of replacing the PI current controller in the field oriented drive control scheme in Fig. 11 by Explicit MPC.

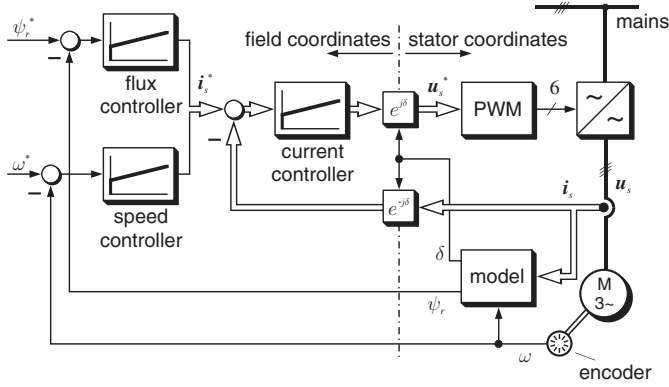


Fig. 11. Typical field oriented control of an induction machine [44].

The dynamics of an induction machine are governed by nonlinear differential equations. To obtain a model suitable for Explicit MPC, see (16), in [44] the time-continuous machine model was discretized and the nonlinear cross-coupling between the stator current components  $i_{sd}$  and  $i_{sq}$  was neglected. The state variable  $x(k)$  in (16) was chosen as:

$$x(k) = [i_{sd}(k) \quad i_{sq}(k)]^T.$$

Despite the fact that the model used is only approximate, it turns out that the Explicit MPC formulation adopted can outperform standard PI control without requiring significant additional computation times. Figs. 12(a) and 12(b) illustrate experimental results. In these figures,  $i_{sq}^*$  is the reference of the stator current component, whereas  $u_{sq}^*$  refers to the stator voltage component, i.e., the control input, which is fed to the PWM module, see Fig. 11.

#### G. Comments

The results of [44] are certainly promising. However, we feel that MPC has significantly more to offer than replacing individual modules within a cascaded control structure. Indeed, the main advantage of MPC, with respect to other control approaches, lies in the possibility to control non-linear and constrained systems. In addition, various objectives, such as reference tracking and disturbance compensation, can be incorporated. Thus, it is worth studying the feasibility of developing MPC architectures which govern the entire drive control architecture without using any additional PI loops or

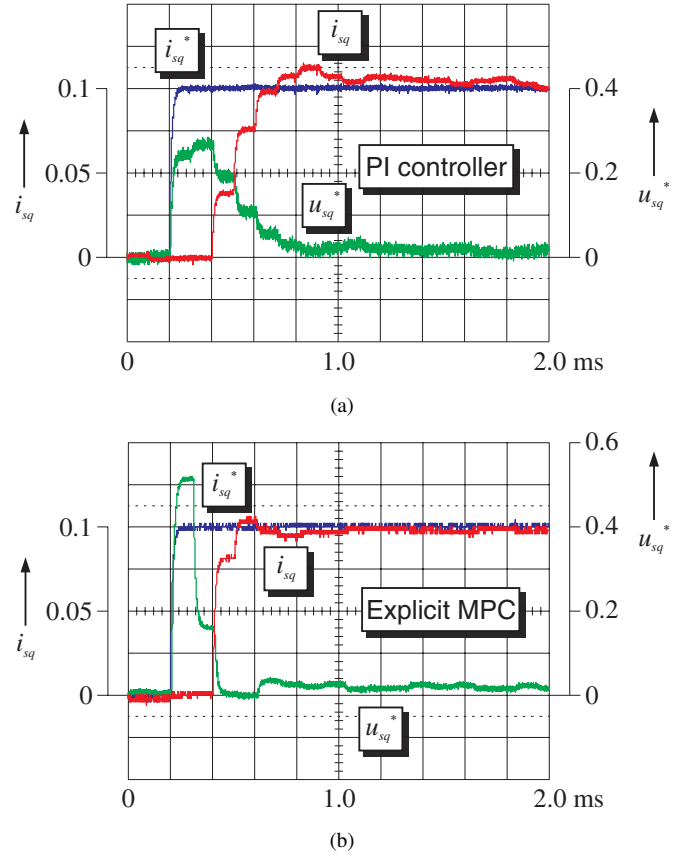


Fig. 12. Experimental tracking performance of current control: (a) with PI controllers designed according to Symetrical Optimum, (b) with Model Predictive Controller (MPC) [44].

PWM modules. For that purpose, nonlinearities need to be taken into account and the finite set nature of switching states should be respected.

In the following section we will revise some MPC formulations where the switches are controlled directly, without using PWM modules.

### VII. FINITE CONTROL SET MODEL PREDICTIVE CONTROL

Considering the discrete nature of power converters, it is possible to simplify the optimization problem of MPC by avoiding the use of modulators. Taking into account the finite set of possible switching states of the power converter, which depends on the possible combinations of the *on/off* switching states of the power switches, the optimization problem is reduced to the evaluation of all possible states and selection of the one which minimizes the given cost function. In addition to this, if the horizon length is set to  $N = 1$ , the calculation of the optimal actuation is very simple and easy to implement experimentally, as will be shown later in this section.

#### A. System Model

When modeling a converter, the basic element is the power switch, which can be an Insulated-Gate Bipolar Transistor (IGBT), a thyristor, a Gate Turn-off thyristor (GTO), or others. The simplest model of this power switches considers an ideal switch with only two states: on and off. Therefore, the total



TABLE I  
POSSIBLE SWITCHING STATES FOR DIFFERENT CONVERTER TOPOLOGIES.

Converter	Switching states
3-phase inverter	8
3-phase NPC inverter	27
5-phase inverter	32
Matrix converter	27
Direct converter	9
Flying capacitor	8

number of switching states of a power converter is equal to the number of different combinations of the two switching states of each switch. However, some combinations are not possible, for example those combinations that short-circuit the DC link. Lets consider the example of an H-bridge single-phase inverter. It has 4 switches, so the total number of combinations is  $2^4 = 16$ . However, two switches in the same leg of the inverter can not be on at the same time, so it is usual to drive them as complementary switches. This way, the number of possible states is reduced and each leg has only two states. So the number of possible states is  $2^2 = 4$ .

As a general rule, the number of possible switching states can be calculated as  $x^y$ , where  $x$  is the number of possible states of each leg of the converter, and  $y$  is the number of phases (or legs) of the converter. This way a three-phase two-level converter has  $2^3 = 8$  possible switching states, a three-phase three-level converter has  $3^3 = 27$  switching states, and a five-phase two-level converter has  $2^5 = 32$  switching states. Some examples of different converter topologies and their corresponding number of possible switching states are shown in Table I. For some other converter topologies the way of calculating the possible switching states may be different.

### B. Horizon Length

When a horizon length  $N$  is used, the number of possible input sequences, considering the possible switching states of the converter, can be quite large. Then, the idea of predicting the behavior of the system for all possible switching state sequences becomes difficult to apply in a real system. A simple solution is the use of  $N = 1$ , reducing the number of calculations to the number of possible switching states of the converter.

The block diagram of a Finite Control Set MPC considering a prediction horizon  $N = 1$  is shown in Fig. 13. Here, the state variables of the system  $\mathbf{x}(k)$  are measured (or estimated) and are used as initial condition for the predictions. The  $n$  predicted values  $\mathbf{x}(k+1)$ , corresponding to the  $n$  possible switching states of the converter are evaluated using the cost function. The switching state  $\mathbf{S}$  which minimizes the cost function is selected and applied.

### C. Some Application Examples

1) *Current control*: Considering a three-phase two-level inverter, the 8 possible switching states and voltage vectors are summarized in Table II. Here, variables  $S_a$ ,  $S_b$  and  $S_c$  represent the switching state of the  $a$ ,  $b$  and  $c$  legs of the

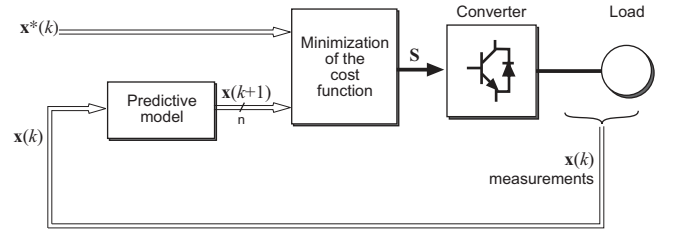


Fig. 13. Finite control set MPC.

TABLE II  
POSSIBLE SWITCHING STATES AND VOLTAGE VECTORS FOR A THREE-PHASE INVERTER.

$S_a$	$S_b$	$S_c$	$\mathbf{v}$
0	0	0	$\mathbf{v}_0 = 0$
1	0	0	$\mathbf{v}_1 = \frac{2}{3}V_{dc}$
1	1	0	$\mathbf{v}_2 = \frac{V_{dc}}{3} + j\frac{\sqrt{3}}{3}V_{dc}$
0	1	0	$\mathbf{v}_3 = -\frac{V_{dc}}{3} + j\frac{\sqrt{3}}{3}V_{dc}$
0	1	1	$\mathbf{v}_4 = -\frac{2}{3}V_{dc}$
0	0	1	$\mathbf{v}_5 = -\frac{V_{dc}}{3} - j\frac{\sqrt{3}}{3}V_{dc}$
1	0	1	$\mathbf{v}_6 = \frac{V_{dc}}{3} - j\frac{\sqrt{3}}{3}V_{dc}$
1	1	1	$\mathbf{v}_7 = 0$

inverter. A simple example of current control using FS-MPC for an inverter is shown in [55]–[58]. Here, the following cost function is defined:

$$g = |i_\alpha^*(k) - \hat{i}_\alpha(k+1)| + |i_\beta^*(k) - \hat{i}_\beta(k+1)| \quad (17)$$

where  $i_\alpha^*(k)$  and  $i_\beta^*(k)$  are the real and imaginary part of the reference current vector, and  $\hat{i}_\alpha(k+1)$  and  $\hat{i}_\beta(k+1)$  are the real and imaginary part of the predicted current vector.

As shown also in [47], a discrete-time model suitable for prediction of the load current is:

$$\hat{\mathbf{i}}(k+1) = \left(1 - \frac{RT_s}{L}\right) \mathbf{i}(k) + \frac{T_s}{L} (\mathbf{v}(k) - \hat{\mathbf{e}}(k)) \quad (18)$$

where  $R$  and  $L$  are the load resistance and inductance,  $T_s$  is the sampling frequency,  $\hat{\mathbf{e}}$  is the estimated back-emf of the load,  $\mathbf{i}(k)$  is the measured load current, and the inverter voltage  $\mathbf{v}(k)$  is the decision variable to be calculated for the control.

Experimental results for current control of a three-phase inverter, obtained from [58], are shown in Fig. 14.

A similar current control strategy has been presented for a three-level inverter [59], [60] and a four-level inverter [61]. In [60], the possibility of including additional terms to the cost function is proposed, adding capacitor voltage balancing and reduction of the switching frequency.

For the case of the three-phase PWM rectifier, the possible switching states and voltage vectors generated by the inverter are the same that the ones shown in Table II for an inverter. As well as the current can be controlled, it is also possible to control the active and reactive power [62]–[64].

For more complex converter topologies, the control strategy is the same but with a different set of possible switching states. This is the case of the matrix converter, as presented in

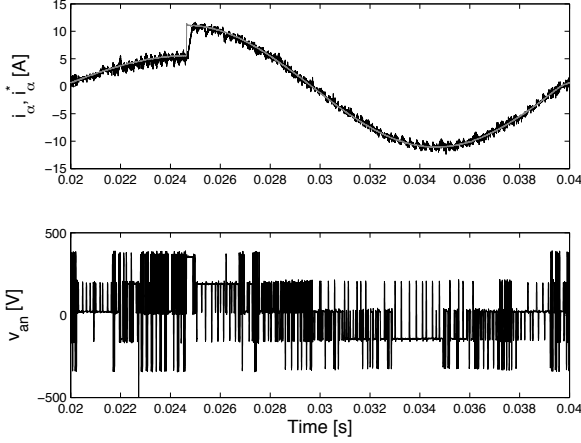


Fig. 14. Current control of a three-phase inverter using finite control set MPC: experimental result.

[65], the direct converter [66]–[68], and the flying capacitor converter [69].

In terms of the variables to be controlled, depending on the converter and the application, several compositions of the cost function has been proposed.

2) *Torque and flux control*: For the same three-phase inverter, considering an induction motor as a load, the torque and flux of the machine can be directly controlled, as shown in [70]. An appropriate cost function is defined as:

$$g = |T_e^*(k) - \hat{T}_e(k+1)| + A||\psi_s(k)^* - \hat{\psi}_s(k+1)|| \quad (19)$$

where  $T_e^*(k)$  is the reference torque and  $\hat{T}_e(k+1)$  is the predicted electric torque for a given switching state,  $|\psi_s(k)^*|$  is the reference amplitude for the stator flux and  $|\hat{\psi}_s(k+1)|$  is the amplitude of the predicted stator flux. The weighting factor  $A$  allows to adjust the importance of the flux error with respect to the torque error.

3) *Power control*: For a three-phase PWM rectifier, the same possible switching states and voltage vectors shown in Table II are valid. Here, the inductive filter model is considered for prediction of the input current and input power of the converter. As well as a predictive current control can be used in the rectifier, another approach for the control of this converter considers the direct control of the active and reactive power [64]. As proposed in [62], [63], the cost function evaluates the error in the active and reactive power:

$$g = (P^* - P(k+1))^2 + (Q(k+1))^2 \quad (20)$$

where the reactive power reference is zero and the active power reference is obtained from the dc link voltage control loop.

4) *Control of an NPC converter*: In a three-level three-phase inverter the number of switching states is 27, generating 19 different voltage vectors. Here, it is possible to take advantage of the redundancy of switching states by considering

additional terms in the cost function. As proposed in [60], it is possible to control the load currents while balancing the capacitor voltages and reducing the average switching state by using the following cost function:

$$g = |i_\alpha^* - \hat{i}_\alpha(k+1)| + |i_\beta^* - \hat{i}_\beta(k+1)| + A|V_{dc1} - V_{dc2}| + Bn \quad (21)$$

where  $V_{dc1}$  and  $V_{dc2}$  are the dc link capacitor voltages,  $n$  is the number of commutations needed to change from the present switching state to the next switching state. The weighting factor  $A$  represents the importance of the capacitor voltage balance, and the weighting factor  $B$  allows to reduce the average switching frequency.

5) *Control of a Matrix Converter*: The control strategy proposed in [65] for the matrix converter takes into account the 27 possible switching states of the 9 bidirectional switches. The goal of the control method is to receive only active power at the input, and that the load current follows its reference with good accuracy. This two requirements are expressed as the following cost function:

$$g = |i_\alpha^* - \hat{i}_\alpha(k+1)| + |i_\beta^* - \hat{i}_\beta(k+1)| + A|Q(k+1)| \quad (22)$$

where  $i_\alpha^*$  and  $i_\beta^*$  are the load current references,  $\hat{i}_\alpha(k+1)$  and  $\hat{i}_\beta(k+1)$  are the predicted load currents for a given switching state, and  $Q(k+1)$  is the predicted reactive power at the input of the converter.

6) *Control of a direct converter*: The direct converter has 6 bidirectional switches which allows 9 possible switching states. The control strategies presented in [66]–[68] consider the control of the capacitor voltages of the LC filter at the input of the converter in a cascaded control structure, in order to obtain unity power factor and controlled amplitude of the output voltage. The cost function used in these works for the control of the capacitor voltages is defined as:

$$g = ||\mathbf{v}_{cap}^*(k+1) - \mathbf{v}_{cap}(k+1)||_2^2 \quad (23)$$

where  $\mathbf{v}_{cap}^*(k+1)$  is the reference capacitor voltage vector, obtained from the outer input current control loop. The capacitor voltages  $\mathbf{v}_{cap}(k+1)$  are predicted for each possible switching state.

7) *Control of a Flying Capacitor Converter*: The application of FS-MPC to a single-phase four-level flying capacitor converter is presented in [69]. This converter has three pair of switches allowing 8 possible switching states that generates 4 different voltage levels. The output current and capacitor voltages are controlled considering also reduction of the switching frequency and control of the spectrum of the output current. This is achieved by using the following cost function:

$$J[k, \vec{u}] = ||e'[k+N]||_P^2 + \sum_{\ell=k}^{k+N-1} \{||e'[\ell]||_P^2 + \lambda_2 ||u'[\ell-1] - u'[\ell]||^2\}, \quad (24)$$

where  $u'$  is the switching state to be applied, and  $e'[k]$  is the predicted value of the overall error signal  $e[k]$ , defined as

$$e[k] = \begin{bmatrix} V_1[k] - \frac{V_{DC}}{3} \\ V_2[k] - \frac{2V_{DC}}{3} \\ W(\rho)(i_L[k] - i_L^{ref}[k]) \end{bmatrix} \quad (25)$$

where  $V_1$  and  $V_2$  are the capacitor voltages,  $i_L$  is the output current. The capacitor voltage references are defined as a fraction of the dc link voltage, and the output current reference is  $i_L^{ref}$ . The filter  $W(\rho)$  allows to include a frequency weighting in the cost function in order to control the spectrum of the output current.

The norm  $\|e'[\ell]\|_P^2$  is defined as

$$\|e'[\ell]\|_P^2 = e'[\ell]^T P e'[\ell], \quad P = \text{diag}\{\lambda_1, \lambda_1, 1\} \quad (26)$$

Parameters  $\lambda_1$ ,  $\lambda_2$  and the filter  $W(\rho)$  are the design parameters for the controller.

As well as the above mentioned examples are implemented as an online calculation of the optimal switching state, it is also possible to use offline calculation of an explicit solution, as proposed in [71] for the torque control of an induction machine.

These examples show the flexibility and the wide range of applications on MPC when the finite set of possible states is considered. This idea has been applied to several other converters and it is open for new applications.

#### D. Spectrum and Switching Frequency

In all the examples described in Section VII-C, the switching state of the converter is changed at equidistant instants in time, i.e. each sampling period an optimal switching state is selected and applied during a whole period. This way, variable switching frequency is obtained, where the maximum switching frequency is limited to half the sampling frequency.

The resulting spectrum of the voltages and currents is spread over a wide range of frequencies and will change depending on the sampling frequency and the operating conditions. This kind of spectrum is not desirable in some applications. In order to get a concentrated spectrum, similar to the one obtained using PWM, a frequency weighted cost function has been proposed in [47], where a narrow band stop filter is included in the cost function.

Some other applications may require a reduced switching frequency, in order to reduce the switching power losses. In these cases a weighting factor related to the commutations can be included in the cost function, as proposed in [60] where it is demonstrated that the average switching frequency can be considerably reduced.

A different approach is the use of a constant switching frequency, as will be explained in the next subsection. A comparison between the variable switching frequency and constant switching frequency algorithms is presented in [72] for the power control of an active front end rectifier.

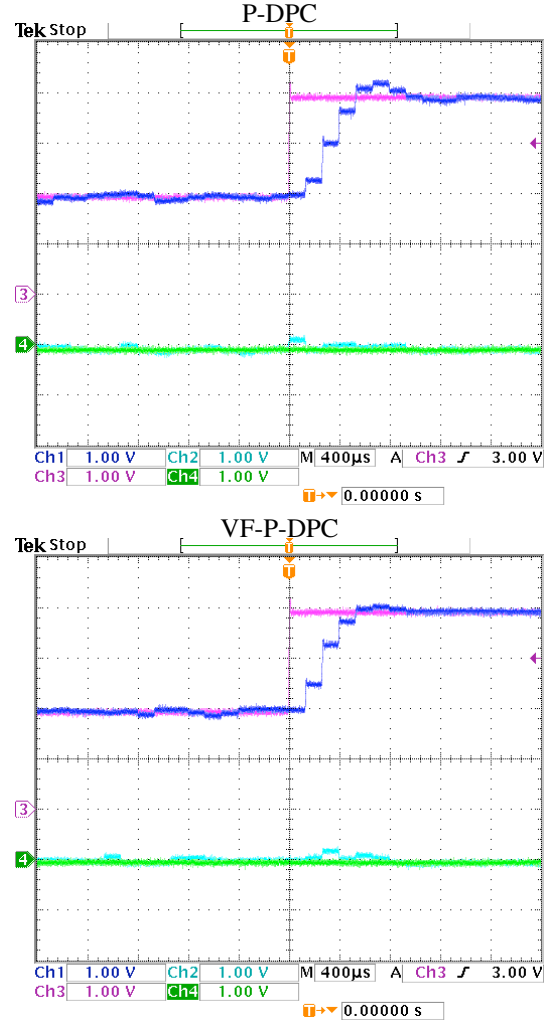


Fig. 15. Experimental tracking performance of active power control for command change from 1 kW to 2 kW. Upper figure: constant switching frequency Predictive Direct power Control (P-DPC) with grid voltage sensors, Lower figure: constant switching frequency Virtual Flux based Predictive Direct power Control (VF-P-DPC) without grid voltage sensors. From the top: commanded and measured active and reactive powers.

#### E. Constant Switching Frequency Algorithm

In most commercial applications the constant switching frequency algorithm is preferred because it allows easy EMI filters design and protection of semiconductor power components. Therefore, a constant switching frequency Predictive Direct Power Control (P-DPC) algorithm has been developed in [73], [74]. This algorithm selects in every sampling period appropriate voltage vector sequence and calculates duty cycles in order to minimize instantaneous active and reactive power errors. Lack of linear controllers and modulator makes the system very fast in transients. However, the P-DPC algorithm is sensitive to measured grid voltage distortion, which causes grid current distortion. Using estimated Virtual Flux (VF) for instantaneous power calculation, the grid side voltage sensors can be eliminated and sampling frequency reduced [75]. Moreover, in operation under distorted grid voltage, the THD factor of the grid current can also be considerably reduced without deterioration of high dynamic performance

(see Fig. 15). Therefore, the VF-P-DPC algorithm is very universal system that can be used for very low switching frequencies (below 2 kHz).

### VIII. CONCLUSIONS

This paper has reviewed the most important types of predictive control used in power electronics and drives. The predictive control methods are divided into following groups: deadbeat control, hysteresis based control, trajectory based control and continuous and finite control set MPC. The basic principles and the latest developments of these methods have been systematically described and application examples has been indicated.

It is demonstrated that predictive control is a very powerful and flexible concept for designing controllers. It presents several advantages that make it suitable for the control of power converters and drives. The use of all available information of the system to decide the optimal actuation allows to achieve very fast dynamics, by including the nonlinearities and restrictions of the system and avoiding the cascaded structure. Its is also possible to take advantage of the discrete nature of the power converters and choose from the possible switching states the optimal solution according to minimization of a predefined cost function.

Predictive control has been applied to a very wide range of systems and it is open for new applications and converter topologies. However, the best suited type of predictive control will depend on the application and requirements of the system.

As conclusion of survey, it is belief of the authors that predictive control strategies will continue to play a strategic role in the development of modern high performance power electronics and drive systems, and will offer a new interesting perspective for future research in this area.

### REFERENCES

- [1] M. P. Kazmierkowski, R. Krishnan, and F. Blaabjerg, *Control in power electronics*. Academic press, 2002.
- [2] N. Mohan, T. M. Undeland, and W. P. Robbins, *Power electronics*, 2nd ed. John Wiley & Sons, Inc., 1995.
- [3] A. Linder, "Modellbasierte prädiktivregelung in der antriebstechnik," Ph.D. dissertation, Wuppertal University, Germany, 2005.
- [4] J. Holtz and S. Stadtfeld, "A predictive controller for the stator current vector of AC machines fed from a switched voltage source," in *International Power Electronics Conference IPEC*, Tokyo, 1983, pp. 1665–1675.
- [5] A. Khambadkone and J. Holtz, "Low switching frequency and high dynamic pulsewidth modulation based on field-orientation for high-power inverter drive," *IEEE Transactions on Power Electronics*, vol. 7, no. 4, pp. 627–632, Oct. 1992.
- [6] M. Depenbrock, "Direct self-control (DSC) of inverter-fed induction machine," *IEEE Transactions on Power Electronics*, vol. 3, no. 4, pp. 420–429, Oct. 1988.
- [7] E. Flach, R. Hoffmann, and P. Mutschler, "Direct mean torque control of an induction motor," in *Conf. Record EPE'97*, vol. 3, Trondheim, 1997, pp. 672–677.
- [8] S. V. Emeljanov, *Automatic control systems with variable structure (Automatische Regelsysteme mit veränderlicher Struktur)*. Munich, Vienna: R. Oldenbourg Verlag, 1969.
- [9] I. Takahashi and T. Noguchi, "A new quick response and high efficiency control strategy of an induction motor," in *Conf. Record IEEE IAS Annual Meeting*, 1985, pp. 1665–1675.
- [10] P. Mutschler, "A new speed-control method for induction motors," in *Conf. Record of PCIM'98*, Nuremberg, May 1998, pp. 131–136.
- [11] O. Kukrer, "Discrete-time current control of voltage-fed three-phase PWM inverters," *IEEE Trans. on Industrial Electronics*, vol. Vol. 11, no. No.2, pp. pp. 260–269, March 1996.
- [12] H. Le-Huy, K. Slimani, and P. Viarouge, "Analysis and implementation of a real-time predictive current controller for permanent-magnet synchronous servo drives," *IEEE Trans. on Industrial Electronics*, vol. Vol. 41, no. No.1, pp. pp.110–117, February 1994.
- [13] H.-T. Moon, H.-S. Kim, and M.-J. Youn, "A discrete-time predictive current control for PMSM," *IEEE Trans. On Power Electronics*, vol. Vol. 18, no. No.1, pp. pp.464–472, January 2003.
- [14] L. Springob and J. Holtz, "High-bandwidth current control for torque-ripple compensation in PM synchronous machines," *IEEE Trans. On Industrial Electronics*, vol. Vol. 45, no. No.5, pp. pp.713–721, October 1998.
- [15] J. Chen, A. Prodić, R. W. Erickson, and D. Maksimović, "Predictive digital current programmed control," *IEEE Trans. On Power Electronics*, vol. Vol. 18, no. No.1, pp. pp.411–419, January 2003.
- [16] R. E. Betz, B. J. Cook, and S. J. Henriksen, "A digital current controller for three phase voltage source inverters," *IEEE Industry Applications Society Annual Meeting*, vol. New Orleans, Louisiana, October 2003.
- [17] S. J. Henriksen, R. E. Betz, and B. J. Cook, "Practical issues with predictive current controllers," *2001 Australasian University Power Engineering Conference*, vol. Centre of Renewable Energy and Sustainable Technologies, Curtin University of Technology, Perth WA, Australia, 2001.
- [18] G. Bode, P. C. Loh, M. J. Newman, and D. G. Holmes, "An improved robust predictive current regulation algorithm," *IEEE Trans. on Industry Applications*, vol. 41, no. 6, pp. 1720–1733, November 2005.
- [19] S.-M. Yang and C.-H. Lee, "A deadbeat current controller for field oriented induction motor drives," *IEEE Trans. on Power Electronics*, vol. 17, no. 5, pp. 772–778, September 2002.
- [20] H. Abu-Rub, J. Guzinski, Z. Krzeminski, and H. A. Toliyat, "Predictive current control of voltage source inverters," *IEEE Transactions on Industrial Electronics*, vol. 51, no. 3, pp. 585–593, June 2004.
- [21] Q. Zeng and L. Chang, "An advanced SVPWM-based predictive current controller for three-phase inverters in distributed generation systems," *IEEE Transactions on Industrial Electronics*, vol. 55, no. 3, pp. 1235–1246, Mar. 2008.
- [22] L. Malesani, P. Mattavelli, and S. Buso, "Robust dead-beat current control for PWM rectifier and active filters," *IEEE Trans. on Industry Applications*, vol. Vol. 35, no. No.3, pp. pp. 613–620, May/June 1999.
- [23] Y. Nishida, O. Miyashita, T. Haneyoshi, H. Tomita, and A. Maeda, "A predictive instantaneous-current PWM controlled rectifier with AC-side harmonic current reduction," *IEEE Trans. On Industrial Electronics*, vol. Vol. 44, no. No.3, pp. pp.337–343, June 1997.
- [24] S.-G. Jeong and M.-H. Woo, "DSP-based active power filter with predictive current control," *IEEE Trans. On Industrial Electronics*, vol. Vol. 44, no. No.3, pp. pp.329–336, June 1997.
- [25] J. Mossoba and P. W. Lehn, "A controller architecture for high bandwidth active power filters," *IEEE Trans. on Power Electronics*, vol. 18, no. 1, part 2, pp. 317–325, January 2003.
- [26] W. Zhang, G. Feng, and Y.-F. Liu, "Analysis and implementation of a new PFC digital control method," *Conf. Record of PESC'03(Power Electronics Specialists Conference)*, vol. Mexico, 2003, cD-ROM.
- [27] P. Mattavelli, G. Spiazzi, and P. Tenti, "Predictive digital control of power factor preregulators," *Conf. Record of PESC'03(Power Electronics Specialists Conference)*, vol. Mexico, 2003, cD-ROM.
- [28] —, "Predictive digital control of power factor preregulators with input voltage estimation using disturbance observers," *IEEE Trans. on Power Electronics*, vol. 20, no. 1, pp. 140–147, January 2005.
- [29] S. Buso, S. Fasolo, and P. Mattavelli, "Uninterruptible power supply multiloop employing digital predictive voltage and current regulators," *IEEE Trans. On Industry Applications*, vol. Vol. 37, no. No.6, pp. pp.1846–1854, November/December 2001.
- [30] P. Mattavelli, "An improved deadbeat control for UPS using disturbance observers," *Trans. on Industrial Electronics*, vol. 52, no. 1, pp. 206 – 212, February 2005.
- [31] A. Nasiri, "Digital control of three-phase series-parallel uninterruptible power supply systems," *IEEE Transactions on Power Electronics*, vol. 22, no. 4, pp. 1116–1127, Jul. 2007.
- [32] S. Saggini, W. Stefanutti, E. Tedeschi, and P. Mattavelli, "Digital deadbeat control tuning for dc-dc converters using error correlation," *IEEE Transactions on Power Electronics*, vol. 22, no. 4, pp. 1566–1570, Jul. 2007.
- [33] P. Correa, M. Pacas, and J. Rodriguez, "Predictive torque control for inverter-fed induction machines," *IEEE Transactions on Industrial Electronics*, vol. 54, no. 2, pp. 1073–1079, Apr. 2007.

- [34] Y. A. R. I. Mohamed and E. F. El-Saadany, "An improved deadbeat current control scheme with a novel adaptive self-tuning load model for a three-phase PWM voltage-source inverter," *IEEE Transactions on Industrial Electronics*, vol. 54, no. 2, pp. 747–759, Apr. 2007.
- [35] —, "Robust high bandwidth discrete-time predictive current control with predictive internal model—a unified approach for voltage-source PWM converters," *IEEE Transactions on Power Electronics*, vol. 23, no. 1, pp. 126–136, Jan. 2008.
- [36] Y. A. R. Mohamed and E. F. El-Saadany, "Adaptive discrete-time grid-voltage sensorless interfacing scheme for grid-connected DG-inverters based on neural-network identification and deadbeat current regulation," *IEEE Transactions on Power Electronics*, vol. 23, no. 1, pp. 308–321, Jan. 2008.
- [37] P. Zanchetta, D. B. Gerry, V. G. Monopoli, J. C. Clare, and P. W. Wheeler, "Predictive current control for multilevel active rectifiers with reduced switching frequency," *IEEE Transactions on Industrial Electronics*, vol. 55, no. 1, pp. 163–172, Jan. 2008.
- [38] E. F. Camacho and C. Bordons, *Model Predictive Control*. New York, N.Y.: Springer-Verlag, 1999.
- [39] J. M. Maciejowski, *Predictive Control with Constraints*. Englewood Cliffs, N. J.: Prentice-Hall, 2002.
- [40] G. C. Goodwin, M. M. Serón, and J. A. De Doná, *Constrained Control & Estimation – An Optimization Perspective*. London: Springer Verlag, 2005.
- [41] S. J. Qin and T. A. Badgwell, "A survey of industrial model predictive control technology," *Contr. Eng. Pract.*, vol. 11, pp. 733–764, 2003.
- [42] D. Q. Mayne, J. B. Rawlings, C. V. Rao, and P. O. M. Scokaert, "Constrained model predictive control: Optimality and stability," *Automatica*, vol. 36, no. 6, pp. 789–814, Jun. 2000.
- [43] C. E. García, D. M. Prett, and M. Morari, "Model predictive control: Theory and practice—a survey," *Automatica*, vol. 25, no. 3, pp. 335–348, 1989.
- [44] A. Linder and R. Kennel, "Model predictive control for electrical drives," in *Proc. IEEE Power Electronics Specialists Conference (PESC)*, Recife, Brazil, 2005, pp. 1793–1799.
- [45] B. Lehman and R. M. Bass, "Extensions of averaging theory for power electronic systems," *IEEE Trans. Power Electron.*, vol. 11, no. 4, pp. 542–553, Jul. 1996.
- [46] S. E. Dreyfus, "Some types of optimal control of stochastic systems," *J. SIAM, Series A: Control*, vol. 2, no. 1, pp. 120–134, 1964.
- [47] P. Cortés, J. Rodríguez, D. E. Quevedo, and C. Silva, "Predictive current control strategy with imposed load current spectrum," *IEEE Trans. Power Electron.*, vol. 23, no. 2, pp. 612–618, Mar. 2008.
- [48] D. E. Quevedo, G. C. Goodwin, and J. A. De Doná, "Finite constraint set receding horizon quadratic control," *Int. J. Robust Nonlin. Contr.*, vol. 14, no. 4, pp. 355–377, Mar. 2004.
- [49] T. Geyer, G. Papafotiou, and M. Morari, "Hybrid model predictive control of the step-down DC–DC converter," *IEEE Trans. Contr. Syst. Technol.*, in press 2008.
- [50] M. Baotic, F. Christophersen, and M. Morari, "Constrained optimal control of hybrid systems with a linear performance index," *IEEE Transactions on Automatic Control*, vol. 51, no. 12, pp. 1903–1919, 2006.
- [51] K.-S. Low and X. Zhuang, "Robust model predictive control and observer for direct drive applications," *IEEE Trans. Power Electron.*, vol. 15, no. 6, pp. 1018–1028, Nov. 2000.
- [52] R. Kennel, A. Linder, and M. Linke, "Generalized predictive control (GPC) – ready for use in drive applications ?" in *Proc. IEEE Power Electronics Specialists Conference (PESC)*, Vancouver, Canada, 2001, pp. 1839–1844.
- [53] A. Bemporad, M. Morari, V. Dua, and E. N. Pistikopoulos, "The explicit linear quadratic regulator for constrained systems," *Automatica*, vol. 38, pp. 3–20, 2002.
- [54] M. Serón, G. C. Goodwin, and J. A. De Doná, "Characterisation of receding horizon control for constrained linear systems," *Asian J. Contr.*, vol. 5, no. 2, pp. 271–286, Jun. 2003.
- [55] J. Rodríguez, J. Pontt, C. Silva, M. Salgado, S. Rees, U. Ammann, P. Lezana, R. Huerta, and P. Cortés, "Predictive control of a three-phase inverter," *IEE Electronics Letters*, vol. 40, no. 9, pp. 561–562, 29 April 2004.
- [56] J. Rodríguez, J. Pontt, C. Silva, P. Cortes, U. Amman, and S. Rees, "Predictive current control of a voltage source inverter," in *Power Electronics Specialists Conference, 2004. PESC 04. 2004 IEEE 35th Annual*, vol. 3, Jun. 2004, pp. 2192–2196.
- [57] A. Linder and R. Kennel, "Direct model predictive control - a new direct predictive control strategy for electrical drives," in *Power Electronics and Applications, 2005 European Conference on*, Sep. 2005.
- [58] J. Rodríguez, J. Pontt, C. Silva, P. Correa, P. Lezana, P. Cortés, and U. Ammann, "Predictive current control of a voltage source inverter," *IEEE Trans. on Industrial Electronics*, vol. 54, no. 1, pp. 495 – 503, February 2007.
- [59] G. Perantzakis, F. Xepapas, S. Papathanassiou, and S. N. Manias, "A predictive current control technique for three-level NPC voltage source inverters," in *Power Electronics Specialists Conference, 2005. PESC '05. IEEE 36th*, Sep. 2005, pp. 1241–1246.
- [60] R. Vargas, P. Cortes, U. Ammann, J. Rodríguez, and J. Pontt, "Predictive control of a three-phase neutral-point-clamped inverter," *IEEE Transactions on Industrial Electronics*, vol. 54, no. 5, pp. 2697–2705, Oct. 2007.
- [61] G. S. Perantzakis, F. H. Xepapas, and S. N. Manias, "Efficient predictive current control technique for multilevel voltage source inverters," in *Power Electronics and Applications, 2005 European Conference on*, Sep. 2005.
- [62] J. Rodríguez, J. Pontt, P. Correa, P. Lezana, and P. Cortes, "Predictive power control of an AC/DC/AC converter," in *Industry Applications Conference, 2005. Fourtieth IAS Annual Meeting. Conference Record of the 2005*, vol. 2, Oct. 2005, pp. 934–939.
- [63] J. Rodríguez, J. Pontt, P. Correa, U. Ammann, and P. Cortes, "Novel control strategy of an AC/DC/AC converter using power relations," in *International Conference on Power Electronics And Intelligent Control For Energy Conservation, Pelindec 2005*, Warsaw, Poland, 16-19 October 2005.
- [64] P. Antoniewicz and M. P. Kazmierkowski, "Predictive direct power control of three-phase boost rectifier," *Bulletin of Polish Academy of Science*, vol. 54, no. 3, pp. 287–292, 2006.
- [65] S. Muller, U. Ammann, and S. Rees, "New time-discrete modulation scheme for matrix converters," *IEEE Trans. on Industrial Electronics*, vol. 52, no. 6, pp. 1607–1615, December 2005.
- [66] M. Catucci, J. Clare, and P. Wheeler, "Predictive control strategies for ZCS direct converter HV power supply," in *Power Electronics and Applications, 2005 European Conference on*, Sep. 2005.
- [67] —, "Predictive control strategy for ZCS single stage resonant converter," in *IEEE Industrial Electronics, IECON 2006 - 32nd Annual Conference on*, Nov. 2006, pp. 2905–2910.
- [68] H. Q. S. Dang, P. Wheeler, and J. Clare, "A control analysis and implementation of high voltage, high frequency direct power converter," in *IEEE Industrial Electronics, IECON 2006 - 32nd Annual Conference on*, Nov. 2006, pp. 2096–2102.
- [69] E. I. Silva, B. P. McGrath, D. E. Quevedo, and G. C. Goodwin, "Predictive control of a flying capacitor converter," in *Proceedings of the American Control Conference*, New York City, USA, Jul. 2007.
- [70] J. Rodríguez, J. Pontt, C. Silva, P. Cortés, S. Rees, and U. Ammann, "Predictive direct torque control of an induction machine," in *11th International Power Electronics and Motion Control Conference, EPE-PEMC 2004*, Riga, Latvia, 2-4 September 2004.
- [71] G. Papafotiou, T. Geyer, and M. Morari, "A hybrid model predictive control approach to the direct control problem of induction motors," *International Journal of Robust Nonlinear Control*, vol. 17, no. 17, pp. 1572–1589, 2007.
- [72] P. Antoniewicz, M. P. Kazmierkowski, S. Aurtenechea, and M. A. Rodríguez, "Comparative study of two predictive direct power control algorithms for three-phase ac/dc converters," in *Euro. Power Electron. (EPE) Conf.*, Aalborg, 2007.
- [73] S. Aurtenechea, M. A. Rodríguez, E. Oyarbide, and J. R. Torrealday, "Predictive control strategy for ac/dc converters based on direct power control," *IEEE Trans. on Industrial Electronics*, vol. 54, no. 3, pp. 1261–1271, June 2007.
- [74] S. Aurtenechea, M. A. Rodríguez, E. Oyarbide, and J. R. Torrealday, "Predictive direct power control - a new control strategy for DC/AC converters," in *IEEE 32nd Annual Conference on Industrial Electronics, IECON 2006*, Nov. 2006, pp. 1661–1666.
- [75] P. Antoniewicz and M. P. Kazmierkowski, "Virtual flux based predictive direct power control of ac/dc converters with on-line inductance estimation," *IEEE Trans. on Ind. Electronics*, vol. 55, no. 12, 2008.





predictive control.

**Patricio Cortés** (S'05-M'08) received the Engineer and M.Sc. degrees in electronic engineering from the Universidad Tecnica Federico Santa Maria (UTFSM), Valparaiso, Chile, in 2004. He received the Ph.D. degree at the same university in 2008.

In 2003 he joined the Electronics Engineering Department UTFSM where he currently is a Research Associate. In 2007 he visited the Institute of Control and Industrial Electronics, Warsaw University of Technology, Poland. His main research interests are power electronics, adjustable speed drives and



**Ralph M. Kennel** (M'90-SM'96) was born in 1955 at Kaiserslautern (Germany). In 1979 he got his diploma degree and in 1984 his Dr.-Ing. (Ph.D.) degree from the University of Kaiserslautern. From 1983 to 1999 he worked on several positions with Robert BOSCH GmbH (Germany). Until 1997 he was responsible for the development of servo drives. Dr. Kennel was one of the main supporters of VECON and SERCOS interface, two multi-company development projects for a microcontroller and a digital interface especially dedicated to servo drives.

Furthermore he took actively part in the definition and release of new standards with respect to CE marking for servo drives.

Between 1997 and 1999 Dr. Kennel was responsible for "Advanced and Product Development of Fractional Horsepower Motors" in automotive applications. His main activity was preparing the introduction of brushless drive concepts to the automotive market.

From 1994 to 1999 Dr. Kennel was appointed Visiting Professor at the University of Newcastle-upon-Tyne (England, UK). From 1999 - 2008 he was Professor for Electrical Machines and Drives at Wuppertal University (Germany). Since 2008 he is Professor for Electrical Drive systems and Power Electronics at the Technical University of Munich (Germany). His main interests today are: sensorless control of AC drives, predictive control of power electronics and Hardware-in-the-Loop systems.

Dr. Kennel is a Senior Member of IEEE, a Fellow of IEE and a Chartered Engineer in the UK. Within IEEE he is Treasurer of the Germany Section as well as Vice President for Meetings of the Power Electronics society (PELS).



**Marian P. Kazmierkowski** (M'89-SM'91-F'98) received the M.Sc., Ph.D. and Dr. Sc. degrees in electrical engineering from the Institute of Control and Industrial Electronics (ICIE), Warsaw University of Technology, Warsaw, Poland, in 1968, 1972, and 1981, respectively.

From 1967 to 1969 he was with Electrotechnical Institute, Warsaw-Miedzylesie, Poland and from 1969 to 1972 he was a PhD-Student at the Electrical Engineering Faculty, Warsaw University of Technology, Poland. From 1972 to 1980 he was an Assistant

Professor at ICIE, Warsaw. From 1980 to 1983, he was with RWTH Aachen, West Germany, as an Alexander von Humboldt Fellow. From 1987 to 2008, he was Director of the ICIE, Warsaw University of Technology.

He was a Coordinating Professor of the International Danfoss Professor Program from 1996 to 2000 at the Aalborg University, Denmark. From 1996 to 2004 he was an elected member of the State Committee for Scientific Research in Poland. He was also Director of the European Centre of Excellence on Power Electronics and Intelligent Control for Energy Conservation - PELINCEC 2003 - 06 at ICIE, Warsaw University of Technology, Poland.

He is the author or co-author of over 350 technical papers and reports, as well as 13 books and textbooks. He co-authored Automatic Control of Converter-Fed Drives (Elsevier, 1994) and co-edited (with R. Krishnan and F. Blaabjerg) and co-authored the compendium Control in Power Electronics (Academic Press, 2002).

Professor Kazmierkowski was the recipient of an Honorary Doctorate degree from Aalborg University, Denmark in 2004, and the Dr Eugene Mittelmann Achievement Award by the IEEE Industrial Electronics Society in 2005. In 2007 he received SIEMENS Research Award in Poland. Since 2007 he is elected member of Polish Academy of Science.

He was Chairman of the 1996 IEEE International Symposium on Industrial Electronics held in Warsaw, Poland. He has served as Vice-President for Publication, in the IEEE Industrial Electronics Society (1999 to 2001). He was the Editor-in-Chief of the IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS (2004-2006) as well as member of many IEEE Committees, Conference Organizing Committees. In 2007 he was General Co-Chair of the IEEE EUROCON 2007 conference held in Warsaw. Currently, he is Past-Chairman of the IEEE Poland Section, and Associate Editor of Bulletin of Polish Academy of Science, Technical Science.



**Daniel E. Quevedo** received the Ingeniero Civil Electronico and Magister en Ingenieria Electronica degrees from the Universidad Tecnica Federico Santa Maria, Valparaiso, Chile, in 2000, and the Ph.D. degree from The University of Newcastle, Australia, in 2005.

He is currently with The University of Newcastle, on a Research Academic position. He has lectured at the Universidad Tecnica Federico Santa Maria and The University of Newcastle. His research interests cover several areas of automatic control, signal processing, power electronics, and communications.

Daniel was supported by a full scholarship from the alumni association during his time at the Universidad Tecnica Federico Santa Maria and received several university-wide prizes during graduation. He received the IEEE Conference on Decision and Control Best Student Paper Award in 2003 and was also a finalist in 2002.



**José Rodríguez** (M'81-SM'94) received the Engineer and the Dr.-Ing degrees from the University Federico Santa Maria in Chile and the University of Erlangen in Germany in 1977 and 1985 respectively, both in electrical engineering. He works since 1977 at the University Federico Santa Maria in Valparaiso, Chile. He is currently Professor and President at the same university.

During his sabbatical leave in 1996 he was responsible for the mining division of the Siemens Corporation in Chile. He has a large consulting experience in the mining industry, especially in the application of large drives like cycloconverter-fed synchronous motors for SAG mills, high power conveyors, controlled drives for shovels and power quality issues. His research interests are mainly in the area of power electronics and electrical drives.

In the last years, his main research interests are in multilevel inverters and new converter topologies. He has authored and co-authored more than 130 refereed journal and conference papers and contributed to one chapter in the Power Electronics Handbook published in 2006 by Academic Press.