

# Polarization Switching in long-wavelength VCSELs subject to orthogonal optical injection

M. S. Torre, A. Hurtado, A. Quirce, A. Valle, L. Pesquera, and M. J. Adams

**Abstract**—The Polarization Switching (PS) appearing in long-wavelength vertical-cavity surface-emitting lasers (VCSELs) subject to orthogonal optical injection is investigated theoretically and experimentally. We have studied the injected optical power required for PS as a function of the frequency detuning between the injected light and the orthogonal linear polarization of the VCSEL. For a wide range of bias currents applied to the device, the injected power required for the occurrence of PS exhibited a minimum and a plateau with respect to the frequency detuning. The minimum (plateau) was found at negative (positive) frequency detuning. The bistable behaviour of the polarization is described. Our experimental results confirm the theoretical predictions of M. Sciamanna et al, Phys Rev. A, vol. 73, 023811, 2006. The levels of the minimum and the plateau were observed to increase as higher bias currents were applied to the VCSEL. A first theoretical and experimental observation of the disappearance and further appearance of PS when increasing the injected power in long-wavelength VCSELs is described. This situation is obtained for small levels of negative frequency detuning and for large enough values of applied bias current. A good overall qualitative agreement is found between our theoretical and experimental results.

**Index Terms**—Polarization switching, optical injection, injection locking, vertical-cavity surface-emitting lasers (VCSELs).

## I. INTRODUCTION

OPTICAL injection in semiconductor lasers has been a subject of interest for many years [1]. External injection of light in a laser diode is a technique that is commonly employed to achieve optical bistability. This fact has attracted

considerable attention due to its potential applications in all-optical signal processing, optical switching, and optical storage [2]. Recently, the unique features of a special type of semiconductor laser, the vertical-cavity surface-emitting laser (VCSEL) [3-11], has led to increased research interest in these applications. VCSELs have demonstrated many impressive characteristics, including low threshold current, single-longitudinal mode operation and circular-beam profile [12]. Additionally, the possibility to fabricate large two-dimensional arrays of VCSELs makes these devices very attractive for optical interconnects. For short haul datacom 850 nm-VCSELs have become the ubiquitous optical solution while long-wavelength VCSELs are also undergoing considerable research effort for use in single-mode fiber metropolitan area networks [3]. Optical injection in VCSELs has also been used for the reduction of the frequency chirp under modulation [13] as well as for the improvement of the modulation response [14]. Although VCSELs are intrinsically single-longitudinal mode devices, they usually show complex polarization characteristics [15-20] and multi-transverse mode dynamics [15,21-25]. The light emitted by a VCSEL is commonly linearly polarized along one of two orthogonal directions, and polarization switching (PS) between the two linearly polarized modes is often observed when the injection current or temperature are varied. Understanding and controlling the VCSEL polarization is crucial for their use in polarization-sensitive applications such as magneto-optical disks and coherent detection systems.

Optical injection strongly affects the transverse mode and polarization characteristics of VCSELs. In fact, optical injection induces transverse mode selection in VCSELs emitting in multiple transverse modes [26-31]. This selection can be achieved when two modes of the free-running VCSEL have parallel or orthogonal polarizations [28,31]. When the VCSEL is emitting in the fundamental transverse mode, stable injection locking has been observed when both the VCSEL and the externally injected light have parallel polarization [32]. A different configuration, usually called “orthogonal optical injection”, was used by Pan *et al.* [33] to inject light into a single transverse mode VCSEL. In that configuration linearly polarized light from a tunable laser source is injected orthogonally to the linear polarization of the free-running VCSEL. Switching from that polarization to the orthogonal polarization mode has been observed as the injected power increases [4-11,33-40]. Optical bistability associated with PS

Manuscript received May, 2009. This work has been funded in part by the Ministerio de Ciencia e Innovación, Spain, under project TEC2009-14581-C02-02 and by the the European Commission, under the Programme FP7 Marie Curie Intra-European Fellowships Grant PIEF-GA-2008-219682. The work of M. S. Torre has been supported by CONICET Grant PIP-114-200801-00163, Argentina.

M. S. Torre is with the Instituto de Física “Arroyo Seco”, UNCPBA, Pinto 399 (7000) Tandil, Argentina. (E-mail: [marita@exa.unicen.edu.ar](mailto:marita@exa.unicen.edu.ar))

A. Hurtado and M. J. Adams are with the School of Computer Science and Electronic Engineering, University of Essex, Wivenhoe Park, CO4 3SQ Colchester, U.K. (E-mail: [ahurt@essex.ac.uk](mailto:ahurt@essex.ac.uk) ; [adammm@essex.ac.uk](mailto:adammm@essex.ac.uk) )

A. Quirce, A. Valle, and L. Pesquera are with the Instituto de Física de Cantabria, Consejo Superior de Investigaciones Científicas (CSIC)-Universidad de Cantabria, E-39005 Santander, Spain. A. Quirce is also with the Departamento de Física Moderna, Univ. de Cantabria, Facultad de Ciencias, E-39005, Santander, Spain (Phone: (34) 942 201465. Fax: (34) 942 200935. E-mail: [quirce@ifca.unican.es](mailto:quirce@ifca.unican.es); [valle@ifca.unican.es](mailto:valle@ifca.unican.es); [pesquerl@ifca.unican.es](mailto:pesquerl@ifca.unican.es))

has also been reported theoretically [4,7-8] and experimentally [5,9-11,33-42]. In the seminal work by Pan *et al.* intensity polarization bistability was observed where hysteresis appeared in the polarization of the slave laser (SL) as the optically injected power was varied [33]. On the other hand, Kawaguchi *et al.* [42] kept the frequency and intensity of the trigger light constant and varied the bias current applied to the slave laser (which in fact changed the frequency detuning and the output intensity of the SL) to obtain polarization switching and bistability.

Our work focuses on the dependence of the injected power required for PS with the frequency detuning between the externally injected signal and the orthogonally polarized mode of the VCSEL. We analyze this problem from a theoretical as well as from an experimental point of view. We use the spin-flip model [16,19] extended to account for orthogonal optical injection as in Ref. [4]. For a wide range of bias currents applied to the VCSEL, we show that the injected power required for PS exhibits a minimum and a plateau with respect to frequency detuning. The minimum appears in the region of negative frequency detuning while the plateau occurs in the positive detuning range. These results confirm the theoretical predictions made by M. Sciamanna *et al.* [4]. We extend the work of Ref. [4] by analyzing in detail the current-dependence of the injected power required for PS vs. detuning curve. The values of the minimum and the plateau grow as the VCSEL current increases. We also report the experimental and theoretical observation of several windows in which PS does not appear as the injected power is increased, providing the VCSEL current is high enough. A previous observation of a window of PS disappearance was done in [5],[8]. A description of these windows is reported in the plane of injected power versus frequency detuning and in that of injected power versus VCSEL current. A good qualitative agreement is found between theory and experiments.

Our paper is organized as follows. Section II gives a description of the experimental set-up. In section III we present experimental results on the range of operating conditions for PS. Section IV is devoted to the description of the theoretical model, while in section V we present our theoretical results. Finally, in section VI a discussion and summary are presented.

## II. EXPERIMENTAL SETUP

Orthogonal optical injection is achieved using the experimental set-up shown in Fig. 1. This setup is based on the experiments of Refs. [9,43]. An all-fiber system has been developed in order to inject the light from a tunable laser (Osics ECL) into a quantum-well commercially available 1550nm-VCSEL (RayCan, Co.). The bias current and the temperature of the device were controlled with a laser driver and temperature controller (ILX Lightwave LDC-3724B), respectively. The temperature of the VCSEL was held constant at 298 °K for all the experiments. In order to minimize the reflections at different FC/PC connectors we have used index-

matching gel in those connections. The optical power and the polarization of the externally injected signal were controlled using a variable optical attenuator and a fibre polarization controller, respectively. An 85/15 fiber directional coupler was included in the setup to divide the optical signal from the tunable laser into two branches. The first branch was connected to an Optical Multimeter (ILX Lightwave OMM-6810B) to monitor the optical input power, whilst the second one was directly launched into the 1550nm-VCSEL via a three-port optical circulator. The reflective output of the VCSEL was measured by connecting the third port of the optical circulator to an Optical Spectrum Analyzer (ANDO AQ6317) with a 0.01 nm resolution.

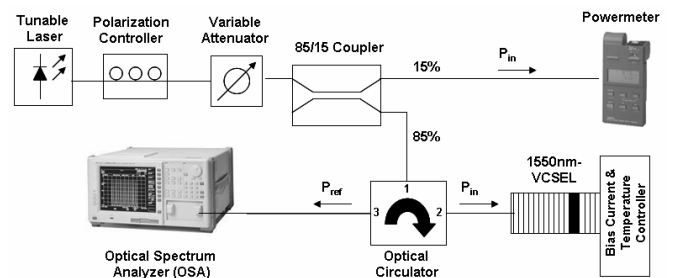


Fig. 1. Experimental set-up for orthogonal optical injection in a VCSEL.

The free-running 1550nm-VCSEL emits in the fundamental transverse mode with a threshold current of  $I_{th} = 2.05$  mA, measured at the temperature of 298 K (see fig. 2a). The VCSEL emits in a linear polarization that we will call the “parallel” (or “y”) polarization. Fig. 2b shows that the lasing mode of the device with parallel polarization is located at the wavelength of 1543 nm when a bias current of 2.50 mA ( $I_{bias} = 1.22 I_{th}$ ) is applied to the VCSEL. The emission in that polarization is stable and no PS is observed for any bias current above threshold. The second subsidiary mode has orthogonal (or “x”) polarization and is shifted approximately 0.5 nm to the long wavelength side of the lasing mode.

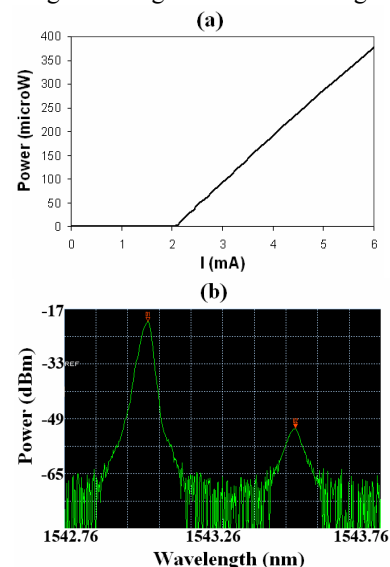


Fig. 2. (color online) (a) L-I Curve of the 1550nm-VCSEL. (b) Spectrum of the device biased with a current of 2.50 mA.

### III. EXPERIMENTAL RESULTS

We have measured the injected power required for PS as a function of the frequency detuning between the externally injected signal and the orthogonal polarization mode of the VCSEL,  $\Delta\nu = \nu_{inj} - \nu_x$ . These measurements are performed for several values of bias current applied to the device. Recently, Hurtado *et al* [43] have studied the injection locking properties of 1550-nm VCSELs subject to orthogonal optical injection. Theoretical and experimental injection locking diagrams in the plane of frequency detuning versus optical input power have been obtained for a single value of current,  $I_{VCSEL}$  [43]. Injection locking has been obtained when the Side Mode Suppression Ratio (ratio between the power of the orthogonal and parallel polarizations, SMSR) is higher than 30 dB [43]. The injected optical power,  $P_{inj}$ , required for PS has displayed an almost symmetric behavior with frequency and has shown a minimum near  $\Delta\nu = -1$  GHz when the VCSEL is biased slightly above threshold ( $I_{VCSEL} = 3$  mA) [43]. In our experiments we also consider that the orthogonal optical injection induces a PS when  $SMSR > 30$  dB.

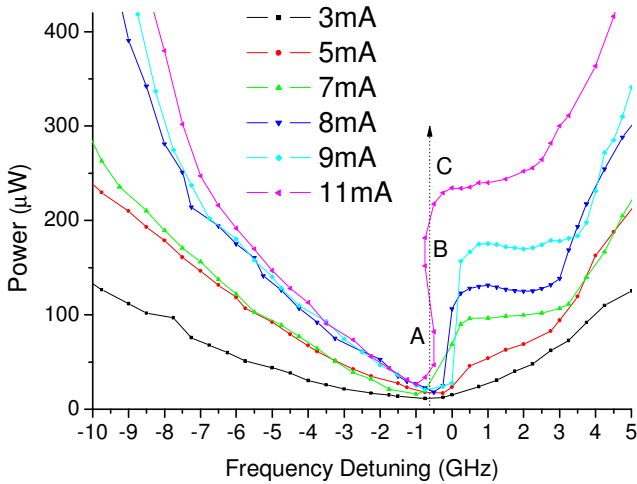


Fig. 3. (color online) Measured minimum injected power required for PS as a function of the frequency detuning for several values of the VCSEL current.

Fig. 3 shows the injected power required for PS as a function of  $\Delta\nu$  for different values of  $I_{VCSEL}$ . When  $I_{VCSEL}$  is small (3 mA) the results reported in [43] are recovered. Results obtained for  $I_{VCSEL} = 5$  mA show that a plateau is being formed at positive  $\Delta\nu$  while the minimum still appears at small negative values of  $\Delta\nu$ . As  $I_{VCSEL}$  is further increased (see the results for  $I_{VCSEL} = 7, 8$  and  $9$  mA in fig. 3) a wide plateau appears at positive values of  $\Delta\nu$ . A shallow local minimum appears at  $\Delta\nu = 2$  GHz, close to the center of the previously described plateau. Therefore, for a wide range of  $I_{VCSEL}$ , the  $P_{inj}$  required for PS shows a clear minimum and a wide plateau for negative and positive values of  $\Delta\nu$ , respectively. These results confirm the theoretical predictions of Ref. [4]. The frequency location of the absolute minimum does not follow a clear trend: a fluctuation between  $\Delta\nu = -1$  GHz and  $\Delta\nu = -0.2$

GHz is observed as  $I_{VCSEL}$  is increased. However, the optical power value of the absolute minimum grows as  $I_{VCSEL}$  increases (the minimum  $P_{inj}$  increases from 11.25 to 26.25  $\mu$ W as  $I_{VCSEL}$  changes from 3 to 11 mA, as seen in fig. 3), although some fluctuations are still clearly visible. On the other hand, the values of the optical power at the plateau increase as higher bias current are applied to the VCSEL. In addition the results obtained for the largest applied value of  $I_{VCSEL}$  (11 mA) show new qualitative features. For positive frequency detunings the plateau begins to disappear because  $P_{inj}$  becomes again an increasing function of  $\Delta\nu$ . More interestingly, the  $P_{inj}$  required for PS has an “S” shape for small negative values of  $\Delta\nu$ . This shape implies a novel behavior of the polarization in a detuning range spanning from  $-0.75$  to  $-0.5$  GHz. A new region appears in that detuning range, marked as region B in Fig. 3. In that region PS to the orthogonal polarization is not observed. A vertical dotted arrow has been included in Fig. 3 to indicate the three different regions of distinct behavior of the polarization appearing as  $P_{inj}$  is increased when the device is biased with 11 mA. These three different regions are marked as regions A, B and C in fig. 3. In Region A, PS from parallel to orthogonal polarization is obtained. Consequently, the orthogonal polarization dominates throughout this region. In region B, PS is no longer observed and the SMSR becomes smaller than 30 dB, reducing to levels of only around 10 dB. Nonetheless, throughout this region the orthogonal polarization is still dominant and no reverse polarization switching to the parallel polarization mode is observed. Finally, in Region C PS is observed and the orthogonal polarization becomes again the dominant one with  $SMSR > 30$  dB. To the best of our knowledge, this is the first experimental observation of the existence of several regions of appearance and disappearance of PS in a VCSEL subject to orthogonal optical injection.

Fig. 4 shows the injected power required for PS vs. detuning when increasing and decreasing the injected power. We find a bistable behaviour of the polarization with wide hysteresis cycles. There is a non monotonous dependency of the hysteresis width vs. the detuning, in agreement with the theoretical predictions of Ref. [4]. The hysteresis width increases as the frequency detuning becomes more negative, also in agreement with Ref. [4]. We have also obtained that for positive values of our frequency detuning,  $0 < \Delta\nu < 15$  GHz, no hysteresis was observed. The condition  $0 < \Delta\nu$  corresponds in Ref. [4] to  $\Delta\omega > \gamma_p$ , where  $\gamma_p$  is the linear birefringence parameter and  $\Delta\omega$  is the frequency detuning with respect to a frequency intermediate between that of the parallel and orthogonal polarizations. This result is in agreement with Fig. 11 of Ref. [4] if  $\Delta\omega < 45$  rad/ns. That figure also shows that the hysteresis width increases with  $\Delta\omega$  when  $\Delta\omega > 45$  rad/ns. That value approximately corresponds to the maximum detuning that has been reached in our experiments: in Ref. [4] (in our experiments) it corresponds to an injected frequency that is larger than the frequency of the orthogonal polarization in a value given by 0.27 (0.24) times the frequency difference

between both polarizations. Further experimental work at larger frequency detunings would be interesting to fully check the theoretical predictions of Ref. [4].

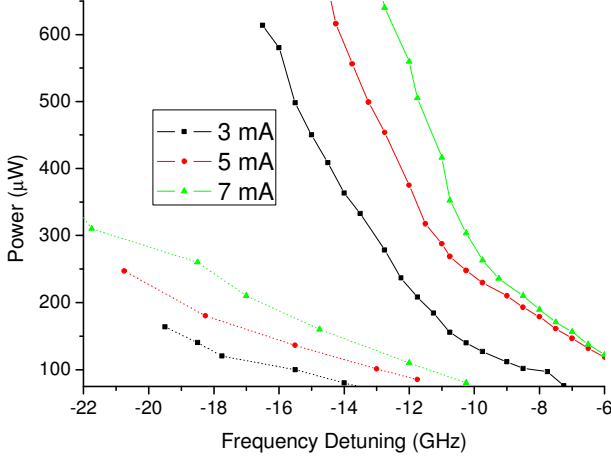


Fig. 4. (color online) Measured injected power required for PS as a function of the frequency detuning for several values of the VCSEL current. Results corresponding to increasing and decreasing the injected power are plotted with solid and dotted lines, respectively

#### IV. THE MODEL

Our rate equation model for the optically injected VCSEL is based on the model reported by San Miguel, Feng, and Moloney, also called spin-flip model (SFM) [16],[19]. The SFM assumes a four-level system in which electrons with different spins yield optical transitions with different circular light polarizations. We extended the SFM model to account for the injection of an external field with an orthogonal polarization to that of the free-running VCSEL [4,7,44,45]. In our simulations the parameters have been chosen such that the free-running VCSEL exhibits a stable and stationary  $y$  linearly polarized state. With these parameters the frequency of the  $y$  polarized mode is higher than that of the  $x$  linear polarization ( $\nu_y > \nu_x$ ). This is exactly the same situation measured for the VCSEL used in the experiments. We therefore choose to inject optically along the  $x$  direction in order to obtain PS from the  $y$  to the  $x$  linear polarizations. The rate equation model written in the frequency reference frame of the master laser is given by

$$\frac{dE_x}{dt} = \kappa(1+i\alpha)(DE_x + inE_y - E_x) - i(\gamma_p + \Delta\omega)E_x - \gamma_a E_x + \kappa_{inj} E_{inj} + \sqrt{\beta_{sp}} \xi_x \quad (1)$$

$$\frac{dE_y}{dt} = \kappa(1+i\alpha)(DE_y - inE_x - E_y) + i(\gamma_p - \Delta\omega)E_y + \gamma_a E_y + \sqrt{\beta_{sp}} \xi_y \quad (2)$$

$$\frac{dD}{dt} = -\gamma_e [D(1 + |E_x|^2 + |E_y|^2)] + \gamma_e \mu - i\gamma_e n(E_y E_x^* - E_x E_y^*) \quad (3)$$

$$\frac{dn}{dt} = -\gamma_s n - \gamma_e n(|E_x|^2 + |E_y|^2) - i\gamma_e n(E_y E_x^* - E_x E_y^*) \quad (4)$$

where  $E_{x,y}$  are the two linearly polarized slowly varying components of the field and  $D$  and  $n$  are two carrier variables.  $D$  accounts for the total population inversion between conduction and valence bands, while  $n$  is the difference between the population inversions for the spin-up and spin-down radiation channels. The internal VCSEL parameters are as follows:  $\kappa$  is the field decay rate,  $\gamma_e$  is the decay rate of  $D$ ,  $\gamma_s$  is the spin-flip relaxation rate,  $\alpha$  is the linewidth enhancement factor,  $\mu$  is the normalized injection current,  $\gamma_a$  is the linear dichroism, and  $\gamma_p$  is the linear birefringence. The fluctuating nature of the spontaneous emission (with a fraction of spontaneous emission photons that goes into the laser mode of  $\beta_{sp} = 10^{-6}$ ) is included in our calculations since  $\xi_x(t)$  and  $\xi_y(t)$  are complex Gaussian noise terms of zero mean and time correlation given by  $\langle \xi_i(t) \xi_j^*(t') \rangle = 2\delta_{ij} \delta(t-t')$ . We have integrated Eqs. (1)-(4) by using the same numerical method for stochastic differential equations used in Ref. [46] with an integration time step of 0.1 ps.

The optical injection parameters are:  $\kappa_{inj}$ ,  $E_{inj}$  and  $\Delta\omega$ ; where  $\kappa_{inj}$  is the coupling coefficient,  $E_{inj}$  is the injected field amplitude and  $\Delta\omega$  is the detuning between the master and slave angular frequencies. We consider the case where the coupling coefficient coincides with the field decay rate ( $\kappa_{inj} = \kappa$ ) for the ideal case of an effectively mode-matched injected input beam [19]. The  $\Delta\omega$  parameter is defined as the difference between the angular frequency of the injected light,  $\omega_{inj}$ , and the reference angular frequency,  $\omega_{ref}$ , intermediate between those of the  $x$  and  $y$  linear polarizations, i. e.  $\Delta\omega = \omega_{inj} - \omega_{ref}$ , where  $\omega_{ref} = (\omega_x + \omega_y)/2$ . The VCSEL parameters chosen for the simulations are:  $\gamma_e = 1 \text{ ns}^{-1}$ ,  $\gamma_p = 192.1 \text{ ns}^{-1}$ ,  $\gamma_a = 1 \text{ ns}^{-1}$ ,  $\gamma_s = 1000 \text{ ns}^{-1}$ ,  $\kappa = 300 \text{ ns}^{-1}$  and  $\alpha = 3$ . With this parameter choice the free-running VCSEL emits in the  $y$  linear polarization and does not show PS over the injected current range studied here. Also, the calculated value for the frequency difference between the  $y$  and  $x$  polarization modes ( $\gamma_p/\pi = 61.1 \text{ GHz}$ ) is close to the experimental value of 63 GHz.

#### V. THEORETICAL RESULTS

In this section we will analyze the minimum injection power needed to obtain PS. We consider that PS occurs when the SMSR  $\geq 30\text{dB}$  (the same criterion used in the experiments). Fig. 5 shows, for different values of bias current  $\mu$ , the minimum values of  $P_{inj} = E_{inj}^2$  needed to obtain PS as a function of the frequency detuning,  $\Delta\nu$ , (calculated as the difference between  $\nu_{inj}$  and  $\nu_x$ , i.e.,  $\Delta\nu = (\omega_{inj} - \omega_x)/2\pi$ ). We note a parabolic-like dependence of the minimum  $P_{inj}$  as a function of  $\Delta\nu$  for a normalized current of  $\mu = 1.6$ . The value of  $\mu$  gives an approximate idea of the value of the current relative to the threshold current (the exact relationship between both quantities is given in [47]). The minimum  $P_{inj}$  appears at a negative value of detuning. For all analyzed bias currents, the injected power needed for PS exhibits an absolute minimum value,  $P_{min}$ , appearing at a frequency detuning of  $\Delta\nu_{min} = -3\text{GHz}$  ( $\Delta\nu_{min}$  does not depend on the bias current). The

theoretical value of  $P_{min}$  increases as  $\mu$  increases.

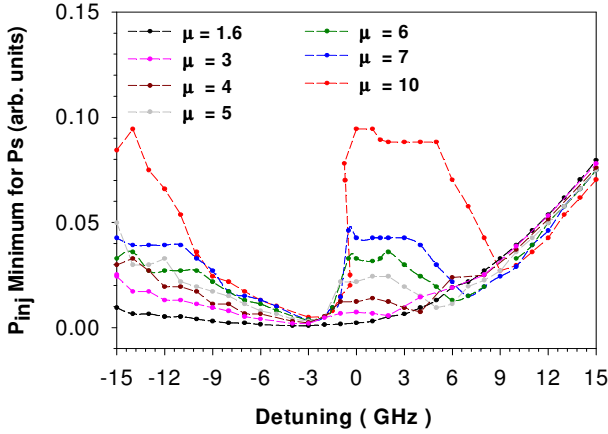


Fig. 5. (color online) Calculated minimum value of  $P_{inj}$  necessary to obtain PS as a function of the detuning  $\Delta\nu$  for different values of injected current,  $\mu$

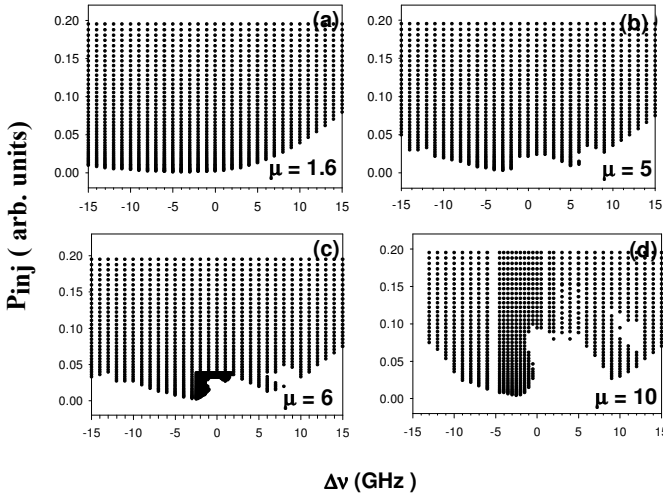


Fig. 6. Calculated injected optical power versus detuning ( $P_{inj}$ -  $\Delta\nu$  plane). A black point indicates the occurrence of PS for (a)  $\mu=1.6$ , (b)  $\mu=5$ , (c)  $\mu=6$ , (d)  $\mu=10$ .

When  $\mu \geq 3$  a plateau with some fluctuations begins to develop for positive values of the frequency detuning. The values of the optical power at those plateaus grow as  $\mu$  increases. Figure 5 also shows that a second minimum value of injected power for the occurrence of PS also appears at larger positive frequency detuning. The value of this second minimum as well as the frequency detuning at which it appears grow as  $\mu$  increases.

For the largest value of the bias current, our experimental results indicated that the  $P_{inj}$  required for PS had an ‘‘S’’ shape for small negative values of  $\Delta\nu$ . In order to compare our theoretical results with the experimental measurements we will not only focus on the minimum value of  $P_{inj}$  required for PS as

in Fig. 5. We will consider numerous values filling the  $P_{inj}$ -  $\Delta\nu$  plane to theoretically evaluate whether windows exist where PS is not observed.

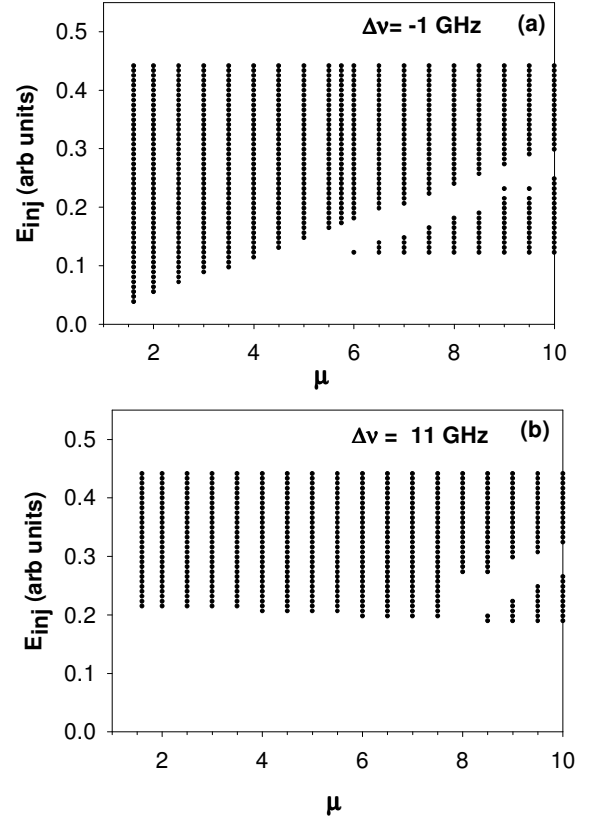


Fig. 7. Calculated injected electric field versus normalized current ( $E_{inj}$ - $\mu$  plane). A black point indicates the occurrence of PS for (a)  $\Delta\nu= -1$  GHz, (b)  $\Delta\nu=-11$  GHz.

The black dots in the  $P_{inj}$ - $\Delta\nu$  plane shown in fig. 6 indicate, for a given value of  $\Delta\nu$ , the value of injected power,  $P_{inj}$ , required for the occurrence of PS. For a current of  $\mu=1.6$  (Fig. 6a) the minimum values of  $P_{inj}$  needed for PS show the same parabolic dependence observed in Fig. 3. The uniform filling above the parabolic curve means that once PS is obtained; increasing  $P_{inj}$  does not produce any further PS. The situation is different when larger values of bias current are considered. Fig. 6b shows calculated results for  $\mu = 5$ . A small window appears in the  $P_{inj}$  -  $\Delta\nu$  plane at around  $\Delta\nu = 6$  GHz,  $P_{inj} = 0.017$  in which no PS is observed. The existence of windows where PS is no longer observed is much more obvious when even higher values of  $\mu$  are considered. Fig. 6c shows that, for small negative values of  $\Delta\nu$ , the  $P_{inj}$  required for PS exhibits an ‘‘S’’ shape with a window appearing centered at  $P_{inj} = 0.022$  for  $-1.4\text{GHz} \leq \Delta\nu \leq -1$  GHz where PS is no longer observed. The ‘‘S’’ shape is more clear when the current increases as it can be seen in Fig. 6d because the range of  $P_{inj}$  values in which there are no PS increases: it is 0.05 (0.015) at  $\Delta\nu=-0.5$  GHz ( $\Delta\nu=-1$  GHz) when  $\mu=10$  ( $\mu=6$ ). This is exactly the same behaviour observed in the experiments (see fig. 3) for the case

of an applied bias current of 11 mA. Figs. 6c and 6d also shows that the window that appeared in Fig. 6b around 6 GHz has evolved to an “island” (surrounded by dots where PS occurs) located at larger values of  $\Delta\nu$ . Therefore, for large enough values of  $\mu$ , two different windows appear in the  $P_{inj} - \Delta\nu$  plane (at negative and positive frequency detuning) where PS is not found. The evolution of both windows can be better understood with the help of Fig. 7. The black dots in the  $E_{inj} - \mu$  plane in Fig. 7 indicate for a given value of  $\mu$  the  $E_{inj}$  value for PS to occur. The first region without PS, appearing at  $\Delta\nu = -1$  GHz, is shown in Fig. 7a as the tilted white band beginning at  $\mu = 6$ . The level of  $E_{inj}$  needed for the appearance of this region increases as  $\mu$  grows. However, the width of this region does not depend on  $\mu$ . This is consistent with the increase of the injected power range as the current increases observed in Figs. 6c and 6d because  $P_{inj} = E_{inj}^2$ . The same trends are observed for the second region without PS, as illustrated in Fig. 7b for  $\Delta\nu = 11$  GHz. Figs. 7a and 7b also show the coexistence of both regions when  $\mu > 8$ .

## VI. DISCUSSION & CONCLUSIONS

In general a good qualitative agreement has been found between theory and experiments on the conditions for the occurrence of PS in a 1550nm-VCSEL under orthogonal optical injection. In agreement with our experimental measurements the theoretical value of  $P_{min}$  increases as  $I_{VCSEL}$  grows. Additionally, both the experimental and theoretical values of  $\Delta\nu_{min}$  are negative. However, the experimentally measured value of  $\Delta\nu_{min}$  does not follow a clear trend with  $I_{VCSEL}$  whilst the theory predicts a constant value for  $\Delta\nu_{min}$ . This theoretical result may be consistent with our experimental observations since the measured fluctuations could be due to thermal effects. Both, experimental and theoretical results show that plateaus appear at positive values of  $\Delta\nu$ . In both cases the value of the optical power at the plateau increases as higher bias current is applied to the VCSEL. However the experimental results show that a shallow minimum can appear at the center of the plateau while a plateau with some fluctuations and a more defined minimum are obtained by using our theory. We have also found, both in experiments and in theory, the existence of windows where the PS disappears. The latter has been observed for the highest current considered and for small negative values of  $\Delta\nu$ . However, the experimental results have not confirmed the theoretical predictions of the existence of similar windows also for positive values of  $\Delta\nu$ . Future work will be devoted to extract the working parameters of our 1550 nm VCSELs, following the approach of Ref. [48], in order to improve the theoretical description of our experiments. We also note that the stability in the different regions of operation has been recently experimentally analyzed [49]. Regions in which the VCSEL is pulsing are identified in the injected power-frequency detuning plane [49]. A theoretical description of those regions seem useful for certain applications.

Summarizing, we have studied theoretically and experimentally the PS appearing in 1550 nm VCSELs subject to orthogonal optical injection. Our VCSELs are characterized by a large value of their birefringence parameter and by a linearly polarized emission over the whole current range. We have investigated the injected power,  $P_{inj}$ , required for PS as a function of the frequency detuning,  $\Delta\nu$ . For a certain range of VCSEL current the injected power for PS exhibits a minimum and a plateau with respect to frequency detuning. The minimum appears at negative frequency detuning whereas the plateau appears at positive detuning. Our experimental results confirm the theoretical predictions of Ref. [4]. Our theoretical calculations extend previous analysis [4] by considering the bias current-dependence of the injected power required for PS vs detuning curve. The injection power levels at the minimum and at the plateau increase as higher bias current are applied to the VCSEL. For the highest current applied to the VCSEL we have described the existence of regions in which an increase of the injected power produces the disappearance and further appearance of PS. We have found these regions, both in experiment and theory, when the frequency detuning is negative and small, in agreement with previous studies [5],[8]. A theoretical description of these regions has been performed in the injected power-frequency detuning ( $P_{inj} - \Delta\nu$ ) and the injected field-VCSEL current ( $E_{inj} - \mu$ ) planes. Numerical simulations also predict the existence of similar regions located at large positive frequency detuning. Bistable behavior of the polarization is also found experimentally. Our experimental results confirm the non monotonous dependency of the hysteresis width vs. the detuning in agreement with the theoretical predictions of Ref. [4]. A good overall qualitative agreement has been found between our theoretical and experimental results.

## REFERENCES

- [1] R. Lang, “Injection locking properties of a semiconductor laser,” *IEEE J. Quantum Electron.*, vol. 18, no. 6, pp. 976-983, Jun.1982.
- [2] H. Kawaguchi, “Bistability and nonlinearities in laser diodes,” Norwood, MA. Artech House (1994).
- [3] F. Koyama, “Recent advances of VCSEL Photonics,” *J. Lightwave Technol.* vol. 24, no. 12, pp. 4502-4513, Dec. 2006.
- [4] M. Sciamanna and K. Panajotov, “Route to polarization switching induced by optical-injection in vertical-cavity surface-emitting lasers”, *Phys. Rev. A*, vol. 73, no. 2, 023811, Feb. 2006.
- [5] J. Buesa, I. Gatara, K. Panajotov, H. Thienpont and M. Sciamanna, “Mapping of the dynamics induced by orthogonal optical injection in vertical-cavity surface-emitting laser,” *IEEE J. Quantum Electron.*, vol. 42, no. 2, pp. 198-207, Feb. 2006.
- [6] T. Mori, Y. Yamayoshi and H. Kawaguchi, “Low-switching-energy and high-repetition-frequency all-optical flip-flop operations of a polarization bistable vertical-cavity surface-emitting laser,” *Appl. Phys. Lett.*, vol. 88, no. 10, 101102, Mar. 2006.
- [7] I. Gatara, K. Panajotov and M. Sciamanna, “Frequency-induced polarization bistability in vertical-cavity surface-emitting lasers with orthogonal optical injection”, *Phys Rev. A*, vol. 75, 023804, Feb.2007.
- [8] I. Gatara, M. Sciamanna, M. Nizette and K. Panajotov, “Bifurcation to polarization switching and locking in vertical-cavity surface-emitting lasers with optical injection”, *Phys Rev. A*, vol. 76, 031803, Sep.2007.
- [9] A. Hurtado, I. D. Henning, and M. J. Adams, “Two-wavelength switching with a 1550 nm VCSEL under single orthogonal optical

- injection," *IEEE J. Sel. Top. in Quantum Electron.*, vol. 14, no. 3, pp. 911-917, May/Jun.2008.
- [10] A. Valle, M. Gomez-Molina, and L. Pesquera, "Polarization bistability in 1550 nm wavelength single-mode vertical-cavity surface-emitting lasers subject to orthogonal optical injection," *IEEE J. Sel. Top in Quantum Electron.*, vol. 14, no. 3, pp. 895-902, May/Jun.2008.
- [11] A. Hurtado, I. D. Henning, and M. J. Adams, "Different forms of wavelength polarization switching and bistability in a 1.55  $\mu\text{m}$  vertical-cavity surface-emitting laser under orthogonally polarized optical injection," *Opt. Lett.*, vol. 34, no 3, pp. 365-367, Feb. 2009.
- [12] K.Iga, "Surface-emitting laser- its birth and generation of new optoelectronics field," *IEEE J. Select. Topics Quantum Electron.*, vol. 6, no. 6, pp. 1201-1215, Nov./Dec 2000.
- [13] C. H. Chang, L. Chrostowski, C. J. Chang-Hasnain, "Injection locking of VCSELs," *IEEE J. Select. Topics Quantum Electron.*, vol. 9, no. 5, pp.1386-1393, Sept./Oct 2003.
- [14] D. Parekh, X. Zhao, W. Hofmann, M. C. Amann, L. A. Zenteno and C. J. Chang-Hasnain, "Greatly enhanced modulation response of injection-locked multimode VCSELs," *Opt. Exp.*, vol. 16, no. 26, pp. 21582-21586, Dec. 2008.
- [15] C. J. Chang-Hasnain, J. P. Harbison, G. Hasnain, A.C. von Lehmen, L. T. Florez, and N. G. Stoffel, "Dynamic, polarization and transverse mode characteristics of vertical cavity surface emitting lasers," *IEEE J. Quantum Electron.*, vol. 27, no. 6, pp. 1402-1409, Jun. 1991.
- [16] M. San Miguel, Q. Feng and J.V. Moloney, "Light-polarization dynamics in surface-emitting semiconductor lasers," *Phys. Rev. A*, vol. 52, no. 2, pp.1728-1739, Aug. 1995.
- [17] K. D. Choquette, R. P. Schneider, K. L. Lear, and R. E. Leibenguth, "Gain-dependent polarization properties of vertical-cavity lasers," *IEEE J. Sel. Topics Quantum Electron.*, vol. 1, no. 2, pp. 661-666, Mar./Apr. 1995.
- [18] A. Valle, K. A. Shore and L. Pesquera, "Polarization selection in birefringent vertical-cavity surface-emitting lasers," *J. Lightwave Technol.*, vol. 14, no. 9, pp. 2062-2068, Sep.1996.
- [19] J. M. Martin-Regalado, F. Prati, M. San Miguel, and N. B. Abraham, "Polarization properties of vertical cavity surface-emitting lasers," *IEEE J. Quantum Electron.*, vol. 33, no. 5, pp. 765-783, May. 1997.
- [20] B. Ryvkin, K. Panajotov, A. Georgievski, J. Danckaert, M. Peeters, G. Verchaffelt, H. Thienpont, and I. Veretennicoff, "Effect of photon-energy-dependent loss and gain mechanisms on polarization switching in vertical-cavity surface-emitting lasers," *J. Opt. Soc. Amer. B*, vol. 16, no. 11, pp. 2106-2113, Nov.1999.
- [21] D. Vakhshoori, J. D. Wynn, G. J. Zyzdik, M. Asom, K. Kojima, R. E. Leibenguth, and R. A. Morgan, "Top-surface emitting lasers with 1.9 V threshold voltage and the effect of spatial hole burning on their transverse mode operation and efficiencies," *Appl. Phys. Lett.* vol. 62, no. 13, pp. 1448-1450, Mar.1993.
- [22] A. Valle, J. Sarma and K. A. Shore, "Spatial hole burning effects on the dynamics of vertical-cavity surface-emitting semiconductor lasers," *IEEE J. Quantum Electron.*, vol. 31, no. 8, pp. 1423-1431, Aug. 1995.
- [23] O. Buccafusca, J. L. A. Chilla, J. J. Rocca, S. Feld, C. Wilmsen, V. Morozov and R.E. Leibenguth, "Transverse mode dynamics in vertical cavity surface emitting lasers excited by fast electrical pulses," *Appl. Phys. Lett.*, vol. 68, no. 5, pp. 590-592, Jan.1996.
- [24] J. Mulet and S. Balle, "Transverse mode dynamics in vertical-cavity surface-emitting lasers," *Phys Rev. A*, vol. 66, no. 5, Art. 053802, Nov. 2002.
- [25] H. B. Zhang, G. Mroczynski, A. Wallrabenstein and J. Schrage, "Analysis of transverse mode competition of VCSELs based on a spatially independent model," *IEEE J. Quantum Electron.*, vol. 40, no. 1, pp. 18-24, Jan.2004.
- [26] J. Y. Law, G. H. M. van Tartwijk, and G. P. Agrawal, "Effects of transverse mode competition on the injection dynamics of vertical-cavity surface-emitting lasers," *Quantum Semiclass. Opt.*, vol. 9, no. 5, pp. 737-747, Oct. 1997.
- [27] M. S. Torre, C. Masoller, and K. A. Shore, "Numerical study of optical injection dynamics of vertical-cavity surface-emitting lasers," *IEEE J. Quantum Electron.*, vol. 40, no. 1, pp. 25-30, Jan. 2004.
- [28] Y. Onishi, F. Koyama, N. Nishiyama, C. Caneau, and C. E. Zah, "Nonlinear optical input-output characteristics of 1.55 microns injection-locked vertical-cavity surface-emitting lasers," *Appl. Phys. Lett.*, vol. 84, no. 17, pp. 3247-3249, Apr. 2004.
- [29] M. S. Torre, A. Valle, and L. Pesquera, "Polarization and transverse mode behavior of VCSELs under optical injection," *Opt. Quantum Electron.*, vol. 38, pp. 445-465, Mar.2006.
- [30] A. Valle, I. Gatere, K. Panajotov, and M. Sciamanna, "Transverse mode switching and locking in vertical-cavity surface-emitting lasers subject to orthogonal optical injection," *IEEE J. Quantum Electron.*, vol. 43, no. 4, pp. 322-333, Apr. 2007.
- [31] M. S. Torre, A. Valle, and L. Pesquera, "Transverse mode selection in vertical-cavity surface-emitting lasers with optical injected signal," *IEEE J. Quantum Electron.*, vol. 46, no. 1, pp. 105-111, Jan. 2010.
- [32] H. Li, T. L. Lucas, J. G. McInerney, M. W. Wright, and R. A. Morgan, "Injection locking dynamics of vertical-cavity semiconductor lasers under conventional and phase conjugate injection," *IEEE J. Quantum Electron.*, vol. 32, no. 2, pp. 227-235, Feb.1996.
- [33] Z. G. Pan, S. Jiang, M. Dagenais, R. A. Morgan, K. Kojima, M. T. Asom, and R. E. Leibenguth, "Optical injection induced polarization bistability in vertical-cavity surface-emitting lasers," *Appl. Phys. Lett.*, vol. 63, no. 22, pp. 2999-3001, Nov.1993.
- [34] Y. Hong, K. A. Shore, A. Larsson, M. Ghisoni and J. Halonen, "Pure frequency-polarisation bistability in vertical-cavity surface-emitting lasers subject to optical injection," *Electron. Lett.*, vol. 36, no. 24, pp. 2019-2020, Nov. 2000.
- [35] Y. Hong, K.A. Shore, A. Larsson, M. Ghisoni and J. Halonen, "Polarisation switching in a vertical-cavity surface-emitting semiconductor laser by frequency detuning," *IEE Proc.-Optoelectron.*, vol. 148, no. 1, pp. 31-34, Feb. 2001.
- [36] B. S. Ryvkin, K. Panajotov, E. A. Avrutin, I. Veretennicoff and H. Thienpont, "Optical-injection-induced polarization switching in polarization-bistable vertical-cavity surface-emitting lasers," *J. Appl. Phys.*, vol. 96, no. 11, pp.6002-6007, Dec. 2004.
- [37] I. Gatere, J. Buesa, H. Thienpont, K. Panajotov and M. Sciamanna, "Polarization switching bistability and dynamics in vertical-cavity surface-emitting lasers under orthogonal optical injection," *Optical and Quantum Electronics*, vol. 38, no.4-6 pp. 429-443, Mar.2006.
- [38] K. H. Jeong, K. H. Kim, S. H. Lee, M. H. Lee, B. S. Yoo and K. A. Shore, "Optical injection-induced polarization switching dynamics in 1.5  $\mu\text{m}$  wavelength single-mode vertical-cavity surface-emitting lasers," *IEEE Photon. Technol. Lett.*, vol. 20, no. 9-12, pp. 779-781, May. 2008.
- [39] A. Quirce, A. Valle and L. Pesquera, "Very wide Hysteresis Cycles in 1550 nm-VCSELs subject to Orthogonal Optical Injection," *IEEE Photon. Technol. Lett.*, vol. 21, no. 17, pp. 1193-1195, Sep. 2009.
- [40] A. Hurtado, I. D. Henning and M. J. Adams, "Wavelength Polarization Switching and Bistability in a 1550-nm VCSEL Subject to Polarized Optical Injection," *IEEE Phot. Technol. Lett.*, vol. 21, no. 15, pp. 1084-1086, Aug. 2009.
- [41] D. L. Boiko, G. M. Stephan and P. Besnard, "Fast polarization switching with memory effect in a vertical cavity surface emitting laser subject to modulated optical injection," *Journal of Applied Physics*, vol. 86, no. 8, pp. 4096-4099, Oct.1999.
- [42] H. Kawaguchi, I. S. Hidayat, Y. Takahash and Y. Yamayoshi, "Pitchfork bifurcation polarization bistability in vertical-cavity surface-emitting lasers," *Electronics Letters*, **31**, no. 2, pp. 109-111, Jan. 1995.
- [43] A. Hurtado, D. Labukhin, I. D. Henning and M.J. Adams, "Injection locking bandwidth in 1550-nm VCSELs subject to parallel and orthogonal optical injection," *IEEE J. Select. Topics Quantum Electron.*, vol. 15, no. 3, pp. 585-593, May/Jun.2009.
- [44] M. Sciamanna and K. Panajotov, "Two-mode injection locking in vertical-cavity surface-emitting lasers," *Opt. Lett.*, vol. 30, no. 21, pp. 2903-2905, Nov. 2005.
- [45] A. Homayounfar and M.J. Adams, "Locking bandwidth and birefringence effects for polarized optical injection in vertical-cavity surface-emittinf lasers," *Opt. Commun.*, vol. 269, no. 1, pp. 119-127, Jan. 2007.
- [46] J. Mulet, C. R. Mirasso, and M. San Miguel, "Polarization resolved intensity noise in vertical-cavity surface-emitting lasers," *Phys. Rev. A*, vo. 64, no. 2, 023817, Jul. 2001.
- [47] A. Homayounfar and M.J. Adams, "Analysis of SFM dynamics in solitary and optically-injected VCSELs," *Opt. Exp.*, vol. 15, no. 17, pp. 10504-10519, Aug. 2007.
- [48] S. Barland, P. Spinicelli, G. Giacomelli, and F. Marin, "Measurement of the working parameters of an air-post vertical-cavity surface-emitting

laser," *IEEE J. Quantum Electron.*, vol. 41, no. 10, pp. 1235-1243, Oct. 2005.

- [49] A. Hurtado, A. Quirce, A. Valle, L. Pesquera, and M. J. Adams, "Nonlinear dynamics induced by parallel and orthogonal optical injection in 1550 nm vertical-cavity surface-emitting lasers (VCSELs)", *Opt. Exp.*, vol. 18, no. 9, pp. 9423-9428 (2010).

**M. S. Torre** received the Licenciada en Física (Ms. Sc.) degree and the Ph. D. degree both from the Universidad Nacional del Centro de la Provincia de Buenos Aires (UNCPBA), Buenos Aires, Argentina.

Her research was primarily in external driven laser physics. From 1995 to 1997, she was a post-Doctoral fellow at the Photonics Technology Department of the ETSI Telecomunicaciones, Universidad Politécnica de Madrid, Madrid, Spain. Her research was in quantum-well semiconductor laser modeling. Since 1988, she has been member of the Physics Institute "Arroyo Seco", UNCPBA. She is currently a Research Professor at the Facultad de Ciencias Exactas of the UNCPBA. and Ajdunto Researcher CONICET ( National Council of Scientific and Technical Investigations) Her research topics include modelling and dynamics of VCSEL, dynamics of semiconductor lasers with external optical feedback, and diffusion effects in semiconductor lasers.

**A. Hurtado** was born in Madrid, Spain, in 1976. He received the Graduate degree in Telecommunications Engineering from the E.T.S. Ingenieros de Telecomunicación, Universidad Politécnica de Madrid, Spain, in 2001, and the PhD degree in Photonic Technology from the Universidad Politécnica de Madrid, in 2006, studying the optical bistability in semiconductor laser amplifiers.

Since 2007 he has been working at the Optoelectronics Research Group of the University of Essex (UK), firstly as a post-doctoral fellow and since 2009 as a Research Officer after being awarded a Marie Curie Intra-European Fellowship. His current research interests include semiconductor lasers, semiconductor laser amplifiers, laser's nonlinear dynamics, optical bistability, and optical switching devices.

**A. Quirce** received the Licenciada en Física (Ms. Sc.) degree from the Universidad de Cantabria, Spain, in 2008. She is currently working toward the PhD degree in Physics. Her current research interests are in the areas of dynamics of vertical-cavity surface-emitting lasers and optical injection effects in semiconductor lasers.

**A. Valle** was born in Reinoso, Cantabria, Spain, in 1965. He received the M. Sc. and Ph.D. degree in physics from the Universidad de Cantabria, Spain, in 1988 and 1993, respectively.

During 1994 and 1995, he was a postdoctoral fellow at the School of Electronic and Electrical Engineering at the University of Bath, England. In 1996 he joined the Instituto de Física de Cantabria (CSIC-UC). Since 1998 he has been lecturer at the Departamento de Física Moderna at the University of Cantabria, Spain. His research interests are in the areas of vertical-cavity surface-emitting lasers, noise and nonlinear dynamics of semiconductor lasers.

**L. Pesquera** was born in Vega de Infanzones, León, Spain, in 1952. He received the M.Sc. degree in physics in 1974 from the Universidad de Valladolid, Spain. He was a postgraduate fellow at the Université de Paris VI during 1977-1980. He received the Ph.D. degree in physics in 1980 from the Universidad de Cantabria, Santander, Spain.

In 1980 he joined the Departamento de Física Moderna of the Universidad de Cantabria. Since 1991 he has been Professor of Physics at the Universidad de Cantabria. In 1995 he joined the Instituto de Física de Cantabria (CSIC-UC). His research work started in the field of stochastic processes applied to Physics and he has made contributions to the foundations of quantum physics, fluctuations in nuclear reactors, disordered systems and laser physics. He is currently working on the modeling of noise and nonlinear properties of semiconductor lasers and their applications to optical communication systems.

**M. Adams** received the Ph.D. degree in laser theory from the University of Wales, Cardiff, U.K., in 1970. He was engaged in optoelectronics research and development with 15 years experience in industry (Plessey, BT), and 22 years in academia (University of Cardiff, University of Southampton, University of Essex, Colchester, U.K.). Since 1996, he has been a Professor at the University of Essex. His current research interests include semiconductor lasers, optical amplifiers, optical waveguides, optical bistability, semiconductor nonlinear optics and optical switching devices, and nonlinear dynamics of lasers. He is the author or coauthor of many articles published widely in the optoelectronics field over many years, including a standard text on optical waveguide theory and two books in semiconductor lasers and optical fibers for use in telecommunications.