

## A glimpse into the microbial fuel cells for wastewater treatment with energy generation

Asim Ali Yaqoob<sup>a</sup>, Mohamad Nasir Mohamad Ibrahim<sup>a,\*</sup>, Khalid Umar<sup>a</sup>,  
Tabassum Parveen<sup>b</sup>, Akil Ahmad<sup>c,d,\*</sup>, David Lokhat<sup>d</sup>, Siti Hamidah Mohd Setapar<sup>c,e</sup>

<sup>a</sup>School of Chemical Sciences, Universiti Sains Malaysia, 11800 Penang, Malaysia, Tel. (604)-6533554;  
Fax: (604)-6574854; email: mnm@usm.my (M.N.M. Ibrahim)

<sup>b</sup>Department of Botany, Aligarh Muslim University, Aligarh, India

<sup>c</sup>Centre of Lipids Engineering and Applied Research, Universiti Teknologi Malaysia, 81310 Johor, Malaysia,  
email: akilchem@yahoo.com (A. Ahmad)

<sup>d</sup>Department of Chemical Engineering, University of KwaZulu-Natal, Durban-4041, South Africa

<sup>e</sup>Malaysia–Japan International Institute of Technology, Jalan Sultan Yahya Petra, Universiti Teknologi, Malaysia,  
Kuala Lumpur 54100, Malaysia

Received 18 July 2020; Accepted 26 October 2020

---

### ABSTRACT

Energy and water storage are a global challenge due to various factors such as ecological changes, increasing population, increasing demand for energy at both commercial/domestic level, and high material cost. To overcome these problems, microbial fuel cells (MFCs) is considered as an emerging novel technology where one side it can generate electricity and on the other hand it also exhibits better removal efficiency of different pollutants from wastewater. In this technology, MFCs can use natural waste materials to produce energy and is also efficient in wastewater treatment. This review covers the basics of the technology around MFCs, focusing on the mechanism of energy production along with wastewater treatment. Some current challenges regarding the MFCs approach (especially electrode play a vital role in the field of MFCs) and some future perspectives are also addressed in this article. Moreover, electrodes constitute a significant component of this technique in deciding the working efficiency of MFCs during wastewater treatment. Hence, the selection of the electrode is a great challenge to make MFCs more prolific and commercial. Therefore, this review addressed these issues along with the concept of electro microbiology.

*Keywords:* Microbial fuel cells; Pollutants; Electricity; Wastewater; Electrodes

---

### 1. Introduction

Recently, the modern world is facing many problems, but some factors are crucial to address as human beings and other living organisms life depends on these factors. Currently, due to the rising of the global population, the energy demand is becoming immensely high. The report of the International Energy Agency (IEA) shows that the expected energy requirement will be 18 billion tonne oil in 2035, as compared to the current situation which is near

to 12 billion tonne oil [1]. Currently, the world obtains its energy by utilizing fossil fuel resources, but their working efficiency, security, and other environmental issues (global warming) make them unsuitable for long-term use. Furthermore, depletion of fossil fuels has also occurred at a rapid pace [2]. So, there is an urgent need to solve this major issue of the modern world related to energy demand. Natural fossil fuels are not classified as renewable energy sources, and this has led to a global energy crisis. To fulfill energy demand in the current scenario of the world, there

---

\* Corresponding authors.

is utmost needs to explore reliable, clean, and sustainable energy resources because non-renewable sources cannot fulfill current demand whilst also producing clean energy and reducing environmental pollutions. Not long ago, the scientific community felt that nuclear energy might be an excellent alternative source of energy, but the safe and proper implementation of this idea still requires more attention [3]. Therefore, there is an urgent requirement to develop a method which can generate renewable and safe energy without the emission of net CO<sub>2</sub> [4]. To provide clean and freshwater to the modern world, which is responsible to cover the basic needs of life is also a big task of 21st century. Water is a major part of substance for all living organisms on earth [5,6]. Water is also called the universal solvent because it has ability to dissolve many substances. Therefore, polluted water has unwanted minerals and chemicals that have adverse effects on human health and cannot be used for any direct purpose [7]. Nowadays, natural water sources have become contaminated due to different factors like high residential ratio, commercial factors, industrial demand, improper irrigation system, agricultural wastes, global warming, and medicinal waste, etc. The effect of these factors on natural sources of water has resulted in a shortage of freshwater to maintain a healthy environment for living organisms [8,9]. The acute level of pollution emerging from industries zones like electronic, chemicals, and electroplating are primary sources of wastewater production which has ultimately severe effect on human being and the aquatic environment [10]. Water pollution also has a severe effect on human health and their environment. Recently, the World Health Organization (WHO) reported that there were more than 1.7 million deaths and near four billion suffering from different diseases due to water pollution. This also has a significant impact on the social and economic cost [11,12]. Therefore, it is indispensable to treat wastewater to overcome the environmental pollution problem and save the ecosystem. There were many traditional methods reported for bioremediation of different toxic organic compounds and metals that have adverse effects on living organisms [13,14]. These conventional methods include ozonation, degradation, electrolytic reduction, coagulation, *in situ* and *ex-situ* treatment, thermal treatment, chemical precipitation, *in-situ* confinement [15]. The above-mentioned methods are quite efficient, but they have several drawbacks like no proper electron acceptor or donor's mechanism and are quite expensive, such that they are not easy to maintain at a commercial level. Moreover, all these conventional methods have prolonged process of degrading of organic pollutants by catalyst (microbes). To address these problems, an idea reported by a researcher in 1911 used an innovative method Microbial fuel cells (MFCs) to produce clean and safe energy along with the treatment of wastewater [16]. It also plays a vital role to eliminate water pollution from the environment. MFC is an innovative, eco-friendly, and low-cost method to generate electricity along with water treatment. MFCs is most promising and developing research field for the scientific community to transform chemical/organic energy into electrical energy through using microbes. This technology has significant potential to make renewable energy by utilizing organic waste. So, MFC is a method with great potential and very preferable than other conventional methods [17].

## 2. Functioning of MFCs

MFCs is further categorized into sediment MFCs and benthic MFCs. Both are commonly used for the generation of electricity and bioremediation of pollutant water [18,19]. Generally, MFCs has two chambers consisting of a cathode and anode, respectively. The anode chamber is enclosed into wastewater solutions (heavy metal or organic solutions) and other (cathode) in surface water [20]. There are many types of microbes which can degrade different type of organic compounds and heavy metals from wastewater solutions and produce electrons and protons. The electrons travel from anode chamber to cathodic part by using an external circuit while protons move directly to the cathode and react with oxygen to make a water molecule. MFC depends upon electroactive microbes, usually called exoelectrogens, to remove toxic organic waste along with the generation of renewable clean energy in the form of electricity [21]. In simple words, MFCs is a tool used to degrade organic waste to convert organic energy into electric form by oxidation of substrates, using microbes that serve as a biocatalyst in the whole process, that is, it is modified type of an electrochemical fuel cell. However, there are many factors that play a significant role in the performance of MFC such as internal resistance, catalyst, ion concentration, chemical substrate, and electrodes spacing, MFC modeling, and electrode material properties [22–25]. Electrode material is considered as a significant to make MFC more reliable and commercially attractive because MFC performance depends upon the conductivity and compatibility of electrodes. In MFC electro-trophs microbes accept electrons from electrodes and convert toxic compounds into less toxic components [26]. To generate power in MFCs, different type of exoelectrogens can transfer electrons from electrodes through four mechanisms such as short-range electron transfer through redox-active proteins, soluble electron shuttling molecules, and long-range electron transport by conductive pili, direct interspecies electron transfer. The powerful and efficient mechanism is long-range electron transfer through conductive pili. The pili have similar characteristics like metal, that is, conductivity [27]. Previously, MFC technique was used for remediation of one compound (metal/organic). However, according to development in MFC, now it is very significant and useful to remediate multiple toxic compounds (cobalt, chromium, mercury, zinc, lead, etc.) along with a good generation of electricity by using multi-electrodes in an anode chamber [28–30]. However, MFC is a technique to provide safe, clean, low emission of carbon dioxide, highly efficient energy generation along with wastewater treatment to the modern world (Fig. 1). There were different sources of water pollutants with their adverse effect on the fresh and natural water, as shown in Table 1.

### 2.1. Mechanism of energy production by MFCs

MFCs is an innovative and emerging technique to generate energy along with wastewater treatment. MFC has two major parts, including the anode chamber and cathode chamber, as presented in Fig. 1. Anode electrode is exposed to wastewater and cathode electrodes exposed to surface water [20]. In MFC chambers, many microbes have the ability to

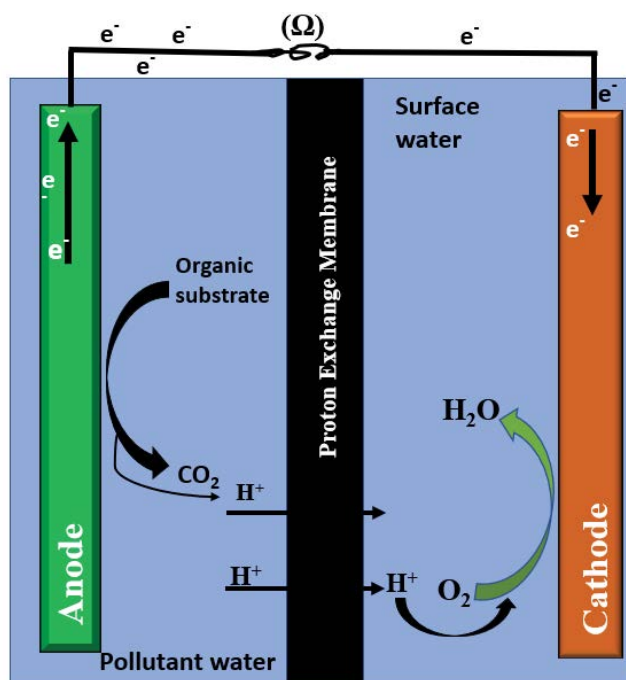


Fig. 1. Schematic diagram of MFCs.

transfer electrons and protons through electrodes [42]. There were five dominant microbes' groups such as *Firmicutes*, *Proteobacteria*, *Acidobacteria*, fungi, and algae that show the electricity generation for their respiration in MFC chamber [43]. Moreover, there were also some microbes reported as electron exchanger with electrodes, these are *Clostridium butyricum* [44], *Rhodospirillum rubrum* [45], *Shewanella* sp. [46], *Geobacter* sp., and *Aeromonas hydrophila* [47]. They also show some electric properties in nature. During the MFC working, microbes can break down different organic and heavy metals complexes to produce electrons and protons to empower their respiration system. They have the ability to produce a flow of electrons by using electrodes.

However, microbes can transfer electrons into the insoluble state of electron acceptors. For example, *Geobacter* has pili which are conductive like metal. Microorganisms grow on the surface of electrodes and make biofilm to transfer electrons more efficiently than using insoluble electron acceptors [48]. Microbes transfer the electrons extracellularly is called exoelectrogens and there were some reported species has ability to transfer electrons, include *Geobacter lovleyi* [49], *Geothrix fermentans*, *Thermincola carboxydophila*, *Geobacter sulfurreducens* [50], *Shewanella oneidensis* [51], *Rhodospseudomonas palustris*, *Thermincola potens* [52], *Escherichia coli* [53], and *Shewanella putrefaciens* [54,55]. For the generation of electricity, exoelectrogens can transfer electrons from electrodes through stated mechanisms such as short-range electron transfer through redox-active proteins, soluble electron shuttling molecules, and long-range electron transport by conductive pili, and direct electron transfer. The direct electron transfer means a direct contact of microbes and electrode surface. There is no mediator or source to transfer the electrons to the anode surface [56]. The better way is long-range electron transfer via conductive pili. The microbes generally follow the routes to transfer electrons as shown in Fig. 2. Different types of wastewater sources are used as a substrate to enhance current density were summarized in Table 2.

Furthermore, there were some reported exoelectrogens are summarized in Table 3 with electron transfer intermediates and their power density.

### 3. Bioremediation of pollutants from wastewater using MFCs

MFC has potential to remove different types of pollutant from wastewater and make it suitable for human use. Several toxic heavy metals, organic, and inorganic compounds are found in wastewater. In this review, bioremediation of toxic heavy metals has been discussed and summarized the general mechanisms of wastewater treatment through MFC. The microbe's properties to accept electrons from (anode and cathode) electrodes are known as electrothrophs. This gives a new direction for the treatment

Table 1  
Sources of water pollutants and their adverse effects

Sources of water pollution	Pollutants	Effect of water pollutants	Reference
Metals complexes, trace major and minor elements, mineral and salts, and heavy toxic metals	Inorganic based pollutants	Public health issues	[31]
Agricultural chemicals	Agricultural waste	Adverse effect on natural water sources	[32]
Detergents, insecticides, pesticides, and herbicides	Organic pollutant	Aquatic life issues and carcinogenic problems	[33]
Different bacteria and viruses	Pathogens	Waterborne diseases	[34]
Municipal contaminated water	Industrial waste	Responsible for water and air pollution	[35]
Plant debris and different fertilizers	Nutrients pollutants	Adverse effect on eutrophication process	[36]
Isotopes	Radioactive waste	Bones, teeth, and skin diseases	[37]
Marine debris	Macroscopic wastes	Plastic pollution	[38]
Sewage and domestic wastes	Water pollutant	Waterborne diseases	[39]
Pharmaceutical drugs	Drug pollutants	Environmental pollution	[40,41]

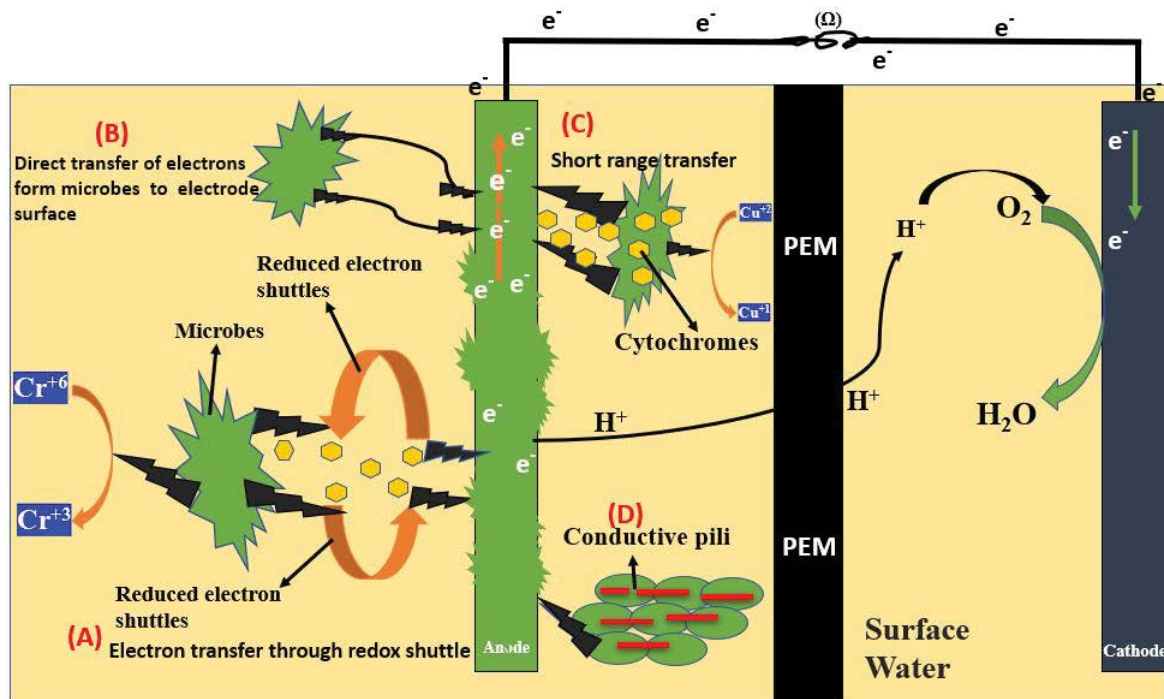


Fig. 2. Mechanism of electron transfer from the electrode to microbes. (A) Electron transfer through electron shuttles, (B) direct electron transfer from microbes to the electrode surface, (C) short range transfer of electrons, and (D) long-range electron transfer via conductive pili.

of heavy metals via reduction, as even some metals are removed by the oxidation process. There were many types of bacteria with the ability to gain electrons directly from electrodes [92,93]. In the previous reported study, electrons are used to transfer by using different types of artificial electron shuttles, but there were many disadvantages reported of artificial shuttle electrons. Moreover, there are many types of microbes which can serve as electron shuttles to get electrons from electrodes of MFC. It can empower bacteria to enhance reduction of fermentation and different inorganic substrates. These bacteria are *Staphylococcus carnosus*, *Clostridium ljungdahlii*, *Shigella flexneri*, *Streptococcus mutans*, and *Acinetobacter calcoaceticus*, etc. and they also carrying active redox molecules [94].

A research group already extensively studied the mechanism of microbes feeding and movement of electrons from electrode to microbes [6,55,56,]. The protons released by microbes are being reduced to hydrogen gas that lowers the potential of electrodes. Hydrogen is not soluble because the gas needs a high amount of energy or a catalyst at the electrode surface to overcome the reduction of protons that can reduce its applications. It is therefore essential to induce a high transfer rate of electrons by empowering the microbes with high current density. The hydrogen gas and redox molecules did not excite the cell which was attached to electrodes. The attached cell remains linked and separated from end products. Thrash and Coate's discussed first time the power concept of microbes by studying *Geobacter* species as electrodes. The reported studies show that *Geobacter* species can transfer electron directly to electrodes [95]. There were many toxic

heavy metals such as chromium ion, nickel, zinc, lead, mercury, copper, and vanadium, etc. that can be removed by different microbes through same mechanism [95–97]. For example, *G. sulfurreducens* accept electrons directly from electrodes and reduce the U(VI) into U(IV) form (soluble to insoluble). The U(VI) is insoluble form and it was adsorbed on electrodes. *G. sulfurreducens* also has the capacity to reduce Cr(VI) to Cr(III), it means able to convert highly toxic nature to less toxic nature. The reduce Cr(VI) depends on the oxidation of the substrate (acetate) at anode electrode to transfer the microbes and reduction of chromium occur at the cathode. Butler et al. [98] stated the *Enterobacter*, *Macellibacteroides*, and *Lactococcus* microbes can remove vanadium with 93.6% removal efficiency and high current density of 543.4 mW/m<sup>2</sup>. Removal of different metals through MFCs are summarized in Table 4. In the whole studies, there is gap that no proper molecular mechanism is known to accept electrons from electrodes. This could be a very useful direction for researcher in future [99].

#### 4. Current challenges

Recently, MFC has become a most attractive and emerging research direction for the scientific community. However, still there are some associated issues which limits its application to wastewater treatment along with the generation of energy. Therefore, there is still a need to make a useful model to generate clean, safe, CO<sub>2</sub> emission free and renewable energy along with wastewater treatment to remove pollutants. To make this technique more favorable and practical at the commercial level, should overcome

Table 2  
Generation of current and different wastewater sources used as substrates in MFCs

Reactor configuration	Wastewater Source	Current density	Reference
DMFC	Glucose	283 mA/m <sup>2</sup>	[57]
DMFC	Synthetic wastewater	0.086 mA/cm <sup>2</sup>	[58]
DMFC	Alcohol distillery	1,000 mA/m <sup>2</sup>	[59]
DMFC	Bad wine wastewater	3.8 W/m <sup>2</sup>	[60]
SMFC	Synthetic wastewater	0.017 mA/cm <sup>2</sup>	[61]
DMFC	Cheese whey	42 mA/m <sup>2</sup>	[62]
SMFC	Acetate	0.08 mA/cm <sup>2</sup>	[63]
DMFC	Domestic pollutant water	0.06 mA/cm <sup>2</sup>	[64]
SMFC	Domestic wastewater	1.7 W/m <sup>3</sup>	[65]
SMFC	Bakery and brewery	10 mA/m <sup>2</sup>	[66]
SMFC	Brewery wastewater	0.2 mA/cm <sup>2</sup>	[67]
DMFC	Farm manure	63.8 mW/m <sup>2</sup>	[68]
DMFC	Chocolate industry wastewater	0.302 mA/cm <sup>2</sup>	[69]
DMFC	Protein-rich wastewater	0.008 mA/cm <sup>2</sup>	[70]
DMFC	Human feces	70.8 W/m <sup>2</sup>	[71]
SMFC	Paper wastewater	125 mA/m <sup>2</sup>	[66]
DMFC	Palm oil effluent with acetate	622 mW/m <sup>2</sup>	[72]
DMFC	Landfill leachates	0.0004 mA/cm <sup>2</sup>	[73]
SMFC	Rhizodeposits	105 mA/m <sup>2</sup>	[74]
DMFC	Forest detritus	1.27 mA	[75]
Tubular MFC	Sewage sludge	73 mA/m <sup>2</sup>	[76]
SMFC	Dairy/food wastewater	15 mA/m <sup>2</sup>	[77]
SMF	Pharmaceutical	117.36 mW/m <sup>3</sup>	[78]
SMFC	Distillery wastewater	245.3 mA/m <sup>2</sup>	[79]
DMFC	Food waste-compost leachate	209 mA/m <sup>2</sup>	[80]
SMFC	Landfill leachates	20.9 W/m <sup>3</sup>	[81]

DMFC: double chamber of MFC; SMFC: single chamber of MFC.

Table 3  
Different exoelectrogens with electron transfer intermediates and their power density

Microbes	Electron transfer intermediates	Current density	Reference
<i>G. sulfurreducens</i>	c-Cytochrome z	3,147 mA/m <sup>2</sup>	[82]
<i>S. oneidensis</i>	Riboflavin, flavins	5,000 mA/m <sup>2</sup>	[83]
<i>Chlorella vulgaris</i>	Methyl viologen, methylene blue	30 mA/m <sup>2</sup>	[84]
<i>R. palustris</i>	c-Type cytochromes	2,720 mA/m <sup>2</sup>	[85]
<i>Geobacter lovleyi</i>	Methyl viologen	480 mA/m <sup>2</sup>	[86]
<i>Pseudomonas aeruginosa</i>	Phenazine-1-carboxamide, pyocyanin	4,300 mA/m <sup>2</sup>	[87]
<i>Klebsiella pneumonia</i>	2,6-Di-tert-butyl-p-benzoquinone	199 mA/m <sup>2</sup>	[88]
<i>T. ferriacetica</i>	Anthraquinone-2,6-disulfonate	12,000 mA/m <sup>2</sup>	[55]
<i>Desulfovibrio desulfuricans</i>	c-Type cytochromes	1,580 mA/m <sup>2</sup>	[89]
<i>Desulfuromonas acetoxidans</i>	c-Type cytochromes	2,000 mA/m <sup>2</sup>	[90]
<i>Geobacter metallireducens</i>	c-Type cytochromes, OmcE and OmcB	450 mA/m <sup>2</sup>	[91]

the current challenges and explore their future opportunities. This review may be useful for researchers to overcome current challenges and may encourage them to explore the role of MFCs in further applications. Some significant and important challenges are discussed in the subsections with some fruitful suggestions.

#### 4.1. Design and model of MFCs

The design of the MFCs device is a crucial factor in enhancing its working efficiency. The removal efficiency of the waste pollutants from wastewater is dependent upon many factors like anode size, anode chamber

Table 4  
Removal efficiency of heavy metals by MFCs and their power density

Toxic heavy metals	Reactor configuration	Removal efficiency	Current density	Reference
Cr(VI)	DMFC	99.5%	1,600 mW/m <sup>2</sup>	[100]
Cr(VI)	DMFC	100%	150 mW/m <sup>2</sup>	[101]
Cr(VI)	DMFC	97%	0.80 V	[102]
Cr(VI)	DMFC	100%	52.1 mW/cm <sup>2</sup>	[103]
Cr(VI)	DMFC	93%	0.5–0.6 mA	[104]
Au <sup>3+</sup>	SMFC	79%	42 mA/m <sup>2</sup>	[105]
Metal Cu and Cu <sub>2</sub> O	DMFC	99%	339 mW/m <sup>2</sup>	[106]
Ag <sup>+</sup> wastewaters	DMFC	99.91%	4.25 W/m <sup>2</sup>	[107]
Selenium	WMFC	98%	12.8 W/m <sup>2</sup>	[108]
Co(II) as hydroxide	SMFC	90%	1.5 W/m <sup>3</sup>	[109]
	DMFC	70%		
Cu <sup>2+</sup> wastewater	DMFC	97.8%	536 mW/m <sup>3</sup>	[110]
Cd and Zn	SMFC	90% Cd 97% Zn	3.6 W/m <sup>2</sup>	[111]
Fe(III)	SMFC	>89%	658 ± 6 mWm <sup>2</sup>	[112]
Oil sands tailings	DMFC	97.8% Se, 96.8% Ba, 94.7% Sr, 81.3% Zn, 77.1% Mo, 66.9% Cu, 44.9% Cr, 32.5% Pb	392 ± 15 mW/m <sup>2</sup>	[113]
Tetrachloroaurate	DMFC	99%	6.58 W/m <sup>2</sup>	[114]
Cr(VI)	SMFC	Paper wastewater	419 ± 4 mW/m <sup>2</sup>	[112]

DMFC: double chamber of MFC; SMFC: single chamber of MFC; WMFC: wetland MFC; Cr: chromium; Fe: iron; Au: gold; Ag: silver; Cu: copper; Co: cobalt; Zn: zinc; Cd: cadmium.

distance, cathode size, cathode chamber distance, the spacing between two electrodes, and length of the MFC model. All these factors indirectly affect the working efficiency of MFCs. For example, when the distance between anode and cathode is increased, the ohmic losses ratio also increases because these factors are directly proportional to each other [115]. Other factors can also increase ohms losses, such as adding more water or increasing anode electrode depth into wastewater. Researchers should consider all these factors when designing a MFCs for high efficiency.

#### 4.2. Electrode materials

The electrodes material is also another important component for MFCs because exoelectrogens growth is dependent upon the efficiency of electrodes, and it also serves as an electron acceptor. Recently, electrode configuration and its material have become attractive points for scientific research to enhance MFCs efficiency because the electrode is responsible for the transfer of the electrons from anode to cathode. The electrodes are generally classified into two categories, viz. bio and chemical electrodes, depending on whether the catalyst is present or not. Electrode material should be highly conductive, chemically stable, have high mechanical and thermal stability, high surface area, high porosity, biodegradation, non-fouling nature, low in cost, and electron discharging ability. These kinds of properties make any electrode feasible for ideal MFCs. Besides, there are few more particular requirements for bio and chemical electrodes. Bio electrodes have the dual ability which serve as a carrier of microbes and can also conduct electricity.

Bio electrodes exhibit high surface area for bacterial growth, improved biocompatibility, surface roughness, and provide biocatalytic properties. Despite these benefits, there is poor bacterial adhesion and transfer of electrons as well. The research community needs to consider electrode modification with other materials like metals, high conducting polymer, and a high conductive compound to overcome this issue. Moreover, chemical electrodes can act as a current collector and as a highly conductive material. However, it requires a catalyst to immobilize the substrate surface and a hydrophobic coating is necessary to prevent water loss. Deng et al. [116] suggested that researchers should use a catalyst-free material to overcome this limitation, such as activated carbon material [116]. Currently, a significant challenge in MFCs performance regarding electrodes is its configuration. A unique configuration is to provide a large surface area for bacterial growth that can produce large amount current and enhance the pollutant removal efficiency from wastewater. Furthermore, electrodes are also classified into two categories based on configuration; plan and 3D electrodes. The plan configuration of the electrode is generally used for chemical based electrodes. The practical and powerful configuration is required when the catalyst is used for chemical based electrodes to proceed oxygen reduction process into three-phase reaction. Generally, metal materials have more conduction capability than carbon materials, like stainless steel or titanium that is used as electrode due to high mechanical power and conductivity. However, there are some drawbacks like low surface area, corrosion ability, that make it unfit at commercial use [117]. Metal-based material has a smooth surface which fails to

facilitate adhesion of microbes. Conducting polymers like polypyrrole, polycarbazole, polyaniline can also be used for electrodes. However, they showed more efficient performance when modified with metals or carbon materials, for example, Ag@polypyrrole and Ag@polycarbazole which exhibit high performance for energy production [30,118]. Carbon materials like carbon paper, cloth, fiber, sheet, carbon coke, carbon plain, carbon brushes, carbon plates, rod, graphite foils, graphite plates, graphite rods, graphite felts, and graphite sheets are commonly used due to high surface area and biocompatibility [119]. The surface areas of some materials are summarized in Table 5. Platinum and copper coating on carbon material may increase the power density as compared with graphite. Furthermore, using graphene material as an electrode is also beneficial because it has high surface area as compared to conventional carbon material, high mechanical and thermal stability and good biocompatibility to the microbial community [120]. Another most important research direction is to chemically modify the electrode materials. Researchers should use different materials to carry out modification and make electrodes more efficient by decreasing cost issues, increasing mechanical, thermal stability, and biocompatibility to the microbial environment.

#### 4.3. Electrode cost

There are many electrode materials such as carbonaceous material, metal and metal oxide, conducting polymer, composite material but they are costly and make this technique unfit to use at a commercial level to purify wastewater. Despite all development in MFCs, there is still a desire to reduce the working cost of MFCs and make it more favorable at the commercial level. So, it is very critical to reduce the cost of the electrodes for practical implementation. The development of low-cost material can enhance the use of this application. Zhang et al. [129] reported that a cathode electrode could be fabricated through metal mesh resources such as stainless steel with a coating low-cost catalyst. There is a high number of demands for cheap catalysts with metals. Another method was also reported earlier to reduce the cost by developing the bio-cathodes.

Table 5  
Electrode materials with their surface area

Materials	Surface area, m <sup>2</sup> /g	Reference
Graphite foil	90	[121]
Carbon black	15–64	[122]
Carbon nanotubes	1,315	[123]
Carbon cloth	2.39–15	[124]
Carbon aerogel paper	600	[125]
Carbon nanotube paper	400	[125]
Carbon fiber paper	80	[125]
Coke carbon	300	[126]
Graphene oxide	2,600	[127]
Activated carbon	1,000	[127]
Graphite oxide	1,200	[128]

Currently, carbon (paper, rod, brushes, fiber, and sheets), graphite (sheets, fiber, cloth, and rod), metal (Ag, Pt, Cu, and titanium), and some conducting polymer are very commonly used at laboratory scale. We concluded some commercial prices of used material in electrode preparation in Table 6.

Now day's graphene is an excellent material used as an electrode to reduce the cost of MFCs with better working efficiency. Graphene has high conductivity and surface area than traditional material. The commercial graphene is very expensive (~150 US dollar per gram). Marcano et al. [134] explained an improved synthesis method by upgrading Hummer's method to use carbonized material as the raw material. He used different waste material to carbonize and then convert into graphene oxide with high conductivity and surface area. Therefore, graphene could be used with other materials to reduce cost and make more conductive and efficient. The scientific community can reduce the cost by using this method to make electrode instead of buying commercial material.

#### 4.4. Electromicrobiology concept

Electromicrobiology is a broad field and there are much opportunities to do some innovative research to explore further practical applications. In MFCs, electromicrobiology has received significant attention but still, it is not a fully known concept, that is, during the generation of energy and wastewater treatment, how monoculture electron transferable to electrodes and then electrodes to microbes. This concept is under consideration because the proper mechanism is still unknown [135]. There are many reported bacterial groups like *Acidobacteria*, fungi, *Firmicutes*, algae, and *Proteobacteria* phyla shows electricity generation from their bodies to maintain their aquatic environment within chamber. Some common bacteria species are *R. ferrireducens*, *C. butyricum*, *Geobacter* spp., *Shewanella* species, and *Aeromonas hydrophila*, etc. show electric properties in nature. In former studies, further advances have been achieved due to the growth of common bacteria named; *G. sulfurreducens* and *S. oneidensis*. The *G. sulfurreducens* and *S. oneidensis* which have different electron transfer mechanism than other species because every species has its own properties to transfer the electrons. There is an urgent need to address conductive pili and conductive filament of microorganisms [136]. The conductive pili typically act as metal, because pili often carry the same characteristics. The direct electron transfer mechanism is also very useful in order to save time because electron moves to electrode then from electrode to bacteria rapidly to enhance reduction of

Table 6  
Commercial cost of electrode's material

Material	Cost (US\$)	Reference
Graphene powder	150/g	[130]
Carbon powder	0.11/g	[131]
Carbon nanotubes	8.4/g	[132]
Graphite oxide powder	175/g	[130]
Carbon black	86/kg	[133]



compounds. Therefore, to properly understand the mechanism of electron movement, there is a need to address biofilm morphology and functioning to enhance bio electrogenic activity in bio-catalyzed systems. The biofilm can hamper the electron movement to electrodes. Therefore, the isolating electroactive biofilms are vital to explore further in applications such as bioremediation, biosensors, biocorrosion, and different metal reduction processes.

## 5. Conclusion and future perspectives

MFCs has offered a novel research direction and are controllable, eco-friendly, and environmentally stable for the generation of electricity along with offering bioremediation of wastewater. Currently, MFCs have been receiving significant attention and it is applicable in many applications like bioremediation of wastewater (removal of heavy metals, organic, and inorganic compound) biological oxygen demand sensors and gastrobots (food digester device). The types of MFCs, that is, benthic and sediment MFC both offer many opportunities to empower sea-bred devices, monitoring and tracking systems, etc. Therefore, fabrication of high conductive electrodes and their modification with different metals or conducting polymers make MFCs more prolific and significant with regard to electronic applications at a larger level. MFC is a novel device to produce clean, safe, and renewable energy for human-kind and to maintain a clean environment on the earth [137]. Moreover, MFCs is an emerging field within the scientific community, so in order to make it feasible at the commercial level, electrodes must be derived from natural wastes such as vegetable, fruit fibers, agricultural wastes, industrial wastes, medicinal wastes, etc. It is also possible to convert these materials into useful materials by processing this waste material through different methods such as hammer's method as described earlier [138]. This waste has the ability to show electricity generation as carbon support. For instance, researchers could modify this material to enhance the porosity of the material that gives high surface area as anode electrode [139]. The anode material should be further explored by analyzing its compositional influence, texture, size, and surface activities. In addition, the electron mechanism from bacteria to the electrode and from electrode to microbes also needs to be explored in order to build more understanding in the generation of electric current. The scientific community needs to find simple and less expensive materials to promote charge transformation at the anode electrode. In the case of metal and composites, mono, di, tri, or quarter catalyst should be favorable to enhance catalytic sites and surface area for better results. Previously, researchers used this technique to recover non-complex material but in the future there is a need to develop it further to recover complex material. All these stated challenges could be addressable by joint research of multi-disciplines like the electrical field, material science, computer science, biological science, and chemistry.

## Acknowledgments

This research article was financially supported by Universiti Sains Malaysia, 11800 Penang Malaysia under

the Research University Grant; 1001/PKIMIA/8011070. The author (Prof. Dr. Mohamad Nasir Mohamad Ibrahim) gratefully acknowledges Dr. David Lokhat from the Department of Chemical Engineering, University of KwaZulu-Natal, South Africa collaboration for literature review and support.

## References

- [1] S. Kumar, H.T. Kwon, K.H. Choi, J.H. Cho, W. Lim, I. Moon, Current status and future projections of LNG demand and supplies: a global prospective, *Energy Policy*, 39 (2011) 4097–4104.
- [2] A. Salehabadi, M.F. Umar, A. Ahmad, M.I. Ahmad, M. Rafatullah, Carbon-based nanocomposites in solid-state hydrogen energy storage technology: an overview, *Int. J. Energy Res.*, 1 (2020) 1–15.
- [3] Y. Funabashi, K. Kitazawa, Fukushima in review: a complex disaster, a disastrous response, *Bull. At. Sci.*, 68 (2012) 9–21.
- [4] A.A. Yaqoob, A. Khatoun, S.H.S. Mohd, K. Umar, T. Parveen, M.N.M. Ibrahim, A. Ahmad, M. Rafatullah, Outlook on the role of microbial fuel cells in remediation of environmental pollutants with electricity generation, *Catalysts*, 10 (2020) 819–853, doi: 10.3390/catal10080819.
- [5] A.A. Yaqoob, T. Parveen, K. Umar, M.N.M. Ibrahim, Role of nanomaterials in the treatment of wastewater: a review, *Water*, 12 (2020) 495–525, doi: 10.3390/w12020495.
- [6] S.Z. Abbas, T.C. Whui, K. Hossain, A. Ahmad, M. Rafatullah, Isolation and characterization of mercury resistant bacteria from industrial wastewater, *Desal. Water Treat.*, 138 (2019) 128–133.
- [7] A. Ahmad, S.H. Mohd-Setapar, S.C. Chuo, A. Khatoun, W.A. Wani, R. Kumar, M. Rafatullah, Recent advances in new generation dye removal technologies: novel search of approaches to reprocess waste water, *RSC Adv.*, 5 (2015) 30801–30818.
- [8] C.R. Holkar, A.J. Jadhav, D.V. Pinjari, N.M. Mahamuni, A.B. Pandit, A critical review on textile wastewater treatments: possible approaches, *J. Environ. Manage.*, 182 (2016) 351–366.
- [9] M.F. Umar, A. Nasar, Reduced graphene oxide/polypyrrole/nitrate reductase deposited glassy carbon electrode (GCE/RGO/PPy/NR): biosensor for the detection of nitrate in wastewater, *Appl. Water Sci.*, 8 (2018), doi: 10.1007/s13201-018-0860-1.
- [10] Y. Wang, D. Chen, Y. Zou, Green textile materials and techniques for water resource protection, *Desal. Water Treat.*, 122 (2018) 195–198.
- [11] X. Yana, B.K. Yanga, C. Hua, W. Gonga, Pollution source positioning in a water supply network based on expensive optimization, *Desal. Water Treat.*, 110 (2018) 308–318.
- [12] G. Pranjali, M. Deepa, A.B. Nair, Nanotechnology in waste water treatment: a review, *Int. J. Chem. Technol. Res.*, 5 (2013) 2303–2308.
- [13] A.A. Yaqoob, M.N.M. Ibrahim, A review article of nanoparticles; synthetic approaches and wastewater treatment methods, *Int. Res. J. Eng. Technol.*, 6 (2019) 1–7.
- [14] S.K. Gunatilake, Methods of removing heavy metals from industrial wastewater, *J. Multidiscip. Eng. Sci. Stud.*, 1 (2015) 1–7.
- [15] A.A. Yaqoob, A. Serrà, M.N.M. Ibrahim, Advances and challenges in developing efficient graphene oxide-based ZnO photocatalysts for dye photo-oxidation, *Nanomaterials.*, 10 (2020) 932–958, doi: 10.3390/nano10050932.
- [16] M. Mustakeem, Electrode materials for MFCs: nanomaterial approach, *J. Renewable Sustainable Energy*, 4 (2015) 1459–1467.
- [17] A.A. Yaqoob, M.N.M. Ibrahim, M. Rafatullah, Y.S. Chua, A. Ahmad, K. Umar, Recent advances in anodes for MFCs: an overview, *Mater*, 13 (2020) 2078–2106, doi: 10.3390/ma13092078.
- [18] W. Guo, H. Song, L. Zhou, J. Sun, Simultaneous removal of sulfanilamide and bioelectricity generation in two-chambered microbial fuel cells, *Desal. Water Treat.*, 57 (2016) 24982–24989.



- [19] U. Schroder, F. Harnisch, L.T. Angenent, Microbial electrochemistry and technology: terminology and classification, *Energy Environ. Sci.*, 8 (2015) 513–519.
- [20] R. Nitisoravut, R. Regmi, Plant MFCs: a promising biosystems engineering, *Renewable Sustainable Energy Rev.*, 76 (2017) 81–89.
- [21] R. Kumar, L. Sing, A.W. Zularisam, F.I. Hai, MFCs is emerging as a versatile technology: a review on its possible applications, challenges and strategies to improve the performances, *Int. J. Energy Res.*, 42 (2018) 369–394.
- [22] A.L. Schneider, H. Schell, S. Hild, K.M. Mangold, A. Tiehm, Studies into design and operation of microbial fuel cells using oxygen gas diffusion electrodes, *Desal. Water Treat.*, 91 (2017) 222–227.
- [23] K.Y. Kim, W. Yang, B.E. Logan, Impact of electrode configurations on retention time and domestic wastewater treatment efficiency using MFCs, *Water Res.*, 80 (2015) 41–46.
- [24] P. Wu, Y. Wang, P. Wu, S. Lu, C. Yu, Effects of cathode materials on H<sub>2</sub>O<sub>2</sub> production in microbial fuel cells, *Desal. Water Treat.*, 153 (2019) 105–111.
- [25] H.Y. Tsai, W.H. Hsu, Y.C. Huang, Characterization of carbon nanotube/graphene on carbon cloth as an electrode for air-cathode MFCs, *J. Nanomater.*, 3 (2015) 1–9.
- [26] Y. Tao, H. Xue, L. Huang, P. Zhou, W. Yang, X. Quan, J. Yuan, Fluorescent probe based subcellular distribution of Cu(II) ions in living electrotrophs isolated from Cu(II)-reduced biocathodes of MFCs, *Bioresour. Technol.*, 255 (2017) 316–325.
- [27] J.C. Akunna, J. O’Keefe, R. Allan, Reviewing factors affecting the effectiveness of decentralised domestic wastewater treatment systems for phosphorus and pathogen removal, *Desal. Water Treat.*, 91 (2017) 40–47.
- [28] E. Radzimska-Lenarcik, K. Witt, The application of membrane extraction in the separation of zinc and cadmium ions, *Desal. Water Treat.*, 128 (2018) 140–147.
- [29] J.A. Wisniewski, S. Szerzyzna, The removal of chromium ions from water in Donnan dialysis process, *Desal. Water Treat.*, 128 (2018) 125–132.
- [30] C.P.J. Isaac, A. Sivakumar, Removal of lead and cadmium ions from water using *Annona squamosa* shell: kinetic and equilibrium studies, *Desal. Water Treat.*, 51 (2013) 7700–7709.
- [31] A.A. Yaqoob, H. Ahmad, T. Parveen, A. Ahmad, M. Oves, I.M. Ismail, H.A.Qari, K. Umar, M.N.M. Ibrahim, Recent advances in metal decorated nanomaterials and their various biological applications: a review, *Front. Chem.*, 19 (2020) 341–363, doi: 10.3389/fchem.2020.00341.
- [32] E.P. Zapata, R.L. Ruiz, T. Harter, A.I. Ramirez, J. Mahlknecht, Assessment of sources and fate of nitrate in shallow groundwater of an agricultural area by using a multi-tracer approach, *Sci. Total Environ.*, 470 (2014) 855–864.
- [33] A. Bakir, I.S. O’Connor, S.J. Rowland, A.J. Hendriks, R.C. Thompson, Relative importance of microplastics as a pathway for the transfer of hydrophobic organic chemicals to marine life, *Environ. Pollut.*, 219 (2016) 56–65.
- [34] T. Bora, J. Dutta, Applications of nanotechnology in wastewater treatment—a review, *J. Nanosci. Nanotechnol.*, 14 (2014) 613–626.
- [35] D. Kolodynska, J. Bak, Biochars and their derivatives for removal of various types of impurities from aqueous solutions, *Desal. Water Treat.*, 112 (2018) 42–52.
- [36] C.M. Mehta, W.O. Khunjar, V. Nguyen, S. Tait, D.J. Batstone, Technologies to recover nutrients from waste streams: a critical review, *Crit. Rev. Environ. Sci. Technol.*, 45 (2015) 385–427.
- [37] K. Umar, A.A. Dar, M.M. Haque, N.A. Mir, M. Muneer, Photocatalysed decolorization of two textile dye derivatives, Martius Yellow and Acid Blue 129 in UV-irradiated aqueous suspensions of *Titanium Dioxide*, *Desal. Water Treat.*, 46 (2012) 205–214.
- [38] M. Vikas, G.S. Dwarkish, Coastal pollution: a review, *Aquat. Procedia*, 4 (2015) 381–388.
- [39] K. Verma, K. Gupta, A. Gupta, A review on sewage disinfection and need of improvement, *Desal. Water Treat.*, 56 (2015) 2867–2871.
- [40] D.G.J. Larsson, Pollution from drug manufacturing: review and perspectives, *Philos. Trans. R. Soc. London, Ser. B*, 369 (2014) 530–571.
- [41] R. Pal, M. Megharaj, K.P. Kirkbride, R. Naidu, Illicit drugs and the environment—a review, *Sci. Total Environ.*, 463 (2013) 1079–1092.
- [42] M.I. Din, M. Iqbal, Z. Hussain, R. Khalid, Bioelectricity generation from waste potatoes using single chambered microbial fuel cell, *Energy Sources Part A*, 31 (2020) 1–11, doi: 10.1080/15567036.2020.1797944.
- [43] R. Kumar, L. Sing, Z.A. Wahid, M.F.M. Din, Exoelectrogens in MFCs toward bioelectricity generation: a review, *Int. J. Energy Res.*, 39 (2015) 1048–1067.
- [44] M. Guizani, M. Saitod, R. Ito, N. Funamizu, Combined FO and RO system for the recovery of energy from wastewater and the desalination of seawater, *Desal. Water Treat.*, 154 (2019) 14–20.
- [45] K. Chandrasekhar, Effective and nonprecious cathode catalysts for oxygen reduction reaction in MFCs, *Microb. Electrochem. Technol.*, 4 (2019) 485–501.
- [46] K. J. Michelson, R.E. Alcalde, R.A. Sanford, A.J. Valocchi, C.J. Werth, Diffusion-based recycling of flavins allows *Shewanella oneidensis* MR-1 to yield energy from metal reduction across physical separations, *Environ. Sci. Technol.*, 53 (2019) 3480–3487.
- [47] S.P. Jung, S. Pandit, Important factors influencing MFCs performance, *Microb. Electrochem. Technol.*, 4 (2019) 377–406.
- [48] S.Z. Abbas, M. Rafatullah, N. Ismail, M.I. Syakir, A review on sediment microbial fuel cells as a new source of sustainable energy and heavy metal remediation: mechanisms and future prospective, *Int. J. Energy Res.*, 41 (2017) 1242–1264.
- [49] X. Hengduo, X. Leilei, Z. Shiling, Z. Yuechao, F.H. Liu, Reductive degradation of chloramphenicol by *Geobacter metallireducens*, *Sci. China Technol. Sci.*, 1 (2019) 1–7.
- [50] G. Anand, D. Waiger, N. Vital, J. Maman, L.J. Ma, S. Covo, How does *Fusarium oxysporum* sense and respond to nicotinaldehyde, an inhibitor of the NAD<sup>+</sup> salvage biosynthesis pathway?, *Front. Microbiol.*, 10 (2019) 329–340.
- [51] Y. Tokunou, K. Saito, R. Hasegawa, K.H. Neelson, K. Hashimoto, H. Ishikita, Basicity of N5 in semiquinone enhances the rate of respiratory electron outflow in *Shewanella oneidensis* MR-1, *bioRxiv*, 1 (2019) 68–93.
- [52] K.C. Wrighton, J.C. Thrash, R.A. Melnyk, J.P. Bigi, K.G. Byrne-Bailey, J.P. Remis, D. Schichnes, M. Auer, C.J. Chang, J.D. Coates, Evidence for direct electron transfer by a Gram-positive bacterium isolated from a MFCs, *Appl. Environ. Microbiol.*, 77 (2011) 7633–7639.
- [53] T. Zhang, C. Cui, S. Chen, H. Yang, P. Shen, The direct electrocatalysis of *Escherichia coli* through electroactivated excretion in MFCs, *Electrochem. Commun.*, 10 (2008) 293–297.
- [54] D.R. Lovley, The microbe electric: conversion of organic matter to electricity, *Curr. Opin. Biotechnol.*, 19 (2008) 564–571.
- [55] S.Z. Abbas, M. Rafatullah, N. Ismail, F.R. Shakoori, Electrochemistry and microbiology of microbial fuel cells treating marine sediments polluted with heavy metals, *RSC Adv.*, 8 (2018) 18800–18813.
- [56] M.F. Umar, S.Z. Abbas, M.N.M. Ibrahim, N. Ismail, M. Rafatullah, Insights into advancements and electrons transfer mechanisms of electrogens in benthic microbial fuel cells, *Membranes*, 10 (2020), doi: 10.3390/membranes10090205.
- [57] M. Rahimnejad, A.A. Ghoreyshi, G. Najafpour, T. Jafary, Power generation from organic substrate in batch and continuous flow MFCs operations, *Appl Energy*, 88 (2011) 3999–4004.
- [58] S. Ishii, S. Suzuki, T.M. Norden-Krichmar, K.H. Neelson, Y. Sekiguchi, Y.A. Gorby, Functionally stable and phylogenetically diverse microbial enrichments from MFCs during wastewater treatment, *PLoS One*, 7 (2012) 30–49.
- [59] P.T. Ha, T.K. Lee, B.E. Rittmann, J. Park, I.S. Chang, Treatment of alcohol distillery wastewater using a Bacteroidetes-dominant thermophilic MFCs, *Environ. Sci. Technol.*, 46 (2012) 3022–3030.
- [60] K. Rengasamy, S. Berchmans, Simultaneous degradation of bad wine and electricity generation with the aid of the coexisting biocatalysts *Acetobacter aceti* and *Gluconobacter roseus*, *Bioresour. Technol.*, 104 (2012) 388–393.
- [61] A. Aldrovandi, E. Marsili, L. Stante, P. Paganin, A. Giordano, Sustainable power production in a membrane-less and

- mediator-less synthetic wastewater MFCs, *Bioresour. Technol.*, 100 (2009) 3252–3260.
- [62] K. Stamatelidou, G. Antonopoulou, A. Tremouli, G. Lyberatos, Production of gaseous biofuels and electricity from cheese whey, *Ind. Eng. Chem. Res.*, 50 (2010) 639–644.
- [63] B. Min, Ó.B. Román, I. Angelidaki, Importance of temperature and anodic medium composition on MFCs performance, *Biotechnol. Lett.*, 30 (2008) 1213–1218.
- [64] Y.K. Wang, G.P. Sheng, W.W. Li, Y.X. Huang, Y.Y. Yu, R.J. Zeng, H.Q. Yu, Development of a novel bioelectrochemical membrane reactor for wastewater treatment, *Environ. Sci. Technol.*, 45 (2011) 9256–9261.
- [65] C. Abourached, M.J. English, H. Liu, Wastewater treatment by MFCs prior irrigation water reuse, *J. Cleaner Prod.*, 137 (2016) 144–149.
- [66] S.B. Velasquez-Orta, I.M. Head, T.P. Curtis, K. Scott, Factors affecting current production in MFCs using different industrial wastewaters, *Bioresour. Technol.*, 102 (2011) 5105–5112.
- [67] Y. Feng, X. Wang, B.E. Logan, H. Lee, Brewery wastewater treatment using air-cathode MFCs, *Appl. Microbiol. Biotechnol.*, 8 (2008) 873–880.
- [68] N. Samsudeen, T. Radhakrishnan, M. Matheswaran, Bioelectricity production from MFCs using mixed bacterial culture isolated from distillery wastewater, *Bioresour. Technol.*, 195 (2015) 242–247.
- [69] S.A. Patil, V.P. Surakasi, S. Koul, S. Ijmulwar, A. Vivek, Electricity generation using chocolate industry wastewater and its treatment in activated sludge based MFCs and analysis of developed microbial community in the anode chamber, *Bioresour. Technol.*, 100 (2009) 5132–5139.
- [70] Z. Liu, J. Liu, S. Zhang, Z. Su, Study of operational performance and electrical response on mediator-less MFCs fed with carbon-and protein-rich substrates, *Biochem. Eng. J.*, 45 (2009) 185–191.
- [71] D. Fangzhou, L. Zhenglong, Y. Shaoqiang, X. Beizhen, L. Hong, Electricity generation directly using human feces wastewater for life support system, *Acta Astronaut.*, 68 (2011) 1537–1547.
- [72] B.C. Jong, P.W.Y. Liew, M.L. Juri, B.H. Kim, A.Z.M. Dzomir, K.W. Leo, M.R. Awang, Performance and microbial diversity of palm oil mill effluent MFCs, *Lett. Appl. Microbiol.*, 53 (2011) 660–667.
- [73] J. Greenman, A. Gálvez, L. Giusti, I. Ieropoulos, Electricity from landfill leachate using MFCs: comparison with a biological aerated filter, *Enzyme Microb. Technol.*, 44 (2009) 112–119.
- [74] L. Lu, D. Xing, Z.J. Ren, Microbial community structure accompanied with electricity production in a constructed wetland plant MFCs, *Bioresour. Technol.*, 195 (2015) 115–121.
- [75] J. Dai, J.J. Wang, A.T. Chow, W.H. Conner, Electrical energy production from forest detritus in a forested wetland using MFCs, *GCB Bioenergy*, 7 (2015) 244–252.
- [76] Y. Yuan, Q. Chen, S. Zhou, L. Zhuang, P. Hu, Improved electricity production from sewage sludge under alkaline conditions in an insert-type air-cathode MFCs, *J. Chem. Technol. Biotechnol.*, 87 (2012) 80–86.
- [77] V.R. Nimje, C.Y. Chen, H.R. Chen, C.C. Chen, Y.M. Huang, M.J. Tseng, K.C. Cheng, Y.F. Cheng, Comparative bioelectricity production from various wastewaters in MFCs using mixed cultures and a pure strain of *Shewanella oneidensis*, *Bioresour. Technol.*, 104 (2012) 315–323.
- [78] G. Velvizhi, S.V. Mohan, Biocatalyst behavior under self-induced electrogenic microenvironment in comparison with anaerobic treatment: evaluation with pharmaceutical wastewater for multi-pollutant removal, *Bioresour. Technol.*, 102 (2011) 10784–10793.
- [79] G. Mohanakrishna, S.K. Mohan, S.V. Mohan, Carbon based nanotubes and nanopowder as impregnated electrode structures for enhanced power generation: evaluation with real field wastewater, *Appl. Energy*, 95 (2012) 31–37.
- [80] B. Cercado-Quezada, M.L. Delia, A. Bergel, Testing various food-industry wastes for electricity production in MFCs, *Bioresour. Technol.*, 101 (2010) 2748–2754.
- [81] A.L. Vázquez-Larios, O.S. Feria, H.M.P. Varaldo, M.T.P. Noyola, E.R. Leal, N.R. Seijas, Bioelectricity production from municipal leachate in a MFCs: effect of two cathodic catalysts, *Int. J. Hydrogen Energy*, 39 (2014) 16667–16675.
- [82] D.R. Lovley, Powering microbes with electricity: direct electron transfer from electrodes to microbes, *Environ. Microbiol. Rep.*, 3 (2011) 27–35.
- [83] E. Abazarian, R. Gheshlaghi, M.A. Mahdavi, The effect of number and configuration of sediment MFCs on their performance in an open channel architecture, *J. Power Sources*, 325 (2016) 739–744.
- [84] A.A. Carmona-Martínez, F. Harnisch, U. Kuhlicke, T.R. Neu, U. Schroder, Electron transfer and biofilm formation of *Shewanella putrefaciens* as function of anode potential, *Bioelectrochemistry*, 93 (2013) 23–29.
- [85] K.P. Nevin, B.C. Kim, R.H. Glaven, J.P. Johnson, T.L. Woodard, S.F. Covalla, A.E. Franks, A. Liu, D.R. Lovley, Anode biofilm transcriptomics reveals outer surface components essential for high density current production in *Geobacter sulfurreducens* fuel cells, *PLoS One*, 4 (2009) 1–11, doi: 10.1371/journal.pone.0005628.
- [86] S. Kalathil, D. Pant, Nanotechnology to rescue bacterial bidirectional extracellular electron transfer in bioelectrochemical systems, *RSC Adv.*, 6 (2016) 30582–30597.
- [87] K.L. Keller, B.J. Rapp-Giles, E.S. Semkiw, I. Porat, S.D. Brown, J.D. Wall, New model for electron flow for sulfate reduction in *Desulfovibrio alaskensis* G20, *Appl. Environ. Microbiol.*, 80 (2014) 855–868.
- [88] K.M. Leung, G. Wanger, M.Y. El-Naggar, Y. Gorby, G. Southam, W.M. Lau, *Shewanella oneidensis* MR-1 bacterial nanowires exhibit p-type, tunable electronic behavior, *Nano Lett.*, 13 (2013) 2407–2411.
- [89] W. Miran, M. Nawaz, A. Kadam, S. Shin, J. Heo, J. Jang, Microbial community structure in a dual chamber MFCs fed with brewery waste for azo dye degradation and electricity generation, *Environ. Sci. Pollut. Res.*, 22 (2015) 13477–13485.
- [90] A.Z. Alshehri, Formation of electrocatalytic conductive bacterial nanowires by *Desulfovibrio acetoxidans* in MFCs reactor, *Int. J. Curr. Microbiol. Appl. Sci.*, 6 (2017) 1197–1211.
- [91] C.M. Cordas, L.T. Guerra, C. Xavier, J.J.G. Moura, Electroactive biofilms of sulphate reducing bacteria, *Electrochim. Acta*, 54 (2008) 29–34.
- [92] S. Bajracharya, A.T. Heijne, X.D. Benetton, K. Vanbroekhoven, C.J.N. Buisman, D. Pant, Carbon dioxide reduction by mixed and pure cultures in microbial electrosynthesis using an assembly of graphite felt and stainless steel as a cathode, *Bioresour. Technol.*, 195 (2015) 14–24.
- [93] G. Pant, A. Singh, M. Panchpuri, R.G. Prasuna, K. Hossain, S.Z. Abbas, A. Ahmad, N. Ismail, M. Rafatullah, Enhancement of biosorption capacity of cyanobacterial strain to remediate heavy metals, *Desal. Water Treat.*, 165 (2019) 244–252.
- [94] A.E. Rotaru, P.M. Shrestha, F. Liu, M. Shrestha, D. Shrestha, K. Zengler, C. Wardman, K.P. Nevin, D.R. Lovley, A new model for electron flow during anaerobic digestion: direct interspecies electron transfer to Methanosaeta for the reduction of carbon dioxide to methane, *Energy Environ. Sci.*, 7 (2014) 408–415.
- [95] K. Tizaoui, B. Benguella, B. Makhoukhi, Selective adsorption of heavy metals (Co<sup>2+</sup>, Ni<sup>2+</sup>, and Cr<sup>3+</sup>) from aqueous solutions onto natural marine clay, *Desal. Water Treat.*, 142 (2019) 252–259.
- [96] J. Xiong, T. Zhao, H. Cheng, S. Lic, S. Wang, G. Chend, The assessment on the heavy metal pollution and health risks in the Liujiang River under the Xijiang River region, *Desal. Water Treat.*, 149 (2019) 315–322.
- [97] A. Hashlamon, A. Ahmad, L.C. Hong, Pre-treatment methods for seawater desalination and industrial wastewater treatment: a brief review, *Int. J. Sci. Res. Sci. Eng. Technol.*, 1 (2015) 422–428.
- [98] C.S. Butler, P. Clauwaert, S.J. Green, W. Verstraete, R. Nerenberg, Bioelectrochemical perchlorate reduction in a MFCs, *Environ. Sci. Technol.*, 44 (2010) 4685–4691.
- [99] A.S. Mathuriya, J. Yakhmi, MFCs to recover heavy metals, *Environ. Chem Lett.*, 12 (2014) 483–494.

- [100] Z. Li, X. Zhang, L. Lei, Electricity production during the treatment of real electroplating wastewater containing  $\text{Cr}^{6+}$  using MFCs, *Process Biochem.*, 43 (2008) 1352–1358.
- [101] G. Wang, L. Huang, Y. Zhang, Cathodic reduction of hexavalent chromium [Cr(VI)] coupled with electricity generation in MFCs, *Biotechnol. Lett.*, 30 (2008) 19–59.
- [102] Z. He, J. Kan, F. Mansfeld, L.T. Angenent, K.H. Neilson, Self-sustained phototrophic MFCs based on the synergistic cooperation between photosynthetic microorganisms and heterotrophic bacteria, *Environ. Sci. Technol.*, 43 (2009) 1648–1654.
- [103] P. Singhvi, M. Chhabra, Simultaneous chromium removal and power generation using algal biomass in a dual chambered salt bridge MFCs, *J. Bioremed. Biodegrad.*, 4 (2013) 185–290.
- [104] E.Y. Ryu, M. Kim, S.J. Lee, Characterization of MFCs enriched using Cr(VI)-containing sludge, *J. Microbiol. Biotechnol.*, 21 (2011) 187–191.
- [105] J.C. Varia, S.S. Martinez, S. Velasquez-Orta, S. Bull, Microbiological influence of metal ion electrodeposition: studies using graphite electrodes  $[\text{AuCl}_4]^-$  and *Shewanella putrefaciens*, *Electrochim. Acta*, 115 (2014) 344–351.
- [106] D. Wu, L. Huang, X. Quan, G.L. Puma, Electricity generation and bivalent copper reduction as a function of operation time and cathode electrode material in MFCs, *J. Power Sources*, 307 (2016) 705–714.
- [107] C. Choi, Y. Cui, Recovery of silver from wastewater coupled with power generation using a MFCs, *Bioresour. Technol.*, 107 (2012) 522–525.
- [108] A.B. Holmes, F.X. Gu, Emerging nanomaterial for the applications of selenium removal for wastewater treatment, *Environ. Sci. Nano*, 3 (2016) 982–996.
- [109] L. Huang, Y. Liu, L. Yu, X. Quan, G. Chen, A new clean approach for production of cobalt dihydroxide from aqueous Co(II) using oxygen-reducing biocathode MFCs, *J. Cleaner Prod.*, 86 (2015) 441–446.
- [110] M. Liang, H.C. Tao, S.F. Li, W. Li, L.J. Zhang, Treatment of  $\text{Cu}^{2+}$ -containing wastewater by MFCs with excess sludge as anodic substrate, *Huan Jing Ke Xue Huanjing Kexue*, 32 (2011) 179–185.
- [111] C. Abourached, T. Catal, H. Liu, Efficacy of single-chamber MFCs for removal of cadmium and zinc with simultaneous electricity production, *Water Res.*, 51 (2014) 228–233.
- [112] Y. Li, Y. Wu, S. Puranik, Y. Lei, T. Vadas, B. Li, Metals as electron acceptors in single-chamber MFCs, *J. Power Sources*, 269 (2014) 430–439.
- [113] Y. Jiang, A.C. Ulrich, Y. Liu, Coupling bioelectricity generation and oil sands tailings treatment using MFCs, *Bioresour. Technol.*, 139 (2013) 349–354.
- [114] C. Choi, N. Hu, The modeling of gold recovery from tetrachloroaurate wastewater using a MFCs, *Bioresour. Technol.*, 133 (2013) 589–598.
- [115] V.M.O. Martinez, M.J.S. Garcia, A.P. de los Rios, F.J.H. Fernandez, J.A. Egea, L.J. Lozano, Development in MFCs, *Chem. Eng. J.*, 271 (2015) 50–60.
- [116] Q. Deng, X. Li, J. Zuo, A. Ling, B.E. Logan, Power generation using an activated carbon fiber felt cathode in an upflow MFCs, *J. Power Sources*, 195 (2010) 1130–1135.
- [117] A.A. Yaqoob, K. Umar, M.N.M. Ibrahim, Silver nanoparticles: various methods of synthesis, size affecting factors and their potential applications—a review, *Appl. Nanosci.*, 13 (2020) 1–10.
- [118] A.A. Yaqoob, K. Umar, Z. Ahmad, M.N.M. Ibrahim, A. Akil, S.A. Bhawani, Synthesis of  $\text{Ag}@$ polycarbazole nanocomposite using ferric acetate as an oxidant, *Asian J. Chem.*, 5 (2020) 1069–1074.
- [119] A. Kwiecińska, M. Kochel, K. Rychlewska, J. Figa, The use of ultrafiltration in enhancement of chemical coke oven wastewater treatment, *Desal. Water Treat.*, 128 (2019) 24–221.
- [120] S.Y. Lu, M. Jin, Y. Zhang, Y.B. Niu, J.C. Gao, C.M. Li, Chemically exfoliating biomass into a graphene-like porous active carbon with rational pore structure, good conductivity, and large surface area for high-performance supercapacitors, *Adv. Energy Mater.*, 8 (2018) 25–45.
- [121] O.N. Shornikova, E.V. Kogan, N.E. Sorokina, V. V. Avdeev, The specific surface area and porous structure of graphite materials, *Russ. J. Phys. Chem. A*, 83 (2009) 1022–1025.
- [122] S. Hussain, S. Boland, A. Baeza-Squiban, R. Hamel, Oxidative stress and proinflammatory effects of carbon black and titanium dioxide nanoparticles: role of particle surface area and internalized amount, *Toxicology*, 260 (2009) 142–149.
- [123] M.E. Birch, T.A. Ruda-Eberenz, M. Chai, R.L. Hatfield, R. Andrew, Properties that influence the specific surface areas of carbon nanotubes and nanofibers, *Ann. Occup. Hyg.*, 57 (2013) 1148–1166.
- [124] X.L. Zhou, T.S. Zhao, Y.K. Zeng, L. An, L. Wei, A highly permeable and enhanced surface area carbon-cloth electrode for vanadium redox flow batteries, *J. Power Sources*, 329 (2016) 247–254.
- [125] S.F. Zopf, M.J. Panzer, Integration of UV-cured Ionogel electrolyte with carbon paper electrodes, *AIMS Mater. Sci.*, 1 (2014) 59–69.
- [126] P. Li, J.Y. Hwang, S.M. Park, Y.K. Sun, Superior lithium/potassium storage capability of nitrogen-rich porous carbon nanosheets derived from petroleum coke, *J. Mater. Chem. A*, 6 (2018) 12551–12558.
- [127] F. Bonaccorso, L. Colombo, G. Yu, M. Stoller, V. Tozzini, A.C. Ferrari, R.S. Ruoff, V. Pellegrini, Graphene, related two-dimensional crystals, and hybrid systems for energy conversion and storage, *Science*, 347 (2015) 12–46.
- [128] K. Dž, F. Korać, S. Gutić, Graphite, graphite oxide, graphene oxide, and reduced graphene oxide as active materials for electrochemical double layer capacitors: a comparative study, *Bull. Chem. Technol. Bosnia Herzegovina*, 45 (2015) 35–38.
- [129] F. Zhang, T. Saito, S. Cheng, M.A. Hickner, B.E. Logan, MFCs cathodes with poly(dimethylsiloxane) diffusion layers constructed around stainless steel mesh current collectors, *Environ. Sci. Technol.*, 44 (2010) 1490–1495.
- [130] A. Zurutuza, C. Marinelli, Challenges and opportunities in graphene commercialization, *Nat. Nanotechnol.*, 9 (2014) 730–749.
- [131] F. Meng, L. Gao, Y. Yan, J. Cao, N. Wang, T. Wang, T. Ma, Ultra-low-cost coal-based carbon electrodes with seamless interfacial contact for effective sandwich-structured perovskite solar cells, *Carbon*, 145 (2019) 290–296.
- [132] M.F.L.D. Volder, S.H. Tawfick, R.H. Baughman, A.J. Hart, Carbon nanotubes: present and future commercial applications, *Science*, 339 (2013) 535–539.
- [133] Y. Wang, Z. Liu, P. Hao, Investigation on mechanical and microwave heating characteristics of asphalt mastic using activated carbon powder as electro-magnetic absorbing materials, *Constr. Build. Mater.*, 202 (2019) 692–703.
- [134] D.C. Marcano, D.V. Kosynkin, J.M. Berlin, A. Sinitskii, Z. Sun, A. Slesarev, L.B. Alemany, W. Lu, J.M. Tour, Improved synthesis of graphene oxide, *ACS Nano*, 4 (2010) 4806–4814.
- [135] Q. Wu, S. Jiao, M. Ma, S. Peng, MFCs system: a promising technology for pollutant removal and environmental remediation, *Environ. Sci. Pollut. Res.*, 1 (2020) 1–6.
- [136] R.L. Heydorn, C. Engel, R. Krull, K. Dohnt, Strategies for the targeted improvement of anodic electron transfer in MFCs, *ChemBioEng Rev.*, 7 (2020) 4–17.
- [137] V.S. Sarathi, K.S. Nahm, Recent advances and challenges in the anode architecture and their modifications for the applications of MFCs, *Biosens. Bioelectron.*, 43 (2013) 461–475.
- [138] L. Ezziat, A. Elabed, S. Ibsouda, S. El-Abed, Challenges of microbial fuel cell architecture on heavy metal recovery and removal from wastewater, *Front. Energy Res.*, 7 (2019) 1–10.
- [139] V. Chaturvedi, P. Verma, Microbial fuel cell: a green approach for the utilization of waste for the generation of bioelectricity, *Bioresour. Bioprocess.*, 3 (2016) 19–38.