


N70-32002

A LITERATURE SURVEY OF CLEAR AIR TURBULENCE

Don R. Veazey

Texas A & M University
College Station, Texas

March 1970

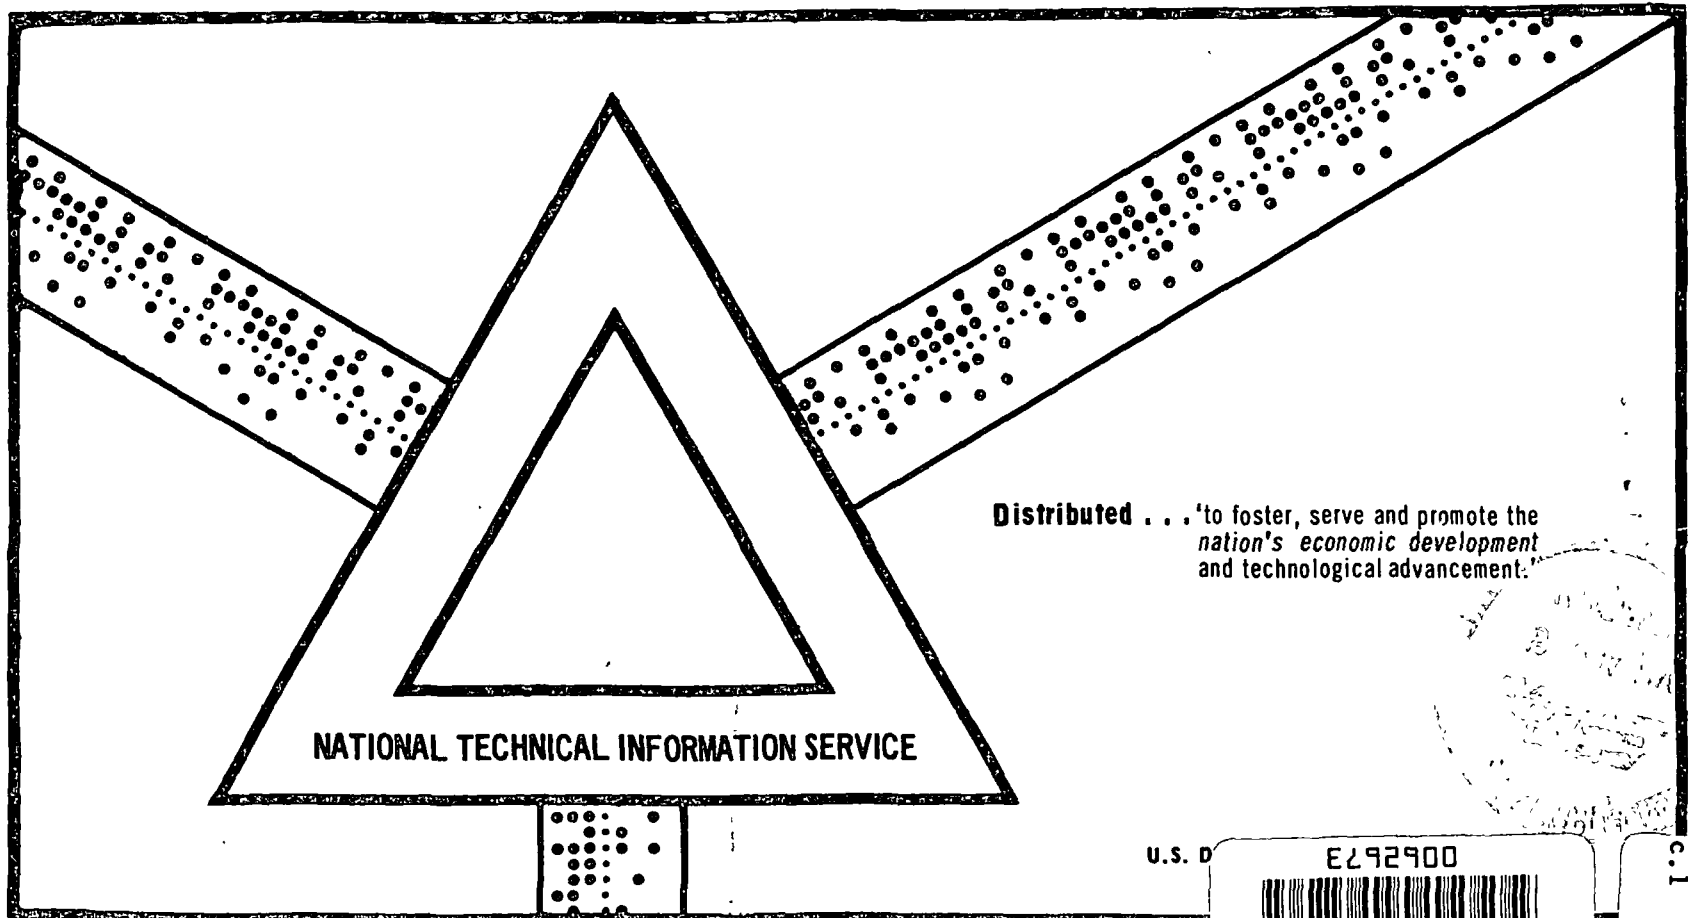

Distributed . . . 'to foster, serve and promote the
nation's economic development
and technological advancement.'

LOAN COPY: RETURN TO
AFWL (WLOI)
KIRTLAND AFB, N MEX

U.S. D

0092900



TECH LIBRARY KAFB, NM

NASA
CR
106211
c.1

This document has been approved for public release and sale.

NASA CR-106211

A LITERATURE SURVEY OF CLEAR AIR TURBULENCE

Don R. Veazey

Texas A & M University
College Station, Texas 77840

March 1970

1. Clear Air Turbulence

Prepared for

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
Washington, D. C. 20546



N70-32002	
(ACCESSION NUMBER)	(TRU)
CR-106211	(CODE)
(NASA CR OR TX OR AD NUMBER)	(CATEGORY)

Reproduced by the CLEARINGHOUSE for Federal Scientific & Technical Information Springfield Va 22151

1. Report No. NASA CR-106211	2. Government Accession No.	3. Recipient's Catalog No.
Title and Subtitle A LITERATURE SURVEY OF CLEAR AIR TURBULENCE		5. Report Date March 1970
Author(s) Don R. Veazey		6. Performing Organization Code
Performing Organization Name and Address Texas A & M University College Station, Texas 77840		8. Performing Organization Report No.
Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D. C. 20546		10. Work Unit No.
Supplementary Notes		11. Contract or Grant No. NGR-44-001-081
		13. Type of Report and Period Covered Contractor Report
		14. Sponsoring Agency Code

Abstract

The subject matter concerned with turbulence in clear air is summarized. Principal subjects covered include observational techniques, properties of CAT, correlations between CAT and synoptic parameters, forecasting of CAT, theories of CAT, and the remote detection of CAT. A brief summary of the method of perturbations also is given.

The literature pertaining to the major subject divisions is cited extensively. References in addition to those cited also are listed.

17. Key Words (Suggested by Author(s)) Clear air turbulence - Dynamic instability Wave motion - Detection Perturbation equations		18. Distribution Statement Unclassified - Unlimited	
19. Security Classif (of this report) Unclassified	20. Security Classif (of this page) Unclassified	21. No. of Pages 101	22. Price*

*For sale by the Clearinghouse for Federal Scientific and Technical Information
Springfield, Virginia 22151

References: p. 63 - 92



ACKNOWLEDGEMENTS

The author is indebted to a number of people who have provided assistance in the preparation of this report. Sincere gratitude is expressed to Drs. James R. Scoggins and Vance Moyer for their many helpful suggestions and editorial assistance; to my wife, Patsy, who helped in the compilation of the many references, and; to Mrs. Carmelita Budge and Mrs. Teresa Saad for their effort in the preparation of the final report.

PRECEDING PAGE BLANK NOT FILMED.

TABLE OF CONTENTS

Section	Title	Page
ABSTRACT		ii
ACKNOWLEDGMENTS		iii
TABLE OF CONTENTS		iv
LIST OF FIGURES		vii
LIST OF TABLES		x
1.	INTRODUCTION	1
2.	TECHNIQUES OF OBSERVING CAT	3
2.1	Primary Observational Tools	3
2.11	Observations by Aircraft	3
2.12	Observations by Balloons	7
2.13	Cloud Observations	8
2.14	Observations by Artificial Tracers	8
2.2	Supporting Observational Tools	9
3.	CAT STUDIES	10
4.	PROPERTIES OF CAT	11
4.1	Seasonal Distribution	11
4.2	Geographical Distribution	12
4.3	Meso-scale Properties of CAT	13
4.31	Horizontal Dimensions	13
4.32	Vertical Dimensions	15
4.33	Temporal Distribution	16
4.34	Intensity of CAT	17
4.35	Lateral vs Vertical Gustiness	19
4.4	Distribution of CAT with Respect to Atmospheric Phenomena	19
4.41	Jet Streams	19

Section	Title	Page	Section	Title	Page
	4.42 Troughs, Ridges, and Other Features	22		ABBREVIATIONS FOR REFERENCES	60
	4.5 Spectral Properties of CAT	24		CITED REFERENCES	63
5.	RELATIONSHIPS BETWEEN CAT AND SYNOPTIC PARAMETERS	28		ADDITIONAL REFERENCES	82
5.1	CAT and Horizontal Wind Speed	28		APPENDIX I	93
5.2	CAT Versus Horizontal and Vertical Wind Shear	28		APPENDIX II	95
5.3	CAT Versus Hydrostatic Stability and/or Lapse Rate of Temperature	29			
5.4	CAT Versus the Richardson Number (Ri)	29			
5.5	CAT Indices	31			
6.	FORECASTING CAT	36			
6.1	A Brief History of CAT Forecasting	36			
6.2	Routine Forecast Procedures	36			
6.3	Forecasting CAT by Numerical Methods	40			
6.4	Other Methods	40			
6.5	Evaluation of Forecast Methods	41			
7.	THEORIES OF CAT	43			
7.1	Turbulent Flow of Fluids	44			
7.2	Dynamic (Inertial) Instability	47			
7.3	Atmospheric Wave Motions	49			
	7.31 Gravity Waves	50			
	7.32 Waves on a Surface of Discontinuity	51			
	7.33 Mountain Waves	53			
8.	THE REMOTE DETECTION OF CAT	57			
8.1	Passive Techniques	57			
8.2	Active Techniques	58			

LIST OF FIGURES

Figure	Title	Page
1.	Illustration of Eq. 2.11(5) (after Houbolt and Kordes, 1954).	7
2.	Frequency of exceeding given values of gust velocity per mile of flight for five areas (after Coleman and Steiner, 1960).	13
3.	Curves of average turbulence frequency vs height for the United States (after Endlich and Mancuso, 1968).	13
4.	Percentage of turbulence exceeding a given length encountered between 40,000 and 70,000 ft during a number of research flights (after Burnham, 1968).	15
5.	Variation in percentage of rough air with altitude (after Coleman and Steiner, 1960).	15
6.	Vibration threshold levels of human feeling (after Hildreth, <u>et al.</u> , 1963).	18
7.	Estimated overall gust distributions for operations at various altitudes (after Rhyne and Steiner, 1962)	18
8.	Average frequencies at which given values of derived gust velocity were exceeded per mile of flight during the phase 2 HIGAT program (after Burnham, 1968).	18
9.	Mean distribution of turbulent flying time (CAT) in per cent of total flying time for nine Project Jet Stream flights 1956-1957 (after Sasaki, 1958).	20
10.	Schematic cross-section through the jet stream (J) potential temperatures (thin lines), and isotachs (semi-heavy lines) The boundaries of the stable baroclinic frontal zone are marked by heavy dashed lines, the tropopause by heavy solid lines The shaded area within the "isentropes trough" indicates the region in which the occurrence of moderate to severe CAT (A) is most likely The dotted line represents the northern boundary of extensive cirrus-cloud sheets (after Reiter, 1962c)	21
11.	Distribution of turbulence in the vicinity of a sharp trough and jet stream (after Endlich, 1963)	21
12.	Turbulent regions in straight jet streams (in the absence of mountain waves) (after Endlich, 1963)	21
13.	Turbulent regions in sharply-curved anti-cyclonic jet streams (after Endlich, 1963)	22

Figure	Title	Page
14.	25-mb isotachs (areas > 100 knots shaded) and isotherms ($^{\circ}\text{C}$), 13 April 1962, 0000 GCT, and moderate and severe cases of CAT observed within ± 6 hours of map time (after Reiter, 1962c).	22
15.	Per cent occurrence of high-level turbulence about the jet stream over the North Atlantic Ocean in vertical "boxes" of 40 mb x 120 n.m. (After Clodman <u>et al.</u> , 1961).	22
16.	Typical power spectra of vertical component of turbulence measured in clear air, cumulus cloud, and thunderstorm (after Houbolt <u>et al.</u> , 1964).	24
17.	Schematic presentation of spectral density, $(\text{km/hr})^2/(\text{rad/km})$, as a function of wave number (cycles/km), or wavelength in meters, for turbulence in the free atmosphere. Data sources of spectra are identified in Table V (after Pinus <u>et al.</u> , 1966).	26
18.	Characteristic temperature profile produced by ageostrophic meridional wind component above and (a) on the poleward and (b) equatorward side of a sharp subtropical wind maximum (after Spillane, 1967).	29
19.	Nomogram for forecasting bumpiness in flight (after Pinus, 1957)	37
20.	UAL CAT forecasting model - 1961 Revision (after Harrison, 1961).	38
21.	UAL Mountain wave nomogram (after Harrison, 1961).	38
22.	Forecast degree of CAT. When the maximum vertical velocity in the lee wave is determined from Eq. 25 and the lee wavelength is determined from $\lambda=2\pi/k$, the degree of CAT can be determined from this graph (after Foltz, 1967).	41
23.	Spectra of lee wave energy. The values entered on the spectral curves of $-5/3$ slope are the maximum vertical velocities contained in the lee waves in m sec^{-1} at the lee wave-length necessary to result in the level of energy (w component) in the CAT wavelength region to cause various degrees of CAT (after Foltz, 1967).	41
24.	Cross section of conditions associated with a typical mountain wave (after Jenkins, 1958)	53

Figure	Title	Page
25.	Vertical cross-section at 1000P December 18, 1951 from Sequoia to the western slope of the Inyo Mountains. Isentropes are drawn for every 5°C. Both T and T_p are plotted for the Lodgepole (Sequoia) sounding. Locations of barograph stations are shown by small circles. Dashed lines indicate the paths of the Radiosonde balloon and of flight 2006. The ratio of the vertical scale to the horizontal is 2.5 to 1 (after Holmboe and Klieforth, 1957).	54
26.	An example of a train of lee waves. k^2 is greater in the lower layers than higher up. Each streamline may contain many wave crests (after Scorer, 1949).	55

LIST OF TABLES		
Table	Title	Page
1.	Seasonal occurrence of CAT in the United States (after Fetner, 1956).	11
2.	Horizontal extent of turbulent regions (after Reiter, 1962)	14
3.	Expectation of encountering CAT per 100 flights (after Spillane, 1967)	16
4.	Distribution of CAT at 300 mb (after Kronebach, 1964)	23
5.	Power spectra of turbulence in the free atmosphere (after Pinus, <u>et al.</u> , 1966)	27
6.	Results of the relationships between CAT and Ri	32
7.	Recurrence (%) of aircraft bumping in relation to the character of the barometric field (after Pinus, 1957)	34
8.	Turbulence cases (all intensities) for amount of flying (%) (after Clodman <u>et al.</u> , 1961)	34
9.	Vertical wind shear ΔU (m/sec) for different temperature discontinuities and critical wavelength at an interface (after Reiter, 1962c)	52

1. INTRODUCTION

The problems concerned with clear-air turbulence (CAT) were not revealed until the latter stages of World War II. Until that time aviators as well as meteorologists felt that the air would be increasingly "smooth" as one went higher into the troposphere. Above the tropopause, in the stratosphere, it was generally conceded that the airflow would be laminar and that powered flight in this region would be comfortable, safe, and smooth.

However, high-flying combat aircraft often encountered bumpiness and irregular flight at altitudes above the tropopause. Pilots reported that the bumpiness was similar in nature to that encountered at lower altitudes, with one important difference. That difference was the fact that the turbulence was encountered in clear air and could not be attributed to convective activity or any other obvious cause.

As aircraft began flying higher and faster, the reports of turbulence in a clear sky became more numerous. More importantly, the potential danger to aircraft flying through these regions was recognized. With this recognition, CAT became the problem of aircraft engineers, meteorologists (both theoretical and practical), military leaders, commercial airlines personnel, and many others involved with flight through the atmosphere.

CAT is important to the communications engineer since it scatters signals transmitted by electromagnetic waves (Tatarski, 1961). As pointed out by Reiter (1963), CAT is responsible also for the scintillation of stars, and hence the astronomer becomes concerned with the problem. Apart from the problem of forecasting the occurrence of CAT for flight operations, the meteorologist also must determine the effect of turbulence on the energy budget of the atmosphere and any possible influence on global weather phenomena.

Even though CAT is an important problem, the definition of clear-air turbulence is not agreed upon universally. Reiter (1962c) suggested that "bumpiness in flight through clear air" might be a suitable definition. Others refer to the phenomenon as critical air turbulence (Dutton 1967 Monson, et al., 1969), or in special instances, as undulance (Hildreth et al., 1963). In 1966, the National Committee for Clear Air Turbulence (U.S. Dept. of Commerce, 1966) adopted the following definition of CAT

"...all turbulence in the free atmosphere of interest in aerospace operations that is not in, or adjacent to, visible convective activity. This includes turbulence found in cirrus clouds not in

or adjacent to visible convective activity."

In addition, most studies of CAT are restricted to altitudes greater than 10,000 ft (Anderson, 1956; Clodman and Ball, 1959; Colson and Panofsky, 1965; etc.) with no absolute upper limit. Any upper limit would realistically be imposed by the specific problem or area of application with which one is concerned.

2. TECHNIQUES OF OBSERVING CAT

Numerous techniques exist by which we may determine the structure, characteristics, and scale of CAT. In this section we shall be concerned primarily with those techniques which provide insight into the problem and data from which we might deduce the physical processes which lead to the formation of CAT. This is opposed to those techniques that exist as a means of providing a forewarning or probable existence of CAT. These latter types will be included in the section on detection of CAT.

2.1 Primary Observational Tools

2.1.1 Observations by Aircraft

Many types of aircraft have contributed data to the CAT problem. In many instances, the data consisted of nothing more than the pilot's report on the location of the turbulence and his own personal reaction to it. Much of the earliest data came from VGH (velocity, acceleration, and altitude) instruments which represent time-history measurements of the acceleration of the aircraft's center of gravity, air speed, and pressure altitude (Hislop, 1951; Pinus 1957; Zbrozek, 1965). The data obtained from VGH measurements depend heavily on aircraft type, assumptions involved in computations of aircraft gust-loading, pilot response, and to some degree the analyst or the method used to analyze the data.

In order to obtain gust velocities from VGH measurements, the dynamic response of the aircraft to the gust must be removed (Pratt and Walker, 1954). As pointed out by Zbrozek (1965), it is impossible to account for all the dynamic properties of the aircraft and therefore some simplifying assumptions must be made.

The assumptions used to derive the maximum airplane acceleration are (Crooks et al., 1968a):

- a.) the airplane is rigid,
- b.) the airplane is free to rise but not pitch;
- c.) prior to entry into a gust, the airplane is in steady and level flight; and
- d.) the gust velocity profile is a one-minus-cosine shape with a length of 25 wing chords.

This approach to the problem of gust loads on aircraft is known as the discrete-gust technique. With the above assumptions, measured acceleration increments Δn can be converted into derived gust velocities by the equation

$$U_{de} = \frac{2W\Delta n_{max}}{C_{L\alpha} \rho_0 S V_e K_g}, \quad 2.11(1)$$

where:

W is aircraft weight (lb),

$C_{L\alpha}$ is wing lift curve slope, (rad^{-1}),

ρ_0 is air density at sea level ($lb \ sec^2 \ ft^{-4}$),

S is wing area (ft^2),

V_e is equivalent airspeed ($ft \ sec^{-1}$),

K_g is gust alleviation factor, and

U_{de} is the derived equivalent gust velocity ($ft \ sec^{-1}$), positive upward.

The alleviation factor, K_g , is equivalent to

$$\frac{0.88 U_g}{5.3 + U_g}$$

where

$$U_g = \frac{2W}{C_{L\alpha} C_g S} \quad (\text{Pratt and Walker, 1954})$$

and C is the mean aerodynamic chord, g is the acceleration of gravity ($ft \ sec^{-2}$), and ρ is air density at flight level ($lb \ sec^2 \ ft^{-4}$). K_g allows for some of the dynamic properties of the aircraft including unsteady lift and is determined empirically. It must be stressed that U_{de} is a derived gust velocity and is not the same as might be measured by an anemometer. Also, $U_{de} = U_d (\rho/\rho_0)^{1/2}$, so that at sea level, U_{de} is equal to U_d . A more detailed explanation of Eq. 2.11(1) may be found in Pratt and Walker (1954), Houbolt et al. (1964), Zbrozek (1965), and Crooks et al. (1968a).

The use of the discrete-gust concept is a convenient and simple way of relating the accelerations experienced by one airplane to those which are likely to be experienced by another. The concept further implies that the relative

loads for single, isolated gusts are a measure of the relative loads in a sequence of gusts (Houbolt et al., 1964). The overall description of atmospheric turbulence in terms of discrete gusts is usually given as a frequency of gusts of given magnitude per mile for a range of altitudes (Forri et al., 1962).

As aircraft configuration and response characteristics began to change, as airframes became larger and more flexible, and as their mass distributions became different, an approach more general than the discrete-gust concept was needed. The approach adopted was that of power spectral techniques or generalized harmonic analysis. A complete treatment of this subject can be found in Press (1957), Press and Houbolt (1955), Houbolt et al. (1964) and others. A simplified summary of this concept can be found in Zbrozek (1965) and Dutton (1967).

The power spectral approach has many advantages over the discrete-gust method. According to Hildreth et al. (1963), the main assets are:

1. A more realistic representation of the continuous nature of atmospheric turbulence;
2. A more realistic accounting for aircraft configuration and response characteristics; and
3. Allowance for design and operational changes.

There are many methods in existence for obtaining continuous or at least high-frequency measurements of the wind field relative to a flying aircraft. If some desired quantity cannot be measured directly, another quantity is measured that can be related to the one desired. The instrumentation used in Project HICAT (Crooks et al., 1968a), for example, provided measurements of dynamic pressure, static pressure, temperature, aircraft attitude (pitch, roll, and yaw), angular rates, components of linear acceleration, etc. The angle of attack and angle of sideslip are measured from flow vanes or differential pressure probes (Houbolt et al., 1964; Burns and Rider, 1965). These latter measurements are the basis for the description of atmospheric turbulence. Methods for treating the data and means of correcting the measurements can be found in the works of Burns and Rider (1965), Vinnichenko (1966), Crooks et al. (1968a), and others.

Dutton (1967) shows that the vertical component of the gust velocity can be obtained from aircraft measurements by using the equation

$$w_g = V \alpha_v - V \theta + \int_0^t a_z dt + l_x \dot{\theta} \quad 2.11(2)$$

Houbolt et al. (1964) give the lateral and longitudinal components, respectively, as

$$v_g = -V \beta_v - V \psi + l_x \dot{\psi} + \int_0^t (a_y + g \dot{\phi}) dt + l_z \dot{\phi} \quad 2.11(3)$$

and

$$u_g = (V - \bar{V}) - \int_0^t (a_x - g \theta) dt \quad 2.11(4)$$

where:

a_x, a_y, a_z are longitudinal, lateral, and vertical accelerations, respectively;

g is acceleration due to gravity;

l_x, l_z are longitudinal and vertical distances from accelerometer to flow vane;

u_g, v_g, w_g are longitudinal, lateral, and vertical gust velocities;

V is airplane speed;

α_v is vertical vane angle;

β_v is side vane angle;

θ is pitch angle;

$\dot{\phi}$ is roll angle; and

ψ is yaw angle.

Equations 2.11(2) to 2.11(4) contain the assumptions (Houbolt et al., 1964) that boom flexure is negligible, that disturbances are small enough that the angle in radians can be used in place of the sine of the angle, and that the effects of variation in upwash on vane indications may be allowed for or are negligible.

Using the time histories of $u_g, v_g,$ and w_g obtained from Eqs. 2.11(2) to 2.11(4), one can employ standard techniques to obtain the spectral characteristics of atmospheric gusts. A standard analysis generally consists of prewhitening the data, estimating values of the auto-correlation function, obtaining raw estimates of power, smoothing the estimates of power, and then postdarkening the smoothed estimates to obtain the final estimates of the power spectrum (Blackman and Tukey, 1959; Houbolt et al., (Appendix D), 1964).

An alternate method may be used to find the spectrum of atmospheric gusts. If one knows the response function of the data-gathering aircraft, then the frequency spectrum of atmospheric gusts is characterized by (Reiter, 1962e)

$$\phi_0(\omega) = [T(\omega)]^2 \phi_i(\omega), \quad 2.11(5)$$

where $\phi_i(\omega)$ and $\phi_0(\omega)$ are the frequency spectra of input and output, respectively, and $T(\omega)$ is the response function of the aircraft. Figure 1, taken from a report by Houbolt and Kordes (1954), illustrates Eq. 2.11(5).




Fig. 1 Illustration of Eq. 2.11(5)
(after Houbolt and Kordes, 1954)

2.12 Observations by Balloons

Balloons have been employed as wind sensors for many years. In most instances, the balloon is tracked through space by either radar or theodolites, and the balloon may or may not carry instrumentation. Wind profile data are obtained from the positional records of the balloon, but as shown by Scoggins (1963c), most of the small-scale motions are averaged out. An excellent discussion of the errors associated with standard wind measurements by balloons can be found in Reiter (1963). Balloons may also carry accelerometers and thus provide data on atmospheric gusts. This latter system is often referred to as a gust-sonde (Anderson, 1956). Reiter (1962c) suggests that constant-level balloons might carry microbarographs and produce more reliable data than gust-sondes. In the past few years, superpressure balloons and highly accurate tracking systems have been employed to determine the fine structure of detailed vertical wind profiles (Leviton, 1962, Johnston, 1962; Scoggins, 1963b).

Experimental results of flow around spheres may be found in many books on fluid dynamics (e.g., Goldstein, 1938; Schlichting, 1960). A brief summary of the theoretical considerations of balloon dynamics may be found in Scoggins (1964). A more detailed treatment is given by Eckstrom (1965) and Scoggins (1967).

The chief difficulty in using balloons to measure atmospheric turbulence is that smooth-skinned balloons experience spurious, self-induced oscillations even when rising in calm air (Scoggins, 1964; Murrow and Henry, 1965). Hence, it is impossible to measure true wind motions on a small scale.

This difficulty has been overcome largely by using a superpressure, rough-skinned balloon known as the Jimsphere (Eckstrom, 1965; Scoggins, 1967). When coupled with a highly accurate tracking radar such as the FPS-16, detailed vertical wind profiles may be obtained. Some of these profiles and possible explanations for the exhibited structure of the profiles may be found in Scoggins (1964, 1965), Scoggins and Vaughan (1965), Weinstein *et al.* (1966), DeMandel and Scoggins (1967), and others.

2.13 Cloud Observations

Perturbations in the upper-level winds may be deduced by detailed analysis of cloud photographs. This technique has been used by Ludlam (1952), Reiter (1962b), Reiter and Hayman (1962), and Reiter and Nania (1964). The photographs allow one to determine (or at least infer) the wave lengths and orientation of perturbations at the cirrus level. An excellent photograph of turbulence indicated by cirrus clouds was taken by Regula (1968) while flying near Newfoundland in 1967. According to Colson (1962), the presence of high clouds appears to increase the probability of the occurrence of turbulence. Kadlec (1963) has found evidence of a strong relation between CAT and the thickness of cirrus clouds. Other workers have attempted to use satellite pictures of cloud patterns in order to study CAT relationships (Weigman, 1965; Cooley and Ball, 1969), but little progress has been made in this area. The primary reason for the failure of satellites to detect cloud patterns associated with CAT is that the resolution threshold of weather satellite data is too large.

2.14 Observations by Artificial Tracers

Various methods using artificial tracers have been employed to measure the effects of upper-level turbulence or to measure this turbulence directly. Clodman (1958a) studied the effects of turbulence on the behavior of aircraft contrails, and smoke trails have been studied by Durst (1948). Henry *et al.* (1961) have shown how detailed vertical wind profiles may be obtained from smoke trails released from rockets. Reiter (1964a) used smoke as a tracer to follow CAT "patches" when they were found in research flights over Australia. Other techniques use aluminum foil or some other radio-reflective material released at high levels and these materials are then tracked by radar. For

high-altitude study, i.e., 80-150 km, sodium vapor released from rockets is used to determine the structure of the wind and properties of diffusion (Manning, 1961).

Reiter (1962c) lists two basic difficulties in the application of the above techniques to the study of CAT. They are:

- a.) The aircraft or rocket may disturb the airflow to a degree so as to produce serious imperfections in the data, and
- b.) Contrails or smoke trails will spread out and dissipate due to small-scale turbulence and diffusion processes.

Motions on a scale corresponding to CAT may therefore be extremely difficult to separate from these superimposed small-scale effects.

2.2 Supporting Observational Tools

The techniques which are deemed to be of a support nature are those which either have been used sparingly or do not lend themselves to widespread use by the scientific community. Included in this group are direct observations of CAT by radar (Atlas and Naito, 1966; Atlas *et al.*, 1968), lidar observations (Collis, 1964; Bourquin and Shigemoto, 1965; Collis *et al.*, 1969), acoustical sensing techniques (Bates, 1965), and astronomical observations such as the scintillation of starlight (Protheroe, 1961; Battan, 1962) and the trembling in the Sun's image (Okoshi, 1967).

Microbarograph traces may be used to deduce the presence of gravity waves which may be associated with CAT. Kuettner (1952b) discusses this technique, and Gossard (1960) presents spectra on pressure variations associated with gravity waves over California. Hodge and Voltz (1968) have studied the possible relationship between mesoscale surface pressure waves and CAT.

3. CAT STUDIES

A great deal of time, money, and effort has been expended to gather data and determine the relevant properties of CAT. Because of the immense scope of the problem, most studies of CAT have been conducted or sponsored by governmental agencies from all parts of the world.

One of the first CAT-oriented programs was conducted by the Royal Aircraft Establishment in the United Kingdom during the period 1946-1948 (Met. Office Dis., 1958). From 1948 to 1950, the Ministry of Supply supported a flight program to study CAT over the air routes of British European Airways (Hislop, 1951). Measurements of free-atmosphere turbulence were conducted by the National Advisory Committee for Aeronautics (NACA) during the period 1951-52 with the use of gust-sondes (Anderson, 1956). The U.S. Air Force sponsored Project Jetstream during the winter months of 1953-54 and 1954-55, and again from 1956-1958 (Brundidge, 1958; Reiter, 1963; etc.). Project Cloud Trail was established in the U.S. Air Force Air Defense Command and ran for one year, December 1954 to December 1955 (Clem, 1957).

Another CAT measurement program, Project TOPCAT, was conducted over South Australia during 1963 (Radok and Reiter, 1964; Burns and Rider, 1965). A massive program to locate and measure atmospheric gusts (and other parameters as well) is currently being sponsored by the U.S. Air Force under the code name ALLCAT (Dutton, 1967; Atnip, 1969; Loving, 1969). Project ALLCAT is designed to measure atmospheric properties from the surface to 200,000 ft (61 km). A comprehensive measurement program has been and continues to be conducted in the U.S.S.R. (Vinnichenko, 1969). Other specialized but less comprehensive programs have been conducted by the Air Force Cambridge Research Laboratories (Penn and Pisinski, 1967), as well as by commercial airlines in the United States (Harrison, 1961; Kadlec, 1964).

Nearly all of the above studies, plus many others, were or are conducted on the basis of obtaining accurate meteorological data. Numerous other data have been compiled using CAT reports such as might be received via PIREPS, etc. Studies using data of this type have been reported by Bannon (1951), Turner (1959), Colson and Rustenbeck (1961), Kroll and Rustenbeck (1961), Briggs (1961a, 1961b, 1963), Colson (1961, 1962, 1963, 1969), Sorenson (1964), Colquhoun and Bourke (1967a), Endlich and Mancuso (1968), and many others.

4. PROPERTIES OF CAT

The one dominant fact that has emerged from studies such as the ones listed above is that CAT can and does occur at any altitude, at any location, and at any time. This means, of course, that all present-day aircraft must face the possibility of encountering some degree of turbulence while in flight. This is true also for spacecraft that are ascending or descending through Earth's atmosphere as well as for the proposed SST which will be operational in the near future (Reiter, 1964a; Kordes and Love, 1967; Ehernberger, 1968b; Burnham, 1968). Thus a knowledge of the properties of CAT is mandatory so that aerospace operations may be conducted in a reasonable and safe manner.

4.1 Seasonal Distribution

Nearly all statistical studies of CAT have shown that aircraft encounter CAT most frequently during the winter months. Clem (1957) showed that CAT occurrence for all sectors of the U.S. was greatest on a percentage basis during the winter. Table 1 is a summary of Clem's findings.

Table 1. Seasonal occurrence of CAT in the United States (after Clem, 1957).

	NW US	SW US	NE US
Winter	28%	33%	44%
Spring	24%	19%	32%
Summer	23%	14%	28%
Fall	22%	16%	27%

Briggs (1963) showed that the seasonal variation of turbulence at heights of 20,000 to 40,000 ft over Europe ranges from a summer minimum of about 6700 n mi per incident of turbulence to an autumn maximum of about 3500 n mi per incident. This is an increase of nearly 46 per cent from summer to autumn. He further shows that the variation in the eastern Mediterranean is from a summer minimum of 7570 n mi per incident to a winter maximum of 2910 n mi per incident. These latter figures represent a seasonal change of 38 per cent in the encounter of turbulence by aircraft. Other studies in the N. Hemisphere, such as those by Colson (1963), Rao and Sadogopan (1968), and others, show results of a similar nature. An exception to this general fact was reported by

Berenger and Heissat (1959), who found more turbulence over France during the summer than during the winter.

Recent measurements in the S. Hemisphere show that the occurrence of CAT on a percentage basis is greatest during the fall and winter. Colquhoun (1967c) found that the greatest percentage of CAT occurred in March (autumn) and that 52 per cent of all aircraft flights in the measuring program encountered some degree of turbulence in this time period. In summarizing the results of the Australian phase of the U.S. Air Force's HICAT program, Spillane (1967) reports that the greatest frequency of occurrence of CAT is in the winter and early spring.

4.2 Geographical Distribution

Among the studies which attempt to define the geographical distribution of CAT, there is no universal agreement. Several facts must be kept in mind when comparing one study with another. First, the method of quoting results is not uniform (Clodman *et al.*, 1961). Furthermore, different methods of collecting the data might give different results for the same location. Terrain effects differ from one location to another so that strict comparisons become very difficult. Finally, many studies are based on data collected from scheduled airline flights so that a statistical bias might be introduced. These latter flights also use turbulence-avoidance techniques so that an additional bias is possible.

The study by Clem (1957) of Project Cloud Trail data showed that the highest incidence of CAT between 25,000 and 45,000 ft was in the northeastern United States. Balzer and Harrison (1959) report that there is reason to believe that the exposure to high-level CAT over the United States is fairly uniform. Colson (1963), in studying over 12,000 CAT reports covering the period September 1960 to August 1962, found a maximum of CAT occurrence over southeast Colorado with a secondary maximum over southern New England.

Variations of CAT occurrence over Western Europe have been found by Hislop (1951), Berenger and Heissat (1959), Briggs (1963), and others. Colquhoun (1967a, 1967b, 1967c) and Colquhoun and Bourko (1967a, 1967b) show that CAT occurrences in the South Pacific have maximum values over southern Australia with another area of high occurrence in the vicinity of Borneo.

Coleman and Steiner (1960) and Steiner (1966) have analyzed data from U-2 flights made over the U.S., Japan, Turkey, England, and Germany. Their results show that the frequency of exceeding given values of gust velocity per mile of




Fig. 2. Frequency of exceeding given values of gust velocity per mile of flight for five areas (after Coleman and Steiner, 1960).

flight differs very little among these locations (see Fig. 2). Figure 3 shows values of average turbulence frequency vs height for the United States. These values were obtained by Endlich and Mancuso (1968) in their attempt to estimate a turbulence climatology between 20,000 and 45,000 ft.

A study by Clodman *et al.* (1961) shows that the frequency of occurrence of CAT over the oceans is about one-tenth of that over the continents. In an experiment to relate CAT to terrain, Turner (1959) found that over the British Isles, CAT was four times as frequent over the coastlines and more than twice as frequent over land as over the sea. He noted also that the difference was less marked during the summer.

To explain the variability of CAT occurrences over land and over the ocean, one is led naturally to consider the effects of terrain on high-level turbulence. Ludlam (1952) suggests that cirrus clouds can be caused by hills 1000 ft high. According to Jenkins (1952), some obstacles can affect the air flow up to 25 times their height. Wave patterns that are orographically induced have been detected in the ozonosphere (Paetzold and Zachorner, 1955). Terrain effects of CAT occurrence are reported for areas over Australia (Colquhoun, 1967c), the Middle East (Rao and Sadogopan, 1968), and the United States (Clodman and Ball, 1959; Endlich and Mancuso, 1965a; Foltz, 1967). The importance of terrain in the production of CAT will be discussed in Section 7.

4.3 Meso-scale Properties of CAT

4.3.1 Horizontal Dimensions

CAT encountered by aircraft is normally described as being of a patchy nature. The occurrence ratio of turbulent patches to smooth patches within a given turbulent area varies from the order of 1:1 to about 1:10 (Clem, 1957). Clodman *et al.* (1961) conclude that, on the average, about 3 per cent of the distance flown by




Fig. 3. Curves of average turbulence frequency vs height for the United States (after Endlich and Mancuso, 1968).

an aircraft in the range of 20,000 to 45,000 ft over land will be turbulent. Hislop (1951) found that the mean horizontal extent of turbulent areas was 75 to 100 km. Clodman (1953) gives this figure at about 90 km with an extreme of approximately 450 km. Press *et al.* (1953) report horizontal extents of 15 to 60 km, while Clem (1957) reports that 50 per cent of the cases have horizontal dimensions less than 80 km. Clem also found that CAT patches are elongated in the direction of the wind and that they are frequently several times longer than they are wide. Cunningham (1958), using the data from Project Jet Stream (Fetner, 1956), gives the frequency distribution of horizontal extent shown in Table 2. These data pertain to the continental United States.

Table 2. Horizontal extent of turbulent regions (after Fetner, 1956)

Extent (mi)	10.0	10-19.9	20-29.9	30-39.9	40-49.9
% Occurrence	31.5	21.4	9.5	10.1	6.5
Extent (mi)	50-59.9	60-69.9	70-79.9	80-89.9	90-99.9
% Occurrence	4.8	2.4	2.4	0.6	1.2
Extent (mi)	100-149.9	150-199.9	200.0		
% Occurrence	6.5	2.4	0.6		

Steiner (1966) found that in the flights of the U-2 aircraft, 50 per cent of the turbulent areas exceeded 10 mi in length.

When various intensities of CAT are categorized, the statistical distribution is found to change. Clodman (1953), for example, states that areas with strong turbulence usually are larger and thicker. This fact was noted also by Press *et al.* (1953). Briggs and Roach (1963) report that in 22 flights through jet streams, the following was found:

Turbulence Intensity	Duration (min)	% of Total Flying Time
slight	165	5.4
moderate	122	4.0
severe	5	0.2

These data seem to show that the more severe CAT areas are smaller, or just the opposite from what was found by Clodman and Press *et al.*, mentioned above. A summary of some recent flight data is shown in Fig. 4 (after Burnham, 1968).

The horizontal dimensions of CAT over the Atlantic Ocean have been reported by Morgan (Clodman *et al.*, 1961) to be about 100 n mi, on the average. His

figures, when broken down into intensity categories, show that CAT areas of moderate, severe, and violent have horizontal dimensions of 93.4, 124.6, and 87.0 n mi, respectively.

4.32 Vertical Dimensions

CAT areas are generally quite thin in the vertical with 2000 ft being the average thickness (Hislop, 1951; Clem, 1957; Farthing, 1959; Clodman et al., 1961; etc.). Press et al. (1953) report that 50 per cent of the cases they studied were less than 2000 ft thick. The extreme thickness values which have been reported range from 100 to 20,000 ft (Clodman, 1953; Berenger and Heissat, 1959; Farthing, 1959). Turbulent patches often occur in multiple layers which may have several thousand feet of relatively smooth air separating them (Anderson, 1956; Clem, 1957).

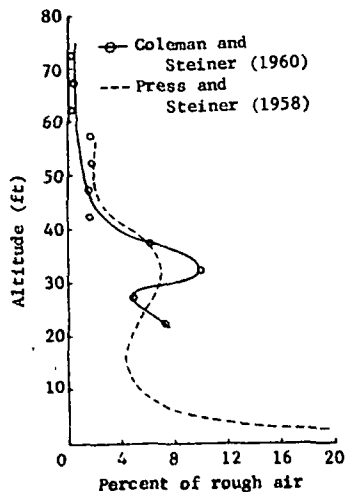


Figure 5 is a compilation of the variation with altitude of the percentage of time spent in rough air by aircraft (Coleman and Steiner, 1960). Also shown in the figure, for comparison purposes, are the results obtained by Press and Steiner (1958). This figure indicates that CAT encountered 7 to 10 per cent of the time at flight levels between 30,000 and 40,000 ft, and less than about 2 per cent of the time at altitudes greater than 50,000 ft. Anderson's (1956) gust-sonde analysis showed the following altitudes where the

Fig. 5. Variation in percentage of rough air with altitude (after Coleman and Steiner, 1960).

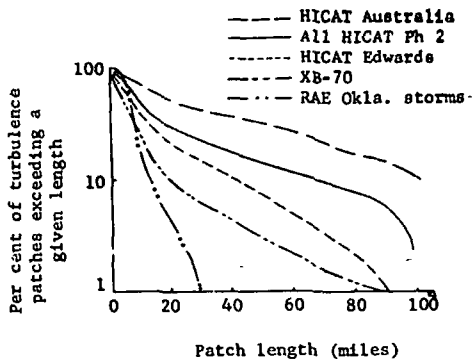


Fig. 4. Percentage of turbulence exceeding a given length encountered between 40,000 and 70,000 ft during a number of research flights (after Burnham, 1968).

turbulence encounters were maxima and minima:

Minimum Exposure	Maximum Exposure
6.2 km	7.4 km
9.5 km	11.0 km
12.8 km	14.4 km

His data showed a rapid decrease in turbulence encounters above 15,000 m. A recent study by Spillane (1967) showed that the expectation of encountering CAT per 100 flights is greatest in the height range of 50,000 to 55,000 ft. His results are summarized in Table 3.

Table 3. Expectation of encountering CAT per 100 flights (after Spillane, 1967)

Height ($\times 10^3$ ft)	%	Height ($\times 10^3$ ft)	%
10-15	20	40-45	11
15-20	19	45-50	15
20-25	11	50-55	43
25-30	20	55-60	35
30-35	37	60-65	17
35-40	13		

4.33 Temporal Distribution

CAT is often called a "random" phenomenon (Reiter, 1963) and this would certainly be in keeping with the statistical approach to the theory of CAT. This idea is not unfounded since oftentimes an aircraft will report turbulence while another aircraft passing through the same area a short time later will not (Hislop, 1951). However, many observations tend to show that CAT, although transient, is persistent. Endlich (1963) has reported that moderate or severe CAT may persist for many hours, while Colson (1963) has shown that CAT areas may persist for periods up to a day. Some detailed vertical wind profiles have shown persistent fine structure for periods up to several hours (Weinstein et al., 1966; DeMandel and Scoggins, 1967). Reiter (1964a) has written of a turbulent patch over South Australia that was marked by smoke. The research aircraft was able to follow this patch of turbulence for about 45 minutes. The distance traversed by the patch was approximately 100 mi. Reiter also states

that the intensity level of CAT as well as the size of the patch stayed about the same during the entire period.

4.34 Intensity of CAT

The intensity of CAT is of extreme importance to the aircraft engineer, for this is one of the parameters that determine the structural loads which the aircraft must be built to withstand. Aircraft controllability and pilot/passenger comfort also are dependent on this factor.

Various classifications have been used to describe the intensity of CAT. One subject's classification uses the categories mild, light, moderate, severe, and violent (Hyde, 1954b). The meaning of these categories is as follows:

- Mild - "Cobblestone", 6-8 cycles sec^{-1} , discernable to passengers;
- Light - "Cobblestone", control displacement, passenger discomfort;
- Moderate - uncomfortable control, unstable all axes, seat belts required;
- Severe - Cb-type turbulence, extremely uncomfortable for passengers; and
- Violent - intense bumps, high "g", completely unacceptable, threshold of structural failure.

Other classifications use incremental vertical acceleration as a basis for categorizing intensity. Crooks *et al.* (1968a) offer the following:

CAT Description	Peak "g" Increment
very light	± 0.05 to ± 0.10
light	± 0.10 to ± 0.25
moderate	± 0.25 to ± 0.50
severe	± 0.50 to ± 0.75
extreme	± 0.75 or greater

For a basis of comparison, Burnham (1968) states that acceleration increments of ± 0.06 g would be of some inconvenience to a passenger who was trying to drink. Figure 6 shows the human reaction to a range of aircraft accelerations.

Since structural damage is possible for an aircraft encountering intense turbulence (Reiter, 1962a), it is of interest to note some of the extreme values which have been found by various workers. Hislop (1951) reported that the "Mosquito" aircraft flying over Europe experienced incremental accelerations of 1.5 g or 35 $\text{ft sec}^{-1} U_{de}$. Other values which have been reported are Bindon (1951), 3 g; Hyde (1954a), 2.5 to 4.0 g; Farthing (1959), 36 $\text{ft sec}^{-1} U_{de}$;

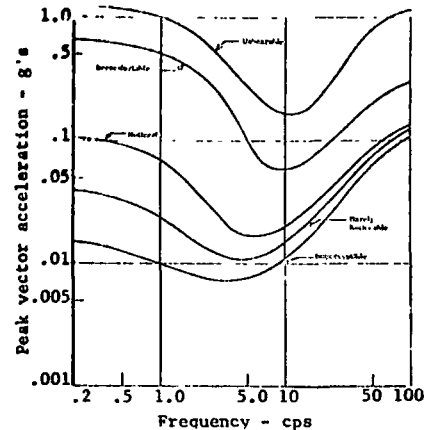


Fig. 6. Vibration threshold levels of human feeling (after Hildreth *et al.*, 1963).

Steiner (1966), 58 $\text{ft sec}^{-1} U_{de}$; and Crooks *et al.* (1968a), 1.1 g or 22 $\text{ft sec}^{-1} U_{de}$. Some of the most severe encounters with CAT have occurred in mountainous regions. In a spectacular accident in which a B-52 lost 85 per cent of its vertical stabilizer, lateral gusts were estimated to exceed 100 ft sec^{-1} (Dutton, 1967). Later measurements using F-106 fighter aircraft in the Sangre de Cristos Mountains, Colorado, revealed more than 25 gusts with amplitudes exceeding 100 ft sec^{-1} . The maximum gust recorded during the tests was 175 ft sec^{-1} (Dutton, 1967).

In the interest of aircraft design, data of the above nature have been subjected to various statistical treatments. Hislop (1951) offers the following analysis: Operating a fleet of 20 Comet aircraft at an annual utilization of 3,000 hr, one would expect that one of the airplanes would encounter a 36 ft sec^{-1} gust on the average of every 2 wk and a 50 ft sec^{-1} gust once every 4 yr. Other examples of studies of this type are those made by Rhyne and Steiner (1962), Coy (1967), Burnham (1968), and Crooks *et al.* (1968a). Figures 7 and 8 illustrate several of the estimates for overall gust distributions in the vertical.




Fig. 7. Estimated overall gust distributions for operations at various altitudes (after Rhyne and Steiner, 1962).

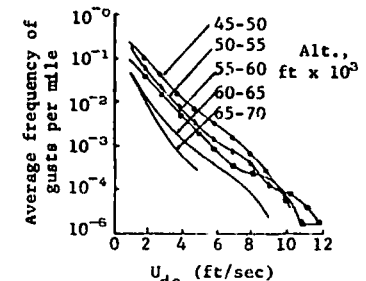


Fig. 8. Average frequencies at which given values of derived gust velocity were exceeded per mile of flight during the phase 2 HICAT program (after Burnham, 1968).

4.35 Lateral vs Vertical Gustiness

Horizontal atmospheric gusts may cause aerospace vehicles to experience vertical accelerations due to the change of lift induced across the wings or other lifting elements. Clodman (1957, 1958b) indicates that for speeds of high flying aircraft, it would take horizontal gusts of about 30 ft sec^{-1} (on the average) to produce moderate to heavy bumpiness. Gusts of this magnitude are about four times as great as the vertical velocities needed to produce equivalent aircraft accelerations (Hislop, 1951). In the light of the measurements made in the Sangre de Cristos which were mentioned earlier, it seems that, under certain conditions and in certain locations, horizontal gusts become very important.

In an experiment to determine the relative magnitude of vertical and horizontal gusts in the atmosphere, Donely (1940) found that eddies of the sizes which affect airplanes are largely isotropic. His results pertained to the low and mid-troposphere.

In a stable stratification, vertical motions will be suppressed because of the large amount of work which would be required to overcome the force of gravity. Theoretically, then, horizontal gusts should prevail in the stratosphere (Reiter, 1963). This is verified somewhat by the findings of Clodman and Ball (1959). Their statistical investigation based on 25 flights in the vicinity of the jet stream show that horizontal gustiness prevails in the stratosphere while vertical gustiness is prevalent in the troposphere. Reiter and Burns (1966) found that long wave perturbations tend to be anisotropic when found in stable layers of the stratosphere and the upper troposphere; but perturbations with wave lengths below a certain critical value (see Section 7) break down into isotropic turbulence. Findings of this nature suggest that the atmospheric modes which produce either isotropic or anisotropic turbulence must be considered when forecasting high-level turbulence.

4.4 Distribution of CAT with Respect to Atmospheric Phenomena

4.41 Jet Streams

Theoretical considerations made by Richardson (1920), Arakawa (1951), and others suggest that vertical and horizontal wind shears are important mechanisms for the formation of turbulence. It follows then that the jet stream should be a region with a high incidence of CAT. This fact has been borne out by the studies of Bannon (1952), Clem (1957), Endlich and McLean (1957), Sasaki (1958), Balzer and Harrison (1959), Briggs and Roach (1963), Kao and Sizoo (1966), and

Penn and Pisinski (1967), just to name a few. Studies in the S. Hemisphere (Spillane, 1965, 1967; Colquhoun and Bourke, 1967a, 1967b; etc.) also show the jet stream to be a preferred region for the occurrence of CAT. The now-classic study made by Bannon (1952) showed that CAT appeared to be grouped in particular zones relative to the jet axis. He found also that 75 per cent of the cases studied occurred on the low-pressure side of the stream. Bannon's results have been verified by Sasaki (1958) in his analysis of nine Project Jet Stream flights. Sasaki's results are shown in Fig. 9. The figure is expressed in percentage of turbulent flying time of the total flying time. This figure clearly shows that

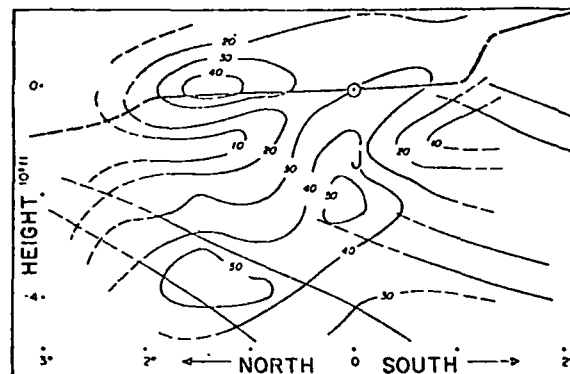


Fig. 9. Mean distribution of turbulent flying time (CAT) in per cent of total flying time for nine Project Jet Stream flights 1956-1957 (after Sasaki, 1958).

the turbulence frequency on the cyclonic (low-pressure) side of the jet exceeds that on the anticyclonic side. Contrary to this, turbulence over the ocean seems to favor the anticyclonic side of the jet stream above the axis (Clodman *et al.*, 1961). As pointed out by Reiter (1963), the positions of the individual turbulence maxima coincide with the locations of stable baroclinic zones. This corresponds quite well with Endlich's and McLean's (1957) jet-stream "front" (a stable layer characterized by extreme vertical wind shears). This furthermore agrees with numerous findings of turbulence near the tropopause (see Danielsen, 1959) in the vicinity of the jet stream (Clem, 1957; Briggs and Roach, 1963; Penn and Pisinski, 1967; Panofsky *et al.*, 1968).

The distribution of severe CAT in relation to the jet stream has been investigated by Harrison (1959), Reiter (1962c), and Endlich (1963). Harrison's study discriminated between CAT occurrence versus various jets and positions of jets; viz., occurrence relative to polar jets, occurrence between two jets, and occurrence relative to subtropical jets. He found that severe CAT occurred primarily below and poleward of the polar jet axis. His study of severe CAT occurrences between two jets revealed that nearly all cases occurred below and equatorward of the northernmost jet. He could reach no conclusion concerning the relation between severe CAT and the subtropical jet because of a very small sample size.

Other examples of the distribution of CAT relative to the jet stream are shown in Figs. 10 to 13. Figure 14 shows the location of reported occurrences




Fig. 10. Schematic cross-section through the jet stream (J): potential temperatures (thin lines), and isotachs (semi-heavy lines). The boundaries of the stable baroclinic frontal zone are marked by heavy dashed lines, the tropopause by heavy solid lines. The shaded area within the "isentrope trough" indicates the region in which the occurrence of moderate to severe CAT (A) is most likely. The dotted line represents the northern boundary of extensive cirrus-cloud sheets (after Reiter, 1962c).




Fig. 11. Distribution of turbulence in the vicinity of a sharp trough and jet stream (after Endlich, 1963).




Fig. 12. Turbulent regions in straight jet streams (in the absence of mountain waves) (after Endlich, 1963).

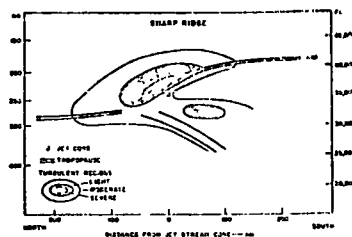


Fig. 13. Turbulent regions in sharply-curved anticyclonic jet streams (after Endlich, 1963).

of moderate and severe CAT relative to synoptic features on an upper-level chart for 13 April

1962. Figure 15 depicts the distribution about the jet stream of reported high-level turbulence over the North Atlantic Ocean.

The longitudinal distribution of CAT along the jet stream also has been investigated. Studies by Clem (1954) and Chambers (1955) indicate that turbulence may be somewhat more prevalent in the exit region of an isotach maximum. A study by Lennic (1969) shows that turbulence occurs near the exit region of the jet stream under conditions of cyclonic development. On the other hand, more turbulence was found in the entrance region of an isotach maximum by Bannon (1951) and by Balzer and Harrison (1959). Reiter (1962b) and Reiter and Nania (1964) have found evidence which suggests that CAT is concentrated at the confluence region of two jet streams. Over the oceans, the delta region seems to be more turbulent than any other section of the jet stream (Reiter, 1963).

4.42 Troughs, Ridges, and Other Features

In order to develop practical forecasting techniques, numerous studies have been made in which CAT was correlated with synoptic features other than jet streams. Bannon (1952) found that, of those

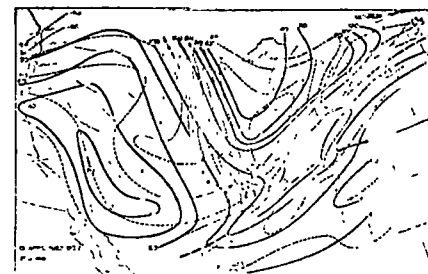


Fig. 14. 25-mb isotachs (\bar{u} -eas > 100 knots shaded) and isotherms ($^{\circ}\text{C}$), 13 April 1962, 0000 GCT, and moderate and severe cases of CAT observed within ± 6 hours of map time (after Reiter, 1962c).

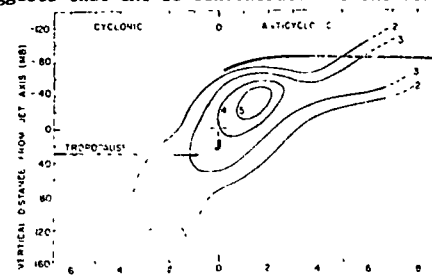


Fig. 15. Percent occurrence of high-level turbulence about the jet stream over the North Atlantic Ocean in vertical "boxes" of 40 mb x 120 n mi (after Glodman et al., 1961).

cases not related to the jet stream, most were associated with upper lows, upper troughs, or discontinuous tropopause surfaces. He reported also that less than 7 per cent of the cases appeared to have no obvious association with any configuration of the upper-air pattern. CAT associated with sharp trough lines aloft and deep upper-level cold lows has been reported by Clem (1957), Smigielski (1960), Briggs (1961a), Srinivasan (1961), and Endlich (1963).

Kronebach (1964) has studied the distribution of CAT with respect to troughs, ridges, and closed lows at 300 mb. His findings are shown in Table 4.

Table 4. Distribution of CAT at 300 mb (after Kronebach, 1964).

	Feature	% Total	% Within 5° Lat At or Behind	% Within 5° Lat At or Ahead	% Within 2.5° Lat
Cyclonic	Troughs	44	25	18	-
	Closed low	-	-	-	1
Anticyclonic	Ridges	13	7	6	-
		43% Undefined			

Surface synoptic features also have been related to occurrence of CAT. Turner (1959) found that over the land and coasts of the British Isles, only one-third of the cases were associated with fronts. On the other hand, three-fourths of the cases over the sea apparently were connected with fronts and half of these were warm fronts. In a study of satellite photographs, Weigman (1965) found that most turbulence below 20,000 ft was located in the warm air above the warm frontal boundary in advance of its surface position.

Sorenson (1964) studied all available CAT reports for December 1963 in the hope of finding means of delimiting CAT forecast areas. His study indicates that certain synoptic conditions and areas are favorable for CAT formation. Some of these are as follows:

- a.) regions of increasing thermal gradients,
- b.) areas of sharp horizontal shifting of wind aloft, and
- c.) areas of sharp vertical direction shear (see also, Reiter and Nania, 1964).

Sorenson also points out that CAT seldom develops in areas of

- a.) uniformly curved flow or straight flow,
- b.) decreasing winds or decreasing thermal gradients, or

- c.) above the tropopause east of 100° W. longitude unless there is fairly strong evidence of thermal convergence occurring above it.

Spectral Properties of CAT

In order to evaluate the effect of turbulence on aircraft, we must know turbulence energy is distributed over various eddy sizes (see Eq. 2.11(5)). spectrum of turbulent energy also is important for an understanding of the physical processes leading to the formation of CAT (Reiter and Burns, 1966; us et al., 1967).

Many of the early studies of the spectrum of turbulence in clear air were ducted at altitudes below 5,000 fr (Press, 1957; Houbolt et al., 1964). turbulence spectra have been computed also for turbulence in cumulus clouds and thunderstorms (Steiner, 1965, 1966). Examples of typical power spectra of turbulence measured in these three weather conditions are given in Fig. 16.

More recently, the micro-structure of free-atmospheric turbulence has been estigated. Specially instrumented aircraft over the U.S.S.R. (Vinnichenko al., 1965), Australia (Burns and Rider, 1965), and the United States (Crooks al., 1968a) have produced sets of power spectra of CAT at the level of the stream. As pointed out by Pinus et al. (1967), data of this nature give inditions, for the first time, of processes that lead to the formation of turbulent ght conditions in clear air. Kao and Woods (1964) have obtained energy

tra of mesoscale turbulence along across the jet stream. Thus, tur- nce spectra are available for the -stream level over wave lengths sing from approximately 50 m to 900 km (Pinus et al., 1967).

The shape of the energy spec- i has been disputed for many years. as been shown by Kolmogorov (1941) Batchelor, 1959) that in the inal subrange, the energy is pro- ional to the inverse five-thirds r of frequency. This can be ex- sed by

$$(\omega) = \alpha c^{2/3} \omega^{-5/3} \quad (1)$$

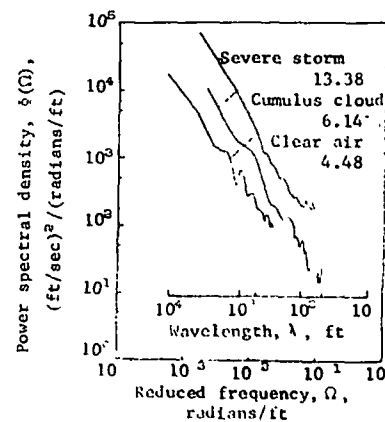


Fig. 16. Typical power spectra of vertical component of turbulence measured in clear air, cumulus cloud, and thunderstorm (after Houbolt et al., 1964).

where $E(\omega)$ is the frequency-dependent energy of turbulence motion, α is a universal constant, ϵ is the rate of dissipation of energy, and ω is frequency (Lumley and Panofsky, 1964). The minus-five-thirds relationship has been well substantiated at low levels. Evidence that this shape holds for higher levels in the atmosphere has been presented by MacCready (1962), Houbolt *et al.* (1964), Reiter and Burns (1966), and others. Under certain conditions, the spectral curves seem to follow a minus two relationship (Lappe and Davidson, 1962; Kao and Woods, 1964), minus four-thirds, minus eleven-fifths (Reiter and Burns, 1966), as well as others (Cgura, 1958).

The power spectra obtained by some of the investigations mentioned above are shown in Fig. 17. Table 5 lists the sources and characteristics of the spectra in Fig. 17.

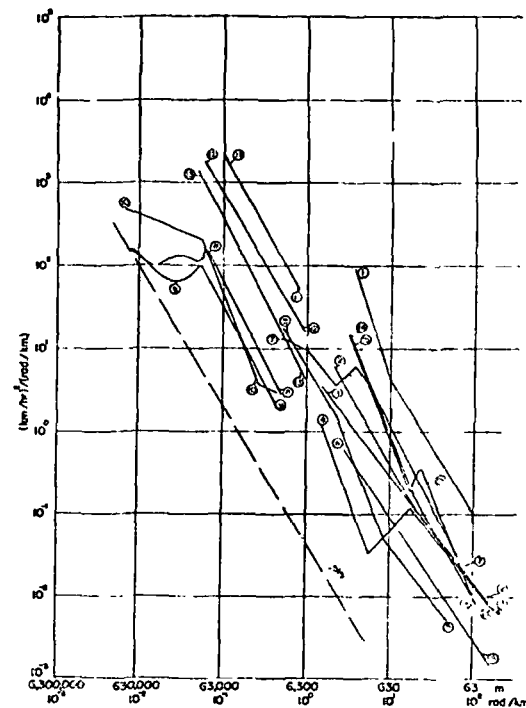


Fig. 17. Schematic presentation of spectral density, $(\text{km/hr})^2 / (\text{rad/km})$, as a function of wave number (cycles/km), or wavelength in meters, for turbulence in the free atmosphere. Data sources of spectra are identified in Table V. (after Pinus *et al.*, 1967).

Table 5. Power Spectra of Turbulence in the Free Atmosphere (Pinus, et al., 1966).

Spectrum No.	Source	Characteristics (turbulence components given with respect to course of aircraft)
1	Shur, 1962	w-component, severe CAT, near jet stream level, stable stratification.
2	Reiter and Burns 1965	u, v-components, moderate CAT, jet stream level, stable stratification.
3	Reiter and Burns 1965	w-component, flight parallel to wind, moderate CAT, jet stream level, stable stratification.
4	Reiter and Burns 1965	w-component, flight nearly normal to wind, moderate CAT, jet stream level, stable stratification.
5	Vinnichenko, Pinus and Shur, 1965	u-component, no CAT, near jet stream level, stable stratification.
6	Reiter and Burns 1965	u,v,w-components, light turbulence at 100 m altitude, unstable stratification.
7	Vinnichenko, Pinus and Shur, 1965	u-component, light turbulence at 1000 m altitude, unstable stratification.
8	Kao and Woods 1964	u-component, at jet stream level, flight parallel to jet stream.
9	Kao and Woods 1964	v-component, at jet stream level, flight parallel to jet stream.
10	Kao and Woods 1964	u,v-components, at jet stream level, flight normal to jet stream.
11	Pinus, 1963	u-component, severe CAT, under core of jet stream, flight normal to jet stream.
12	Pinus, 1963	u-component, moderate CAT, under core of jet stream, flight normal to jet stream.
13	Pinus, 1963	u-component, light CAT, over core of jet stream, flight normal to jet stream.
14	Shur, 1962	w-component, moderate CAT, at jet stream level, stable stratification.
15	Shur, 1962	w-component, moderate CAT, at jet stream level, stable stratification.

5. RELATIONSHIPS BETWEEN CAT AND SYNOPTIC PARAMETERS

We know from studies of the type covered in the preceding section that CAT is a microscale phenomenon. However, numerous correlations have been attempted to find a relation between CAT and macroscale parameters (Endlich, 1964; Endlich and Mancuso, 1964; Scoggins et al., 1969; etc.). As a result, correlation studies have shown large discrepancies. Furthermore, as pointed out by Moore and Krishnamurti (1966), the usual parameters such as the Richardson number, etc., are probably important in the region where turbulence is created, and are important only in that region at or just before the time the flow breaks down into turbulence. This means that once turbulence is initiated, it may be too late to look at these parameters since the flow field will be changed because of the onset of turbulence. In a similar fashion, others have pointed out that it is difficult to determine whether certain features (e.g., lapse rate of temperature, Richardson number, etc.) are responsible for turbulence or whether they themselves are caused by the turbulence (Gruzina and Sofiev, 1964; Reed, 1969). In spite of the foregoing limitations, some success has been achieved using certain gross dynamic parameters.

5.1 CAT and Horizontal Wind Speed

Studies which have attempted to show a relation between CAT and horizontal wind speed have been largely unsuccessful. For example, Lake (1956) concluded that wind speed alone was a poor forecasting tool. Colson (1962) and Briggs and Roach (1963) reached this same conclusion. Others finding a poor relationship between CAT and horizontal wind speed include Hislop (1951), Davies (1951), Colquhoun and Bourke (1967a,b), and Colquhoun (1967a,b,c.). An exception to these general findings is reported by Ehernberger (1968a). He found that turbulence of significant intensity at SST supersonic climb and cruise altitudes is related in some degree to horizontal wind speeds in excess of 70 kt.

5.2 CAT Versus Horizontal and Vertical Wind Shear

Hislop (1951), Lake (1956), Clem (1957), Briggs (1961b), and George (1961) have all found that vertical shear is an important parameter in high-level turbulence. The results concerning horizontal shear are not so clear. Harrison (1959, 1961) states that horizontal shear is important in the forecasting of CAT. However, Briggs and Roach (1963) conclude in their study that horizontal wind shear is not highly correlated with the occurrence of CAT. Kronebach (1964) also obtained a poor relationship between the occurrence of CAT and horizontal shear of wind. According to Colson and Panofsky (1965), any corre-

lation between CAT and horizontal shear is probably due to a statistical relation between horizontal and vertical wind shear.




Fig. 18. Characteristic temperature profile produced by ageostrophic meridional wind component above and (a) on the poleward and (b) equatorward side of a sharp subtropical wind maximum (after Spillane, 1967).

5.3 CAT Versus Hydrostatic Stability and/or Lapse Rate of Temperature

Lake (1956) found that moderate turbulence was most likely to be associated with lapse rates which were less than dry adiabatic but greater than isothermal. He also found that, with either the adiabatic or inversions class of lapse rates, no turbulence was likely. The data from Project Rough Rider (Clem, 1957) showed that a useful relationship existed between CAT and steep lapse rates of temperature. Endlich (1964) found that a discontinuity of lapse rate at an upper front or at the tropopause was important for the existence of CAT. Flights with Jindivik target aircraft over the Woomera Rocket Range in S. Australia have shown that CAT is most likely to occur when there is a sharp "kink" in the temperature profile between 50 and 200 mb (Spillane, 1967). The characteristic temperature profiles discussed by Spillane are shown schematically in Fig. 18.

Keitz (1959) found that a significant correlation existed between the observation of CAT and a forecasted change in the hydrostatic stability. The change in stability was determined to be caused by differential advection. Based on Keitz's observation, Schwerdtfeger and Radok (1959) have suggested a simple method using hodographic techniques to detect changes in static stability.

As indicated earlier, individual turbulence maxima coincide with the location of stable baroclinic zones. According to Danielsen (1959), the stable and baroclinic zones associated with CAT formation are rather thin. Hence, since accurate measurements of stability over thin layers are difficult to obtain, any relationship between hydrostatic stability and high-level turbulence is difficult to examine.

5.4 CAT Versus the Richardson Number (Ri)

A criterion widely used to describe the stability of fluid flow is the Richardson number (Ri) (Richardson, 1920; Calder, 1949; Dugstad, 1958a; etc.). Ri expresses the ratio of buoyancy forces to shearing stresses and can be written in the form

$$Ri = \frac{K_H}{K_M} \frac{g}{\bar{T}} \frac{\beta}{\gamma} \quad 5.4(1)$$

In this equation, K_H is the eddy conductivity, K_M is the eddy viscosity, g the acceleration of gravity, and \bar{T} the mean temperature. The factor β expresses the sum of the observed lapse rate of temperature and the dry adiabatic lapse rate, i.e., $\partial T/\partial z + \Gamma$, while γ is the vertical wind shear squared, viz., $\gamma = (\partial \bar{u}/\partial z)^2$. It should be noted that \bar{u} is the mean vector wind.

Theoretically, if Ri is smaller than some critical value, Ri_c , laminar flow will break down into turbulence. Richardson suggested that turbulence would develop and grow if $Ri < 1$. Other values given for Ri_c are 0.5 by Prandtl (Scorer, 1956), 0.25 by Taylor (1931), 0.25 to 1.0 by Wanta (1953), plus many others (see, e.g., Lyons *et al.*, 1964; Lumley and Panofsky, 1964; Webster, 1964; Panofsky *et al.*, 1968).

It is generally assumed that the ratio K_H to K_M is equal to 1. However, this ratio is dependent on stability and other parameters. Values ranging from 0.83 to 3 have been reported (Lumley and Panofsky, 1964, p. 105-106), and a value of 0.65 has been reported for the free atmosphere by Petterssen and Swinbank (1947). Most studies which have attempted to correlate CAT with Ri have assumed that $K_H/K_M = 1$ so that Eq. 5.4(1) becomes simply

$$Ri = g\beta/\bar{T}\gamma. \quad 5.4(2)$$

Many shortcomings are inherent in the evaluation or computation of Ri. These have been discussed by Scorer (1956), Colson and Panofsky (1965), Reiter and Lester (1967), and Scoggins *et al.* (1969). In summary, these shortcomings include:

- Poorly resolved data, i.e., significant vertical wind shears and lapse rates are often smoothed out (Reiter, 1963; Colson and Panofsky, 1965; Scoggins *et al.*, 1969);
- improper choice of scale length (Reiter and Lester, 1967; Scorer, 1956);
- non-synchronous data collection (Zavarina and Yudin, 1960), and
- failure to take into account the sign of the vertical wind shear (Lake, 1956).

With these shortcomings, it is no wonder then that relationships between Ri and CAT have shown little consistency.

Table 6 is a compilation of the results obtained by several investigators as regards relationships between CAT and Ri. As expected, the results are highly divergent.

5.5 CAT Indices and Other Relationships

Since the Richardson number fails as a suitable indicator of turbulence, other dynamic parameters have been combined in the search for a consistent indicator of turbulence. One of these indices is due to Colson and Panofsky (1965), and the other to Endlich and Mancuso (1964).

The CAT index of Colson and Panofsky is really an index of CAT energy. The index is derived by using energy considerations, dimensional analysis, and similarity theory. By making several simplifying assumptions, one may write the index as

$$I = (\Delta V)^2 (1 - Ri/Ri_c), \quad 5.5(1)$$

where ΔV is the vector change of the horizontal wind in a layer. The parameters used in computing I may be taken from ordinary meteorological data. Analyses by Colquhoun (1967c) and Blackburn (1969) have shown that the index is, in general, a poor indicator of turbulence.

Endlich and Mancuso give their index as

$$V(\partial\alpha/\partial z)(\partial^2T/\partial z^2), \quad 5.5(2)$$

in which V is wind speed, α is wind direction, and T is temperature. Hence, this index incorporates the vertical directional shear and the curvature of the vertical profile of temperature. Both of these quantities have been shown to be of some importance in CAT processes (Sasaki, 1958; Reiter and Nania, 1964; Sorenson, 1964). Correlation studies have shown that this index also is unreliable (Endlich and Mancuso, 1965b; Colquhoun, 1967c).

Klein and Pinus (1954), Pinus (1957), and Balzer and Harrison (1959) have found that cold air advection is more conducive to the occurrence of CAT than either warm or neutral advection. Sorenson (1964) has shown that either cold or warm advection is associated with CAT occurrence depending on the particular synoptic situation. Differential advection of temperature, which is indicated

Table 6. Results of the relationships between CAT and Ri

Investigator	Findings
Anderson (1956)	50% probability of CAT with $Ri < 1.06$, 82% with $Ri < 6$
Bannon (1951)	No relation between CAT and Ri in stratosphere. 30% probability of CAT with $Ri < 3$
Berenger and Heissat (1959)	70% probability of CAT with $Ri \leq 1$
Briggs (1961b)	$Ri < 5$ or horizontal shear $> 0.3 \text{ hr}^{-1}$ gives 80% success of CAT forecasts
Briggs and Roach (1963)	Significant increase in turbulence for decrease in Ri
Colquhoun (1967c)	Generally poor results
Colson (1962)	Probability of CAT occurrence increases with decreasing value of Ri
Colson (1963)	Fair correlation for flights below 29,000 feet
Durst (1943)	Weak relationship between CAT and Ri
Endlich (1964)	CAT regions with areas delimited by $Ri_c = 1$
Endlich and McLean (1965)	With $Ri \leq 0.7$, 50% increase in frequency of occurrence of all classes of CAT
Endlich and Mancuso (1964)	$Ri = 0.6$ correctly identified 28% of turbulent cases and 97% of non-turbulent cases. $Ri_c = 1$ "over forecasts" CAT
Gruzina and Soffiev (1964)	No unequivocal relation between turbulence on a scale of 2-10 m and Ri. Small Ri are not prerequisites for turbulence.
Jaffe (1963)	$Ri_c = 1.5$ verified as CAT indicator
Kao and Woods (1964)	Found agreement between CAT and $Ri - 1.0$
Kronebach (1964)	$Ri_c = 1.0$ useful for 12-hour forecast.
Lake (1956)	No clear relationship between CAT and Ri
Panofsky and McLean (1964)	ALLCAT reports occurred in regions of low Ri
Panofsky et al. (1968)	Ri in neighborhood of 0.5
Penn and Pisinski (1967)	For $Ri \leq 0.5$: 105 cases with CAT and 44 with no CAT. For $Ri > 0.5$: 44 cases with CAT and 246 with no CAT
Pettersen and Swinbank (1947)	$Ri_c = 1.54$ for free atmosphere

Table 6. (cont'd.)

Investigator	Findings
Pinus (1957)	Ris 4 gave weak aircraft bumpiness while Ris 0.5 gave moderate to strong bumpiness
Pinus and Shmeter (1962)	85% probability of CAT with Ris 4
Pinus and Shmeter (1965)	Concluded that the smaller the value of Ri, the greater the probability of turbulence. Ri does not give necessary and sufficient conditions for CAT
Reiter and Lester (1967)	Concluded that there is usually a strong dependence of Ri on layer thickness L. It does not appear fruitful to specify Ri for CAT occurrence unless the dependence $Ri = f(L)$ is known for the time and vicinity of the atmospheric level in question
Rustenbeck (1963)	In general, CAT frequency 64% for Ris 5. In the region 4,000 feet above to 10,000 feet below the level of maximum winds 79% of CAT with Ris 5. Found poor correlation in the stratosphere
Scoggins (1963a)	No correlation
Scoggins <u>et al.</u> (1969)	Poor relationship with turbulence occurring with about equal frequency for all $Ri's < 50$
Scorer (1957)	CAT probability approaches 100% with Ris 0.01
Stinson <u>et al.</u> (1964)	Showed that layers with $Ri < 1$ were common and persisted for many hours
Zavarina and Yudin (1960)	Found good correlation with $Ri_c = 1$

33

by a turning of the wind with height, has been shown to be important by Keitz (1959), Reiter (1964c), Reiter and Nania (1964), and others.

Several investigations have shown that more turbulence is found with cyclonic curvature and shear than with anticyclonic conditions (Pinus, 1957; Clodman, 1958a; Balzer and Harrison, 1959). This is in agreement with the findings cited in Section 4.42. Sorenson (1964) reported that he found a significant number of CAT cases during December 1963, which occurred in connection with anticyclonic curvature. According to Clodman et al. (1961), turbulence over the ocean is favored by anticyclonic shear and curvature. Some of the evidence supporting these conclusions is given in Tables 7 and 8.

Table 7. Recurrence (%) of aircraft bumping in relation to the character of the barometric field (after Pinus, 1957)

Character of Current	Cyclonic Curvature of the Height Contours in the Layer			Anticyclonic Curvature of the Height Contours in the Layer		
	3-8 km	8-14 km	3-14 km	3-8 km	8-14 km	3-14 km
Convergence	57.4	50.0	50.0	22.0	26.6	29.0
Divergence	17.3	8.0	15.6	7.3	5.3	6.8
Parallel Structure	17.2	9.6	14.9	8.7	4.4	7.0

Table 8. Turbulence cases (all intensities) for amount of flying (%) (after Clodman et al., 1961)

300-mb Contour Curvature	Season	Horizontal Wind Shear		Total
		Anticyclonic	Cyclonic	
Anticyclonic	APR. - SEP.	2.84	7.80	10.64
	OCT. - MAR.	21.80	16.31	38.11
	YEAR	24.64	24.11	48.75
Cyclonic	APR. - SEP.	2.41	1.91	4.32
	OCT. - MAR.	8.86	3.87	12.73
	YEAR	11.27	5.78	17.05
Total	APR. - SEP.	5.25	9.71	15.00
	OCT. - MAR.	30.66	20.18	51.00
	YEAR	35.91	29.89	66.00

34

Other parameters that have been related to CAT include strong horizontal gradients of temperature (Reiter, 1962c; Sorenson, 1964; George, 1965; Moore and Krishnamurti 1966; Kadlec, 1969), curvature of the vertical profile of wind (Lake, 1956; Endlich and Mancuso, 1965a), vorticity patterns and advection of vorticity (Colquhoun and Bourke, 1967a,b; Colquhoun, 1967c), deformation of the wind field (Mancuso and Endlich, 1966), horizontal and vertical gradients of kinetic energy (Briggs and Roach, 1963; Kronebach, 1964), and the Scorer parameter (Lake, 1956). None of these parameters have shown a consistent and reliable relationship with the occurrence of CAT.

McKay (1968) suggested that CAT might be associated with atmospheric electric phenomena. He correlated reports of CAT with radar-detected sporadic E(Es) activity. The correlation can only be described as inferential because of the extremely small sample.

6. FORECASTING CAT

6.1 A Brief History of CAT Forecasting

As was pointed out in the introduction, the phenomenon of CAT was first discovered in the latter stages of World War II. Formal forecast procedures were not in use, however, until 1959 when commercial flights with turbojet aircraft were initiated. At this time, United Air Lines began to issue routine CAT forecasts (Sorenson, 1964). Early procedures were based on a meandering jet-stream model related to horizontal wind shear as outlined by Harrison (1959). In 1960, Eastern Air Lines adopted the procedures formulated by George (1960b, 1961). Procedures for forecasting CAT were introduced by the U.S. Weather Bureau in 1962 (Hanson et al., 1962). The USAF Air Weather Service established its CAT Forecast Section at Kansas City, Mo., in 1961. The procedures used by AWS were basically those of Harrison and George (Kronebach, 1964). Modifications to some of the above procedures have been introduced as new knowledge has been gained (Harrison, 1961; Kronebach, 1964; Reiter, 1964c; Sorenson, 1964).

6.2 Routine Forecast Procedures

The forecast procedures and rules which are presented in this section lend themselves to routine usage by the operational forecaster. The only requirement for application of the techniques is access to ordinary meteorological data, viz., standard synoptic reports, rawinsonde or pibal data, upper-level charts, etc. Success of the forecasts is dependent on several factors, viz.,

- a.) accuracy of the data,
- b.) accurate data analysis,
- c.) degree of correlation between CAT and forecast parameters, and
- d.) skill of the forecaster.

A technique developed by Pinus (1957) is based on the thermal wind equation along with an expression for Ri. It can be shown, for a stable current of air of sufficiently large scale, that

$$Ri = \frac{f^2 T}{\rho} \frac{\Gamma - \gamma}{\theta_T^2}, \quad 6.2(1)$$

where f is the coriolis parameter, ρ the density of the air (average value for the atmospheric level under consideration), T the observed temperature of the air, Γ the dry adiabatic lapse rate, γ the observed lapse rate, and β_1 the horizontal temperature gradient. Values of γ and β_1 are determined from analyzed charts and these values are then used to enter the nomogram shown

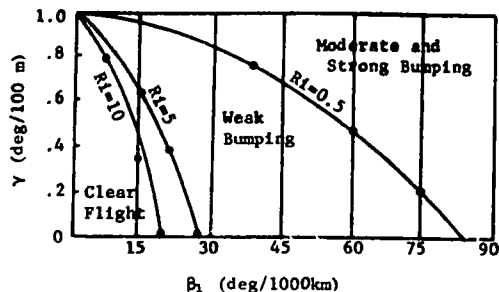


Fig. 19. Nomogram for forecasting bumpiness in flight (after Pinus, 1957).


in Fig. 19. The success of this technique is highly dependent on the relationship between CAT and R_i , which, as was seen in Section 5.4, is unreliable.

Following a study of 76 cases of severe CAT occurrence, Harrison (1959) proposed a set of forecasting rules. His rules are as follows:

- Rule 1. Severe CAT occurs in a layer of strong horizontal wind shear.
- Rule 2. Three out of four severe CAT occurrences are found to the left of the jet core facing downwind.
- Rule 3. CAT has a strong tendency to be associated with a meandering polar jet stream.
- Rule 4. About one severe CAT case in ten occurs between the polar and sub-tropical jet streams when they are in close proximity.
- Rule 5. At least one severe CAT case in 20 is mountain wave in origin.

The forecast procedures of United Air Lines are based upon these rules in addition to some modifications proposed by Harrison (1961) and Sorenson (1964). The UAL forecasting model is shown in Fig. 20. Figure 21 is the UAL mountain wave nomogram which is used for forecasting Type IV CAT occurrences. According to Sorenson, CAT zones also should be indicated in the following regions:

- 1. In troughs where horizontal shear is ≥ 40 kt per 150 n mi and the thermal gradient is steepening.
 - a.) Between the thermal trough and jet axis.
 - b.) In areas where the wind direction changes by 30° or more in 4° of latitude.

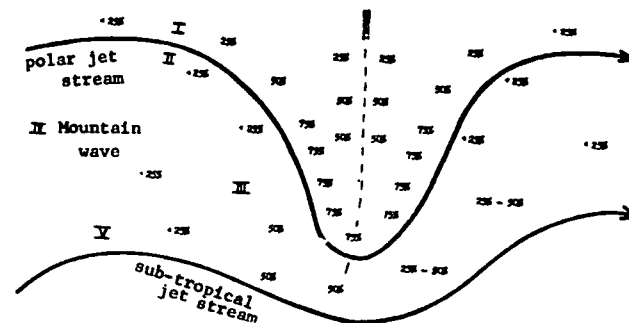

- 1. Horizontal wind shear should be 40 k/150 n mi
- 2. Vertical wind shear may be substituted for Types II and III (6 k/1,000 ft)
- 3. Use Fig. 21 for Type IV - Mountain Wave cases

Fig. 20. UAL CAT forecasting model - 1961 Revision

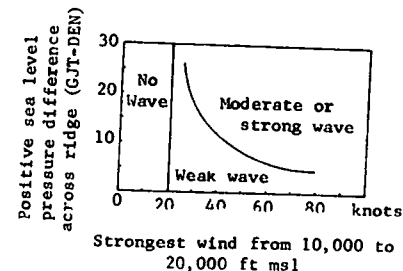


Fig. 21. UAL Mountain wave nomogram.

- c.) Ahead of the trough when southerly winds at 700 or 500 mb turn sharply eastward.
- d.) In areas of pronounced "undercutting".
- e.) In areas of cold advection at 200 mb.
- 2. In sharp ridges, when winds at LMW (level of maximum wind) are at least

- 40 kt and the radius of curvature at 700 or 500 mb is smaller than 4° of latitude (and tending to sharpen further). Include the area 3° of latitude on either side of the ridge line with the required curvature.
3. In tightening thermal gradients along mountain ranges when winds are nearly normal to the range.
 4. Limit CAT to 3,000 ft above the tropopause (5,000 ft over mountain areas) unless significant thermal convergence is occurring above these limits.

Vertical wind shear has been incorporated into a technique proposed by George (1961). His investigations show that in severe CAT cases, it is usually possible to draw smooth isolines connecting equal altitudes of the base of significant shear layers. Wind shears greater than 6 kt per 1000 ft are deemed as being significant. George has found that severe CAT occurs where large gradients of horizontal wind shear (50 kt per 150 n mi) cross the centers of the vertical shear isotachs (defined as the inner two closed isotachs when drawn for intervals of 3 kt per 1000 ft). CAT usually occurs within a few thousand feet above the base of the vertical shear layer. George indicates that it is best to forecast CAT occurrence in a layer about 10,000 ft deep from 3,000 ft below to 7,000 ft above the base of the shear layer. The details of chart preparation to use this method can be found in Shell Aviation News, No. 273, March 1961.

The U.S. Weather Bureau (ESSA) issues CAT forecasts on the basis that there is more than a 50 per cent chance for moderate-severe CAT in areas of strong vertical vector shear where the atmosphere is unstable or rapidly becoming so (ESSA, 1966). Areas where these conditions are most likely to occur are:

1. To left of strong jet (one isotach ≥ 125 kt at 300 mb) looking downstream between the trough and upstream ridge where the averaged vertical scalar shear is greater than 6 kt per 1000 ft. This area is most likely to have moderate or greater CAT when on the latest 300 mb chart, an area of cold air advection also is indicated as impinging on the left side of the jet stream.
2. In the confluent region between two jet cores where the cores are less than 5° of latitude apart.
3. In sharp, V-shaped troughs which slope rapidly with elevation below 300 mb.
4. In the "neck" of cut-off lows.
5. To the right (looking downstream) of strong anticyclonically curved jet streams.

6. Over mountain ranges, when the jet core crosses at right angles to the major axis of the range, and winds at the top of the mountain are at least 25 kt.

6.3 Forecasting CAT by Numerical Methods

The techniques of predicting CAT by numerical methods generally fall into two groups. One group utilizes automated procedures to compute various quantities such as R_i , static stability, etc., from current upper-air data. Forecasts are then based upon the currently existing situation. The CAT Forecast Section of AWS utilizes R_i as an indicator of CAT, and areas within isopleths of $R_i \leq 1.0$ are assumed to locate the probable area of CAT for the following 12 hours (Kronebach, *op. cit.*).

The second group of forecasts is based upon the prognosticated values of atmospheric parameters. Various parameters such as vertical shear, R_i , and vertical wind speed are computed over a grid network. Forecasts for turbulence are then made on the basis of statistical correlations between CAT and the various parameters (Endlich and Mancuso, 1965b).

Numerical techniques generally are favorable from the standpoint of both speed and accuracy. The techniques are highly dependent, however, upon the atmospheric model that is employed (see e.g., Shuman and Hovermale, 1968), the input data, and of course, upon the various statistical correlations used in making the forecasts.

6.4 Other Methods

A method of making short-period warnings over mountainous terrain recently has been proposed by Foltz (1967). The method is predicated on the assumption that CAT with "wavelengths" of approximately 100 m is caused by unstable gravity waves. Foltz further assumes that the turbulence is isotropic and that the energy spectral distribution follows the "-5/3 law" over wavelengths of 0.05 to 20 km. Utilizing various aspects of the theory of air flow over mountains (see Krishnamurti, 1964b), Foltz derives an expression for the maximum vertical velocity to be expected in a lee wave with wavelength λ (Reiter and Foltz, 1967), viz.,

$$v_o \approx \frac{2nHb}{e^{kb}} u_1 \frac{4r^2 A}{\lambda} \quad 6.4(1)$$

In this equation, w_0 is the vertical velocity (maximum), h the mountain height, b the half-width of the mountain, u_1 the wind speed at gradient-wind level, and k the wave number ($k = 2\pi/\lambda$). The parameter A is equal to $\tan^2 \alpha (\eta \pi - \alpha - \tan \alpha)^{-1}$, where α is an angle between 0 and 90 deg (Corby and Wallington, 1956), and η is a positive integer greater than zero. Reiter and Foltz show that A is approximately equal to 1 (maximum value) when $\alpha \approx 65$ deg, and $\eta = 1$. Hence, all the parameters in Eq. 6.4(1) can be estimated using topographic maps, synoptic charts, and satellite photographs (to determine λ , which might also be determined visually). Figure 22 is a nomogram used in conjunction with Eq. 6.4(1) to determine the intensity of CAT associated with mountain wave activity. The spectra for various intensity levels of CAT, extrapolated with "-5/3 slope" to lee-wave lengths, are shown in Fig. 23.

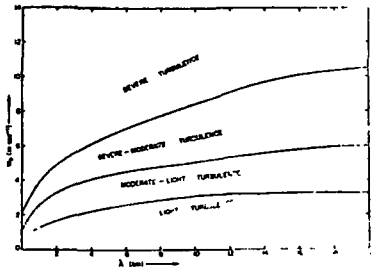


Fig. 22. Forecast degree of CAT. When the maximum vertical velocity in the lee wave is determined from Eq. 25 and the lee wavelength is determined from $\lambda = 2\pi/k$, the degree of CAT can be determined from this graph (after Foltz, 1967).

Reiter (1964a) has suggested that forecast procedures might be improved significantly if we: a) first look for physical causes of CAT rather than for multi-discriminate correlations with atmospheric parameters, and b) as a second step, search for a combination of parameters that might bring about the necessary conditions to make the physical causes effective. But, as pointed out by Reiter and Foltz (1967), we will never be able to pin-point isolated patches of turbulence in space and time because of the vast difference of scales involved in the forecasting problem.

6.5 Evaluation of Forecast Methods

Sorenson (1964) has summarized the problems affecting most techniques of forecasting CAT. The problems are that the techniques

1. over-forecast to a large extent (so as to be certain of "hitting" the areas of CAT),
2. miss some important areas of turbulence and
3. are based on symptoms rather than causes.

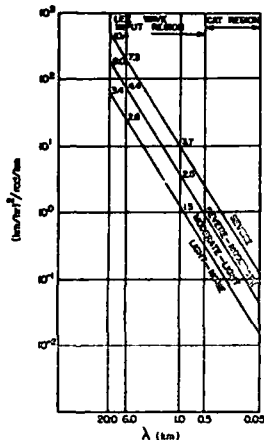


Fig. 23. Spectra of lee wave energy. The values entered on the spectral curves of -5/3 slope are the maximum vertical velocities contained in the lee waves in $m \text{ sec}^{-1}$ at the lee wavelength necessary to result in the level of energy (w component) in the CAT wavelength region to cause various degrees of CAT (after Foltz, 1967).

7. THEORIES OF CAT

To the present day, no single theory is fully capable of explaining the phenomenon of CAT. There are several reasons why this is so. First, if by CAT one means "bumpiness in flight through clear air" (Reiter, 1962e), the physical nature of the phenomenon is multi-faceted. Atmospheric motions which affect aircraft are known to occur under both stable and unstable flow regimes. They also occur under conditions of both laminar and turbulent flow. Second, truly turbulent flow in clear air may at times be of a scale so as to be completely unimportant to aerospace vehicles. But, CAT of this scale can be, and is, important to the astronomer, radio engineer, and others (see Section 1.).

Before going into the various theories which have been advanced to explain CAT, a distinction must be made between turbulence and undulance. The motion of a fluid particle in an undulating medium can be described rather specifically, while in a turbulent medium, the motion can be described only in statistical terms. Furthermore, the process of diffusion is not caused by undulance (Hildreth *et al.*, 1963). Another important difference between the two is that, under conditions of static stability, undulant flow can persist whereas turbulence is greatly inhibited (Lumley and Panofsky, 1964). According to Hildreth *et al.* (1963), undulance can be induced in the atmosphere by one or more of the following:

- a.) flow over mountains,
- b.) convective activity in adjacent layers, and
- c.) shear flow across a stable layer.

The mechanisms which produce turbulence are as follows:

- a.) mechanical stirring caused by the flow of air over terrain or other "rough" surfaces,
- b.) convection caused by differential heating or cooling, and
- c.) instability in shear flow.

From the foregoing, then, it appears that the applicability of any one CAT theory is dependent upon several factors. These factors seem to be one's definition of CAT and the specific area of application.

The theories which have been advanced to explain the occurrence of upper-level turbulence can be put in one of three broad classes:

- a.) theories of turbulent fluid flow,
- b.) theories of dynamic or inertial instability, and

c.) theories of wave instability.

Airflow of an undulant nature is treated by means of wave theory.

7.1 Turbulent Flow of Fluids

The study of turbulence in fluids is due in large part to Osborne Reynolds (Brunt, 1952). Assuming an incompressible fluid, Reynolds concluded that the kinetic energy of the turbulent motion would increase, be stationary, or diminish depending on whether the rate at which work is done by the eddy stresses is greater than, equal to, or less than the rate at which work has to be done to maintain the turbulence against the stabilizing forces (Lamb, 1945). Reynold's theory of the criterion of turbulence was extended to the atmosphere by Richardson (1920). The Richardson number and many of its limitations were discussed earlier in Section 5.4.

The Richardson number has been modified by several workers to account for factors which were omitted in its original derivation. Dugstad (1958a) investigated the effects of horizontal wind shear and the dynamic stability of the mean flow on Richardson's criterion. With the inclusion of these two aspects of fluid flow, Dugstad shows that the general criterion for increasing turbulence is given by

$$(G-A)\tan^2\alpha - 2(B+C-F)\tan\alpha + H-D > 0, \quad 7.1(1)$$

where:

- A = $C_e g T^{-1} (\partial T / \partial z + \Gamma_d)$
- B = $C_e g (2T)^{-1} (\partial T / \partial x)$
- C = $\frac{1}{2} \mu_e (f + 2Vr^{-1}) \partial V / \partial z$
- D = $\mu_e (f + 2Vr^{-1}) (f + \partial V / \partial x + Vr^{-1})$
- F = $\frac{1}{2} \mu_e (f + 2 \partial V_\theta / \partial r) \partial V_\theta / \partial z$
- G = $\mu_e (\partial V_\theta / \partial z)^2$
- H = $\mu_e (f + \partial V_\theta / \partial r + V_\theta r^{-1}) (\partial V_\theta / \partial r - V_\theta r^{-1})$
- f = Coriolis parameter = $2 \Omega \sin \phi$, where Ω is Earth's angular velocity
- l = characteristic mixing length
- r = radius of curvature of mean flow
- α = angle between the x-axis and l (xz-plane)
- θ = azimuth angle of cylindrical coordinate system
- V_θ, V_r = tangential and radial velocities, respectively
- C_e = eddy conductivity in direction of l

μ_e = eddy viscosity along l
 g = acceleration of gravity
 Γ_d = dry-adiabatic lapse rate of temperature.

Special cases also are given by Dugstad. Specifically, he shows that the criterion for isotropic turbulence is given by

$$\left(\frac{\partial v_\theta}{\partial z}\right)^2 + \left(f + \frac{\partial v_\theta}{\partial r} - \frac{v_\theta}{r}\right) \left(-f + \frac{\partial v_\theta}{\partial r} - \frac{v_\theta}{r}\right) > \frac{C_e}{\mu_e} \frac{g(\partial T}{\partial z} + \Gamma_d) \quad 7.1(2)$$

This equation is quite similar to the Richardson number with the exception of the second term on the left-hand side. For vertical turbulence, Dugstad's criterion is identical to that of Richardson's (see Eq. 5.4(1)).

As mentioned in Section 4.41, observations have shown that there may be an increase in the frequency of CAT within stable and baroclinic layers. This is clearly contradictory to the implications of Richardson's criterion. Pinus (1957), Reed (1960), Reiter (1963), and others have shown that, by combining the thermal wind equation with Ri, one arrives at

$$Ri^* = f^2 \theta (g \partial \theta / \partial z)^{-1} [(\partial z / \partial n)_\theta - (\partial z / \partial n)_p - (\theta / g)(\partial \bar{v} / \partial \theta)]^{-2}, \quad 7.1(3)$$

where θ is potential temperature, n is the coordinate measured normal to the wind current, the subscripts θ and p indicate differentiation on isentropic or isobaric surfaces, respectively, and \bar{v} is the acceleration of the vector wind, and Ri^* is a modified Richardson number. Other symbols used in the equation follow standard notation. The term $\partial \bar{v} / \partial \theta$ is extremely difficult to measure and $(\partial z / \partial n)_p$ is usually small in comparison to $(\partial z / \partial n)_\theta$. Hence, if we neglect these terms, we get a simplified form for Ri^* which states that perturbations are likely to amplify in stable and baroclinic layers, viz.,

$$Ri^* \approx \frac{f^2 \theta}{g(\partial \theta / \partial z)(\partial z / \partial n)_\theta} \quad 7.1(4)$$

It should be noted that this equation goes far beyond the original assumptions made by Richardson, in that broad-scale flow has been introduced, i.e., inertia effects are now important.

Scorer (1969) and Badgley (1969) have discussed the changes in Ri associated with broad-scale flow. The conclusion reached by Scorer is that the greatest decreases in Ri occur where air with positive shear ($\partial v / \partial z > 0$) is decelerated and flows upslope, or where air with negative shear is decelerated while flowing downslope. Badgley reaches the same conclusion whereby he suggests that breeding places for CAT might well be regions where the air is descending and spreading out normal to the positive shear vector and simultaneously slowing up in the direction of the negative shear vector.

Another stability criterion which is applicable in the vicinity of the jet-stream has been derived by Sasaki (1958); this incorporates the curvature of the vertical profiles of wind and temperature. The criterion can be written as

$$S_1 \equiv \Delta T + \Gamma - m_1 \Delta v^2 \begin{cases} < 0 & \text{unstable} \\ > 0 & \text{stable} \end{cases} \quad 7.1(5)$$

where m_1 is a statistical factor $(\bar{T} / g \Delta T)(K_m / K_H)$ equal to 0.0198 °C/kt² (empirically determined). After the manner of Reiter (1963), S_1 can be used to investigate the conditions of critical flow at the tropopause and at the level of the jet stream. Use is made of the following definitions:

$$\tau_1 \equiv \overline{\Delta T} + 2m_1 \overline{\Delta v} (\overline{\Delta \Delta v})$$

and

$$j \equiv \overline{\Delta \Delta v} = \frac{\Delta v_{+1} - \Delta v_{-1}}{2}$$

where the subscripts +1, 0, and -1 refer to the upper, middle, and lower layers of a three-layer model of the atmosphere. Furthermore, $\Delta v_{+1} \equiv v_{+1} - v_0$ and $\Delta v_{-1} \equiv v_0 - v_{-1}$. With this notation, the results of Sasaki may be summarized as follows:

- 1.) At the tropopause, $|\tau_1| > m_1 j^2$, for which $0 < S_1 < m_1 j^2$ implies stability and $S_1 < 0$ implies instability.
- 2.) At jet-stream level $|\tau_1| < m_1 j^2$ so that stable conditions exist for $m_1 j^2 - |\tau_1| < R < m_1 j^2$ and unstable conditions for $R < m_1 j^2 - |\tau_1|$.

7.2 Dynamic (Inertial) Instability

Dynamic instability has been used to explain the occurrence of CAT in regions of strong horizontal and vertical wind shears (Arakawa 1951, 1953, 1958; Kao, 1964). If a fluid particle, embedded in a broad geostrophic current, is originally in a stable state, it will describe oscillations about its equilibrium state if removed from its equilibrium position. The period of the oscillations described by the particle in this stable state will be $T = 2\pi/f = \frac{1}{2}$ pendulum day (Hess, 1959). Conditions may exist, however, in which a fluid particle moving into certain flow configurations will experience unstable accelerations. Under these conditions, any small perturbation may amplify rapidly and finally break down into turbulence.

Solberg (1939) has discussed the vanishing of absolute vorticity in the case of transition to instability (also see Kleinschmidt, 1941, Van Mieghem, 1944a,b, 1945, 1946, 1948, 1950). The vertical component of the absolute vorticity η in a zonal current is given by

$$\eta = -\frac{\partial u}{\partial y} + f + \frac{u}{R} \tan \phi \quad 7.2(1)$$

where y is the meridional coordinate pointing northward, f the Coriolis parameter, u the speed of the west wind, R the radius of Earth, and ϕ the latitude. With neglect of the last term in 7.2(1), the stability criterion becomes

$$f - \left(\frac{\partial u}{\partial y}\right) \begin{matrix} > 0 & \text{stable} \\ = 0 & \text{neutral} \\ < 0 & \text{unstable,} \end{matrix} \quad 7.2(2)$$

for the anticyclonic side of strong jet streams. Dynamic instability also is possible on the cyclonic side of the jet-stream according to the criterion developed by Arakawa (1951). According to his theory, the critical cyclonic shear is given by

$$-\frac{\partial u}{\partial y} = \omega \sin \phi + \frac{2u}{R} \tan \phi, \quad 7.2(3)$$

in which ω is the angular velocity of Earth. Arakawa (1958) has also shown that dynamic turbulence is related to a critical value of the vertical gradient

of wind speed. He gives as the critical negative wind shear (wind speed decreasing with height) the following approximate relationship

$$\frac{\partial u}{\partial z} = -f \cot \phi - \left(\frac{\partial T}{\partial z} + \Gamma\right) \frac{R}{fT} \tan \phi, \quad 7.2(4)$$

where T , Γ , and g are the temperature, dry-adiabatic lapse rate, and acceleration of gravity, respectively.

The instability criterion of Arakawa expressed by Eq. 7.2(3) has been disputed by Kao (1964). Using energy considerations and the assumption that the motion of a fluid will be stable or unstable if the change of the eddy kinetic energy is increasing or decreasing with time, Kao found that the stability criterion can be given by

$$-\langle u'v' \rangle \left(\frac{1}{r} \frac{\partial \bar{u}}{\partial \phi} + \frac{\bar{u}}{r} \tan \phi \right) - \langle u'w' \rangle \left(\frac{\partial \bar{u}}{\partial r} - \frac{\bar{u}}{r} \right) + \frac{g}{T} \langle w'T' \rangle \begin{matrix} > 0 & \text{unstable} \\ < 0 & \text{stable} \end{matrix} \quad 7.2(5)$$

The various quantities in 7.2(5) are defined as follows:

u', v', w' : perturbation wind speeds positive to the west, north, and vertically upward, respectively; and

r, ϕ : radial and latitudinal coordinates of a spherical coordinate system.

Quantities within $\langle \rangle$ are time integral values and barred quantities are average values. If the perturbation value of the vertical velocity is equal to zero, i.e., $w' = 0$, Kao shows that the stability criterion is given by

$$\left(\frac{1}{r} \frac{\partial \bar{u}}{\partial \phi} + \frac{\bar{u}}{r} \tan \phi \right) \left(\frac{1}{r} \frac{\partial \bar{u}}{\partial r} - f - \frac{\bar{u}}{r} \tan \phi \right) \begin{matrix} > 0 & \text{unstable} \\ < 0 & \text{stable} \end{matrix} \quad 7.2(6)$$

For a positive vortex (westward-flowing zonal current) with positive lateral velocity shear toward the pole, Eq. 7.2(6) becomes

$$\frac{1}{r} \frac{\partial \bar{u}}{\partial \phi} > f + \frac{\bar{u}}{r} \tan \phi \begin{matrix} \text{unstable} \\ \text{stable} \end{matrix} \quad 7.2(7)$$

and with negative lateral velocity shear toward the pole, the criterion is

$$\frac{1}{r} \frac{\partial \bar{u}}{\partial \phi} < -\frac{\bar{u}}{r} \tan \phi \quad \text{unstable} \\ \frac{1}{r} \frac{\partial \bar{u}}{\partial \phi} > -\frac{\bar{u}}{r} \tan \phi \quad \text{stable} \quad . \quad 7.2(8)$$

Equation 7.2(7) is equivalent to the criterion of Solberg and Klienschmidt (7.2(2)), but Eq. 7.2(8) differs considerably from that of Arakawa, 7.2(3). Dugstad (1958a) has shown also that Arakawa's criterion, expressed by 7.2(3), is in error. For geostrophic flow conditions, the critical wind shears of Arakawa would be $\partial v_g / \partial r = -f$ and $\partial v_g / \partial r = \frac{1}{2} f$, which quite clearly are physically impossible.

7.3 Atmospheric Wave Motions

The hydrodynamic equations of motion hold a wealth of information from which an explanation for a wide range of physical phenomena may be derived. Mathematical solutions for most problems of dynamic meteorology are exceedingly difficult to obtain for a variety of reasons, viz., non-linearity of the differential equations, correctly specified boundary conditions, incomplete specification of the problem, etc. The difficulty arising from nonlinear equations can be overcome for a wide range of problems by applying the method of perturbations (see, e.g., Bjerknes et al., 1933; Haurwitz, 1941, 1951). The method of perturbations "linearizes" the nonlinear equations through the assumption that atmospheric motions consist of small perturbations superimposed on a steady, mean field of flow. Several simplifying assumptions (see Appendix II) about the mean flow field permit the resulting perturbation equations to have solutions that have the form of waves. Problems involving sound waves, gravity waves, waves in the upper westerlies, shearing waves, and flow over hills and mountains have been solved successfully using perturbation techniques.

A wave traveling in the x-direction with phase velocity c and not undergoing a change in shape can be represented mathematically by $A \cos k(x-ct)$ or $A \sin k(x-ct)$, where A is the amplitude of the wave, k the wave number (equal to $2\pi/\lambda$), λ the wave length, and t the time. Simple harmonic waveforms like the above can be generalized to allow A, c, and k to be functions of time as well as of other coordinate directions (Kasahira, 1967). Another, and in many ways more useful, wave function has the form

$$A \exp ik(x-ct), \quad 7.3(1)$$

in which $\exp = e$, the base of the natural logarithms, $i = \sqrt{-1}$, and A, x, c, and t are the same as defined above. The phase velocity, c, in 7.3(1) may be complex, i.e.,

$$c = c_r + ic_i \quad 7.3(2)$$

in which case, the wave function takes the form

$$A \exp [kc_i t] \exp [ik(x-c_r t)]. \quad 7.3(3)$$

The factor, $\exp [kc_i t]$, determines whether the wave form is stable, neutral, or unstable according to the following:

$$c_i > 0 \quad \text{amplified waves, unstable,} \\ c_i = 0 \quad \text{neutral waves, and} \\ c_i < 0 \quad \text{damped waves, stable.}$$

The rate of amplification for those cases where $c_i > 0$ is important since very small amplification would represent little development (Haltiner and Martin, 1957). A convenient measure of wave instability is the doubling time, which is the time required for the amplitude of a wave disturbance to double its magnitude.

7.31 Gravity Waves

Gravity waves are an example of wave motion in a single layer. The assumptions used to obtain a mathematical description of these waves include: (1) fluid is incompressible, (2) coriolis force and friction are neglected, (3) wave motion is two-dimensional, and (4) only the undisturbed fluid is in hydrostatic equilibrium. Under these conditions, gravity is the prime restoring force. It should be noted that in this system, no vorticity can be created and, since the undisturbed motion has no vorticity, the wave motion is irrotational.

Pure gravity waves are stable as long as the wave height is small, but they may be unstable if the undisturbed fluid velocity is a nonlinear function of height. The speed of gravity waves depends on the wavelength, λ , and on the thickness, h, of the fluid in which they occur. Wave speed may be calculated from the solution of the perturbation equations, which is given by

$$c = U \pm \left(\frac{g\lambda}{2\pi} \tanh h \frac{2\pi h}{\lambda} \right)^{\frac{1}{2}} \quad 7.31(1)$$

In this equation, c is the wave speed and U is the velocity of the undisturbed fluid. If the fluid depth exceeds the wave length by about 60 per cent, then, the wave speed is very closely approximated by

$$c \approx U \pm \left(\frac{g\lambda}{2\pi} \right)^{\frac{1}{2}} \quad 7.31(2)$$

Another special case exists for the case in which λ is much larger than h , i.e., $h < \lambda/25$. These are the conditions for long waves in a shallow ocean or atmosphere and the wave speed can be calculated from

$$c \approx U \pm (gh)^{\frac{1}{2}} \quad 7.31(3)$$

Pure gravity waves are of little interest in the formation of CAT because of their relatively long wave length and the fact that they are stable. However, it must be realized that a complete spectrum of waves is possible through superposition and interference patterns by a number of gravity waves and by gravity waves interacting with other small-scale waves.

7.32 Waves on a Surface of Discontinuity

A great deal of evidence has been collected which tends to show that CAT is associated with waves forming on stably stratified interfaces. Observations by Reiter (1962a,b), Endlich (1964), Reiter and Nania (1964), Reiter and Burns (1966), and many others support this contention.

The waves forming on the boundary separating two layers having different wind speeds are called shear waves. These waves are always unstable, as can be seen from Eq. 7.32(1). If the densities in the two layers also are different, the resulting waves are called shear-gravity waves. The phase velocity of shear-gravity waves in an incompressible fluid is given by

$$c = \frac{\rho U + \rho' U'}{\rho + \rho'} \pm \left\{ \frac{g\lambda}{2\pi} \frac{\rho - \rho'}{\rho + \rho'} - \frac{\rho \rho' (U - U')^2}{(\rho + \rho')^2} \right\}^{\frac{1}{2}} \quad 7.32(1)$$

The primed symbols in this equation refer to the upper fluid.

Shear-gravity waves are automatically unstable if the uppermost fluid is more dense than the lower. These waves also may be unstable if the wind shear, $U - U'$, is sufficiently large so as to make the radical in Eq. 7.32(1) imaginary. The critical wave length for which the latter condition may arise is found by equating the last term in Eq. 7.32(1) to zero. Hence, λ_{crit} is given by

$$\lambda_{crit} = \frac{2\pi}{g} \frac{(U - U')^2 \rho \rho'}{\rho^2 - \rho'^2} \quad 7.32(2)$$

Reiter (1962e) uses temperature, T , instead of density to obtain values of λ_{crit} , viz.,

$$\lambda_{crit} = \frac{2\pi}{g} \frac{(U - U')^2 T T'}{(T' + T)(T' - T)} \quad 7.32(3)$$

If we let $\bar{T} = (T + T')/2$, $\Delta T = T' - T$, $\Delta U = U - U'$, and note that $\frac{1}{2}(\Delta T)^2 < \bar{T}^2$, then, Eq. 7.32(3) can be written as

$$\lambda_{crit} = \frac{\pi}{g} \left\{ \frac{(\Delta U)^2 \bar{T}}{\Delta T} \right\} \quad 7.32(4)$$

Table 9 shows the sensitivity of λ_{crit} on vertical wind shear for different discontinuities of temperature (after Reiter, 1962c). The dependence of Eq. 7.32(4) on the meso-structure of the atmosphere clearly shows that the patchy nature of CAT can be explained by shear-gravity waves.

Table 9. Vertical wind shear ΔU (m/sec) for different temperature discontinuities and critical wave lengths at an interface (after Reiter, 1962c).

ΔT	$L_c = 200$ m	$L_c = 100$ m	$L_c = 50$ m
2°	2.3 m/sec	1.6 m/sec	1.2 m/sec
4°	3.3	2.3	1.6
6°	4.0	2.9	2.0
8°	4.7	3.3	2.3
10°	5.2	3.7	2.6

Stable waves of the shear-gravity type also may be responsible for aircraft-observed CAT. Because of their short wave length, an aircraft "plowing" through these waves could well experience vertical accelerations of the order produced by true turbulence or gusts (Reiter, 1962e).

It should be noted that shear-gravity waves are not dependent on terrain features for their initiation. That this is true has been shown by the observation of billow clouds over relatively level terrain (Haurwitz, 1941; Ludlam, 1967).

7.33 Mountain Waves

As observed by Harrison (1959), at least one case in 20 of severe CAT is associated with wave formations in the lee of mountains. All mountain waves are not turbulent as evidenced by numerous pilot reports (Alaka, 1958); however, extremely strong vertical and horizontal gusts have been observed (Colson, 1954; Dutton, 1967). Typically, the mountain wave is evidenced by the occurrence of several types of clouds, particularly the cap cloud, the rotor cloud, and the lenticular (Moatzogtl) cloud. Occasionally, if the air is very dry, waves may exist without the presence of any clouds. Figure 24 is a schematic presentation showing typical flow and cloud patterns associated with mountain waves. An example of the atmospheric structure observed during the "Sierra Wave Project" is shown in Fig. 25. (Holmboe and Klieforth, 1957).

The effect of mountains on the air flow at great heights, as evidenced by wave patterns in nacreous clouds, has been reported by Dieterichs (1950), Palm and Foldvik (1960), and others. As previously indicated, the mountain effect has even been detected in the ozonosphere (Paetzold and Zschorner, 1955).

The framework for the theoretical treatment of airflow over mountains was begun in the 1880's by Rayleigh (1883) and Kelvin (1886). It was not applied to the atmosphere, however, until the 1940's when theories were offered by Lyra (1940) and

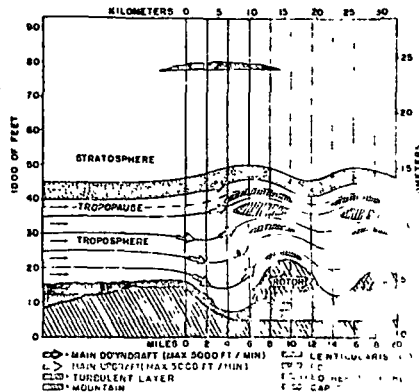


Fig. 24. Cross section of conditions associated with a typical mountain wave (after Jenkins, 1958).

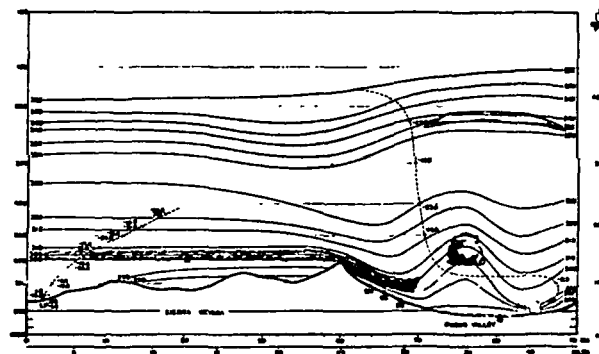


Fig. 25. Vertical cross-section at 1000P December 18, 1951 from Sequoia to the western slope of the Inyo Mountains. Isentropes are drawn for every 5°C. Both T and T₀ are plotted for the Lodgepole (Sequoia) sounding. Locations of barograph stations are shown by small circles. Dashed lines indicate the paths of the Radiosonde balloon and of flight 2006. The ratio of the vertical scale to the horizontal is 2.5 to 1 (after Holmboe and Klieforth, 1957).

Queney (1947). In 1949, Scorer (1949) investigated a two-layer model of the atmosphere in which he permitted a vertical variation of wind and temperature. Other theoretical work on the mountain-wave problem has been done by Holland (1951), Wurtele (1953), Long (1953a,b, 1958), Palm (1958), Krishnamurti (1964a), Das (1964), and many others. A detailed summary of this work, plus many other aspects of the problem, may be found in reviews by Corby (1954), Queney *et al.* (1960), Krishnamurti (1964b), and Alaka (1958).

The works of Scorer (1949, 1951a,b,c, 1953a,b, 1954a,b, 1955, 1957, 1958a, b, 1959), Corby (1954), Corby and Wallington (1956), Corby and Sawyer (1958), and Scorer and Klieforth (1959), to name a few, reveal some of the properties of the mean flow over mountains that are necessary (but not sufficient) for the perturbation wave solutions to contain lee waves. These properties can be determined relatively easily from radiosonde data and, hence, are important in a practical as well as theoretical sense.

Disturbances of the size applicable to the mountain-wave problem are described by the wave equation,

$$\frac{\partial^2 \psi}{\partial z^2} - A \frac{\partial \psi}{\partial z} + (k^2 - k^0) \psi = 0, \quad 7.33(1)$$

where $A = gC^{-2} + \beta$, C is the speed of sound, β the vertical stability, and Y is a stream function. k^2 is known as the "Scorer parameter" and is equal to

$$\frac{g\beta}{U^3} - \frac{1}{U} \frac{\partial^2 U}{\partial z^2} \quad 7.33(2)$$

The "Scorer parameter" characterizes the dynamic properties of the atmosphere at each level.

Scorer found that standing lee waves are possible only if k^2 is less in some fairly-deep upper layer than in a layer below. For wave formation, the two-layer model requires that the decrease in k^2 from the lower layer to the upper layer should attain a certain minimum magnitude. This magnitude is dependent on the depth of the lower layer, h , with the limiting condition given by

$$k_L^2 - k_U^2 > \frac{\pi^2}{4h^2} \quad 7.33(3)$$

The condition that k^2 decrease with height may be met by a wide range of vertical profiles of wind and temperature. Figure 26 gives an example of the

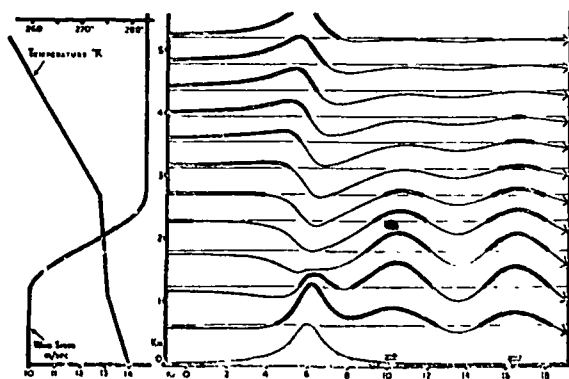


Fig. 26. An example of a train of lee waves. k is greater in the lower layers than higher up. Each streamline may contain many wave crests. (After Scorer, 1944).

streamline pattern computed by Scorer, using the wind and temperature profiles shown on the left of the figure. Corby and Wallington (1956) have shown that for identical k^2 profiles, the largest amplitude waves are produced by strong winds at the surface (mountain top). Large amplitude waves are associated with narrow but steep obstacles and also with long waves which fulfill the requirement specified by Eq. 7.33(3).

Turbulence associated with lee waves has been discussed theoretically by Scorer (1954b, 1955, 1959, 1969), Scorer and Wilson (1963), Reiter (1963), and Pao (1969). General discussions of mountain wave turbulence with emphasis on aviation aspects can be found in Jenkins (1952), Corby (1954), Alaka (1958) and Queney *et al.* (1960).

8. THE REMOTE DETECTION OF CAT

Aviation interests have long sought means whereby advanced warning of the location and/or probable occurrence of CAT may be obtained. Since all present-day forecasting techniques essentially are probabilistic in nature, numerous airborne and land-based, passive and active systems have been devised to obtain the desired forewarning. Paulsen (1966) has listed the techniques which have been investigated or which offer practical utility in the near future:

- a. sonic techniques,
- b. stellar scintillation or microwave scintillation techniques,
- c. infrared and microwave radiometry,
- d. low-frequency radar,
- e. microwave radar,
- f. optical-laser radar, and
- g. electric-field and corona-discharge techniques.

8.1 Passive Techniques

Kadlec (1964, 1966) has discussed the possibility of using inflight sensors to detect horizontal changes in the ambient temperature. This technique is based on thermal gradients supposedly associated with the atmospheric structure in the neighborhood of CAT. Reiter (1963), McLean (1965), and Atlas (1969) have shown that this method is highly unreliable. Techniques using infrared and microwave radiometers have been proposed by Astheimer (1965), Norman and Macoy (1966), and others. These methods obtain integrated path temperatures over paths whose lengths vary as a function of the proximity of the instrument's center frequency to the peak of an appropriate absorption band (Paulsen, 1966). From these measurements a discontinuity of temperature in the flight path of the aircraft can be computed. CAT warnings then are based on the assumption that CAT is associated with these discontinuities. This technique has been evaluated by Mather (1967), Flint (1958, 1969), and Weiss (1968). The results are similar to those obtained by direct temperature sensing, i.e., highly unreliable.

Other passive systems are based on the method of measuring optical and microwave scintillations of stars (Greene et al., 1966; Fried, 1968). These methods suffer from the limitation of being useful only during the night or at least during the time that star fields can be observed (Atlas, 1969).

Observations of coronal discharge have been correlated with CAT by Nanevich et al., (1966). A significant correlation was found to exist between CAT encounters and periods of electrical discharge. A somewhat similar technique

seen investigated by Ten Brook and Seashore (1966). They, however, have queried the possible relationship between CAT and atmospheric quasi-electrostatic fields. Initial results for both of these techniques seem promising.

Active Techniques

The use of radar to detect CAT shows the most promise of any method tested in the past few years. Echoes from CAT arise because of scattering caused by variations in the refractive index. The intensity of the echo depends on the magnitude of the mean gradient of refractive index and, in a complex manner, the intensity of the turbulence (Hicks et al., 1967). The theoretical basis for CAT detection by radar has been discussed by numerous workers (Stewart, 1961; Bates Zirkle, 1966; Atlas et al., 1966; Atlas and Naito, 1966; Hardy et al., Hicks et al., 1967; Stevens and Reiter, 1967; Buehler et al., 1968; 1968; Hardy and Ottersten, 1968). Simultaneous observations of CAT by radar and aircraft (Hicks et al., 1967) have confirmed the possibility of using radar as a forewarning tool.

Optical radars and laser measurements also have been proposed for use in CAT detection (Collis, 1964; Gibson, 1966; Brece et al., 1966; Zirkle, 1966). Both optical and radar methods involve spectral analysis of the doppler shift of light back-scattered by moving particles in the atmosphere. From these measurements, the average magnitude of gusts and the gust spectrum of the gust components can be obtained. Another approach involves the mapping of CAT formations and relating these patterns to rough flying conditions (Atlas, 1966).

Measurements of atmospheric winds, and hence various gust components, also can be accomplished by tropospheric radio scatter (Atlas, 1969). As indicated by Atlas (1969), tropo-scatter systems provide enhanced signal levels over conventional radar systems. This advantage means that a CAT warning system based on this technique would be highly reliable.

Most of the systems covered in this section can be used in either a ground-based or airborne operation. The state-of-the-art ultra-sensitive radar can be used only from the ground, however. Atlas et al., (1966) have shown that a 100% improvement in the best airborne radar is needed to detect most CAT. This improvement in sensitivity would permit CAT detection at a range of approximately 100 miles, although not with 100 per cent confidence (Atlas, 1969).

An excellent collection of papers on the individual methods discussed in this section may be found in two bound works:

- a.) ION/SAE Conference Proceedings, 1966; Society of Automotive Engineers, Inc., 485 Lexington Ave., New York, New York 10017.
- b.) Clear Air Turbulence and Its Detection. Pao and Goldburg, Editors, Plenum Press: New York, 1969.

ABBREVIATIONS FOR REFERENCES

- Astronautics and Aeronautics
- Aerospace Engineering (Astronautical/Aerospace Engineering)
- Aeronautical Engineering Review, New York
- Air Force Cambridge Research Center, Cambridge Massachusetts
- Air Force Cambridge Research Laboratories, Cambridge, Massachusetts
- Air Force Flight Dynamics Laboratory, Wright-Patterson AFB, Ohio
- Air Force Surveys in Geophysics, Cambridge Research Center
- Annalen der Hydrographie, Berlin
- American Institute of Aeronautics and Astronautics
- Annalen der Meteorologie, Hamburg
- Archiv Fur Meteorologie, Geophysik und Bioklimatologie, Serie A, Wien
- Australian Meteorological Magazine, Melbourne
- American Meteorological Society, Boston
- Air Weather Service, U.S. Air Force, Scott AFB, Illinois
- Atmospheric Science (Technical) Paper
- Bulletin of the AMS, Boston
- Bulletin of the Academy of Sciences, U.S.S.R., Geophysics Series
- Berichte des Deutschen Wetterdienstes, Offenbach
- British European Airways
- Beitrage zur Physik der (frei) Atmosphere, Frankfort a.m.
- Boeing Scientific Research Laboratories, Seattle
- Compendium of Meteorology, AMS, Boston
- Colorado State University, Department of Atmospheric Science, Ft. Collins
- Meteorology Branch, Department of Transport, Technical Circular, Toronto
- Deutsche Versuchsanstalt fur Luft-und Raumfahrt, Munich
- Environmental Science Services Administration, Washington, D.C.
- Final Report
- Great Britain Meteorological Research Committee, London
- Glavnaia Geof. Observatory, U.S.S.R.
- Geofysiske Publikasjoner, Oslo
- Geophysics Research Directorate, AFCRC, Cambridge, Massachusetts
- Geophysical Research Papers, AFCRC, Cambridge, Massachusetts
- Hydrometeorological Publishing House, Moscow
- Izvestiia, Fizika Atmosfera i Okeana, Akademiia Nauk SSSR
- Indian Journal of Meteorology and Geophysics, Delhi

ION - Institute of Navigation
 ISC - Izvestia, Ser. Geof., Akademiia Nauk SSSR
 ISGC - Izvestia, Ser. Geograf. i Geof., Akademiia Nauk SSSR
 JA - Journal of Aircraft
 JAM - Journal of Applied Meteorology, AMS, Boston
 JAS - Journal of the Atmospheric Sciences, AMS, Boston
 JFM - Journal of Fluid Mechanics, Cambridge, England
 JGR - Journal of Geophysical Research
 JINL - Institute of Navigation, Journal, London
 JM - Journal of Meteorology, AMS, Boston
 JMR - Journal of Meteorological Research, Tokyo
 JRAS - Journal of the Royal Aeronautical Society, London
 LMS - London Mathematical Society, Proceedings, London
 MA - Meteorologiske Annaler, Oslo
 MM - Meteorological Magazine, London
 MR - Meteorologische Rundschau, Offenbach
 MRP - Meteorological Research Report
 MWR - Monthly Weather Review, Washington, D.C.
 N - Nature, London
 NAA - North American Aviation, Space and Information Systems Division
 NACA - National Advisory Committee on Aeronautics, Washington, D.C.
 NASA - National Aeronautics and Space Administration, Washington, D.C.
 NCAR - National Center for Atmospheric Research, Boulder, Colorado
 NRLR - Naval Research Laboratory Report
 NSSL - National Severe Storms Laboratory
 NYU - New York University
 PF - Physics of Fluids
 PM - Philosophical Magazine, London
 PnG - Papers in Meteorology and Geophysics, Tokyo
 PSU - Pennsylvania State University, University Park
 QJRMS - Royal Meteorological Society, Quarterly Journal, London
 RAE - Royal Aircraft Establishment, Farnborough, England
 RG - Reviews of Geophysics, Washington, D.C.
 RM - Research Memorandum
 RP - Research Paper
 RR - Research Report
 RSLA - Royal Society of London, Proceedings, Ser. A.

S - Science, American Association for the Advancement of Science, Washington, D.C.
 SAE - Society of Automotive Engineers, New York
 SP - Special Publication
 SR - Scientific Report
 SRI - Stanford Research Institute, Menlo Park, California
 T - Tellus, Stockholm
 TAM - Texas A&M (College) University, College Station
 TIP - Tsentral'naia Institut Prognozov, U.S.S.R.
 TM - Technical Memorandum
 TN - Technical Note
 TP - Technical Paper
 TR - Technical Report
 TsAO - Tsentral'naia Aerologicheskaiia Observatory, U.S.S.R.
 UALMC - United Air Lines, Meteorology Circular, Chicago
 UCLA - University of California at Los Angeles, Department of Meteorology
 USWB - U.S. Weather Bureau, Washington, D.C.
 W - Weather, London
 WMOTN - World Meteorological Organization, Technical Note, Geneva
 ZM - Zeitschrift fur Meteorologie, Berlin

CITED REFERENCES

- Alaka, M.A., 1958: Aviation aspects of mountain waves. WMO/TN No.68. TP.26, No.18: 48pp.
- Anderson, A.D., 1956: Free-atmosphere turbulence. NRLR 4735: 90pp.
- Arakawa, H., 1951: Possible heavy turbulent exchange between the extra tropical tropospheric air and the polar stratospheric air. T3(3): 208-211.
- Arakawa, H., 1953: Clear air turbulence near the jet stream. QJRMS 79: 162-163.
- Arakawa, H., 1957: Clear-air turbulence associated with negative vertical wind shear. JM 14: 188-189.
- Arakawa, H., 1958: Possible criteria of an explanation of the phenomenon of clear-air turbulence encountered by aircraft. PMG 9: 25-28.
- Astheimer, R.W., 1965: Infrared technique for the remote detection of clear air turbulence. Symposium on Remote Sensing of Environment, 3rd, University of Michigan, Ann Arbor, Oct. 14-16, 1964, Proceedings: 105-123.
- Atlas, David, 1969: Clear air turbulence detection methods: a review. Clear Air Turbulence and Its Detection. (Pao and Goldberg, Eds.), Plenum Press, New York: 381-401.
- Atlas, David, R.E. Carbone, and K. Naito, 1968: Bistatic microwave probing in a refractively perturbed clear atmosphere. JAS 25: 257-268.
- Atlas, David, K.R. Hardy, K.M. Glover, I. Katz and T.G. Konrad, 1966: Tropopause detected by radar. S 153(3740): 1110-1111.
- Atlas, David, Kenneth R. Hardy, and Keikichi Naito, 1966: Optimizing the radar detection of clear air turbulence. JAM 5: 450-460.
- Atlas, David and K. Naito, 1966: Bistatic scatter from turbulent media. Conference on Radar Meteorology, 12th, Norman, Okla., Oct. 1966, Proceedings: 285-290.
- Atrip, F.K., 1969: Turbulence at low altitudes - summary of the results of LO-LOCAT phases I and II. Clear Air Turbulence and Its Detection. (Pao and Goldberg, Eds.), Plenum Press, New York: 207-231.
- Badgley, F.I., 1969: Large scale processes contributing to clear air turbulence. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York: 109-126.
- Balzer, M.E. and H.T. Harrison, 1959: The nature of clear air turbulence. UALMC 48: 46pp.
- Bannon, J.K., 1951: Meteorological aspects of turbulence affecting aircraft at high altitude. Prof. Notes, Met. Off., London, No.104.
- Bannon, J.K., 1952: Weather systems associated with some occasions of severe turbulence at high altitude. MM 81(958): 97-101.
- Batchelor, G.K., 1959: The Theory of Homogeneous Turbulence. Cambridge University Press: 197pp.
- Bates, F.C., 1965: Detection of generating eddies in clear air turbulence aloft by acoustical sensing. Symposium on Remote Sensing of Environment, 3rd, University of Michigan, Ann Arbor, Oct. 14-16, 1964, Proceedings: 95-103.
- Bates, R.H.T., 1962: Suggestions for adaptation of the Porcupine II B Radar for the detection of small atmospheric dielectric irregularities. FR Contract AF 19(604) - 8340, National Co., Inc., Malden, Mass.: 118pp.
- Battan, Louis J., 1962: Stellar scintillations and clear air turbulence. JAM 1: 574-575.
- Berenger, M. and J. Heissat, 1959: Contribution a l'etude statistique et meteorologique de la turbulence. Ministère des Travaux Publics et des Transports, Monographies de la Meteorologie National, No.17, Paris, France.
- Bhalotra, Y.P.R., 1955: A case of severe clear-air turbulence over North India. W 10: 329-330.
- Bindon, H.H., 1951: Clear air gusts in the upper troposphere over eastern Canada. W 6: 152-153.
- Bjerknes, V., J. Bjerknes, H. Solberg, and T. Bergeron, 1933: Physikalische Hydrodynamik mit Anwendung auf die Dynamische Meteorologie. Springer-Verlag, OHG, Berlin.
- Blackburn, James Harvey, Jr., 1969: A study of clear-air turbulence from detailed wind profiles over Cape Kennedy, Florida. Master's thesis, Department of Meteorology, TAM.
- Blackman, R.B. and J.W. Tukey, 1959: The Measurement of Power Spectra. Dover Pub., Inc.
- Bourquin, Kent and Fred H. Shigemoto, 1965: Laboratory investigation of turbulence detection using a laser. NASA, SP-83: 53-59.
- Breece, R.C., D.L. Freid and R.J. Munick, 1966: Design study of laser radar for detection of clear air turbulence. FR Contract AF 19(628)-5135, NAA: 166pp.
- Briggs, J., 1961a: Widespread severe clear-air turbulence, 13 November 1958. MM 90(1,069): 234-239.

- Briggs, J., 1961b: Severe clear-air turbulence near the British Isles. MM 90(1,070): 245-254.
- Briggs, J., 1963: High-level turbulence over Europe and the Mediterranean. JINL 16(2): 220-226.
- Briggs, J. and W.T. Roach, 1963: Aircraft observations near jet streams. QJRMS 89(380): 225-247.
- Brundage, K.C., 1958: A preliminary study of eleven Project Jet Stream flights. FR Contract AF 19(604)-1565, TAM.
- Brunt, Sir David, 1952: Physical and Dynamic Meteorology, Cambridge University Press, Chapters XI and XII.
- Buehler, W.E., C.H. King and C.D. Lunden, 1968: Radar echoes from clear air turbulence. BSRL Document D1-82-0740: 8pp.
- Burnham, J., 1968: Atmospheric turbulence and the SST: a review in the light of recent research. RAE TR 68096: 83pp.
- Burns, A., 1963: Power spectra of low level atmospheric turbulence measured from an aircraft. RAE TN Structures - 329.
- Burns, A. and C.K. Rider, 1965: Project Topcat power spectral measurements of clear air turbulence associated with jet streams. RAE TR 65210: 11pp.
- Burns, Anne, T.W. Harrold, J. Burnham and C.S. Spaving, 1965: Turbulence in clear air near thunderstorms. ESSA, NSSL TM, IERTM-NSSL-30: 20pp.
- Calder, K.L., 1949: The criterion of turbulence in a fluid of variable density with particular reference to conditions in the atmosphere. QJRMS 75: 71-88.
- Chambers, E., 1955: Clear air turbulence and civil jet operations. JRAS 59(537): 613-628.
- Clem, L.H., 1954: Clear-air turbulence from 25,000 to 45,000 ft over the United States. AWS TR 105-47.
- Clem, L.H., 1955: Clear-air turbulence near the jet-stream maxima. BAMS 36: 58-60.
- Clem, LeRoy H., 1957: Clear-air turbulence over the United States. AER 16(11): 63-68.
- Clodman, J., 1953: High level turbulence. DTTC, TEC 160, Cir 2332.
- Clodman, J., 1957: Anisotropic high level turbulence. QJRMS 83: 110-120.
- Clodman, J., 1958a: Contrail dissipation and high-level turbulent diffusion. DTTC, TEC 227, Cir 3088.
- Clodman, J., 1958b: Anisotropic high level turbulence. QJRMS 84: 181-182.
- Clodman, Joseph and J.T. Ball, 1959: Clear air turbulence. FR Contract AF 19(604)-3068, NYU: 48pp.
- Clodman, J., C.M. Morgan, Jr., and J.T. Ball, 1961: High level turbulence. AWS TR 158: 84pp.
- Coleman, Thomas L. and Roy Steiner, 1960: Atmospheric turbulence measurements obtained from airplane operations at altitudes between 20,000 and 75,000 feet for several areas in the northern hemisphere. NASA TN D-548: 24pp.
- Collis, R.T.H., 1964: Lidar detection of CAT. AA 52.
- Collis, R.T.H., R.M. Endlich and R.L. Mancuso, 1969: Recent studies related to clear air turbulence. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.). Plenum Press, New York, 361-377.
- Colquhoun, J.R., 1967a: Clear air turbulence analysis over the South Pacific region for a five-day period in June 1965. AMM 15(2): 94-111.
- Colquhoun, J.R., 1967b: Clear air turbulence analysis over the South Pacific region for a five-day period in September 1965. AMM 15(2): 112-130.
- Colquhoun, J.R., 1967c: A summary of four, five-day clear air turbulence reporting periods. AMM 15(2): 131-132.
- Colquhoun, J.R. and V.L. Bourke, 1967a: Clear air turbulence analysis over the South Pacific region for a five-day period in Dec. 1964. AMM 15(2): 47-72.
- Colquhoun, J.R. and V.L. Bourke, 1967b: Clear air turbulence analysis over the South Pacific Region for a five-day period in March 1965. AMM 15(2): 73-93.
- Colson, D., 1954: Meteorological problems in forecasting mountain waves. BAMS 35: 49-51.
- Colson, De Ver, 1961: Analysis of clear air turbulence during April 1960. MWR 85(3): 94-98.
- Colson, De Ver, 1962: Analysis of clear air turbulence data for March 1962. MWR 91(2): 73-82.
- Colson, De Ver, 1963: Summary of high level turbulence over United States. MWR 91(12): 605-609.
- Colson, De Ver, 1969: Clear air turbulence and upper level meteorological patterns. Clear Air Turbulence and Its Detection, (Pao and Goldberg, Eds.), Plenum Press, New York: 337-360.

- Colson D. and H.A. Panofsky, 1965: Index of clear air turbulence. QJRMS 91(309): 507-513.
- Colson, De Ver and Rustenbeck, J.D., 1961: Clear air turbulence over western United States, October 8-12, 1960. USWB (Unpublished report).
- Conover, J.H., 1960: Cirrus patterns and related air motions near the jet stream as derived by photography. JM 17(5): 532-546.
- Cooley, Duane S. and J.T. Ball, 1969: Research to determine cloud and synoptic parameters associated with clear air turbulence. NASA Contract No. NAS 12-699, Travelers Research Corp.: 71pp.
- Corby, G.A., 1954: The air flow over mountains. QJRMS 80(346): 491-521.
- Corby, G.A. and J.S. Sawyer, 1958: The airflow over a ridge - the effects of the upper boundary and high level conditions. QJRMS 84(359): 25-37.
- Corby, G.A., and C.E. Wallington, 1956: Airflow over mountains: The lee-wave amplitude. QJRMS 82(353): 266-274.
- Coy, Richard G., 1967: Atmospheric turbulence spectra from B-52 flight loads data. AFFDL-TR-67-13: 50pp.
- Crane, Harold L., and Robt. G. Chilton, 1956: Measurements of atmospheric turbulence over a wide range of wavelength for one meteorological condition. NACA TN 3702: 18pp.
- Crooks, W.M. et al., 1968a: Project HICAT. AFFDL-TR-68-127, Vol.I: 309pp.
- Cunningham, N.W., 1958: A study of the duration of clear-air turbulence near the jet stream and its relation to horizontal temperature gradient. (In: Saucier, W.J., et al., Wind field near the tropopause). FR Contract AF 19(604)-1565, TAM: 75-85.
- Danielsen, E.F., 1959: The laminar structure of the atmosphere and its relation to the concept of a tropopause. AMGBA 11(3): 293-332.
- Das, P.K., 1964: Lee waves associated with a large circular mountain. LJMG 15(4): 547-557.
- Davies, D.M., 1951: Analysis of CAT between September 1949 and April 1951. BOAC, R.S.D. Rep. No.25 (Mimeographed).
- DeMandel, R.E. and J.R. Scoggins, 1967: Mesoscale wave motions as revealed by improved wind profile measurements. JAM 6(4): 617-620.
- Dieterichs, H., 1950: Uber die Entstehung der Perlmutterwolken. MR 3: 208-213.
- Donely, P., 1940: Experimental investigation to determine the relative magnitude of vertical and horizontal gusts in the atmosphere. NACA Memorandum Report, Washington, D.C.
- Dugstad, Ivar, 1958a: A generalization of Richardson's criterion of turbulence. MA 4(13): 331-350.
- Durst, C.S., 1943: Measurement of turbulence in the free atmosphere. GBMRC, MRP No.64.
- Durst, C.S., 1948: The fine structure of wind in the free air. QJRMS 74: 349-360.
- Dutton, John A., 1967: Belling the CAT in the sky. BAMS 48(11): 813-820.
- Eckstrom, C.V., 1965: Theoretical study and engineering development of Jimsphere wind sensor. FR Contract NAS 8-11158, G.T. Schjeldahl Co.
- Ehernberger, L.J., 1968a: Meteorological aspects of high-altitude turbulence encountered by the XB-70 airplane. National Conference on Aerospace Meteorology, 3rd, New Orleans, La., May 6-9, 1968, Proceedings: 515-522.
- Ehernberger, L.J., 1968b: Atmospheric conditions associated with turbulence encountered by the XB-70 airplane above 40,000 feet altitude. NASA TN D-4768: 47pp.
- Endlich, Roy M., 1963: The detailed structure of the atmosphere in regions of clear-air turbulence. FR Contract Cwb-10324, SRI: 62pp.
- Endlich, R.M., 1964: The mesoscale structure of some regions of clear-air turbulence. JAM 3(3): 261-276.
- Endlich, R.M. and G.S. McLean, 1957: The structure of the jet stream core. JM 14: 543-552.
- Endlich, R.M., and G.S. McLean, 1965: Empirical relationships between gust intensity in clear-air turbulence and certain meteorological quantities. JAM 4: 222-227.
- Endlich, R.M., and R.L. Mancuso, 1964: Clear-air turbulence and its analysis by use of rawinsonde data. FR Contract Cwb-10624, SRI Project No.4521.
- Endlich, R.M., and R.L. Mancuso, 1965a: On the analysis of clear air turbulence by use of rawinsonde data. MWR 93(1): 47-58.
- Endlich, R.M. and R.L. Mancuso, 1965b: Objective analysis and forecasting of clear-air turbulence. FR Contract Cwb-10871, SRI: 56pp.
- Endlich, Roy M. and Robt. L. Mancuso, 1968: The turbulence climatology of the United States between 20,000 and 45,000 feet estimated from aircraft reports and meteorological data. AFGRL-68-0337, SRI: 68pp.
- Endlich, R.M., R.L. Mancuso and J.W. Davies, 1966: Techniques for determining a world-wide climatology of turbulence through use of meteorological data. SR No.1, Contract AF 19(628)-5173, SRI: 62pp.

- Essa, Weather Bureau, 1966: Forecasters Handbook, A Series, Vol. I. Office of Meteorology Operations, Washington, D.C., (Draft Copy).
- Estoques, M.A., 1958: Some characteristics of turbulence at high altitudes. GRD RN4, AFCRC-TN-58-624.
- Farthing, E.D., 1959: Analysis of high-level PIREPS during the period Oct. 6 - Nov. 6, 1958. Transworld Airlines - Meteorology Section.
- Ferri, A., D. Kuchemann and L.H.G. Sterne, (Editors), 1962: Progress in Aeronautical Sciences. Pergamon Press.
- Fetner, M.W., 1956: Summary of location and extents of turbulent areas encountered during flight investigations of the jet stream from October 1953 to May 1954 and November 1954 to July 1955. NACA RM, RML 55 HO 4a.
- Flint, E.F., 1968: Clear air turbulence: an aviation hazard. Naval Research Reviews, 21(7), p. 1-6, July.
- Flint, E.F., 1969: Infrared clear air turbulence detection and warning system. Clear Air Turbulence and Its Detection (Pao and Goldberg, Ed.), Plenum Press, New York: 449-475.
- Foltz, H.P., 1967: Prediction of clear air turbulence. ASP No.16, CSU: 145pp.
- Fried, D.L., 1968: Remote probing of the optical strength of atmospheric turbulence and of wind velocity. Proc. of the Panel on Remote Atmos. Probing of the National Academy of Sciences, Washington, D.C.
- George, J.J., 1960b: Method for the prediction of clear air turbulence. Eastern Air Lines: 17pp.
- George, J.J., 1961: Prediction of clear air turbulence. Shell Aviation News, London, No. 273: 14-16.
- George, J.J., 1965: A different synoptic look at some cases of clear air turbulence. Eastern Air Lines, TR (Unpublished).
- Gibson, Frank W., 1966: Some applications of the laser as an atmospheric probe. AMS/AIAA Conference on Aerospace Meteorology, AMS/AIAA Papers, 66-374: 20pp.
- Goldstein, S. (Ed.), 1938: Modern Developments in Fluid Dynamics. Oxford University Press, London.
- Gossard, E.E., 1960: Spectra of atmospheric scalars. JGR 65(10): 3339-3354.
- Greene, J., S. Roberto, and M. Lewinstein, 1966: Early warning of clear air turbulence by photometric measurements. National Air Meeting on Clear Air Turbulence, Proceedings, Feb. 23-24, ION-SAE: 163-171.

- Gruzinova, L.G. and E.I. Sofiev, 1964: Relationship between the Richardson number and atmospheric turbulence. AFCRL, Research Translation. Original in Trudy, Hydromet. Insti., No.19(34): 79-82.
- Haltiner, G.J. and F.L. Martin, 1957: Dynamical and Physical Meteorology. McGraw-Hill Book Co., Inc., Chapters 11 and 21.
- Hanson, D.M., L. Rothenberg, D. Colson, M.F. Grace, and S. Simplicio, 1962: Procedures for forecasting clear air turbulence. Tech. Note 5, Office of Forecast Development, U.S. Weather Bureau.
- Hardy, K.R., 1968: Radar investigations of clear-air turbulence. OAR Research Applications Conference, 3rd, Arlington, Va., March 21, 1968, Proceedings. Vol. 1: Sec. D (16p.).
- Hardy, K.R., D. Atlas and K.M. Glover, 1966: Multi-wave length back-scatter from the clear atmosphere. JGR 71: 1537-1552.
- Hardy, K.R. and Hans Ottersten, 1968: Radar and aircraft investigation of clear-air turbulence. National Conference on Aerospace Meteorology, 3rd, New Orleans, La., May 6-9, 1968, Proceedings: 539-546.
- Harrison, H.T., 1959: The use of horizontal wind shear in forecasting high level clear air turbulence. UALMC No.49: 49pp.
- Harrison, H.T., 1961: Progress in forecasting high level clear air turbulence. UALMC No.52: 56pp.
- Haurwitz, B., 1941: Dynamic Meteorology, McGraw-Hill Book Co., New York.
- Haurwitz, B., 1951: The perturbation equations in meteorology. The Compendium of Meteorology, AMS, Boston.
- Heath-Smith, J.R., 1955: Turbulence encountered by Comet I aircraft. RAE Structures Rep. No.179.
- Henry, R.M., G.W. Brandon, H.B. Tolefson and W.E. Langford, 1961: The smoke-trail method for obtaining detailed measurements of the vertical wind profile for application to missile dynamic response problems. NASA TN D-976: 45pp.
- Hess, Seymour L, 1959: Introduction to Theoretical Meteorology. Holt, Rinehart and Winston, New York.
- Hicks, John J. et al., 1967: Clear air turbulence: Simultaneous observations by radar and aircraft. S 157(3790): 808-809.
- Hildreth, W.W. et al., 1963: High-altitude clear air turbulence. AFFDL, Tech. Documentary Rep. No. ASD- TDR-63-440, Contract AF 33(657)-9364, Lockheed California Co.: 202pp.
- Hislop, G.S., 1951: Clear air turbulence over Europe. JRAS 55: 185-225.

- Hislop, G.S., and D.M. Davis, 1950: Final report of the clear air gust research project. BOAC, R.S.D. Report No.15.
- Hodge, Mary W. and D.T. Voltz, 1968: Possible relations of mesoscale surface pressure waves to the jetstream region and to clear air turbulence. National Conference on Aerospace Meteorology, 3rd, New Orleans, La., May 6-9, 1968, Proceedings: 557-564.
- Holland, E., 1951: Fluid flow over a corrugated bed, Prog. Rep. 5, Contract AF 19(122)-263, AFCRL, Appendix A.
- Holmboe, Jorgen and Harold Klieforth, 1957: Investigations of mountain lee waves and the air flow over the Sierra Nevada. FR Contract AF 19(604)-728, UCLA: 290pp.
- Houbolt, J.C. and E.E. Kordes, 1954: Structural response to discrete and continuous gusts of an airplane having wing bending flexibility and a correlation of calculated and flight results. NACA Report 1181.
- Houbolt, J.C., Roy Steiner, and K.G. Pratt, 1964: Dynamic response of airplanes to atmospheric turbulence including flight data on input and response. NASA TR R-199: 115pp.
- Hyde, E.A., 1954a: High altitude air turbulence. Flight, 65: 492-493.
- Hyde, E.A., 1954b: Clear air turbulence and allied phenomena. Pilots News Letter, Trans Australia Air Lines.
- Jaffe, A., 1963: Clear air turbulence and the Richardson number. Flugwissenschaftliche Forschungsanstalt e.v., Munich (FFM), FFM-Bericht No.58: 61pp.
- Jenkins, C.F., 1952: Forecasting the mountain wave. AFSG No.15. 32pp.
- Johnston, K.D., 1962: Response of spherical balloon to wind gusts. Mem. M-AERO-A-12-62, NASA Marshall Space Flight Center, Huntsville, Alabama.
- Junge, C., 1950: Zur Anwendug des Richardsons chen Kriteriums in der freien Atmosphäre. AM 3: 298-301.
- Kadlec, F.W., 1963: An inflight study of the relation between jet stream cirrus and wind shear turbulence. FR Contract Cwb-10856, Eastern Air Lines Inc.
- Kadlec, P.W., 1964: A study of flight conditions associated with jet stream cirrus, atmospheric temperature and wind shear turbulence. FR Contract Cwb-10674, Eastern Air Lines, Inc.
- Kadlec, P.W., 1966: Exploration of the relationship between atmospheric temperature change and clear air turbulence. National Air Meeting on Clear Air Turbulence, Proceedings, Feb. 23-24, 1966, ION-SAF: 44-50.
- Kadlec, Paul W., 1969: Atmospheric temperature changes associated with high altitude turbulence. NASA CR-106204: 23pp.
- Kao, S.-K., 1964: Turbulence criteria for a circumpolar vortex in a rotating gravity field. PF 7(5): 629-632.
- Kao, S.-K. and A.H. Sizoo, 1966: Analysis of clear air turbulence near the jet stream. JGR 71(16): 3799-3805.
- Kao, S.-K. and H.D. Woods, 1964: Energy spectra of meso-scale turbulence along and across the jet stream. JAS 21(5): 513-519.
- Kasahara, A., 1967: Lecture notes on "The General Circulation of the Earth's Atmosphere." Copy in Working Collection, Department of Meteorology and Oceanography, Texas A&M University, 175pp.
- Keitz, Edwin L., 1959: Differential advection as a factor in clear-air turbulence. JM 16(1): 57-62.
- Kelvin, W.T., 1886: On stationary waves in flowing water. PM 5(22): 353-357, 445-452, 517-530.
- Kleinschmidt, E., 1941: Stabilitätstheorie des geostrophischen Windfeldes. AH 69: 305-325.
- Klein, I.A., and N.Z. Pinus, 1954: Methodical instructions for the diagnosis and prognosis of atmospheric turbulence causing pitch and roll of high speed aircraft. HPH.
- Kolmogorov, A.N., 1941: The local structure of turbulence in incompressible viscous fluids for large Reynolds numbers. Doklady, Academia Nauk SSSR, 30: 301.
- Kordes, Eldon E. and Love, Betty J., 1967: Preliminary evaluation of XB-70 airplane encounters with high-altitude turbulence. NASA TN D-4209: 21pp.
- Krishnamurti, T.N., 1964a: Finite amplitude mountain wave problem with entropy as a vertical coordinate. MWR 92(4): 147-160.
- Krishnamurti, T.N., 1964b: Theory of two-dimensional mountain waves. RG 2(4): 593-624.
- Kroll, Sarah J. and J.D. Rustenbeck, 1961: Clear-air turbulence over southeastern United States, Dec. 12-15, 1960. USWB: 7pp.
- Kronebach, George W., 1964: Automated procedure for forecasting clear air turbulence. JAM 3(2): 119-125.
- Kuettner, J., 1952a: Note on high level turbulence encountered by a glider. AFSG No.29.
- Kuettner, J.P., 1952b: On the possibility of soaring on traveling waves in the jet stream. AER 11(12): 22-28.
- Lake, Herman, 1956: A meteorological analysis of clear air turbulence. GRP No.47, AFCRC-TR-56-201: 63pp.

- Lamb, Sir Horace, 1945: Hydrodynamics. Dover Publications, New York, 571-575, 617-618, 674-678.
- Lappe, U.O. and B. Davidson, 1962: On the validity of Taylor's hypothesis and the Kolmogoroff spectral law. NYU Contract No.
- Lennie, J.C., 1969: Clear-air turbulence over the North Atlantic; some notably turbulent periods. MM 98(1158): 9-19.
- Leviton, R., 1962: A detailed wind profile sounding technique, Proceedings of the National Symposium on Winds for Aerospace Vehicle Design. AFSC 1(140): 187-196.
- Long, R.R., 1953a: A laboratory model resembling the "Bishop Wave" phenomenon. BAMS 34: 205.
- Long, R.R., 1953b: Some aspects of the flow of stratified fluids. I. A theoretical investigation. TS: 42-54.
- Long, Robt. R., 1958: Tractable models of steady-state stratified flow with shear. QJRMS 84(360): 159-161.
- Loving, Neal V., 1969: Technical and meteorological planning to meet the ALLCAT program objectives. Clear Air Turbulence and Its Detection. (Pao and Goldberg, Eds.), Plenum Press, New York: 127-143.
- Ludlam, F.H., 1952: Orographic cirrus clouds. QJRMS 78(338): 554-562.
- Ludlam, F.H., 1967: Characteristics of billow clouds and their relation to clear-air turbulence. QJRMS 93(398): 419-435.
- Lumley, J.L. and H.A. Panofsky, 1964: The Structure of Atmospheric Turbulence. Interscience Publishers: 239pp.
- Lyons, R., H.A. Panofsky, and S. Wollaston, 1964: The critical Richardson number and its implication for forecast problems. JAM 3: 136.
- Lyra, G., 1940: Ueber den Einfluss von Bodenerhebungen auf die Stromung einer stabil geschichteten Atmosphäre. BPA 26: 197-206.
- MacCready, P.B., Jr., 1962: Turbulence measurements by sailplane. JGR 67: 1051-1059.
- McKay, A.R., 1968: Clear-air turbulence and sporadic E activity. S 162 (3850): 270.
- McLean, George, 1965: Investigation into the use of temperature gradients as an in-flight warning of impending clear-air turbulence. RP No.85, AFCRL: 13pp.
- Mancuso, R.L. and R.M. Endlich, 1966: Clear air turbulence frequency as a function of wind shear and deformation. MWR 94(9): 581-585.

- Manring, E.R., 1961: Optical tracers for atmospheric soundings. AE 20 (9): 8-9, 34-36.
- Mather, G.K., 1967: Flight evaluation of an infrared spectrometer as a clear air turbulence detector. National Research Council of Canada, Aeronautical Report LR-477: 35pp.
- Meteorological Office Discussion on clear-air turbulence, 1958. MM 88(1040): 50-54.
- Monson, K.R., G.W. Jones, R.H. Mielke, et al., 1969: Low altitude atmospheric turbulence, LO-LOCAT Phase III Interim Report. AFFDL-TR-69-63, Vol.II.
- Moore, Richard L. and T.N. Krishnamurti, 1966: Atmospheric clear air turbulence. N 209(5022): 462-464.
- Murrow, H.N. and R.M. Henry, 1965: Self-induced balloon motions. JAM 4(1): 131-138.
- Nanevich, J.E., E.F. Vance and S.M. Serebreny, 1966: Correlation between clear air turbulence and aircraft electrical activity. National Air Meeting on Clear Air Turbulence, Proceedings, Feb. 23-24, ION-SAE: 77-83.
- Norman, Sol M. and N.H. Macoy, 1966: Inference of clear air turbulence by means of an airborne infrared system. JA 3(4): 289-296.
- Ogura, Y., 1958: On the isotropy of large-scale disturbances in the upper atmosphere. JM 15: 375-382.
- Okoshi, N., 1967: Relation between the trembling in the sun's image and upper air turbulence. JMR 19(12): 645-649.
- Paetzold, H. and H. Zschorner, 1955. Beobachtung eines "Ozonloches" über den Alpen. ZM 9: 250-251.
- Palm, Enok, 1958: Two-dimensional and three-dimensional mountain waves. GP 20(3): 25pp.
- Palm, E. and A. Foldvik, 1960: Contribution to the theory of two-dimensional mountain waves. GP 21(6): 30pp.
- Panofsky, H.A. and J.C. McLean, 1964. Physical mechanisms of clear air turbulence. RR to USWB, PSU 20pp.
- Panofsky, H.A. et al., 1968. Case studies of the distribution of CAT in the troposphere and stratosphere. JAM 7(3) 384-389.
- Pao, Yih-Ho, 1969: Origin and structure of turbulence in stably stratified media. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York 73-99.

- Pao, Y. and A. Goldberg, 1968: Foreword to Symposium on Clear Air Turbulence and Its Detection. Seattle, Wash., Aug. 14-16, 1968.
- Paulsen, W.H., 1966: Investigations of techniques for detecting clear air turbulence. National Conf. on Clear Air Turbulence, Proceedings, Feb. 23-24, 1966, ION-SAE: 51-54.
- Penn, Samuel and T.A. Pisinski, 1967: Mesoscale structure of the atmosphere in regions of clear air turbulence. AFSG No.190, AFCRL: 85pp.
- Petterssen, S., and W.C. Swinbank, 1947: On the application of the Richardson criterion to large-scale turbulence in the free atmosphere. QJRMS 73: 335-345.
- Pinus, N.Z., 1957: Atmospheric turbulence commensurate with the size of airplanes. ISG 3: 395-400.
- Pinus, N.Z., E.R. Reiter, G.N. Shur, and N.K. Vinnechenko, 1967: Power spectra of turbulence in the free atmosphere. T 19(2): 206-213.
- Pinus, N.Z. and S.M. Shmeter, 1962: Atmospheric turbulence affecting aircraft bumping. HPH.
- Pinus, N.Z. and S.M. Shmeter, 1965: Aerologie, Vol. II. HPH, Leningrad: 350pp.
- Pratt, K.G. and W.G. Walker, 1954: A revised gustload formula and a re-evaluation of v-g data taken on civil transport airplanes from 1933 to 1950. NACA, Report 1206: 9pp.
- Press, Harry, 1957: Atmospheric turbulence environment with special reference to continuous turbulence. North Atlantic Treaty Organization, Advisory Group for Aeronautical Research and Development, Report. No.115: 29pp.
- Press, Harry and John C. Houbolt, 1955: Some applications of generalized harmonic analysis to gust loads on airplanes. Jour. Aero. Sci., 22(1): 17-26.
- Press, H., M.H. Schindler, and J.K. Thompson, 1953: Summary of pilots' reports of clear-air turbulence at altitudes above 10,000 feet. NACA, RML 52 L 30a.
- Press, H. and Roy Steiner, 1958: An approach to the problem of estimating severe and repeated gust loads for missile operations. NACA TN 4332.
- Protheroe, W.M., 1961: Stellar scintillations. S 134: 1593-1599.
- Queney, P., 1947: Theory of perturbations in stratified currents with application to air flow over mountain barriers. Chicago University, Misc. Rep., No.23.
- Queney, P. et al., 1960: The air flow over mountains. WMO/TN No.98 TP.43, No.34: 135pp.
- Radok, U. and E.R. Reiter, 1964: Project TOPCAT. W 14(5): 156.
- Rao, N.S.B. and A. Sadogopan, 1968: Correlation between clear air turbulence and temperature gradients at standard isobaric levels. IJMC 19: 59-64.
- Rayleigh, R.J., 1883: The form of standing waves on the surface of running water. LMS 15: 69-78.
- Reed, R.J., 1960: Some comments on "holograph" analysis as applied to the occurrence of clear-air turbulence. JM 17(4): 476-477.
- Reed, R.J., 1969: A study of the relation of clear air turbulence to the mesoscale structure of the jet stream region. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York: 288-307.
- Regula, H., 1968: Luftaufnahmen von Turbulenzcirren in einem Hohenzweig. MR 21(5): 155-156.
- Reiter, Elmar R., 1962a: A case study of severe clear-air turbulence. ASP No.30, Contract N 189(188)-55120.A, CSU: 12pp.
- Reiter, E.R., 1962b: The atmospheric micro-structure and its bearing on clear-air turbulence. TP No.39, Preliminary Report, CSU: 21pp.
- Reiter, E.R., 1962c: Nature and observation of high-level turbulence especially in clear air. TP No.41, CSU: 28pp.
- Reiter, E.R., 1962e: On the nature of clear-air turbulence (CAT). AE 21(11): 39-46.
- Reiter, E.R., 1963: Jet-Stream Meteorology. Chicago, University of Chicago Press, 515pp.
- Reiter, Elmar R., 1964a: CAT and SCAT. AA 2(5): 60-65.
- Reiter, E.R., 1964c: Project TOPCAT - clear air turbulence models and forecasting for Project TOPCAT, Second Phase. University of Melbourne, Meteorology Department.
- Reiter, Elmar R. and Anne Burns, 1966: Structure of clear-air turbulence derived from "TOPCAT" aircraft measurements. JAS 23(2): 206-212.
- Reiter, E.R. and H.P. Foltz, 1967: Prediction of clear-air turbulence over mountainous terrain. JAM 6(3): 549-556.
- Reiter, Elmar R. and R.W. Hayman, 1962: On the nature of clear air turbulence. ASP No.28, CSU: 34pp.

- Reiter, E.R. and P.F. Lester, 1967: Dependence of the Richardson number on scale length. ASP No. 111, CSU: 39pp.
- Reiter, E. R., and Abele Nania, 1964: Jet-stream structure and clear air turbulence. JAM 3(3): 247-260.
- Rhyme, R.H. and R. Steiner, 1962: Turbulence and precipitation problems associated with operation of supersonic transports. Paper presented at Fourth Conference on Applied Meteorology, Hampton, Va., Sept. 10-14, 1962.
- Richardson, L.F., 1920: The supply of energy from and to atmospheric eddies. RSLA 97(686): 354-373.
- Rustenbeck, J.D., 1963: The association of Richardson's criterion with high level turbulence. MWR 91: 193-198.
- Sasakid, Y., 1958: A theory and analysis of clear air turbulence. SR No. 1, Contract AF 19(604)-1565, TAM: 75pp.
- Sawyer, J.S., 1960: Numerical calculation of the displacement of a stratified air stream crossing a ridge of small height. QJRMS 86(369): 326-345.
- Schlichting, H., 1960: Boundary Layer Theory. McGraw-Hill Book Co., New York.
- Schwerdtfeger, Werner and Uwe Radok, 1959: Hodograph analysis as applied to the occurrence of clear-air turbulence. JM 16(5): 588-592.
- Scoggins, J.R., 1963a: Preliminary study of atmospheric turbulence above Cape Canaveral, Florida. NASA Rep. MTP-AERO-63-10: 74pp.
- Scoggins, J.R., 1963b: High resolution wind measurement; a launch design problem. AE 1(3): 106-107.
- Scoggins, J.R., 1963c: An evaluation of detail wind data as measured by the FPS-16 radar/spherical balloon technique. NASA, TND-1752.
- Scoggins, J.R., 1964: Aerodynamics of spherical balloon wind sensors. JGR 69(4): 591-598.
- Scoggins, J.R., 1965: Spherical balloon wind sensor behavior. JAM 4(1): 139-145.
- Scoggins, J.R., 1967: Sphere behavior and the measurement of wind profiles. NASA TN D-3994: 53pp.
- Scoggins, J.R., 1969: Personal communication concerning progress on analysis of turbulence data from the XB-70 airplane.
- Scoggins, J.R., M.M. Pendergast, and V.E. Moyer, 1969: An investigation of small-scale motions and the forecasting of wind profiles over short periods of time at Cape Kennedy, Florida. FR Contract NASH-21257: 100 pp.
- Scoggins, J.R. and W.W. Vaughan, 1965: Some properties of atmospheric turbulence for space vehicles. AIAA Paper 65-504: 10 pp.
- Scorer, R.S., 1949: Theory of waves in the lee of mountains. QJRMS 75(323): 41-56.
- Scorer, R.S., 1951a: Clear-air turbulence over Europe. W 6(2): 59-60.
- Scorer, R.S., 1951b: Gravity waves in the atmosphere. AMGBA 4: 176-193.
- Scorer, R.S., 1951c: On the stability of stably stratified shearing layers. QJRMS 77(331): 76-84.
- Scorer, R.S., 1953a: Forecasting mountain and lee waves. MM 82(974): 232-234.
- Scorer, R.S., 1953b: Theory of air flow over mountains: II - The flow over a ridge. QJRMS 79(339): 70-83.
- Scorer, R.S., 1954a: Theory of air flow over mountains: III - Airstream characteristics. QJRMS 80(345): 417-428.
- Scorer, R.S., 1954b: Turbulence generated by standing waves. QJRMS 81(346): 629-630.
- Scorer, R.S., 1955: Turbulence generated by standing waves. QJRMS 81(350): 619.
- Scorer, R.S., 1956: Clear air turbulence in the jet stream. The Aeroplane. XCL(2353): 532-534.
- Scorer, R.S., 1957: Clear air turbulence in the jet stream. W 12: 275-282.
- Scorer, R.S., 1958a: Natural Aerodynamics. Pergamon Press, London.
- Scorer, R.S., 1958b: Airflow over mountains: indeterminacy of solution. QJRMS 84(360): 182-183.
- Scorer, R.S., 1959: Turbulence produced in waves of large amplitude. QJRMS 85(364): 131-143.
- Scorer, R.S., 1969: Mechanisms of clear air turbulence. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York: 34-50.
- Scorer, R.S. and H. Klieforth, 1959: Theory of mountain waves of large amplitude. QJRMS 85(364): 131-143.
- Scorer, R.S. and S.D.R. Wilson, 1963: Secondary instability in steady gravity waves. QJRMS 89(392): 532-539.
- Shuman, F.G. and J.B. Hovermale, 1968: An operational six-layer primitive equation model. JAM 7(4): 525-546.

- Smigielski, Frank J., 1960: A note on clear air turbulence during April and May 1960. MWR 89(3): 91-93.
- Solberg, H., 1939: Le mouvement d'inertie de l'atmosphère stable et son rôle dans la théorie des cyclones. Procès-Verbaux de l'Assoc. de Meteorologie, UGCI, Edinburg (1936), II. Memoires et discussions: 66-82.
- Sorenson, John E., 1964: Synoptic patterns for clear air turbulence. UALIC No.56: 67pp.
- Spillane, K.T., 1965: Atmospheric structures associated with turbulence in the free atmosphere. AMM 50: 44-45.
- Spillane, K.T., 1967: Clear air turbulence and supersonic transport. Nature 214(5085): 237-239.
- Srinivasan V., 1961: Some cases of clear air turbulence. IJMC 12(2): 279-282.
- Steiner, Roy, 1965: Summary of atmospheric turbulence data. NASA SP-83: 19-25.
- Steiner, Roy, 1966: Review of NASA high-altitude clear air turbulence sampling programs. JA 3(1): 48-52.
- Stevens, J.J. and E.R. Reiter, 1967: Estimating refractive index spectra in regions of clear air turbulence. JAM 6(5): 911-913.
- Stewart, P.G., 1961: Radar in turbulence research. Weather Radar Conference, 9th, Kansas City, Mo., Oct. 1961, Proceedings: 206-211.
- Stinson, R., A.I. Weinstein and E.R. Reiter, 1964: Details of wind data from high resolution balloon soundings. NASA TM X53115: 25pp.
- Tatarski, V.I., 1961: Wave Propagation in a Turbulent Medium. McGraw-Hill Book Co., New York: 285pp.
- Taylor, G.I., 1931: Effect of variation in density on the stability of superposed streams of fluids. RSLA 132: 499-523.
- Ten Broek, H.W., and C.R. Seashore, 1966: Study of low frequency electrical characteristics of clear air turbulence and storm front centers. FR, Contract AF 19(628)-5060, Honeywell, Inc., Systems and Research Div.: 123pp.
- Turner, H.S., 1959: The geographical distribution of clear-air turbulence. NM 88(1040): 33-38.
- U.S. Department of Commerce, 1966: Report of the National Committee for Clear Air Turbulence.
- Van Mieghem, J., 1944a: Forme intrinseque du critere d'instabilite' dynamique de E. Kleinschmidt. Bull. Acad. Belg. Cl. Sci., Ser. 5, 30: 19-33.
- Van Mieghem, J., 1944b: Relation d'identite' entre la stabilite' de l'equilibre dynamique de E. Kleinschmidt et la stabilite' des oscillations d'inertie de l'atmosphère terrestre. Bull. Acad. Belg. Cl. Sci., Ser. 5, 30: 134-143.
- Van Mieghem, J., 1945: Interpretations energetiques du critere d'instabilite' de E. Kleinschmidt. Bull. Acad. Cl. Sci., Ser. 5, 31: 345-352.
- Van Mieghem, J., 1946: Sur la stabilite' du courant geostrophique. La Meteorologie: 9-33.
- Van Mieghem, J., 1948: L'instabilite' hydrodynamique et les perturbations du courant d'ouest. AMGBA 1(2): 143-148.
- Van Mieghem, J., 1950: Hydrodynamic instability. CM: 434-453.
- Vinnichenko, N.K., 1966: Clear air turbulence at heights of 6-12 km. IFAO 2(11): 1135-1141.
- Vinnichenko, N.K., 1969: Recent investigations of clear air turbulence in the U.S.S.R. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York: 246-270.
- Vinnichenko, N.K., N.Z. Pinus and G.N. Shur, 1965: Some results of the experimental turbulence investigations in the troposphere. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965, 74-91.
- Wanta, R.C., 1953: The onset of turbulence in an elevated layer near sunrise. QJRMS 79: 398-405.
- Webster, C.A.G., 1964: An experimental study of turbulence in a density-stratified shear flow. JFM 19: 221-228.
- Weigman, E.J., 1965: Distribution of clear air turbulence reports and cloud patterns as seen in satellite photographs. FR, Contract Cwb-10791, SRI: 101pp.
- Weinstein, A.I., E.R. Reiter, and J.R. Scoggins, 1966: Mesoscale structure of 11-20 km winds. JAM 5(1): 49-57.
- Weiss, M., 1968: Evaluation of an infrared spectrometer as a clear air turbulence detector, Pt. 1. Symposium on Remote Sensing of Environment, 5th, University of Michigan, Ann Arbor, April 16-18, 1968, Proceedings: 587-597.
- Wurtele, M., 1953: The initial-value lee-wave problem for the isothermal atmosphere. SR No. 3, Contract AF 19(122)-26j, Sierra Wave Project, AFCRL.
- Zavarina, M.V. and M.I. Yudin, 1960: An accurate definition and use of the Richardson number for identification of the zones of aircraft bumpiness. Mat. and Hydrol., 2:3.

Zbrozek, J.K., 1965: Atmospheric Gusts. Present state of the art and further research. JRAS 69: 27-45.

Zirkle, R.E., Jr., 1966: Study of techniques for detection and measurement of clear air turbulence. FR, Contract AF 19(628)-2376, Honeywell, Inc., Systems and Research Center: 125pp.

ADDITIONAL REFERENCES

- Aanensen, C.J.M., 1948: Turbulence in clear air near a warm front surface. MM 77: 209-210.
- Anderson, I.R., 1966: Mountain lee wave activity over Tasmania on April 17, 1966. AMM 14(3): 119-131.
- Anon., 1967: Mountain waves and foothill winds. NCAR Quart. No.17: 5-7.
- Aplin, J.E., 1960: Atmospheric turbulence encountered over the Atlantic by stratoscruiser aircraft. RAE, TN 288.
- Armendariz, M. and L.J. Rider, 1966: Wind shear for small thickness layers. JAM 5: 810-815.
- Ball, F.K., 1959: Long waves, lee waves, and gravity waves. QJRMS 85(363): 24-30.
- Barakhtin, V.N., 1966: Aerosynoptic conditions of bumpiness of airplanes in the upper troposphere and the lower stratosphere over Asian U.S.S.R. Trudy, TIP, No.157: 118-137.
- Binding, A.A., 1965: Association of clear-air turbulence with 300 mb contour patterns. MM 94(1110): 11-19.
- Bolgiano, R., Jr., 1959: Turbulent spectra in a stably stratified atmosphere. JGR 64: 2226.
- Bolgiano, R., Jr., 1962: Structure of turbulence in stratified media. JGR 67: 3015-3028.
- Bontrond, E.A., 1964: (Comment on) De Ver Colson: Summary of high level turbulence over United States. La Meteorologie, 4(74): 135-140.
- Bracelin, P., 1952: Notes on jet-streams and turbulence at high levels. Cir. No.15/52, Gr. Britain, Naval Weather Service 161-52.
- Brochet, P. and H. Gland, 1967: Contribution to the statistical study of clear air turbulence zone in Mediterranean Europe. La Meteorologie 4(81): 8-23.
- Businger, J.A., 1969: On the energy supply of clear air turbulence. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York: 100-108.
- Casswell, S.A., 1966: A simplified calculation of maximum vertical velocities in mountain lee waves. MM 95(1124): 68-80.
- Chilton, R.C., 1954: Some measurements of atmospheric turbulence obtained from flow-direction vanes mounted on an airplane. NACA TN-3313.

Clarke, R.H., 1966: Turbulence and the detailed structure of a subtropical jet stream. JAS 23(5): 516-530.

Clodman, Joseph, 1961: Turbulence in clear air and in cloud. WMO TN, No. 49. TP.47, No.38: 12pp.

Coleman, T. and N.Y. Meadows, 1959: Airplane measurements of atmospheric turbulence at altitudes between 20,000 and 55,000 feet for firm geographic areas. NASA Memo 4-17-59 L.

Corquhoun, J.R., 1966: Analysis of two occurrences of lee waves. AMM 14(4): 158-171.

Colson, DeVer, 1968: Detection and forecasting of clear-air turbulence and mountain waves. WMO TN, No.227. TP.121, No.95, Aeronautical Met.: 236-255.

Copp, M.R., 1957: Summary of locations, extents, and intensities of turbulent areas encountered during flight investigations of the jet stream from January 7, 1957 to April 12, 1957. NACA RM L57L12.

Corwin, H.G., 1959: Vertical wind shear as measured by use of the geostrophic wind scale. Met. Tech. Bull. 59-2. Trans World Airlines: 3pp.

Cramer, H.E. and F.A. Record, 1955: Power spectra of the eddy-velocity components. JM 12(2): 146-151.

Crooks, W.M., W.W. Hildreth and W.A. Stauffer, 1966: Clear air turbulence. Lockheed Horizons, No.5, 2nd quarter: 78-96.

Crooks, W.M., et al., 1968b: Project HICAT. TR, AFFDL-TR-68-127, Vol. II: 451pp.

Diederich, F.W., 1957: The response of an airplane to random atmospheric disturbances. NACA TN 3910.

Drazin, P.G., 1958: The stability of a shear layer in an unbounded heterogeneous inviscid fluid. JFM 4: 214.

Dugstad, Ivar, 1958b: Clear-air turbulence and bumpiness. (In: Saucier, W.J. et al., Wind field near the tropopause). FR, Contract AF 19 (604)-1565, TAM: 58-74.

Dutton, John A., 1969: The probabilistic structure of clear air turbulence - some observational results and implications. Clear Air Turbulence and Its Detection (Pao and Goldberg, Eds.), Plenum Press, New York: 183-206.

Eastern Air Lines - Weather Bureau joint research on CAT, 1964: BAMS 45(5): 290.

Eggleston, John M. and William H. Phillips, 1960: The lateral response of airplanes to random atmospheric turbulence. NASA TR R-74: 59pp.

Eley, J., D. Keeley and T. Olien, 1961: High level turbulence during winter and spring over Central and Eastern North America. DTIC, Cir. 3554, TEC 378: 3pp.

Endlich, R.M. and R.L. Mancuso, 1967: Forecasting clear-air turbulence by computer techniques. SRI, SRDS Rep. RD-67-65: 86pp.

Etkin, B., 1959: A theory of the response of airplanes to random atmospheric turbulence. Journal of the Aero/Space Sciences, 26(7): 409-420.

Falcone, Francesco and A. Nania, 1968: Preliminaries for a regional study of turbulence in a quiet atmosphere. Rivista di Meteorologia Aeronautica, 28(4): 39-48.

Farthing, E.D., 1952: Vertical and horizontal shear as major factors in clear air turbulence. Met. Tech. Bull., No.52-3, Trans World Airlines: 2pp.

Foldvik, A., 1962: Two dimensional mountain waves: A method for the rapid computation of lee wave lengths and vertical velocities. QJRMS 88(377): 271-285.

Forchtgott, J., 1949: Wave streaming in the lee of mountain ridges. Bull. Met. Czech., Prague, 3: 49.

Forchtgott, Jiri, 1957: Active turbulent layer downwind of mountain ridges. Studia Geophysica et Geodaetica, 1(1): 173-181.

Frost, B.C., 1953: Flying in jet stream winds. Shell Aviation News, 186: 4-8.

George, J.J., 1960a: Weather Forecasting for Aeronautics. Academic Press, New York: 673pp.

George, J.J., 1968: Prediction of clear air turbulence. Eastern Airlines, Inc., Atlanta Airport, June: 76pp, (Reproduction of typescript).

Georgii, Walter, 1967: Kinematics of lee wave flow. DVLB No.613: 42pp.

Godson, W.L., 1950: Generalized criteria for dynamic instability. JM 7(4): 268-278.

Goldstein, S., 1931: On the stability of superposed streams of fluids of different densities. RSLA 132: 524-548.

Gurvich, A.S., B.M. Koprov, L.R. Tsvang and A.M. Yaglom, 1965: Empirical data on the small-scale structure of atmospheric turbulence. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965, 50-52.

Haman, Krzysztof; 1962: On some possible causes of clear air turbulence, Acta Geophysica Polonica, Warsaw, 10(4): 335-357.

- Harrison, H.T., 1956: Synoptic features of the mountain wave at Denver, Colorado. UALMC No. 41: 23pp.
- Harrison, H.T., 1957: Forecasting the mountain wave at Denver, Colorado. UALMC No.42: 33pp.
- Harrison, Henry T., 1965: The mountain wave. NASA Contractor Rep., CR-135: 56pp.
- Harrison, H.T. and Dan F. Sowa, 1966: Mountain wave exposure on jet routes of Northwest Airlines and United Air Lines. UALMC No.60: 74pp.
- Heisenberg, W., 1948: On the theory of statistical and isotropic turbulence. RSLA 195: 402.
- Hennerich, Kurt H., 1967: Case study of clear-air turbulence in the Midwest. FR, Contract Cwb-11308, PSU, Amendment No.1: 21pp.
- Hines, C.O., 1963: The upper atmosphere in motion. QJRMS 89: 1-42.
- Hinze, J.O., 1959: Turbulence. McGraw-Hill Book Co., New York: 586pp.
- Hodge, Mary W., 1967: Large irregularities of rawinsonde ascensional rates within 100 nautical miles and three hours of reported clear air turbulence. MWR 95(3): 99-106.
- Humphreys, W.J., 1912: Holes in the air. Popular Science Monthly, 81: 50-60.
- Il'in, G.P. and P.A. Rublev, 1967: Spectral characteristics of large scale turbulence in the free atmosphere. Met. and Hydro., No.6: 104-105.
- Jones, D.C.E., 1955: Exceptionally severe clear-air turbulence and other phenomena on April 14, 1954. MM 84: 107-111.
- Jones, R.F., 1967: Clear air turbulence. Science Journal, London, 3(2): 34-39.
- Jones, R.F., R.M. McInturff and S. Teweles, 1967: Meteorological problems in the design and operation of supersonic aircraft. WMOTN, No. 216. TP.114, No. 89: 71pp.
- Joseph, P.V. and P. Singh 1966: Nomograms for evaluating Richardson number for forecasting clear air turbulence. IJMG 17(3): 411-414.
- Kadlec, P.W., 1966: Flight observations of atmospheric turbulence. FR, Contract FA 66 WA-1449, Eastern Air Lines, Inc.: 52pp.
- Kapitanova, I.P., 1967. Jet stream turbulence. TsAO, Trudy, No.78: 50-56.
- Kapovits, Albert, 1964: Observations of clear air turbulence in the Carpathian Basin. Idojaras, Budapest, 68(2): 117-120.
- Kordes, Eldon E., 1968: XB-70 contributions to environmental technology of the supersonic transport. Paper presented at 1968 ASME Transportation Engineering Conference, Washington, D.C., Oct. 27-30: 6pp.
- Kuger, H.B., 1961: Two occurrences of clear air turbulence. DTTC, Cir. 3515, TEC-362: 10pp.
- Kupchatnikova, T.P., 1965: Turbulence in the proximity of jetstreams. NASA, Tech. Translation F-246: 95-102.
- Likhtman, D.L., and Iv. Zh. Al'ter-Zelik, 1966: Use of aerological data for the determination of airplane bumpiness in the free atmosphere. IFAO.
- Likhtman, D.L. and E.K. Blutner, 1965: Principle criteria determining the intensity of turbulence in a mountain region. Trudy, Glavnai Geof. Obs., No. 171: 32-37.
- Lipmann, H.W., 1952: On the application of statistical concepts to the buffeting problem. J. Aero. Sci., 19(12): 793-800.
- Lorenz, C.C., 1955: Theory of Hydrodynamic Stability. Cambridge Univ. Press.
- Long, Neal V., 1966: High altitude air turbulence (HICAT): a menace to the aerial highway. AMS/AIAA Papers, 66-362: 16pp.
- Longley, J.L., 1964: The spectrum of nearly inertial turbulence in a stably stratified fluid. JAS 21: 99.
- Longley, J.L., 1965a: The inertial subrange in nonequilibrium turbulence. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965: 157-165.
- Longley, J.L., 1965b: The structure of inhomogeneous turbulent flows. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965: 166-178.
- McCready, Paul B., Jr., 1964: Standardization of gustiness values from aircraft. JAM 3(4): 439-449.
- McDonald, N.J. and H.T. Harrison, 1960: Some observations of the mountain wave in eastern Colorado. BAMS 41(11): 627-632.
- Monahan, D., 1966: Case study of CAT in the Rockies. FR, Contract Cwb-10926, PSU.
- Monell, R., 1960: Case of severe turbulence. AMM 31: 41-43.
- Moyle, G.A., 1959: Some instances of marked turbulence and subsidence. DTTC, Cir. 3174, TEC-296: 7pp.

Mamakin, V.N., 1959: The dependence of the Richardson number upon height. *Met. and Hydro.*, No.7: 29-30.

Mangold, E.C., 1966: Investigation of use of balloons for atmospheric turbulence measurements. FR, USWB Grant-56, Okla. State Univ.: 79pp.

Manley, G., 1945: The helm wind of crossfell, 1937-1939. *QJRMS* 71(309-310): 197-219.

Mason, H.P. and William N. Gardner, 1957: A limited correlation of atmospheric sounding data and turbulence experienced by rocket-powered models. *NAWA*, TN 3953: 51pp.

Medzhitov, R.M., 1959: Mean values of the Richardson number in the lower 5 km of the atmosphere over Minsk. *Hydromet. Obs., Sbornik Rabot*, No.2: 5-12.

Miller, P.H. and Farnham, D.L., 1959: Tropopause and related atmospheric phenomena at the Naval Ordnance Test Station. NAVORD Rep. 6533, U.S. Naval Ord. Test Sta., China Lake, Calif.,- NOTS TP 2226: 152pp.

Miyasaki, Mace T., 1966: Airborne meteorological laboratory for micro-scale measurements. Conference on Radar Meteorology, 12th, Norman, Okla., Oct. 1966, Proceedings: 306-311.

Mizon, E.A., 1965: Forecasting aspects of the first phase of TOPCAT trials. Univ. of Melbourne, Met. Dept., Project TOPCAT Met. Reports.

Moffatt, H.K., 1965: The interaction of turbulence with strong wind shear. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965: 139-156.

Monin, A.S., 1965: On the influence of temperature stratification upon turbulence. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965: 119-120.

Mook, C., 1952: A meteorological analysis of reports of turbulence encountered by aircraft in clear air. *AER* 9: 22-27.

Moore, R.L., P.E. Wasko, and P.A. Lem, 1968: Diagnostic synoptic case studies of clear air turbulence. National Conference on Aerospace Meteorology, 3rd, New Orleans, La., May 6-9, 1968, Proceedings: 528-538.

Montgomery, W.J.T., 1954: Turbulence. *The Canadian Air Line Pilot*, 10(3).

Murgatroyd, R.J., 1957: Winds and temperatures between 20 and 100 km - a review. *QJRMS* 83(358): 417-458.

Murray, R., 1953: The upper troposphere and lower stratosphere near jet streams: an examination of observations made by the Meteorological Research Flight. *RAE, Met. RP No.813*.

Musaelian, Shabo A., 1964: Barrier Waves in the Atmosphere. Jerusalem, Israel Program for Scientific Translations.

Newton, C.W., 1959: Axial velocity streaks in the jet stream: ageostrophic "inertial" oscillations. *JM* 16: 638-645.

Novikov, E.A., 1965: Statistical models in the theory of turbulence and high correlation moments. Atmospheric Turbulence and Radio Wave Propagation. Proceedings of the International Colloquium, June 15-22, 1965: 191.

Obukhov, A.M., 1941: On the spectral energy distribution of a turbulent flow. *ISGG* No.5.

Ottersten, Hans, 1968: Theoretical aspects of CAT detection by radar. Conference on Radar Meteorology, 13th, McGill Univ., Montreal, Aug. 20-23, 1968, Proceedings. Ed. by J.S. Marshall: 252-257.

Pakhomov, L.A., 1962. Aircraft equipment for wind vector measurements. *Trudy TsAO*, No.41.

Panofsky, H.A., 1958: Introduction to Dynamic Meteorology. College of Mineral Industries, The Pennsylvania State University, University Park, Chapter IV.

Panofsky, H.A., 1965. The fine-scale structure of the atmosphere above the surface layer in clear-air. Atmospheric Turbulence and Radio Wave Propagation, Proceedings of the International Colloquium, Moscow, June 15-22, 1965: 17-27.

Panofsky, H.A., J.W. Hinkelman, and W.L. Somervell, 1958: An introduction to atmospheric turbulence. U.S. Navy Wea. Res. Facility, NAVAER 50-IP-546: 78pp.

Panofsky, H.A. and Harry Press, 1962: Meteorological and aeronautical aspects of atmospheric turbulence. Progress in Aeronautical Sciences, N.Y., 3: 179-232.

Pchelko, I.G., 1962: Aero-synoptical conditions of aircraft bumpiness in the upper troposphere and lower stratosphere. *Gidromet, Moscow*.

Pchelko, I.G., 1966: Clear air turbulence. *Met. and Hydro.*, No.12: 10-18.

Pchelko, I.G. and G.V. Vasil'eva, 1967: Turbulence during a clear sky. *Gidromet.*, Moscow, No.7: 3-15.

Pearce, R.P. and P.W. White, 1967. Lee wave characteristics derived from a three-layer model. *QJRMS* 93(396): 155-165.

Penn, Samuel, T.A. Pisinski, and G.E. Hill, 1968: Prediction of vertical wind shear and its relationship to clear-air turbulence. National Conference on Aerospace Meteorology, 3rd, New Orleans, La., May 6-9, 1968, Proceedings: 523-527.

Phillips, O.M., 1967: The generation of clear-air turbulence by the degradation of internal waves. Atmos. Turb. and Radio Wave Propagation, Proc. Intern. Colloquium, 15-22 June 1965, Moscow: 130-135.

Pinus, N.Z., 1963: Statistical characteristics of the horizontal component of the wind velocity at heights of 6-12 km. BASGS: 105-107.

Pinus, N.A., 1964: Some results of meso- and micro-structure of wind field investigations at 6 to 12 km altitudes. Trudy TsAO, No.53.

Powell, F.A., 1968: An evaluation of stratospheric CAT forecasts for mid latitudes. AMM 16(z): 35-46.

Project AROWA, 1955: Operational research into the detailed structure of the jet stream. TR No.2, U.S. NAVY, Task 15.

Prophet, David T., 1969: Clear air turbulence in the stratosphere above a squall line. Conference on Severe Local Storms, 6th, Chicago, April 8-10, 1969, Preprints of papers presented at the conference: 363-366.

Raethjen, P., 1959: Über die Entstehung des "Jet Stream" und seiner Turbulenz. Meteorological Society of Japan, 75th Anniversary of the Journal: 160-164.

Raethjen, P., 1963: Bemerkungen zur "Clear air turbulence". BPA 36(1/2): 77-88.

Rai Sircar, N.C. and Varghese, K.P., 1963: Study of high level clear air turbulence reports received from aircraft. IJMG 14(4): 433-440.

Rao, D.V., 1961: High altitude turbulence and its prognosis. WMOTN, No. 159. TP.77, No.64.

Reed, Richard J., 1960: (Comments on) W. Schwerdtfeger and U. Radok Hodograph analysis as applied to the occurrence of clear-air turbulence and (Replies by) Edwin L. Keitz; Schwerdtfeger and Radok. JM 17(4): 476-478.

Reisig, G.H.R., 1956: Instantaneous and continuous wind measurements up to the higher stratosphere. JM 13: 448-455.

Reiter, E.R., 1960: Turbulenz im Wolkenfreien Raum. BDW No.61.

Reiter, E.R., 1961a: Die nordamerikanische Strahlstromwetterlage vom 23. bis 27. Januar 1957 an Hand von Forschungsflügen des Project Jet Stream. BPA 33: 244-279.

Reiter, E.R., 1961b: The detailed structure of the wind field near the jet stream. JM 18: 9-30.

Reiter, E.R., 1961c: Meteorologie Der Strahlströme (Jet Streams). Springer-Verlag, Vienna.

Reiter, E.R., 1962d: Die vertikale Struktur des Strahlstromkernes aus Forschungsflügen des Project Jet-Stream. BDW No.80: 30pp.

Reiter, E.R., 1964b: Jet streams and turbulence. AMM 45: 13-33.

Reiter, Elmar R., 1965: Atmospheric structure and clear-air turbulence. ASP no.65, CSU: 18pp.

Reiter, E.R., 1966: Clear-air turbulence: Problems and solutions (A state of the art report). National Air Meeting on Clear Air Turbulence, Proceedings, ION-SAE, Feb. 23-24: 13pp. (Reprint).

Reiter, E.R., 1967a: Measurement of air motions by aircraft. NCAR TN No.29: 7-15.

Reiter, E.R., 1967b: Problem of clear air turbulence (CAT): possible future developments. AA 5(8): 56-58.

Rhyne, Richard H., 1958: Measurements of the motions of a large swept-wing airplane in rough air. NACA TN 4310: 22pp.

Rhyne, Richard H. and Roy Steiner, 1964: Power spectral measurement of atmospheric turbulence in severe storms and cumulus clouds. NASA TN D-2469: 48pp.

Rice, S.O., 1939: Mathematical analysis of random noise. Bell System Tech. J., 23: 283-332 and 24: 46-156.

Rider, C.K., 1961: The mountain lee wave problem. AMM 34: 74-75.

Rosini, E. and F. Rispoli, 1966: Distribuzione media mensile della turbolenza nella troposfera sulla regione italiana attraverso il numero di Richardson. Associazione Geofisica Italiana, Rome, 14th, Feb. 18-20, 1965, Atti.: 271-273.

Sastry, P.S.N., 1966: Note on evaluation of the Richardson number in relation to forecasting clear air turbulence. IJMG 17(3): 415-418.

Saucier, W.J. et al., 1958: Wind field near the tropopause. FR, Contract AF 19(604)-1565, TAM.

Sawyer, J.S., 1962: Gravity waves in the atmosphere as a three-dimensional problem. QJRM 88(378): 412-425.

Saxton, David W., 1966: Nature and causes of clear air turbulence. AIAA Paper 66-966: 6pp.

Scoggins, J.R., 1962: FPS-16 radar/spherical balloon tabulated wind data, Cape Canaveral, Florida. NASA, Rep. MTP-AERO-62-86, Marshall Space Flight Center.

- Sekera, Z., 1948: Helmholtz waves in a linear temperature field with vertical wind shear. *JM* 5: 93-102.
- Sen-Gupta, B.K., 1962a: Large-amplitude periodic lee waves in stratified fluids - Pt. 1 - Non-linear solution. *QJRMS* 88(376): 151-155.
- Sen-Gupta, B.K., 1962b: Large-amplitude periodic lee waves in stratified fluids - Pt. 2 - Linear theory. *QJRMS* 88(378): 426-429.
- Shuster, S.M., 1958: Air flow around orographic obstacles. *Trudy TsAO*, No.24: 16-31.
- Shur, G.N., 1959: Equipment for atmospheric turbulence spectra investigation by means of harmonic analysis using magnetic-tape records. *Trudy TsAO*, No.31.
- Shur, G.N., 1962: Experimental investigations of the energy spectrum of atmospheric turbulence. *Trudy TsAO*, No.43: 79-90.
- Sissons, J., 1967: Analysis of clear-air turbulence reports over Africa and adjacent ocean areas South of latitude 15° North. *East African Common Services Organization, Nairobi. Meteorological Dept., Memoirs*, 4(3): 19pp.
- Staras, H., 1955: Forward scattering of radio waves by anisotropic turbulence. *Inst. of Radio Engineers, Proc. IRE*, 43(10): 1374-1380.
- Stinson, J.R. and S.H. Cohen, 1965: Use of isogonisovel charts and the isogon deviation field in forecasting atmospheric turbulence. *Navy Weather Research Facility, Norfolk, Virginia*.
- Sugimoto, Y., 1956: Effect of turbulence on aircraft operations. *JMR* 8: 55-68.
- U.S. Air Force. Cambridge Research Labs. Meteorology Lab., 1966: Radar detection of clear air turbulence. *U.S. Air Force. Office of Aerospace Research, Research Review*, 5(6): 15-17.
- Vasil'ev, A.A., 1966: Use of the Scorer parameter for forecasting turbulence on the leeward side of mountains. *Trudy TsAO*, No.158: 90-98.
- Venkiteswaran, S.P. and H.S.S. Sinha., 1968: Some observations on turbulence in the stratosphere over Minicoy Island. *J. Sci. and Ind. Res.*, 27(5): 178-180.
- Vinnichenko, N.K., N.Z. Pinus and G.N. Shur, 1966: Some data on turbulence causing bumpiness in flight in the upper troposphere and stratosphere. *Met. and Hydro.*, No.11: 26-33.
- von Karmen, T. and L. Howorth, 1938: On the statistical theory of isotropic turbulence. *RSLA* 164: 476-490.
- Walker, Walter G. and Martin R. Copp, 1959: Summary of VGH and V-G data obtained from piston-engine transport airplanes from 1947 to 1958. *NASA TN D-29*: 41pp.
- Willington, C.E., 1953: A lee-wave scale. *QJRMS* 79(342): 545-547.
- Willington, C.E., 1955: Lee waves ahead of a warm front. *QJRMS* 81(348): 251-257.
- Willington, C.E., and Janet Portnall, 1958: A numerical study of the wave-length and amplitude of lee waves. *QJRMS* 84(359): 38-45.
- Willis, Willis L., 1963: Acoustic component of turbulence. *JAM* 2(2): 286-291.
- Willis, E.W., 1966: Project TOPCAT: Summary of meteorological observations and aircraft measurements during routine flights in the Australian jet stream. *RAE TR 5612*: 44pp.
- Williams, N.R., 1958: General features of Northern Hemispheric winds aloft and their variations, with application to aircraft - and missile - system analysis. *U.S. Naval Air Missile Test Center, Point Mugu, Calif., NAMTC Memorandum Report, No. LE-5-58*, Aug. 15, 54pp.
- Wilson, H.P., 1968: On forecasting clear air turbulence. *DITC, TM, TEC* 672: 10pp.
- Wong, Kai-wai, et al., 1965: Observing clear air turbulence over Peking by means of constant level balloons. *Acta Meteorologica Sinica*, 35(4): 449-459.
- Wright, C.S., 1960: Exact solutions for steady two-dimensional flow of a stratified fluid. *JFM* 9(2): 161-174.
- Yarvin, M.V., 1959: Determination of the critical Richardson's number as a criterion of increased atmospheric turbulence. *Trudy GGO*, No. 81: 85-91.
- Yozek, J.K., 1963: Aircraft and atmospheric turbulence. In: *Symposium on Atmospheric Turbulence and Its Relation to Aircraft*, Farnborough, England, Nov. 16, 1961, *Proceedings*. London: 5-42.
- Zerep, Jurgen, 1958: *Das Leewellenproblem der Meteorologie. Die Naturwissenschaften*, 45(9): 197-200.

SYMBOLS AND USEFUL EQUATIONS

A. List of Symbols

- A, B, D, μ , η - amplitudes of wave forms
 c - wave speed, $c = c_r + ic_i$ where $i = \sqrt{-1}$, c_r is real part of c and c_i the imaginary part
 g - acceleration of gravity
 k - wave number, $k = 2\pi\lambda^{-1}$
 P - pressure
 R - radius of Earth
 t - time
 u, v, w - components of motion in the x, y, and z directions, respectively
 x, y, z - coordinates of a right-hand Cartesian coordinate system with x positive to the east, y to the north, and z vertically upward
 ρ, α - density and specific volume, respectively, $\rho\alpha = 1$
 λ - wave length
 Ω_y, Ω_z - components of Earth's angular velocity in y and z directions, respectively

APPENDIX I

B. System of Equations

The three hydrodynamic equations of motion (scalar) are given by

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} + 2\Omega_y w - 2\Omega_z v = -\frac{1}{\rho} \frac{\partial P}{\partial x} \quad (\text{AI-1})$$

$$\frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} + 2\Omega_z u = -\frac{1}{\rho} \frac{\partial P}{\partial y} \quad (\text{AI-2})$$

$$\frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial y} + w \frac{\partial w}{\partial z} - 2\Omega_y u = -\frac{1}{\rho} \frac{\partial P}{\partial z} - g \quad (\text{AI-3})$$

Terms containing factors R^{-1} and those representing friction have been omitted from Eqs. (AI-1) to (AI-3). The equation of continuity for an incompressible fluid may be written as

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0 \quad (\text{AI-4})$$

PERTURBATION THEORY

A. The Perturbation Equations

Derivation of the perturbation equations is dependent on the following assumptions:

- (1) the mean or steady-state motion must satisfy the basic equations, i.e., Eqs. (AI-1) to (AI-4);
- (2) the total motion must satisfy the basic equations; and
- (3) second-order perturbations appearing in the equations may be neglected in comparison with first order terms.

We define the total motion quantities as follows:

$$\begin{aligned} u &= U + u', & v &= V + v', & w &= W + w', \\ P &= \bar{P} + P', & \rho &= \bar{\rho} + \rho', & \alpha &= \bar{\alpha} + \alpha', \end{aligned} \quad (\text{AII-1})$$

where $U, V, W, \bar{P}, \bar{\rho}$, and $\bar{\alpha}$ refer to the undisturbed current; and u', v', w', P', ρ' , and α' refer to the perturbation quantities.

Substituting the quantities in (AII-1) into Eq. (AI-1) gives the equation for total motion in the x direction, viz.,

$$\begin{aligned} \frac{\partial(U+u')}{\partial t} + (U+u')\frac{\partial(U+u')}{\partial x} + (V+v')\frac{\partial(U+u')}{\partial y} + (W+w')\frac{\partial(U+u')}{\partial z} + \\ 2\Omega_y(W+w') - 2\Omega_z(V+v') = -(\bar{\alpha}+\alpha')\frac{\partial(\bar{P}+P')}{\partial x} \end{aligned} \quad (\text{AII-2})$$

The corresponding equation for the basic motion is

$$\frac{\partial U}{\partial t} + U\frac{\partial U}{\partial x} + V\frac{\partial U}{\partial y} + W\frac{\partial U}{\partial z} + 2\Omega_y W - 2\Omega_z V = -\bar{\alpha}\frac{\partial \bar{P}}{\partial x}. \quad (\text{AII-3})$$

Subtracting Eq. (AII-3) from (AII-2) and neglecting second-order perturbations yields the perturbation equations in the x direction. Results for the other two coordinate directions, as well as for the continuity equation, are obtained in the same manner. The set of perturbation equations is thus given by

$$\begin{aligned} \frac{\partial u'}{\partial t} + U\frac{\partial u'}{\partial x} + V\frac{\partial u'}{\partial y} + W\frac{\partial u'}{\partial z} + u'\frac{\partial U}{\partial x} + v'\frac{\partial U}{\partial y} + w'\frac{\partial U}{\partial z} + \\ 2\Omega_y w' - 2\Omega_z v' = -\bar{\alpha}\frac{\partial P'}{\partial x} - \alpha'\frac{\partial \bar{P}}{\partial x} \end{aligned} \quad (\text{AII-4})$$

$$\frac{\partial v'}{\partial t} + u' \frac{\partial v'}{\partial x} + v' \frac{\partial v'}{\partial y} + w' \frac{\partial v'}{\partial z} + u' \frac{\partial v}{\partial x} + v' \frac{\partial v}{\partial y} + w' \frac{\partial v}{\partial z} + 2\Omega_y u' = -\alpha \frac{\partial p'}{\partial y} - \alpha' \frac{\partial \bar{p}}{\partial y} \quad (\text{AII-5})$$

$$\frac{\partial w'}{\partial t} + u' \frac{\partial w'}{\partial x} + v' \frac{\partial w'}{\partial y} + w' \frac{\partial w'}{\partial z} + u' \frac{\partial w}{\partial x} + v' \frac{\partial w}{\partial y} + w' \frac{\partial w}{\partial z} - 2\Omega_y u' = -\alpha \frac{\partial p'}{\partial z} - \alpha' \frac{\partial \bar{p}}{\partial z} \quad (\text{AII-6})$$

$$\frac{\partial u'}{\partial x} + \frac{\partial v'}{\partial y} + \frac{\partial w'}{\partial z} = 0 \quad (\text{AII-7})$$

For most problems, the terms $2\Omega_y w'$ and $2\Omega_y u'$ may be omitted.

B. Boundary Conditions

Wave solutions of Eqs. (AII-4) to (AII-6) are correct only if they satisfy certain boundary conditions. Boundaries may be free, rigid, or internal, or there may be no boundaries at all. Irrespective of the type of boundary, the perturbations must remain small throughout the fluid. A free boundary is exemplified by the top of the homogeneous atmosphere or surface of the ocean (in the case of water waves), a rigid boundary by the ground, and an internal boundary by a density discontinuity. A parcel of fluid at a boundary must remain there since, otherwise, the boundary would dissolve. At a boundary, two conditions apply, namely, the kinematic and dynamic boundary conditions.

The kinematic condition requires that (1) the velocity normal to the rigid boundary be zero; and (2) the component velocities be the same on both sides of an internal boundary. The dynamic condition requires that the pressure be the same on both sides of a boundary. At the top of a free surface such as the homogeneous atmosphere, the pressure and its changes with time are equal to zero.

C. Solution of the Perturbation Equations

1. Gravity waves

Consider a fluid with a free surface in the absence of friction and rotation. In this case, gravity is the primary restoring force. Let the depth of the fluid be h , U the undisturbed horizontal velocity between $z = 0$ and $z = h$, let the waves have an infinite lateral extent in the y direction. Only the undisturbed fluid is in hydrostatic equilibrium, i.e., $0 = -\frac{1}{\rho} \frac{\partial \bar{p}}{\partial z} - g$, $0 \leq z \leq h$. For a homogeneous incompressible fluid, Eqs. (AII-4), (AII-6), and (AII-7) become

$$\begin{aligned} \frac{\partial u'}{\partial t} + U \frac{\partial u'}{\partial x} &= -\frac{1}{\rho} \frac{\partial p'}{\partial x} \\ \frac{\partial w'}{\partial t} + U \frac{\partial w'}{\partial x} &= -\frac{1}{\rho} \frac{\partial p'}{\partial z} \\ \frac{\partial u'}{\partial x} + \frac{\partial w'}{\partial z} &= 0. \end{aligned} \quad (\text{AII-8})$$

Suitable conditions are $w = 0$ at $z = 0$, and $\bar{p} + p' = 0$ at the free surface.

Assume a wave solution of the form

$$\begin{aligned} u' &= A(z) \exp \{ik(x-ct)\} \\ w' &= B(z) \exp \{ik(x-ct)\} \\ p' &= D(z) \exp \{ik(x-ct)\}. \end{aligned} \quad (\text{AII-9})$$

Substituting (AII-9) into (AII-8) gives the system

$$(U-c) A(z) = -D(z)\alpha \quad (\text{AII-10})$$

$$ik(U-c) B(z) = -A'(z)\alpha \quad (\text{AII-11})$$

$$ik A(z) + B'(z) = 0. \quad (\text{AII-12})$$

Now, differentiating (AII-10) with respect to z and equating like members of the result with (AII-11) gives

$$(U-c) A'(z) = ik(U-c) B(z). \quad (\text{AII-13})$$

From (AII-12), we obtain the result

$$ik A'(z) + B''(z) = 0,$$

so that (AII-13) becomes

$$(U-c) \{B''(z) - k^2 B(z)\} = 0. \quad (\text{AII-14})$$

Equation (AII-14) is satisfied by the case $c = U$, i.e., the phase velocity is the same as the undisturbed current, but the general solution is

$$B(z) = \mu_1 \exp(kz) + \mu_2 \exp(-kz),$$

where μ_1 and μ_2 are constants. Since $w' = 0$ at $z = 0$, it follows that $\mu_1 = -\mu_2 = \mu$ and

$$B(z) = \mu[\exp(kz) - \exp(-kz)].$$

Hence, from Eqs. (AII-9) and (AII-10) to (AII-12), we get

$$\begin{aligned} u' &= i\mu[\exp(kz) + \exp(-kz)] \exp[ik(x-ct)] \\ w' &= \mu[\exp(kz) - \exp(-kz)] \exp[ik(x-ct)] \\ P' &= -i\mu\rho(U-c)\{\exp(kz) + \exp(-kz)\} \exp[ik(x-ct)]. \end{aligned} \quad (\text{AII-13})$$

Since the pressure at the top of the fluid, i.e., where $z = h$, must be zero, we get

$$\begin{aligned} \frac{d}{dt}(\bar{P} + P') &= 0 \quad \text{or (neglecting second-order terms)} \\ \frac{\partial P'}{\partial t} + U \frac{\partial P'}{\partial x} + w' \frac{\partial \bar{P}}{\partial z} &= 0. \end{aligned} \quad (\text{AII-14})$$

Recall that $\frac{\partial \bar{P}}{\partial z} = -g\rho$. Since the perturbations are assumed to be small, Eq. (AII-14) is a very close approximation to the conditions at $z = h$. Equation (AII-15) may be rewritten as follows:

$$\begin{aligned} u' &= i\mu(\cosh kz) \exp[ik(x-ct)] \\ w' &= \mu(\sinh kz) \exp[ik(x-ct)] \\ P' &= i\rho(c-U)\mu(\cosh kz) \exp[ik(x-ct)]. \end{aligned} \quad (\text{AII-15})$$

Differentiating the last of Eqs. (AII-15) and substituting into Eq. (AII-14) yields

$$\rho(c-U)ck \cosh kz - Ukp(c-U) \cosh kz - g\mu \sinh kz = 0.$$

Evaluating this last equation at $z = h$ yields the result

$$\begin{aligned} (c-U)^2 &= \frac{\lambda g}{2\pi} \tanh kh \\ \text{or finally} \quad c &= U \pm \left(\frac{\lambda g}{2\pi} \tanh \frac{2\pi h}{\lambda}\right)^{1/2}. \end{aligned} \quad (\text{AII-16})$$

Equation (AII-18) is the "wave equation" satisfying the assumptions which were stipulated for this problem.

2. Shearing-gravitational waves on an internal surface of discontinuity

An internal surface of discontinuity refers to marked changes in T , ρ , and \bar{V} , or a combination of these. Consider a fluid, with an internal boundary at $z = 0$, that is homogeneous and infinitely deep on either side of the boundary. Let the undisturbed flow in the x direction be given by U_0 and U_1 , where subscript 1 refers to the upper layer. If the trajectories of the fluid particles do not range over too great an area, then the effect of Earth's rotation can be neglected. For the upper layer, we assume $\frac{\partial \bar{P}_1}{\partial z} = -\rho_1 g$ and for the lower layer, $\frac{\partial \bar{P}_0}{\partial z} = -\rho_0 g$. Of course, at $z = 0$, the dynamic boundary condition requires that $P_1 = P_0$.

The perturbation Eqs. (AII-8) and their solutions (AII-9) apply to the fluids in each layer. The general solution to the perturbation equations is

$$\begin{aligned} u' &= i\{\mu \exp(kz) - \eta \exp(-kz)\} \exp[ik(x-ct)] \\ w' &= \{\mu \exp(kz) + \eta \exp(-kz)\} \exp[ik(x-ct)] \\ P' &= i\rho(c-U)\{\mu \exp(kz) - \eta \exp(-kz)\} \exp[ik(x-ct)]. \end{aligned} \quad (\text{AII-19})$$

Boundary conditions require that $w'_0 = 0$ at $z = -\infty$ and $w'_1 = 0$ at $z = \infty$. Hence, for $w'_0 = 0$, $\eta = 0$, and for $w'_1 = 0$, $\mu = 0$. The following solutions hold for the indicated layers:

$$\begin{aligned} u'_0 &= i\mu \exp(kz) \exp[ik(x-ct)] \\ w'_0 &= \mu \exp(kz) \exp[ik(x-ct)] \\ P'_0 &= i(c-U)\rho_0 \mu \exp(kz) \exp[ik(x-ct)] \end{aligned} \quad (\text{AII-20})$$

and

$$\begin{aligned} u'_1 &= -i\eta \exp(-kz) \exp[ik(x-ct)] \\ w'_1 &= \eta \exp(-kz) \exp[ik(x-ct)] \\ P'_1 &= -i(c-U)\rho_1 \eta \exp(-kz) \exp[ik(x-ct)]. \end{aligned} \quad (\text{AII-21})$$

The dynamic boundary condition is given by

$$\frac{\partial}{\partial t}(P'_0 - P'_1) + U \frac{\partial}{\partial x}(P'_0 - P'_1) + w' \frac{\partial}{\partial z}(\bar{P}_0 - \bar{P}_1) = 0.$$

Differentiating Eqs. (AII-20) and (AII-21), and then invoking the dynamic boundary condition, yields

$$\{\rho_0(c-U_0)^2k + g(\rho_1-\rho_0)\}\mu + \{(c-U_1)\rho_1k(c-U_0)\eta\} = 0, \quad (\text{AII-22})$$

and

$$\{\rho_0k(c-U_0)(c-U_1)\mu\} + \{(c-U_1)^2\rho_1k + g(\rho_1-\rho_0)\}\eta = 0. \quad (\text{AII-23})$$

Equations (AII-22) and (AII-23) are satisfied if the determinant of the system is zero, i.e.,

$$\begin{vmatrix} \rho_0(c-U_0)^2k + g(\rho_1-\rho_0) & (c-U_1)(c-U_0)\rho_1k \\ \rho_0k(c-U_0)(c-U_1) & (c-U_1)^2\rho_1k + g(\rho_1-\rho_0) \end{vmatrix} = 0.$$

Solving this determinant, we get

$$c^2 - \frac{2(\rho_0U_0 + \rho_1U_1)}{\rho_0 + \rho_1}c + \frac{\rho_1U_1^2 + \rho_0U_0^2}{\rho_0 + \rho_1} + \frac{g}{k} \left(\frac{\rho_0 - \rho_1}{\rho_0 + \rho_1} \right) = 0,$$

which yields for c:

$$c = \frac{\rho_0U_0 + \rho_1U_1}{\rho_0 + \rho_1} \pm \left\{ \frac{g\lambda}{2\pi} \left(\frac{\rho_0 - \rho_1}{\rho_0 + \rho_1} \right) - \rho_0\rho_1 \frac{(U_0 - U_1)^2}{(\rho_0 + \rho_1)^2} \right\}^{1/2}. \quad (\text{AII-24})$$

Equation (AII-24) gives the phase velocity of a shear-gravity wave. The dynamic term may be imaginary if the second term in the bracket exceeds the first. Under these conditions, the wave will be unstable.

References: Haltiner and Martin (1957), Haurwitz (1941), and Panofsky (1958)*.

* See Additional References.