

A Multi-objective Genetic Algorithm based Approach for Energy Efficient QoS-Routing in Two-tiered Wireless Sensor Networks

G. Hossein EkbataniFard^{1*}, Reza Monsefi², Mohammad-R. Akbarzadeh-T.³, Mohammad H. Yaghmaee⁴

¹ Faculty of Engineering, Islamic Azad University – Lahijan Branch, Lahijan, IRAN

^{2, 3, 4} Faculty of Engineering, Ferdowsi University of Mashhad, Mashhad, IRAN

¹Ekbatanifard@stu-mail.um.ac.ir, ²Monsefi@um.ac.ir, ³Akbarzadeh@ieee.org, ⁴Yaghmaee@ieee.org

Abstract — With the growing demand for real time services in Wireless Sensor Networks (WSNs), quality of service (QoS) based routing has emerged as an interesting research topic. But offering some QoS guarantee in sensor networks raises significant challenges. The network needs to cope with battery constraints, while providing QoS (end-to-end delay and reliability) guarantees. Designing such QoS routing protocols that optimize multiple objectives is computationally intractable. Higher power relay nodes can be used as cluster heads in a two-tiered WSN and these relay nodes may form a network among themselves to route data towards the sink. In this model, the QoS guarantee is determined mainly by these relay nodes. In this paper a solution based on NSGA-II is proposed for energy efficient QoS routing in cluster based WSNs. Simulation results demonstrate that the proposed protocol outperforms network performance by optimizing multiple QoS parameters and energy consumption.

Index Terms: Wireless Sensor Network (WSN), Energy Efficient, QoS Routing, multi-objective optimization, Genetic Algorithm (GA), NSGA II.

I. INTRODUCTION

Wireless sensor networks (WSNs) are a framework for the future ubiquitous environment and have many applications for home, health, military, and industry [1]. The concept of sensor networks lies in a set of smart, autonomous sensor nodes, equipped with heavily integrated sensing, processing, and communication capabilities that are networked in an ad hoc fashion.

Sensor nodes are usually powered by lightweight batteries, and replacing or recharging these batteries is often not feasible. Recently, researchers have proposed the use of some special nodes, called relay nodes within the network, for balanced data gathering, to achieve fault tolerance and to extend network lifetime [12]. The relay nodes can be provisioned with higher energy as compared to the other sensor nodes in network.

In this paper, we consider a two-tiered network architecture, where relay nodes act as cluster heads and sensor nodes transmit their data directly to their respective cluster heads. However, the relay nodes are still battery operated and, hence, power constrained.

Today's wireless communication is a gradually changing paradigm from its existing voice-alone services to a new world of real time audio-visual applications [2]. A main objective behind deployment of wireless sensor networks is to capture and transmit the pictures, videos, and important data to the sink. Such applications require strict quality-of-service (QoS) guarantee. However, QoS routing is relevant to many factors such as the energy status of nodes in the network, and the delay, the bandwidth and the reliability requirements to transmit the data. So, good routing protocols have to make the comprehensive considerations of multiple factors to satisfy the transmission requirements of the different data. QoS parameters may be conflicting and interdependent, thus making the problem even more challenging. For example, short multiple-hops reduces transmission power but results in greater number of hops thereby increasing the delay of the data transmission.

Our objective is to identify the major challenge in QoS-routing over sensor networks and providing optimal (or near-optimal) solutions. More specifically the contributions of this paper are the following:

- 1) Analyze QoS parameters, end-to-end delay and reliability (mainly measured by link quality), and energy consumptions in WSNs.
- 2) Develop an efficient protocol that determines a set of near-optimal routes, satisfying application-specific QoS-parameters, in WSNs using elitist non-dominated sorting genetic algorithm (NSGA-II).
- 3) Analyze the performance of our approach through simulations.

The rest of the paper is organized as follows. Section II reviews existing works in sensory routing protocols. In section III we explain network model and analyze QoS parameters. The basic concept of multi-objective optimization relevant to our context is highlighted in Section IV. The proposed energy-aware QoS-routing algorithm is described and illustrated in Section V. Simulation results in Section VI corroborate the fast optimization of the required QoS parameters and the efficiency of the protocol. And finally section VII concludes the paper.

* Corresponding author

II. RELATED WORKS

Most protocols in WSNs are energy aware, which attempt to reduce the energy consumption of the nodes and balance the energy load of the network by all kinds of ways such as geographic information, data aggregation/fusion, and clustering technologies and so on. SPIN [3] is probably the first data-centric routing protocol, which considers data negotiation to reduce redundancy and save energy. Directed diffusion [4] and its extensions provide different variations to conserve the energy for increasing the life-time of sensor networks. Location based protocols, such as, MECN [5], SMECN [6], GAF [7], GEAR [8], primarily rely on the accuracy of sensors' location information to calculate the optimal energy requirement.

The energy aware QoS-routing protocol in [9] finds a least cost energy efficient path, while meeting certain end-to-end delay constraints. SPEED [10], as another QoS routing protocol, depends on state-less geographical non-deterministic forwarding to provide soft real time end-to-end QoS guarantee. Sequential Assignment Routing (SAR) [11] is the first routing protocol for sensor networks that creates multiple trees routed from one-hop neighbors of the sink by taking into consideration both energy resources, QoS metric on each path and priority level of each packet. However, the protocol suffers from the overhead of maintaining the tables and states at each sensor node especially when the number of nodes is large.

A number of papers have demonstrated the usefulness of a GA based approach in sensor networks [14], [15], [12], [13]. The work of [15] focused on deriving an energy efficient scheme that satisfy the required detection probability [15] using a distributed GA. The work of [14] focused on finding an optimal traffic distribution to improve the lifetime of multi-sensor networks.

A GA based approach for routing in two-tiered sensor networks is proposed in [12] that only used energy optimization to maximize life time of network. QuEst [13] is a routing protocol that uses MOGA [16] to find paths in a flat (non-clustered) wireless sensor network.

III. NETWORK MODEL

For our model, we consider a two-tiered wireless sensor network, with n relay nodes acting as cluster heads and one base station (sink). We assume that each sensor node belongs to exactly one cluster and the routing schedule is computed by some centralized entity (e.g., the sink), which is not power constrained.

Sensor nodes transmit their data directly to their respective cluster head nodes (relay nodes) and then cluster head nodes perform the initial fusion of the received data and send them to the sink by the routing tree. According to the energy reserved in the node, the requested delay and the reliability, the sink node determines a routing tree in order to optimize QoS parameters (delay and reliability) and energy consumptions of wireless sensor network.

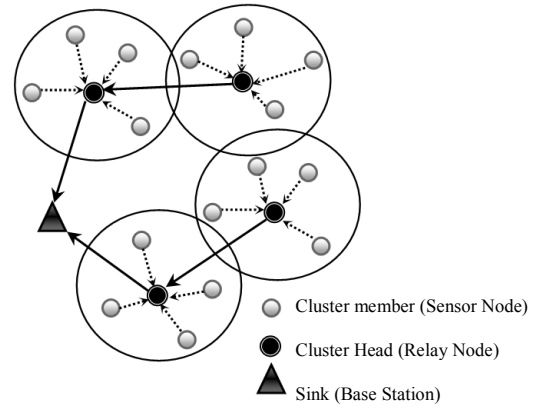


Fig. 1. An example of a clustered WSN.

We represent the sensor network by a graph $G = (V, E)$, where V is the set of relay nodes and E is the set of edges between the relay node-pairs, Figure 1 shows a two-tiered WSN with 4-relay nodes.

A path between a source relay node (v_r) and a destination sink (v_d) is represented by a sequence of nodes $v_r, v_1, v_2, \dots, v_d$, where $v_i \in V$. There can be multiple such paths between a source-destination pair. Figure 2 shows two possible routing trees, considering 3 source relay nodes (4, 6, 7) and node 0 as the sink (destination).

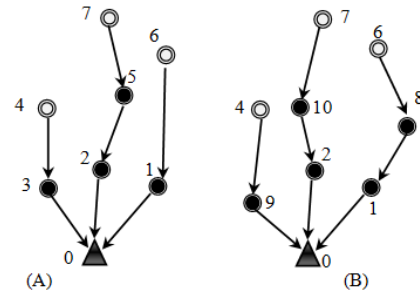


Fig. 2. Two different routing trees.

A. Analysis of QoS parameters

The parameters that we consider in proposed routing algorithm are: 1) End-to-End delay, 2) Reliability, and 3) Energy consumption.

A.1. End to End Delay

We have used *Weibullian distribution* [19] as used in [13] for modeling the delay. The *delay* over a particular route from a source to the sink is basically a sequence of links that is assumed to obey Weibullian distribution with parameter μ . Hence, the probability that the delay d_p , over an individual path p of length k is less than t , is estimated using modified, heavy-tailed Erlangian distribution [19].

$$P_r(d_p < t) = \frac{\left(\frac{\mu}{\alpha}\right)^{k\beta} t^{k\beta-1} e^{-\frac{\mu t}{\alpha}}}{(k-1)!} \quad (1)$$

Where the constants $\alpha > 0$ is the scale parameter, and β is the shape parameter. Now, assuming the worst-case scenario with all independent paths in the routing tree, the probability that the delay of the selected tree (d_{Tree}) will meet the specific delay constraint, is obtained by taking the product of delays over individual paths in that tree:

$$P_r(d_{Tree} < t) = \prod_{p \in Tree} P_r(d_p < t) \quad (2)$$

We attempt to maximize this probability.

A.2. Reliability

We use ETX [20] as reliability metric for calculating the path reliability. ETX is defined as the expected number of transmissions (including retransmission) for a successful end-to-end data forwarding and hop-by-hop acknowledgment. The following expression shows how to compute the ETX metric for a path p consisting of links v_1, \dots, v_n with *forward delivery ratio* of fd_{v_i} and *reverse delivery ratio* of rd_{v_i} for link v_i :

$$etx_{v_i} = \frac{1}{(fd_{v_i} \times rd_{v_i})}$$

$$ETX(p) = etx_{v_1} + etx_{v_2} + \dots + etx_{v_n} \quad (3)$$

The *forward delivery ratio* is the measured probability that a data packet successfully arrives at the recipient and the *reverse delivery ratio* is the probability that the ACK packet is successfully received [20].

The entire routing tree reliability, R_{Tree} , is calculated by taking the mean of the individual path reliability and then reversing it.

$$R_{Tree} = \left(\frac{\sum_{p \in Tree} ETX(p)}{\sum_{p \in Tree} 1} \right)^{-1} \quad (4)$$

The objective of our routing protocol is to maximize the whole routing tree reliability.

A.3. Energy

Energy consumption in a relay node can be estimated using the energy used during data transmission (E_T) and energy used during data reception (E_R):

$$E_T(b, d_{i,j}) = \theta_1 b + \gamma b d_{i,j}^m \quad (5)$$

$$E_R(b) = \theta_2 b \quad (6)$$

Where $d_{i,j}$ is the Euclidian distance between node i and j , θ_1 is the transmit energy coefficient, γ is the amplifier coefficient, m is the path loss exponent, $2 \leq m \leq 4$, and θ_2 is the receive energy coefficient. b represents the traffic bit-rate in the relay nodes, which is a factor of the current bandwidth. If L_{Tree} represents the tree lifetime and $E_{available}$ represents the available energy of a relay node, then by using (5) and (6) we have:

$$L_i = \frac{E_{available}}{E_R + E_T}$$

$$L_{Tree} = \text{Min}(L_i, \forall i(\text{relay nodes in a routing tree})) \quad (7)$$

We also attempt to maximize L_{tree} .

Therefore, an optimal route from all the source nodes to the sink needs to maximize all the three parameters. Hence, the optimization problem can be stated as:

$$\text{Max}(L_{Tree}, P_r(d_{Tree} < t), R_{Tree}).$$

IV. ROUTING ALGORITHM AND PROTOCOL DETAILS

The motivation here is to provide the user (sink) with a set of Pareto optimal solutions by the NSGA-II [18] algorithm and give it the flexibility to choose the best possible solution from this set, depending on the specific application requirements.

The chromosomes of a genetic algorithm contain all the building blocks to a solution for the genetic operators and the fitness functions. In our implementation, we find a pool of possible routing paths from sink to each of source relay nodes, using a depth first search (DFS) algorithm.

However, we note that our proposed protocol does not depend on the particular algorithm used to generate the initial population, and any suitable routing algorithm such as existing geographic routing techniques can also be used for this purpose.

Thus an initial set of routing trees is constructed. Each of these routing trees is mapped to a string consisting of the sequence of nodes along the path from each of the source relay nodes to the sink. The set of all such initial strings constitutes the initial population of chromosomes. Figure 3 shows the string representations of two routing trees of Figure 2.

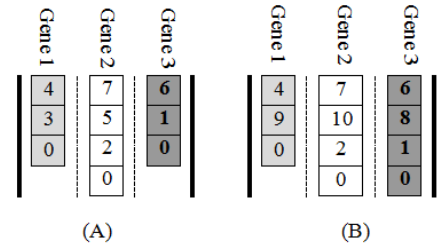


Fig. 3. String representing the routing tree of Figure 2.

The length of each chromosome is equal to the number of source relay nodes, but the length of genes is different based on path link count. In Figure 3 (A) the values of the gene 3 are 6, 1 and 0, indicating that node 6 transmits to the sink through node 1. Similarly, the values in gene 3 in Figure 3 (B) are 6,8,1,0, indicating that node 6 transmits to the sink through node 8 and 1.

For calculating objective functions, we need to derive paths of a tree from each chromosome. As we could see in Figure 3, each gene that ending to 0 (sink number) represents a path from a source relay node to the sink.

We assign each individual with three fitness functions, Energy consumption, Delay and Reliability. By introducing

the non-dominated sorting approach and the crowded distance operator the replacement scheme is executed. First, a combined population $R_t = P_t \cup Q_t$ is formed with the parent population P_t and the offspring population Q_t , where t is the number of generation. Therefore the population R_t will be of size $2N$. And it is sorted according to the non-domination and crowded comparison. By adding solutions from the first front till the size exceeds N , the new parent population P_{t+1} is formed. After that, the solutions of the last accepted front are sorted according to the crowded comparison and the first $(N - \text{Size}(P_{t+1}))$ points are picked.

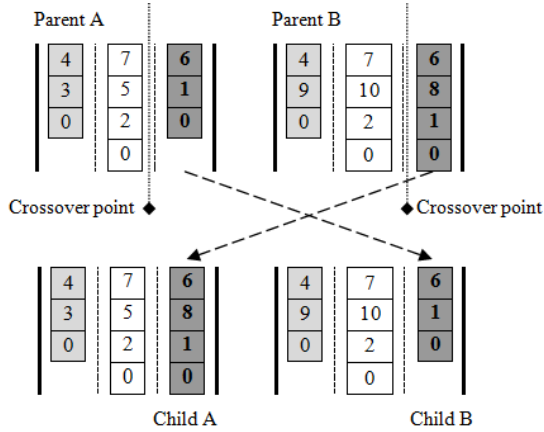


Fig. 4. Example of a single-point crossover.

In this way, the population P_{t+1} of size N is constructed. Subsequently, it is used for the circulated selection, crossover, and mutation to create a new population Q_{t+1} of size N . The recombination operator used in this paper is K -point crossover ($k = 1, 2, \text{ or } 3$ selected randomly depended on the source node count). Figure 4 shows an example of single point crossover, with two parent chromosomes, *Parent A* and *Parent B* from Figure 3. After the crossover, two new child chromosomes, *Child A* and *Child B*, are generated. To give an equal probability to all genes for crossover, we select genes randomly. In fact, we create new routing trees by using the crossover operation.

After recombination, the mutation operator is applied to change some relay nodes in genes (paths) of the chromosomes (trees) of the offspring randomly. Indeed, mutation operator has been used to create new paths in routing trees. Mutation cannot be performed on any arbitrary relay nodes, as that may result in some illegal paths. So, to select a relay node for mutation, first a gene is selected from the chromosome randomly, and then a relay node like x at position i , x_i , of the gene is selected randomly. Then x_i changed with a randomly selected relay node y , where y belongs to the intersection of neighbors of relay node at $i-1$ position and relay node at $i+1$ position, $y \in \{\text{neighbors}(\text{relay_node}_{i-1}) \cap \text{neighbors}(\text{relay_node}_{i+1})\}$. For example, Figure 5 shows a path between source node 8 and sink (0). Z_1 is the coverage area of relay node 1 and Z_7 is the coverage area of relay node 7. Hence, nodes 3, 4, 5, 6, 8 are neighbors of node 7 and nodes 3, 4, 5, 2, 0 are neighbors of node 1. So if

node 3 has been selected for mutation it can be changed with relay nodes 4 or 5 because only these nodes are in intersection area of Z_1 and Z_7 .

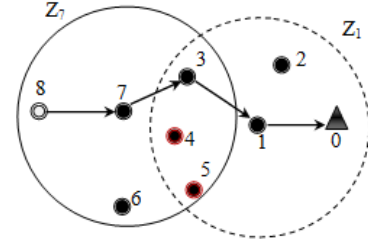


Fig. 5. Selecting a relay node for mutation

To combine the good chromosomes and simultaneously preserve the effective ones, we have considered the rate of crossover at 0.8 and that of mutation at 0.2.

This entire process is repeated until the difference of fitness values between the current Pareto optimal set and the previous one is less than a chosen precision (ϵ). The main procedure of algorithm is described below:

A Genetic Approach to Routing Algorithm:

- 1) **Input** Source Relay Nodes;
- 2) **Set** lifetime of Relay nodes to E_{mit} ;
- 3) **Set** $t := 0$, $N := \text{Population_Size}$;
- 4) Compute *Initial Routes (DFS)*;
- 5) $P_t := \text{Map Routes to Strings}$; /* initial population */
- 6) Calculate all objective functions for each individual in P_t ;
- 7) $F := \text{Do Fast_non_dominated_sorting algorithm}$; /* Resulting non-dominated fronts (F_1, F_2, \dots) */
- 8) **Repeat**
- 9) $Q_t := \text{Generate offspring from } P_t \text{ according to recombination and mutation operator}$;
- 10) /* optimal Route selection based on NSGA-II */
- 11) $R_t := P_t \cup Q_t$;
- 12) $F := \text{Do Fast_non_dominated_Sorting}(R_t)$;
- 13) **Set** $P_{t+1} := \phi$; $i := 1$;
- 14) **While** ($\text{Size}(P_{t+1} + F_i) \leq N$)
- 15) *Crowding_distance_assignment*(F_i);
- 16) $P_{t+1} := P_{t+1} \cup F_i$;
- 17) $i := i + 1$;
- 18) **End While**
- 19) **If** $\text{Size}(P_{t+1}) < N$ **Then**
- 20) Sort F_i in descending order using crowded comparison;
- 21) Put the first $(N - \text{Size}(P_{t+1}))$ members of F_i in P_{t+1} , i.e., $P_{t+1} := P_{t+1} \cup F_i[1: (N - \text{Size}(P_{t+1}))]$;
- 22) **End If**
- 23) Calculate all objective functions for each individual in P_{t+1} ;
- 24) $F := \text{Do Fast_non_dominated_sorting algorithm}$;
- 25) **If** *fitness_changes* $< \epsilon$ **Then**
- 26) *Get Pareto Optimal Sensory Routes*;
- 27) **Break**;
- 28) **End If**

29) $t := t + 1$;
 30) **Until** $t < Max_Generation$.

V. SIMULATION EXPERIMENTS AND RESULTS

In this section, we will present the simulation results as the performance evaluation of our proposed protocol. We use OPNET Modeler 14.0 for simulation. The performance of our proposed algorithm is compared with SPEED [10] and SAR [11] routing protocols in wireless sensor networks in terms of the end-to-end delay, energy consumption and reliability of data transmission. For our experiments, we use a 151-node network, with 40 relay nodes, 110 sensor nodes and a sink, which is not power constrained. Nodes are distributed in a 480×480 meter square area. To evaluate the performances of the protocols properly, experimental parameters of the three protocols were set as the same ones:

- 1) The values for the constants are the same as in [12], as follows:
 - a) $\theta_1 = \theta_2 = 50$ nJ/bit,
 - b) $\gamma = 100$ pJ/bit/m² and
 - c) The path loss exponent, $m=4$.
- 2) The range of each sensor (relay) node is 40m (200m), as in [19], and
- 3) The initial energy of each relay node is 5 J, as in [19].

The performance of the genetic algorithm is greatly affected by a number of factors, such as the population size, the probability of mutation and crossover, and the method of replacement. We have run a number of experiments with different values of these parameters to determine the optimal set for our network size. Finally, the GA parameters used in our simulations are listed in table 1. Although we allow the GA to run for a maximum of 100 generations, we have observed that the best solution is typically found within 20 generations.

TABLE 1
GA PARAMETERS USED IN THIS SIMULATION

Parameter	Value
Population size	20
Crossover rate	0.8
Mutation rate	0.2

The end-to-end delay metric is compared between proposed routing protocol, SAR [11] and SPEED [10] for wireless traffic in Figure 6. It explains that average end-to-end delay for wireless traffic is lower for proposed protocol than SPEED [10] and SAR [11]. This is because that in proposed protocol the packets have been routed to sink from the short delay paths.

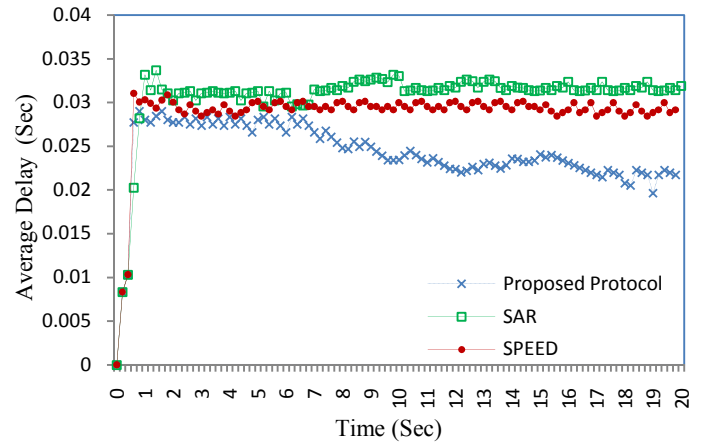


Fig. 6. Average Delay of different routing protocols

With the decrease of the reliability in the network, the error rate of data transmission in the protocols increases as fast as the exponential principle. However, the error rate of data transmission in the proposed protocol is lower than SPEED [10] and SAR [11] at fixed reliability (see Figure 7). The results are because the proposed protocol can keep away from the paths with low reliability (channel quality) and choose the best path with good channel quality from various paths, which reduces the error rate of data transmission.

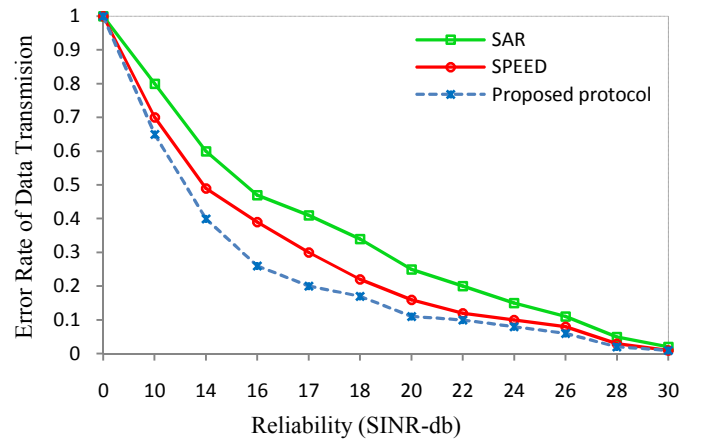


Fig. 7. Reliability of data transmission

Figure 8 delineates the comparative performance in terms of energy consumption of sensor nodes. Results show that the energy consumption of our proposed protocol is less than both SAR [11] and SPEED [10] routing protocols. This shows the efficiency of the proposed protocol in reducing the energy consumption to near-optimal values, while optimizing quality of service parameters (end-to-end delay and reliability) as well.

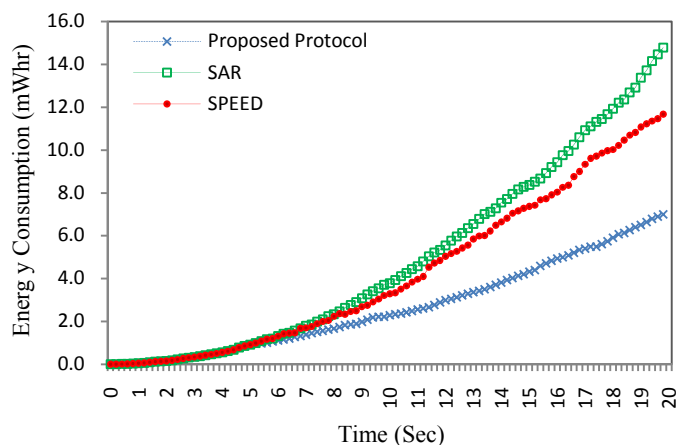


Fig. 8. Energy consumption of WSN

To further inspect of the dynamics of sensory energy consumption, we have shown the average energy consumption in SPEED [10], SAR [11] and the proposed protocol with different increasing traffic arrival rate in Figure 9. However, all the strategies result in increase of energy consumption with increasing traffic arrival, but our proposed protocol results in lowest energy consumption for different traffic arrival rates. This shows the efficiency of the proposed protocol.

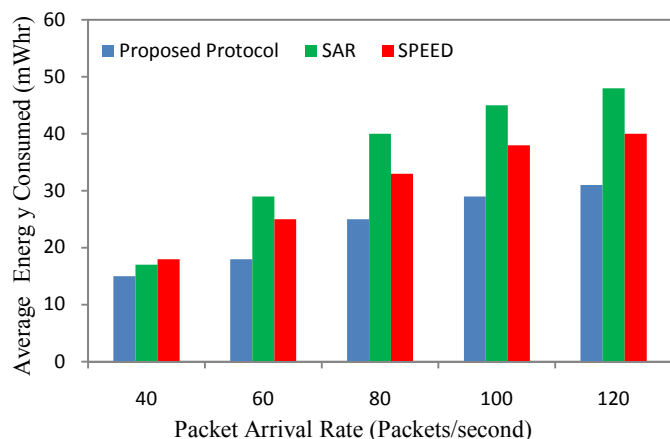


Fig. 9. Energy Consumption with different load

VI. CONCLUSION

In this paper, we have developed a QoS based, energy-aware routing protocol in two-tiered wireless sensor networks from the perspective of multi-objective optimizations utilizing NSGAI [18]. Optimizing a particular objective function may sacrifice optimization of another dependent and conflicting objective. The proposed protocol efficiently optimizes the QoS parameters, reliability and end-to-end delay, and reduces average power consumption of nodes, in fact extending the lifetime of the network. Simulation results delineate the efficiency and performance of the proposed protocol. We are currently investigating the

implementation of the approach in a distributed manner and enhancing the NSGA-II for solving the combined problem of routing and clustering.

REFERENCES

- [1] Akyildiz I. F., Su W., Sankarasubramaniam Y., Cayirci E., "A survey on sensor networks", *IEEE Communications Magazine*, 2002, 40(August), 102–114
- [2] G.Hossein EkbataniFard, Mohammad H. Yaghmaee, Reza Monsefi, "An Adaptive Cross-Layer Multichannel QoS-MAC Protocol for Cluster Based Wireless Multimedia Sensor networks", In proc. of ICUMT 2009, St. Petersburg, Russia, 2009
- [3] Heinzelman W, Kulik J, Balakrishnan H., "Adaptive protocols for information dissemination in wireless sensor networks", In Proc. of ACM/IEEE MobiCom '99, Seattle, WA, 1999
- [4] Intanagonwiwat C, Govindan R, Estrin D, "Directed diffusion: a scalable and robust communication paradigm for sensor networks", In Proc. of ACM MobiCom'00, Boston, MA, 2000
- [5] Rodoplu V, Meng TH., "Minimum energy mobile wireless networks", *IEEE Journal Selected Areas in Communications* 1999, 17, 1333–1344
- [6] Li L, Halpern JY, "Minimum-energy mobile wireless networks revisited", In Proc. Of IEEE ICC Conference, Helsinki, Finland, 2001
- [7] Xu Y, Heidemann J, Estrin D, "Geography-informed energy conservation for ad-hoc routing", In Proc. of the 7th Annual ACM/IEEE International Conference on Mobile Computing and Networking, Rome, Italy, 2001
- [8] Yu Y, Estrin D, Govindan R, "Geographical and energy aware routing: a recursive data dissemination protocol for wireless sensor networks", UCLA Computer Science Department Technical Report, UCLA-CSD TR-01-0023, May 2001
- [9] Gao Q, Blow KJ, Holding DJ, Marshall I, Peng XH, "Radio range adjustment for energy efficient wireless sensor networks", *Ad-Hoc Networks* 2006, Vol.4 (1), 75–82
- [10] Hea T, Stankovica JA, Lub C, Abdelzahera T, "SPEED: a stateless protocol for real-time communication in sensor networks", 23rd IEEE International Conference on Distributed Computing Systems (ICDCS'03), Rhode Island, USA, 2003
- [11] K. Sohrali, J. Pottie, "Protocols for Self-organization of A Wireless Sensor Network", *IEEE Personal Communications* 2000, Vol.7 (5), 16–27
- [12] Ataul Bari, Shamsul Wazed, Arunita Jaekel, Subir Bandyopadhyay, "A genetic algorithm based approach for energy efficient routing in two-tiered sensor networks", *Ad Hoc Networks*, Vol.7, 2009, 665–676
- [13] Navrati Saxena, Abhishek Roy, Jitae Shin, "QuEST: a QoS-based energy efficient sensor routing Protocol", *Wireless Communications and Mobile Computing Journal*, 2009, vol.9, no.3, 417–426
- [14] Y. Pan, X. Liu, "Energy-efficient lifetime maximization and sleeping scheduling supporting data fusion and QoS in Multi-Sensor Net", *Signal Processing*, 2007, Vol.87 (12), 2949–2964
- [15] Q. Qiu, Q. Wu, D. Burns, D. Holzhauer, "Lifetime aware resource management for sensor network using distributed genetic algorithm", *ISLPED'06*, ACM Press, New York, NY, 2006, 191–196
- [16] Srinivas N, Deb K, "Multiobjective optimization using nondominated sorting in genetic algorithms", *Journal of Evolutionary Computation*, 1995, Vol. 2(3), 221–248
- [17] Randy L.Haupt, Sue Ellen Haupt. "Practical Genetic Algorithms", John Wiley & Sons, 2004
- [18] Deb K, Pratap A, Agarwal S, Meyarivan T, "A Fast and Elitist Multiobjective Genetic Algorithm: NSGA-II", *IEEE Transactions on Evolutionary Computation*, 2002, vol.6, no. 2, 182–197
- [19] J. Tang, B. Hao, A. Sen, "Relay node placement in large scale wireless sensor networks", *Computer Communications*, 2006, vol.29 (4), 490–501
- [20] Douglas S. J. De Couto, Daniel Aguayo, John Bicket, and Robert Morris, "A high-throughput path metric for multi-hop wireless routing", *Wireless Networks*, 2005, Vol.11 (4), 419–434