


AD A 052039

AD NO. _____

DDC FILE COPY

MATHEMATICAL MC

DAVID W. TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CENTER



Bethesda, Md. 20084


A NONLINEAR MATHEMATICAL MODEL OF MOTIONS OF A PLANING BOAT IN REGULAR WAVES

by

Ernest E. Zarnick

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED


SHIP PERFORMANCE DEPARTMENT
RESEARCH AND DEVELOPMENT REPORT

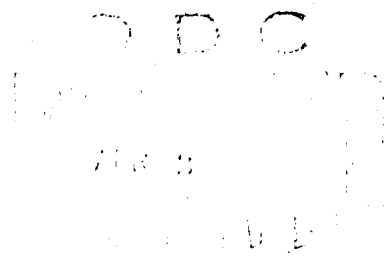

Best Available Copy

DTNSRD-78-72

MAJOR DTNSRDC ORGANIZATIONAL COMPONENTS

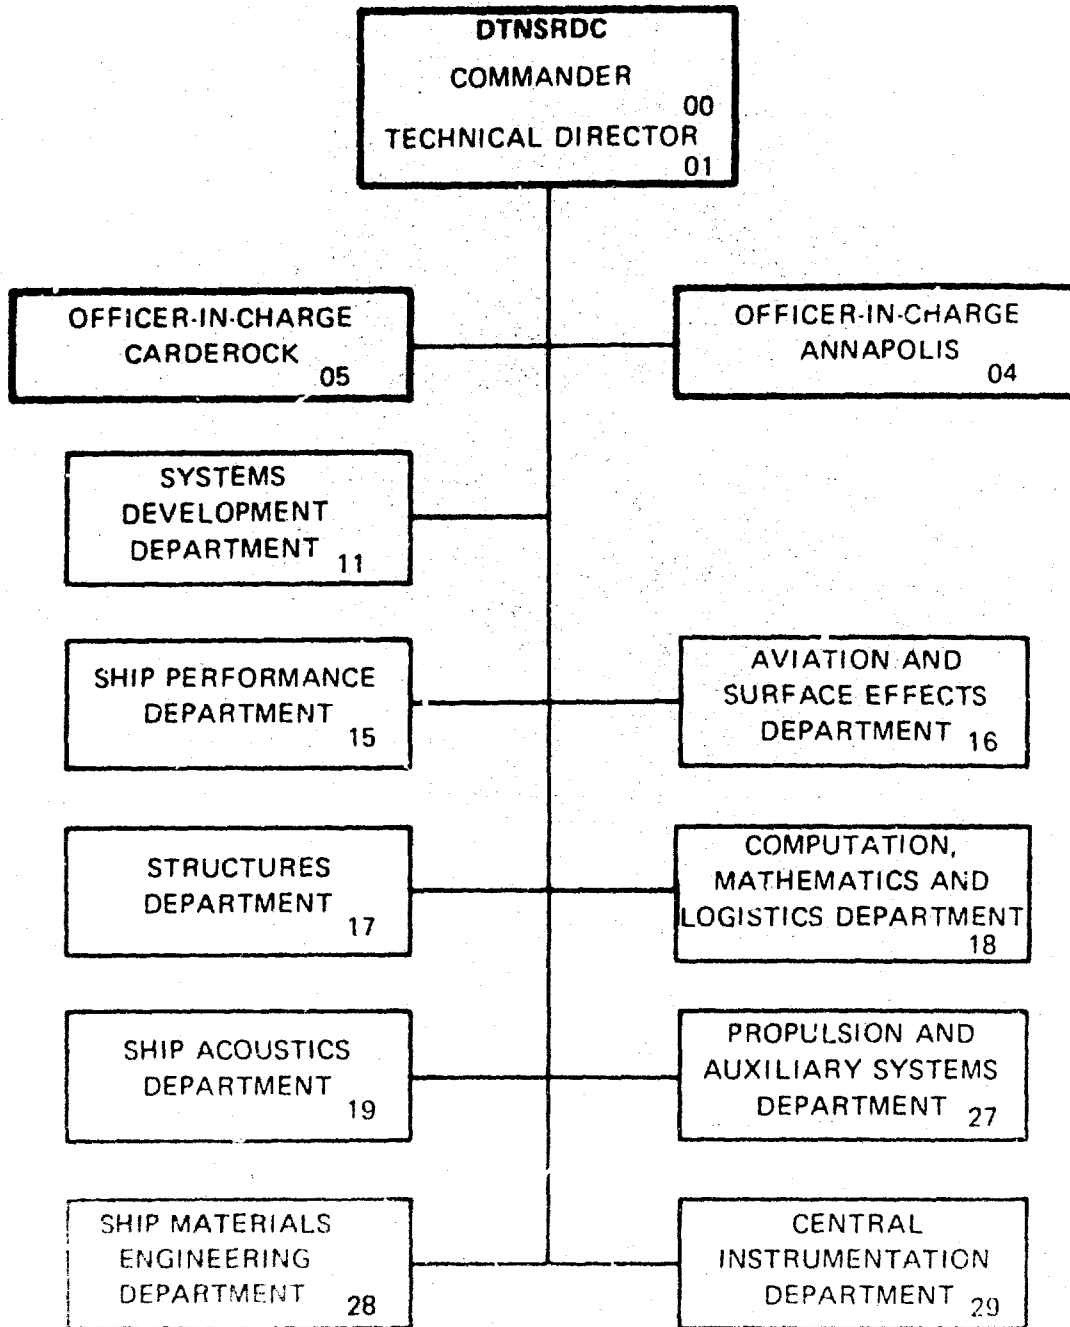

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 14 DTNSRDC-78/032	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) 6 A NONLINEAR MATHEMATICAL MODEL OF MOTIONS OF A PLANING BOAT IN REGULAR WAVES		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) 10 Ernest E./Zarnick		8. CONTRACT OR GRANT NUMBER(s) 16 F43421, SR02301
9. PERFORMING ORGANIZATION NAME AND ADDRESS David W. Taylor Naval Ship Research and Development Center Bethesda, Maryland 20084		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 17 ZF43421001, SR0230101 Work Unit 1-1500-100
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Sea Systems Command (SEA 035) Washington, D.C. 20362		12. REPORT DATE 11 Mar 78
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 86 12 81 P. 1
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED		15. SECURITY CLASS. (of this report) UNCLASSIFIED
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Planing Boat Motions Hydrodynamic Impact Small Boat Worthiness Nonlinear Ship Motions in Waves		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A nonlinear mathematical model has been formulated of a craft having a constant deadrise angle, planing in regular waves, using a modified low-aspect-ratio or strip theory. It was assumed that the wavelengths would be large in comparison to the craft length and that the wave slopes would be small. The coefficients in the equations of motion were determined by a combination of theoretical and empirical relationships. A simplified version for the case of a craft or model being towed at constant speed was programmed for computations on a digital computer, and the results were compared with existing experimental data. 10		

(Continued on reverse side)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

(Block 20 continued)

↘ Comparison of computed pitch and heave motions and phase angles with corresponding experimental data was remarkably good. Comparison of bow and center of gravity vertical accelerations was fair to good. ↑

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	Page
ABSTRACT	1
ADMINISTRATIVE INFORMATION.....	1
INTRODUCTION.....	1
MATHEMATICAL FORMULATION	2
GENERAL	2
TWO-DIMENSIONAL HYDRODYNAMIC FORCE	3
TOTAL HYDRODYNAMIC FORCE AND MOMENT.....	6
EQUATIONS OF MOTION, GENERAL	8
EQUATIONS OF MOTION, SIMPLIFIED FOR CONSTANT SPEED	9
COMPARISON OF COMPUTED RESULTS WITH EXPERIMENTS	10
CONCLUSIONS AND RECOMMENDATIONS	13
ACKNOWLEDGMENTS	13
REFERENCES	33
APPENDIX A – EVALUATION OF HYDRODYNAMIC FORCE AND MOMENT INTEGRALS	35
APPENDIX B – COMPUTER PROGRAM DESCRIPTIONS	39

LIST OF FIGURES


1 – Coordinate System.....	14
2 – Types of Two-Dimensional Flow	14
3 – Lines of Prismatic Models.....	15
4 – Sample Time Histories of Computed Pitch and Heave Motions.....	16
5 – Sample Time Histories of Computed Accelerations of Bow and Center of Gravity	17
6 – Variation of Pitch and Heave with Wave Height	18
7 – Variation of Acceleration of Bow and Center of Gravity with Wave Height	19

	Page
8 – Trajectory of Computer Model Relative to Wave	20
9 – Heave Response for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	21
10 – Pitch Response for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	22
11 – Heave Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	23
12 – Pitch Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	24
13 – Heave Response for 30-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	25
14 – Pitch Response for 30-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	26
15 – Heave Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 4.0$	27
16 – Pitch Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 4.0$	28
17 – Bow Acceleration for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	29
18 – Center of Gravity Acceleration for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	30
19 – Bow and Center of Gravity Accelerations for 20-Degree Deadrise Model at $V/\sqrt{L} = 4.0$ and $V/\sqrt{L} = 6.0$	31
20 – Bow and Center of Gravity Accelerations for 30-Degree Deadrise Model at $V/\sqrt{L} = 6.0$	32

Table 1 – Model Characteristics and Wave Conditions for Computations	11
--	----

NOTATION

A	Mass matrix
A_R	Section area
a	Correction factor for buoyancy force
b	Half-beam of craft
$C_{D,c}$	Crossflow drag coefficient
C_Δ	Load coefficient $\Delta/pg(2b)^3$
C_λ	Wavelength coefficient $L/\lambda [C_\Delta/(L/2b)^2]^{1/3}$
D	Friction drag force
F_x	Total hydrodynamic force in x direction
F_z	Total hydrodynamic force in z direction
F_θ	Total hydrodynamic moment about pitch axis
f	Two-dimensional hydrodynamic force
g	Acceleration of gravity
H	Wave height, crest to trough
h	Vertical submergence of point below free surface
h_z	Double amplitude of heave
I	Pitch moment of inertia
I_a	Added pitch, moment of inertia
k	Wave number
k_a	Two-dimensional added-mass coefficient
L	Hull length
LCG	Longitudinal center of gravity, percent of L
M	Mass of craft
M_a	Added mass of craft

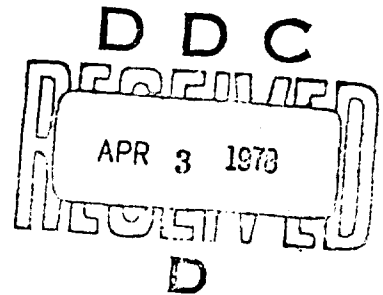

	White Section <input checked="" type="checkbox"/>
	Soft Section <input type="checkbox"/>
REPRODUCTION <input type="checkbox"/>	
JUSTIFICATION	
BY	
REPRODUCTION/AVAILABILITY ROOMS	
AVAIL. AND/OR SPECIAL	
A	

m_a	Sectional (two-dimensional) added mass
N	Hydrodynamic force normal to baseline
r	Wave elevation $r = r_0 \cos(kx + \omega t)$
r_0	Wave amplitude
U	Relative fluid velocity parallel to baseline
V	Relative fluid velocity normal to baseline
V/\sqrt{L}	Speed-to-length ratio in knots/ft ^{1/2}
W	Weight of craft
w_z	Vertical component of wave orbital velocity
\dot{w}_z	Vertical component of wave orbital acceleration
x	Fixed horizontal coordinate
\bar{x}	Vector of state variables
\dot{x}_{CG}	Surge velocity
\ddot{x}_{CG}	Surge acceleration
x_{CG}	Surge displacement
z	Fixed vertical coordinate
\dot{z}_{CG}	Heave velocity
\ddot{z}_{CG}	Heave acceleration
z_{CG}	Heave displacement
β	Deadrise angle
Δ	Hull displacement W
ζ	Body coordinate normal to baseline
λ	Wavelength
θ	Pitch angle
$\dot{\theta}$	Pitch angular velocity

$\ddot{\theta}$	Pitch angular acceleration
θ_p	Double amplitude of pitch
ξ	Body coordinate parallel to baseline
ρ	Density of water
ω	Wave frequency
ℓ	Wetted length

ABSTRACT

A nonlinear mathematical model has been formulated of a craft having a constant deadrise angle, planing in regular waves, using a modified low-aspect-ratio or strip theory. It was assumed that the wavelengths would be large in comparison to the craft length and that the wave slopes would be small. The coefficients in the equations of motion were determined by a combination of theoretical and empirical relationships. A simplified version for the case of a craft or model being towed at constant speed was programmed for computations on a digital computer, and the results were compared with existing experimental data. Comparison of computed pitch and heave motions and phase angles with corresponding experimental data was remarkably good. Comparison of bow and center of gravity vertical accelerations was fair to good.

ADMINISTRATIVE INFORMATION

This investigation was authorized by the Naval Sea Systems Command with initial funding under Task Area SR-023-0101 and completion under Task Area ZF-43-421001.

INTRODUCTION

Computer programs for estimating the motions of displacement ships in waves for all headings and speeds have been in existence for some time. Comparable computational schemes for planing craft do not exist except in limited and restricted cases. A program for planing craft would be quite useful to the small craft designer, providing a means for systematically exploring the effects of numerous design variations on performance of the craft in waves. With minor modification, the program could also be used to examine the merits of a hybrid craft design, e.g., a combination of planing craft and hydrofoil.

Predicting the motions of a planing craft in waves is by no means a simple problem. The analytical description of a high-speed craft, planing in waves, involves several different types of flow phenomena, including planing; hydrodynamic impact, and, to a lesser extent, surface wave generation and hydrostatics. Also, the mathematics tend to become nonlinear rapidly as the motion increases or, like the real craft, can in some instances exhibit large instabilities such as porpoising.

Development of a computer program that would take into account all of the previously described factors and would be applicable for a wide range of speed and wave conditions requires a careful and systematic study in several stages with appropriate verification at each stage. To lay the foundation for such a general program, a simpler problem has been

formulated in this report with potential for expansion and generalization to the more complicated case. The simpler problem is that of a V-shaped prismatic body with hard chines and constant deadrise planing at high speed in regular head waves.

The mathematical formulation is analogous to low-aspect-ratio wing theory with provisions for including hydrodynamic impact loads, essentially a strip theory. Surface wave generation and forces associated with unsteady circulatory flow are neglected, and the flow is treated as quasi-steady. The mathematical formulation is an empirical synthesis of several theoretically derived flows describing the overall craft hydrodynamics. Wave input is restricted to monochromatic linear deepwater waves with moderate wavelengths and low wave slopes.

MATHEMATICAL FORMULATION

GENERAL

Consider a fixed coordinate system (x,z) (Figure 1) with x axis in the undisturbed free surface, pointing in the direction of craft travel, and the z axis, pointing downward. If the motions of the craft are restricted to pitch θ , heave z_{CG} , and surge x_{CG} , the equation of motions can be written as

$$\begin{aligned} M\ddot{x}_{CG} &= T_x - N \sin \theta - D \cos \theta \\ M\ddot{z}_{CG} &= T_z - N \cos \theta + D \sin \theta + W \\ I\ddot{\theta} &= Nx_c - Dx_d + Tx_p \end{aligned} \quad (1)$$

where M is mass of craft

I is pitch moment of inertia of craft

N is hydrodynamic normal force

D is friction drag

W is weight of craft

T_x is thrust component in x direction

T_z is thrust component in z direction

x_c is distance from center of gravity (CG) to center of pressure for normal force

x_d is distance from CG to center of action for friction drag force

x_p is moment arm of thrust about CG.

Equation (1) is exact; however, defining the hydrodynamic forces and moments in waves can be extremely difficult.

A high-speed craft moving in waves may transit through several regimes that have different hydrodynamic flow characteristics. For example, as the craft moves away from the crest of wave, the flow may be characterized by unsteady-state planing until the craft collides with the oncoming wave crest and enters another regime in which impact forces are important. After the impact, the craft may enter still another regime in which it is planing but in which buoyancy forces are rather significant.

The most promising approach to a method that would incorporate all three types of flow conditions into a general formulation would seem to be a modified strip theory. The mathematical justification for this approach is not rigorous; however, there is sufficient precedent to expect promising results. For example, impact loads on landing seaplanes can be estimated reasonably well using a strip theory incorporating the Wagner two-dimensional (2-D), expanding-wedge theory,¹ and Chuang² has provided a strip method for determining loads on an impacting prismatic form that agrees extremely well with experimental results.

More recently, Martin³ has developed a linear strip theory for estimating motions of a planing craft at high speed, which shows good agreement with experimental results. A nonlinear model of the equations of motion would be expected to provide, in addition to the motions, reasonable estimates of the vertical accelerations which are an important consideration in designing a planing craft.

TWO-DIMENSIONAL HYDRODYNAMIC FORCE

Implicit with any strip method is the need to define the 2-D hydrodynamic force acting on an arbitrary cross section of the body. The 2-D flow problem is not simple; however, it lends itself to an empirical approach, using a combination of techniques used in hydrodynamic impact and low-aspect-ratio theories.

The typical cross section of a hard-chine, V-shaped prismatic body such as that being considered here is shown in Figure 2. Figure 2 actually illustrates two different idealized-flow conditions, assumed to represent the crossflow during unsteady planing, depending upon whether the flow separates from the chine (Figure 2a) or not (Figure 2b). Nonwetted-chine flow conditions are typical of the sections near the leading edge of the wetted length of the craft. Wetted-chine flow conditions are more typical of sections near the stern, except possibly in the most extreme motion and wave conditions. Some sections between leading edge and stern may alternate between flow conditions as the wetted length changes with the motions.

*A complete listing of references is given on page 33.

The normal hydrodynamic force per unit length f , acting at a section, is treated as quasi-steady and is assumed to contain components proportional to the rate of change of momentum and the velocity squared (drag term), i.e.

$$f = - \left\{ \frac{D}{Dt} (m_a V) + C_{D,c} \rho b V^2 \right\} \quad (2)$$

where V is the velocity in plane of the cross section normal to the baseline

m_a is the added mass associated with the section form

$C_{D,c}$ is the crossflow drag coefficient

ρ is the density of the fluid

b is the half beam.

For sections near the leading edge of the wetted length with nonwetted chine, the added mass is assumed to be defined in the same manner as during an impact which for a V-shaped wedge is given by

$$m_a = k_a \pi/2 \rho b^2 \quad (3)$$

where k_a is an added-mass coefficient that may also include a correction for water pileup - k_a is assumed to be 1.0 without pileup correction.

The rate of change of momentum of the fluid at a section is given by

$$\frac{D}{Dt} (m_a V) = m_a \dot{V} + V \dot{m}_a - \frac{\partial}{\partial \xi} (m_a V) \frac{d\xi}{dt} \quad (4)$$

where ξ is the body coordinate parallel to the baseline; see Figure 1. The last term on the right-hand side of Equation (4) takes into account the variation of the section added mass along the hull. This contribution can be visualized by considering the 2-D flow plane as a substantive surface moving past the body with velocity $U = -d\xi/dt$ tangent to the baseline. As the surface moves past the body, the section geometry in the moving surface may change with a resultant change in added mass. This term exists even in steady-state conditions and is the lift-producing factor in low-aspect-ratio theory.

The added mass of a section with fully wetted chines has not been developed to the same extent as the V wedge. In steady-state planing problems such as those of Shuford,⁴

the crossflow is treated as a Helmholtz-type flow in which the Bobyleff results are used for estimating drag coefficients. Helmholtz flows are applicable only to steady-state conditions; so, it is assumed that the added mass for the fully wetted chine flow can be determined from Equation (3) using the value of the half-beam at the chine. In using the Shuford approach, it is assumed that the crossflow drag coefficient for a V-section is equal to the drag of a flat plate ($C_{D,c} = 1.0$) corrected by the Bobyleff flow coefficient approximated by $\cos \beta$, i.e.

$$C_{D,c} = 1.0 \cos \beta \quad (5)$$

The Bobyleff flow coefficient is the theoretical ratio of the pressure on a V-section to that experienced by a flat plate for a Helmholtz-type flow.

The same approximation is used for estimating the drag coefficient for nonwetted chine sections, using the instantaneous value of the half-beam at the free surface.

An additional force acting on the body is the buoyancy force f_B . This force is assumed herein to act in the vertical direction and to be equal to the equivalent static buoyancy force multiplied by a correction factor, i.e.

$$f_B = -a\rho g(A) \quad (6)$$

where A is the cross-sectional area of the section, and a is a correction factor.

The full amount of the static buoyancy is not realized because at planing speeds the water separates from the transom and chines, reducing the pressure at these locations to atmospheric or less than the equivalent hydrostatic pressure. A greater reduction is realized in the buoyancy moment because of the corresponding shift in the center of pressure. Shuford⁴ in his work on steady-state planing recommended a factor of one-half to obtain the correct buoyancy force. In the following computations, the buoyancy force was corrected by a factor of one-half, i.e., $a = 1/2$. The buoyancy moment, computed as the static buoyancy force multiplied by its corresponding moment arm, was corrected by an additional factor of one-half to obtain the proper mean-trim angles.

Equation (2) is a synthesis of several idealized flow conditions combined in an empirical manner. In all of these flows, it is assumed that the net relative movement of the fluid past the body is in an upward direction. This condition may not always be met in the case of unsteady planing in waves. Closer scrutiny will be required to determine what limitations will be imposed upon the problem as formulated and/or what modifications will be required to improve the formulation.

TOTAL HYDRODYNAMIC FORCE AND MOMENT

The total normal hydrodynamic force acting on the body is obtained by integrating the stripwise, 2-D, hydrodynamic force given by Equations (2) and (6) over the wetted length l of the body. A body coordinate system (ξ, ζ) with its origin at CG and the ξ axis pointing forward parallel to the baseline of the body is defined in Figure 1 to facilitate this integration. The hydrodynamic force acting in the vertical or z direction of the fixed integral coordinate system is given by

$$\begin{aligned}
 -N \cos \theta &= F_z(t) = \int_l f \cos \theta \, d\xi + \int_l f_B \, d\xi \\
 &= - \left[\int_l \left\{ m_a(\xi, t) \dot{V}(\xi, t) + \dot{m}_a(\xi, t) V(\xi, t) \right. \right. \\
 &\quad - U(\xi, t) \frac{\partial}{\partial \xi} [m_a(\xi, t) V(\xi, t)] \\
 &\quad + C_{D,c}(\xi, t) \rho b(\xi, t) V^2(\xi, t) \left. \right\} \cos \theta \, d\xi \\
 &\quad \left. + a \rho g A \, d\xi \right] \quad (7)
 \end{aligned}$$

where the integration is taken over the instantaneous wetted length. Similarly the force F_x acting in the horizontal or x direction is given by

$$\begin{aligned}
 F_x &= \int_l f \sin \theta \, d\xi \\
 &= - \int_l \left\{ m_a(\xi, t) \dot{V}(\xi, t) + \dot{m}_a(\xi, t) V(\xi, t) \right. \\
 &\quad - U(\xi, t) \frac{\partial}{\partial \xi} [m_a(\xi, t) V(\xi, t)] \\
 &\quad \left. + C_{D,c}(\xi, t) \rho b(\xi, t) V^2(\xi, t) \right\} \sin \theta \, d\xi \quad (8)
 \end{aligned}$$

Wave forces are obtained by neglecting diffraction and assuming that the wave excitation is caused both by the geometrical properties of the wave, altering the wetted length and draft of the craft, and by the vertical component of the wave orbital velocity at the surface w_z , altering the normal velocity V . The horizontal component of orbital velocity is neglected.

since it is assumed small in comparison with the forward speed \dot{x}_{CG} . The velocities U and V may then be written as

$$\begin{aligned} U &= \dot{x}_{CG} \cos \theta - (\dot{z}_{CG} - w_z) \sin \theta \\ V &= \dot{x}_{CG} \sin \theta - \dot{\theta} \xi + (\dot{z}_{CG} - w_z) \cos \theta \end{aligned} \quad (9)$$

The depth of submergence h of the body at any point P(ξ, ζ) may be determined by

$$h = z_{CG} - \xi \sin \theta + \zeta \cos \theta - r \quad (10)$$

where r is the instantaneous value of the wave elevation directly above the point.

For regular head waves the wave elevation for a linear deepwater wave is

$$r = r_0 \cos k(x+ct) \quad (11)$$

where r_0 is the wave amplitude

k is the wave number;

c is the wave celerity.

At point P(ξ, ζ)

$$x = x_{CG} + \xi \cos \theta + \zeta \sin \theta \quad (12)$$

where $x_{CG} = \int \dot{x}_{CG} dt$

The hydrodynamic moment F_θ about CG is obtained in a similar manner by integrating over the wetted length the product of the normal force per unit length and the corresponding moment arm.

$$\begin{aligned}
F_{\theta} &= - \int_{\ell} f(\xi, t) \xi d\xi - \int_{\ell} I_b \cos \theta \xi d\xi \\
&= \int_{\ell} \left\{ m_a(\xi, t) \dot{V}(\xi, t) + \dot{m}_a(\xi, t) V(\xi, t) \right. \\
&\quad \left. - U(\xi, t) \frac{\partial}{\partial \xi} (m_a(\xi, t) V(\xi, t)) + C_{D,c}(\xi, t) \rho b(\xi, t) V^2(\xi, t) \right. \\
&\quad \left. + a \rho g A \cos \theta \right\} \xi d\xi \tag{13}
\end{aligned}$$

EQUATIONS OF MOTION, GENERAL

Integrating the first term in Equations (7), (8), and (13) provides hydrodynamic forces and moments proportional to acceleration of the motion. These can be combined with the inertial terms of the rigid body to give the following equation of motion

$$\begin{aligned}
(M + M_a \sin^2 \theta) \ddot{x}_{CG} + (M_a \sin \theta \cos \theta) \ddot{z}_{CG} - (Q_a \sin \theta) \ddot{\theta} \\
&= T_x + F'_x - D \cos \theta \tag{14} \\
(M_a \sin \theta \cos \theta) \ddot{x}_{CG} + (M + M_a \cos^2 \theta) \ddot{z}_{CG} - (Q_a \cos \theta) \ddot{\theta} \\
&= T_z + F'_z + D \sin \theta + W \\
-(Q_a \sin \theta) \ddot{x}_{CG} - (Q_a \cos \theta) \ddot{z}_{CG} + (I + I_a) \ddot{\theta} \\
&= F'_\theta - D x_d + T x_p
\end{aligned}$$

$$\text{where } M_a(t) = \int_{\ell} m_a(\xi, t) d\xi$$

$$Q_a(t) = \int_{\ell} m_a(\xi, t) \xi d\xi$$

$$I_a(t) = \int_{\ell} m_a(\xi, t) \xi^2 d\xi$$

$$F'_x = F_x - \left\{ -(M_a \sin^2 \theta) \ddot{x}_{CG} - (M_a \sin \theta \cos \theta) \ddot{z}_{CG} + (Q_a \sin \theta) \ddot{\theta} \right\}$$

$$F'_z = F_z - \left\{ \text{appropriate acceleration terms} \right\}$$

$$F'_\theta = F_\theta - \left\{ \text{appropriate acceleration terms} \right\}.$$

A detailed evaluation of the integral expressions for the hydrodynamic forces and moments is provided in Appendix A.

The solution to Equation (14) is cumbersome; however, it can be accomplished using standard numerical techniques. Introducing the state vector $[x_1, x_2, x_3, x_4, x_5, x_6]$

$$\text{where } x_1 = \dot{y}_{CG}$$

$$x_2 = \dot{z}_{CG}$$

$$x_3 = \dot{\theta}$$

$$x_4 = x_{CG}$$

$$x_5 = z_{CG}$$

$$x_6 = \theta$$

Equation (14) can be rewritten, using matrix algebra, as

$$A\vec{x} = \vec{g} \quad (15)$$

so that

$$\vec{x} = A^{-1}\vec{g} \quad (16)$$

where A^{-1} is inverse of the inertial matrix A . Equation (16) is now in a form that lends itself to integration by using a numerical method such as the Runge-Kutta-Merson integration routine.

EQUATIONS OF MOTION, SIMPLIFIED FOR CONSTANT SPEED

Assuming that the perturbation velocities in the forward direction are small in comparison to the speed of the craft, the equations of motion may be further simplified by neglecting the perturbations and setting the forward velocity equal to a constant, i.e.

$$\dot{x}_{CG} = \text{CONSTANT}$$

If it is also assumed that the thrust and drag forces are small in comparison to the hydrodynamic forces and that they are acting through the center of gravity, the equations of motion may be written as

$$\begin{aligned}\ddot{x}_{CG} &= 0 \\ (M + M_a \cos^2 \theta) \ddot{z}_{CG} - (Q_a \cos \theta) \ddot{\theta} &= F'_z + W \\ -(Q_a \cos \theta) \ddot{z}_{CG} + (I + I_a) \ddot{\theta} &= F'_\theta\end{aligned}$$

These equations also represent the case of the craft (model) being towed through CG at CONSTANT speed. Based upon the previously described equations of motion, a computer program has been written in FORTRAN language to compute the motions of a prismatic body, planing in regular head waves at high speed. A listing of the program along with the appropriate flow chart is presented in Appendix B. The listing contains reference to thrust and drag terms; however, they have no significance, except to provide a starting point for possible updating of the program to include these terms in the future.

COMPARISON OF COMPUTED RESULTS WITH EXPERIMENTS

Computations of pitch and heave motions and heave and bow accelerations were made, using the computer program for comparison with the experimental results of Fridsma.⁵ Fridsma tested a series of constant-deadrise models of various lengths in regular waves to define the effects of deadrise, trim, loading, speed, length-to-beam ratio and wave proportions on the added resistance, heave and pitch motions, and impact accelerations at the bow and center of gravity. Figure 3 shows the lines of the prismatic models. The models were towed at CG with a system that permitted freedom in surge. The computer program simulates the model being towed at constant speed with CG at the baseline.

Table 1 presents some characteristics of the model and experimental conditions for which comparisons were made. Most of the comparisons have been made at a speed-to-length ratio V/\sqrt{L} of 6.0 where the mathematical model is expected to be most representative. A limited comparison has also been made at $V/\sqrt{L} = 4.0$; however, no comparison has been made at $V/\sqrt{L} = 2.0$. At this speed, the model (or craft) operates in the displacement mode for which the mathematical formulation is not valid.

The average computer run corresponded to 10-second, real-time, model scale; however, only the last 2 seconds were considered free of transient effects. An example of the computer time histories of pitch and heave motions is shown in Figure 4. Although the motions are periodic, they are not perfectly sinusoidal; consequently, in determining phase relationship, the peak, positive-pitch value (bow up) and the peak, negative-heave value (maximum upward position of CG) were used as reference points. There was a difference when the opposite peaks were used.

TABLE 1 - MODEL CHARACTERISTICS AND WAVE CONDITIONS FOR COMPUTATIONS

(Model Length = 114.3 cm (3.75 ft); L/b = 5; C_{Δ} = 0.608)

CONFIGURATIONS							
SYMBOL	β deg	LCG percent L	Radius of Gyration percent L	v/\sqrt{L}			
A	20	59.0	25.1	4.0			
B	20	62.0	25.5	6.0			
J	10	68.0	26.2	6.0			
M	30	60.5	24.8	6.0			
WAVE CONDITIONS FOR CONFIGURATION --							
A		B		J		M	
H/b	λ/L	H/b	λ/L	H/b	λ/L	H/b	λ/L
0.111	1.0	0.111	1.0	0.111	1.0	0.111	1.0
0.111	1.5	0.111	1.5	0.111	1.5	0.111	1.5
0.111	2.0	0.111	2.0	0.111	2.0	0.111	2.0
0.111	3.0	0.111	3.0	0.111	3.0	0.111	3.0
0.111	4.0	0.111	4.0	0.111	4.0	0.111	4.0
0.111	6.0	0.222	6.0	0.111	6.0	0.111	6.0
		0.334	4.0				
		0.111	6.0				

Corresponding time histories of bow and CG accelerations are shown in Figure 5. The bow acceleration was computed at Station 0. As can be seen in these plots, the impact accelerations ranged in magnitude from cycle to cycle. The maximum impact (or negative value) acceleration computed during the final 2 seconds of run was used in the comparisons with experimental values. In some instances, particularly near resonance, the maximum impact acceleration was more than twice the average impact value.

Figure 6 shows a comparison of variation of computed and experimental pitch and heave motion with wave height for the 20-degree deadrise model in a 15-foot wavelength and for a speed-to-length ratio of 6.0. Figure 7 shows the corresponding impact acceleration at the bow and CG. The computed results closely follow the experimental data, except for CG acceleration at the extreme wave height condition, where the computed value is apparently much lower. Experimental data show that the model was leaving the water at this wave-height condition. The computer model did not leave the water but came very close:

see Figure 8. Figure 8 is a trajectory of the computer model relative to the wave for a selected cycle of motion. The computer model behaves very much as expected. On the left-hand side of the figure, the craft is planing down the crest of the wave and, as it approaches the wave trough, comes very close to leaving the water before slamming and submerging itself deeply into the front of the oncoming wave crest.

Figures 9 through 14 show comparisons of the computed and experimental pitch and heave motions at $V/\sqrt{L} = 6.0$ through a range of wavelengths and at a constant wave height of 2.54 centimeters (1 inch) for deadrise models with 10, 20, and 30 degrees. The data have been plotted with respect to the coefficient C_λ , defined by Fridsma as $L/\lambda [C_\Delta/(L/2b)^2]^{1/3}$. Note that in our notation, b is the half-beam.

Comparisons of heave and pitch for the 10-degree deadrise model shown in Figures 9 and 10, respectively, show excellent results. The computer model accurately predicts the secondary peaks in the pitch and heave responses at $C_\lambda = 0.19$. At this condition, the physical experimental model rebounds so as to fly over alternate waves. The computer model oscillates at half the wave-encounter frequency and comes close to leaving the water at alternate encounters with the wave. It does not quite leave the water to fly over alternate wave crests; nonetheless, it is a good representation of the actual motion.

The heave and pitch comparison for the 20-degree deadrise model at $V/\sqrt{L} = 6.0$ is also excellent as can be seen in Figures 11 and 12, respectively. No experimental phase data for the condition were reported for C_λ greater than 0.072; however, extrapolated results (not shown) are in line with the computed results. The pitch and heave results shown in Figures 13 and 14 for the 30-degree deadrise model are good; however, responses at $C_\lambda = 0.048$ and $C_\lambda = 0.072$ are higher than the experimental results.

For practical considerations a computational scheme for planing boat motions should be valid for a range from approximately $V/\sqrt{L} = 4.0$ to $V/\sqrt{L} = 6.0$. Computations of the motions were made for $V/\sqrt{L} = 4.0$ for the 20-degree deadrise model; see Figures 15 and 16. Again the comparison of the computed heave and pitch response with experimental results is excellent.

Comparisons of the computed and experimental impact accelerations (or largest negative values) are presented in Figures 17 through 20. Figures 17 and 18 show bow and CG accelerations for the 10-degree deadrise model; Figure 19 shows similar results for the 20-degree deadrise model. Figure 20 shows the results for the 30-degree deadrise model. In all cases, the comparison appears to be fair to good. In the shorter wavelengths, $\lambda/L = 1.0$ and $\lambda/L = 1.5$, the computed accelerations are higher than the corresponding experimental values. This is most pronounced for the 10-degree deadrise angle model.

CONCLUSIONS AND RECOMMENDATIONS

A mathematical model of a craft having a constant deadrise angle, planing in regular waves, has been formulated using a modified low-aspect-ratio or strip theory. It was assumed that the wavelengths were long in comparison to the craft length and that the wave slopes were small. The coefficients in the equations of motion were determined by a combination of theoretical and empirical relationships.

A simplified version for the case of a craft or model being towed at constant speed was programed for computations on a digital computer, and the results were compared with existing experimental data.

The comparison of the computed pitch and heave motions and phase angles with the corresponding experimental data gave remarkably satisfying results. Comparison of the bow and CG accelerations was fair to good.

In summary, the previously described mathematical model appears to be a valid representation of a planing craft in waves for the specific craft geometry and wave conditions considered.

To make the computer program more valuable to the designer the following additional work is recommended:

1. Improve estimates of hydrodynamic coefficients to obtain better acceleration data and to include more complicated ship geometry.
2. Determine added resistance in waves.
3. Include freedom to surge and to add components of propulsion.
4. Extend to the case of irregular waves.

ACKNOWLEDGMENTS

Acknowledgment is given to Dr. Joseph Whalen and Ms. Sue Fowler of Operations Research, Inc., who translated the equations of motion into an operational computer program.

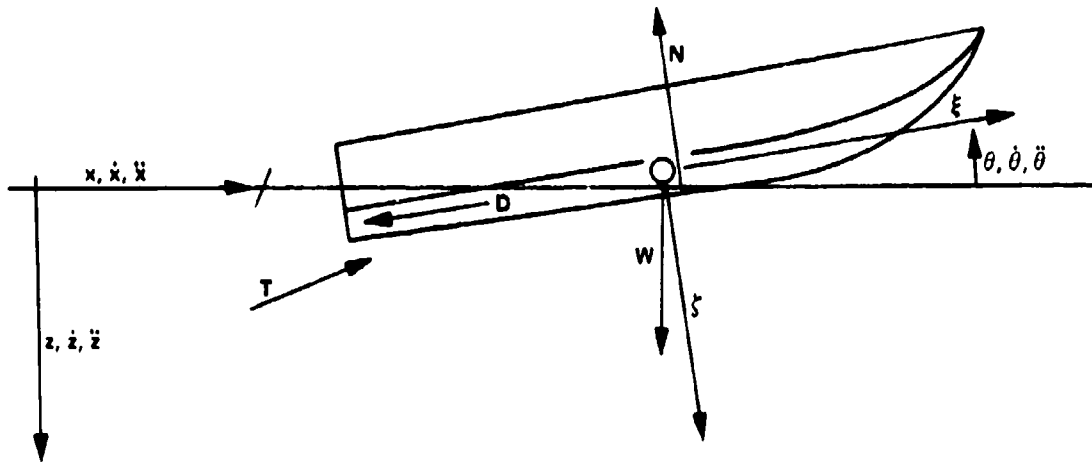


Figure 1 - Coordinate System

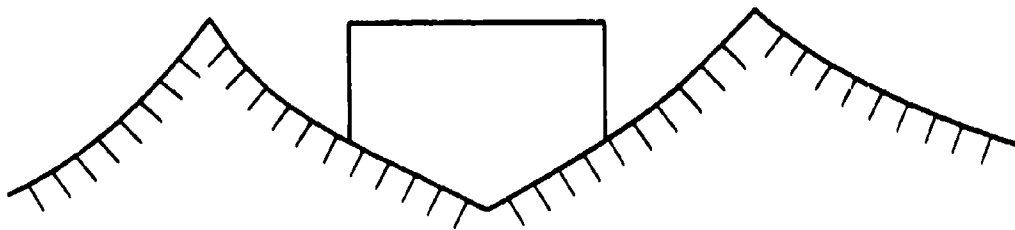


Figure 2a - Flow Separation from Chine

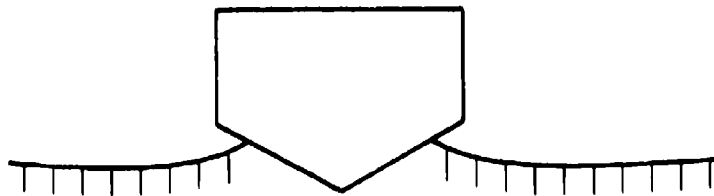


Figure 2b - Nonwetted Chine

Figure 2 - Types of Two-Dimensional Flow

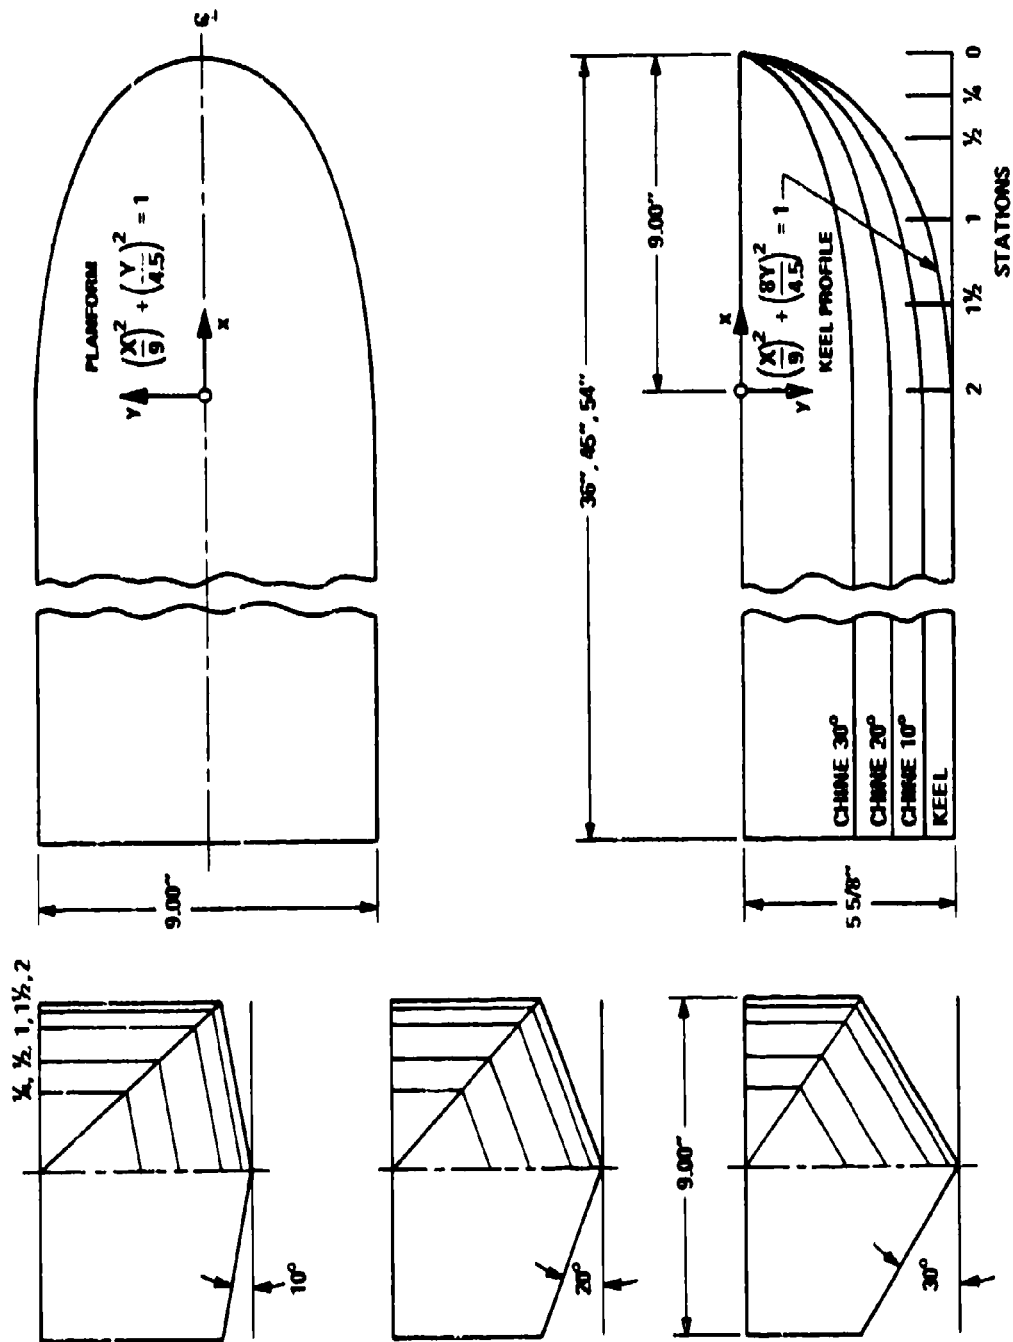


Figure 3 - Lines of Prismatic Models
(From Reference 5)

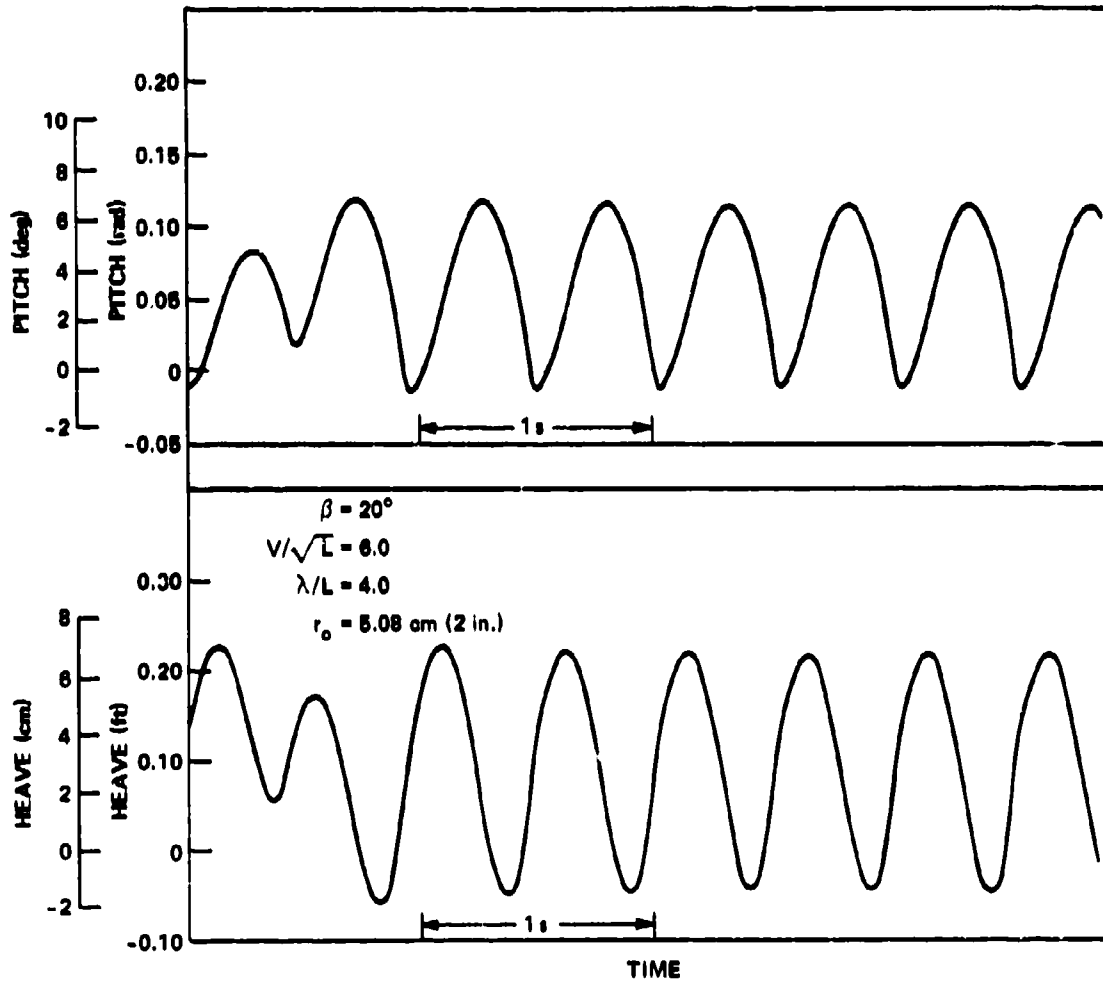


Figure 4 - Sample Time Histories of Computed Pitch and Heave Motions

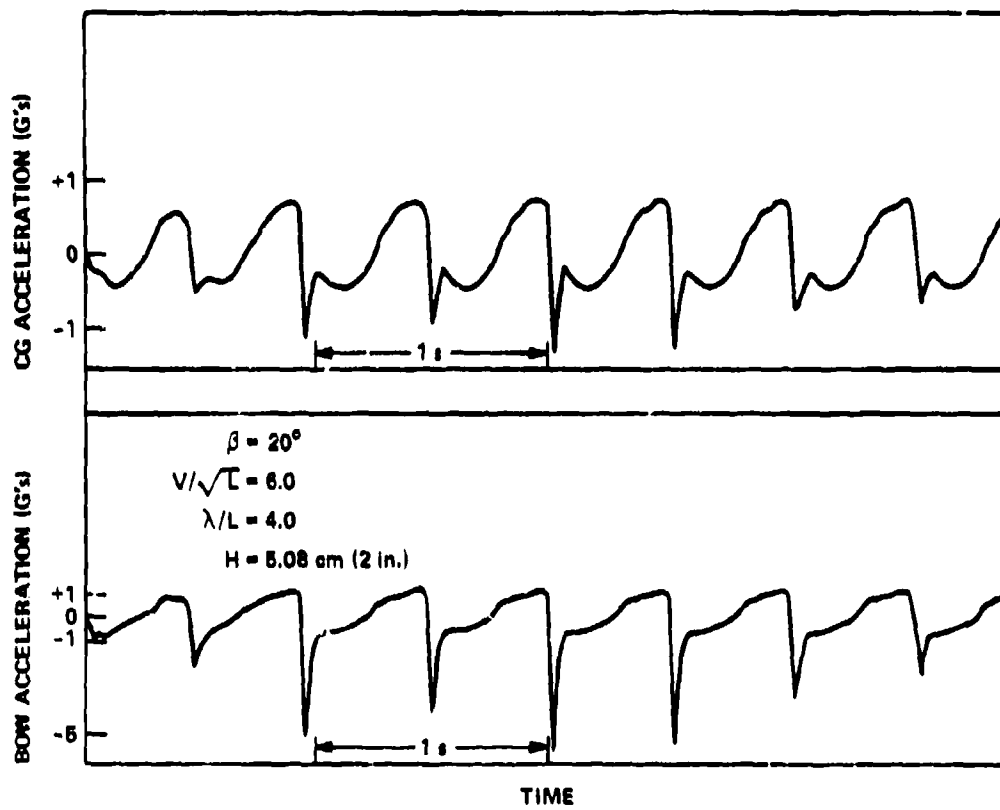


Figure 5 - Sample Time Histories of Computed Accelerations of Bow and Center of Gravity

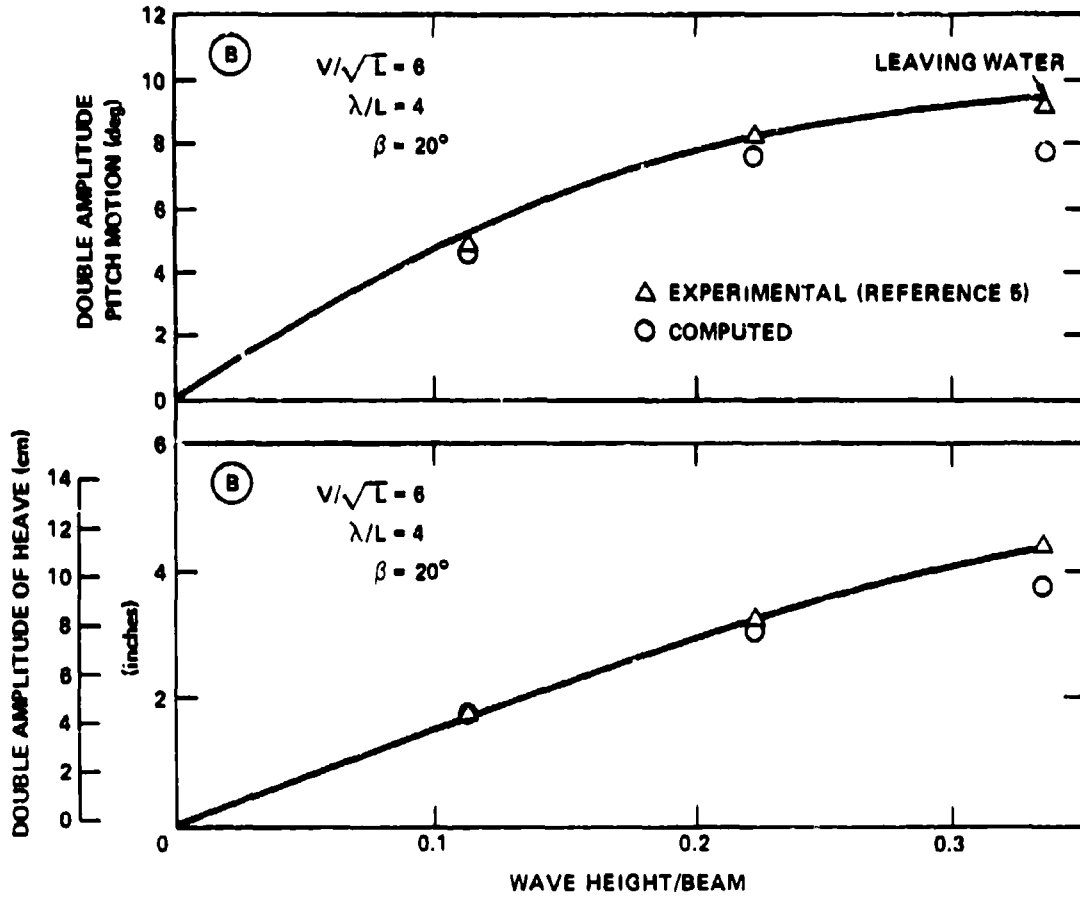


Figure 6 - Variation of Pitch and Heave with Wave Height

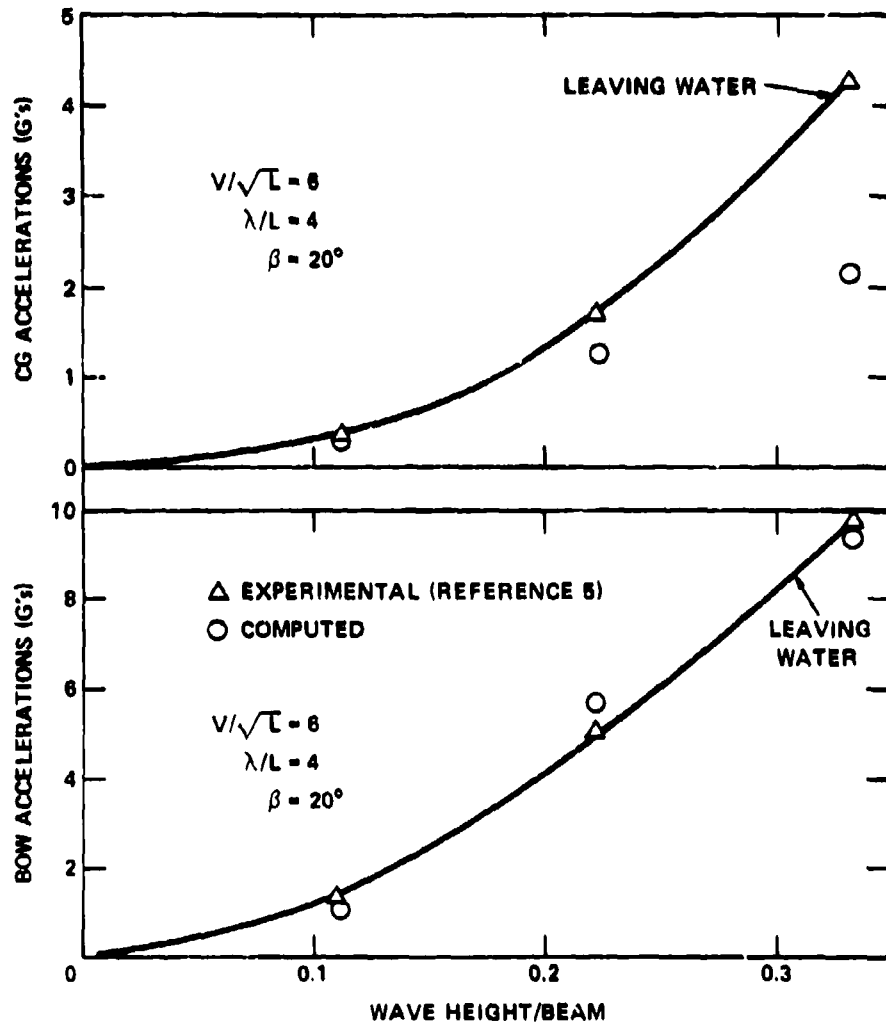


Figure 7 - Variation of Acceleration of Bow and Center of Gravity with Wave Height

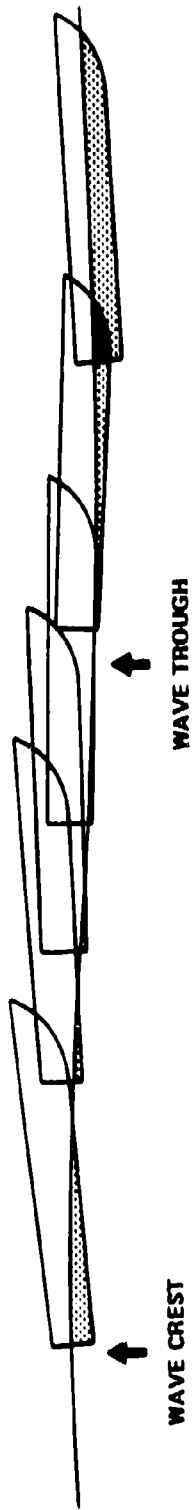


Figure 8 - Trajectory of Computer Model Relative to Wave

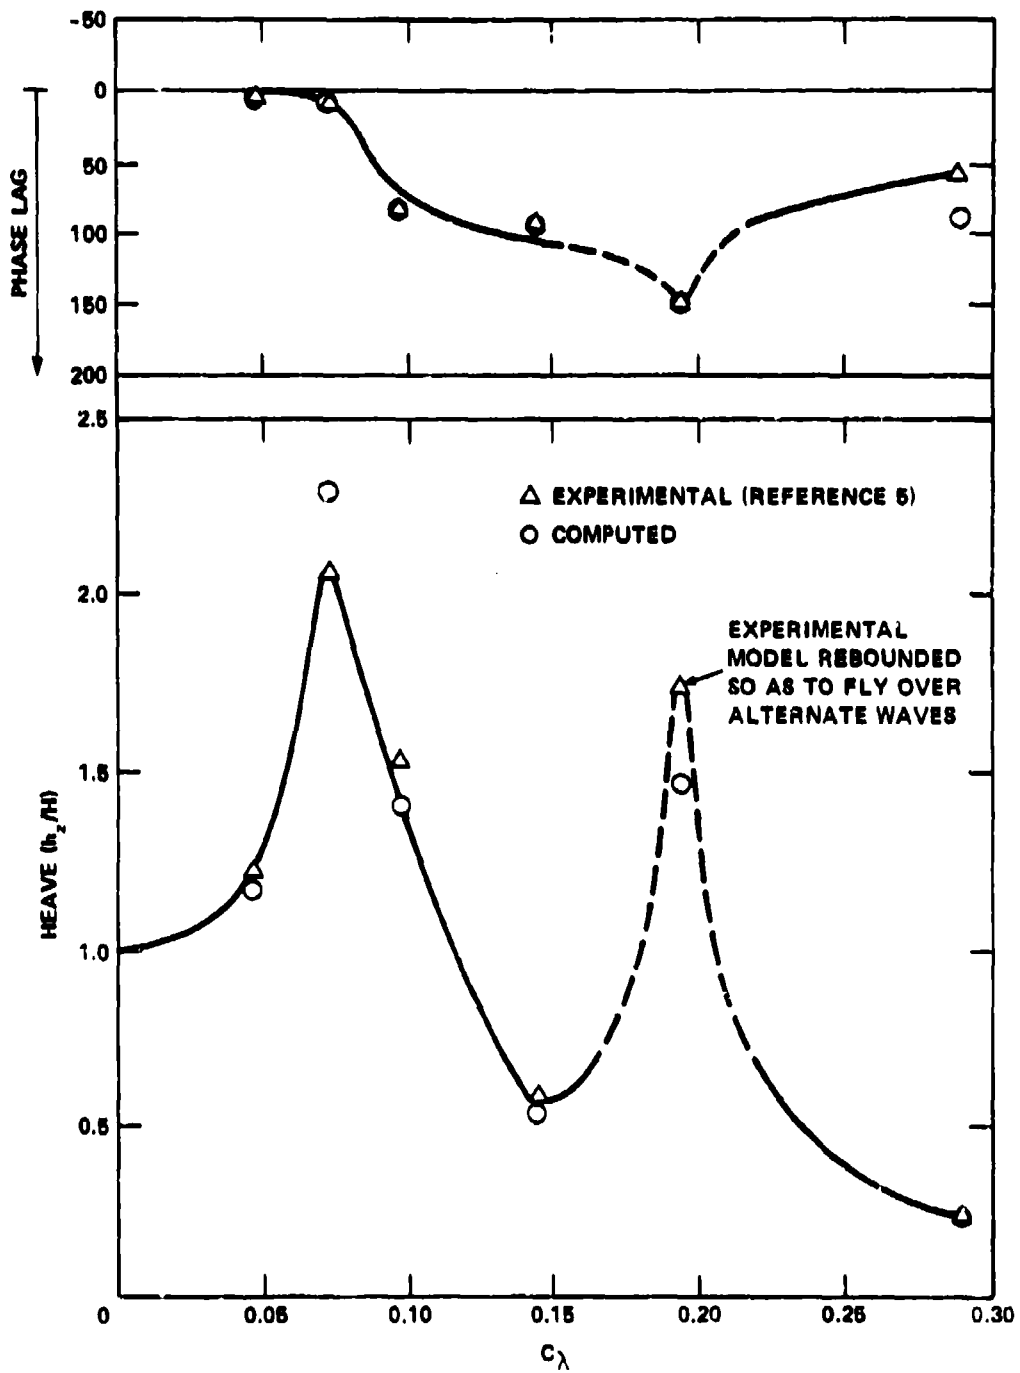


Figure 9 -- Heave Response for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

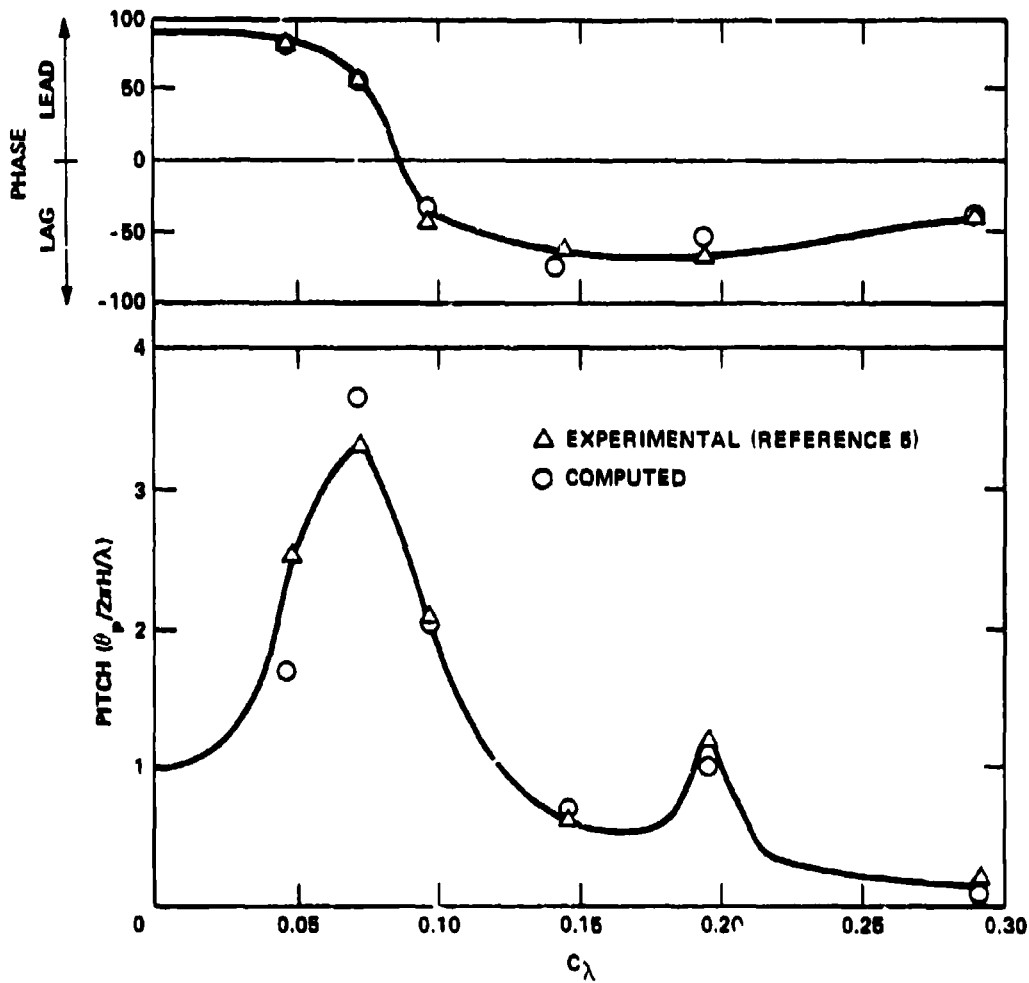


Figure 10 - Pitch Response for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

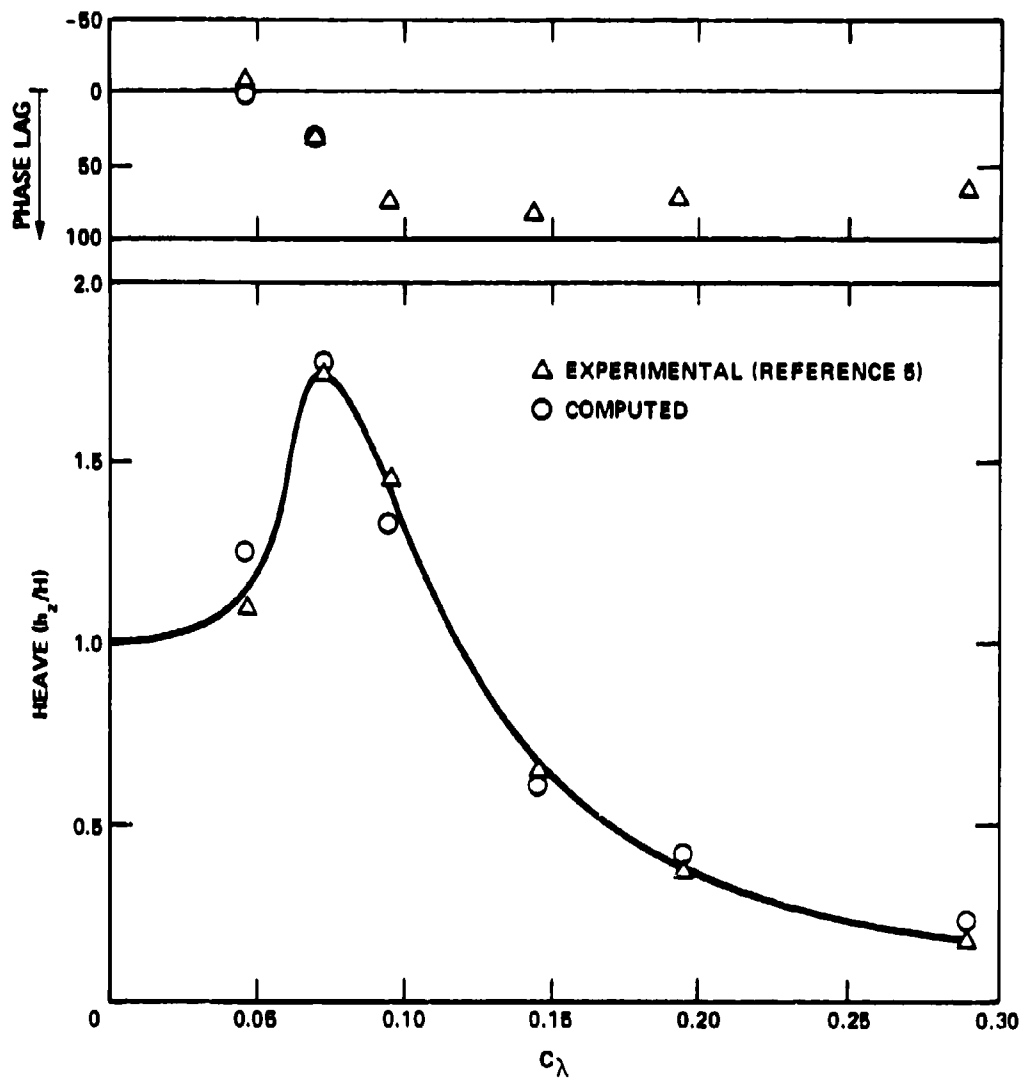


Figure 11 - Heave Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

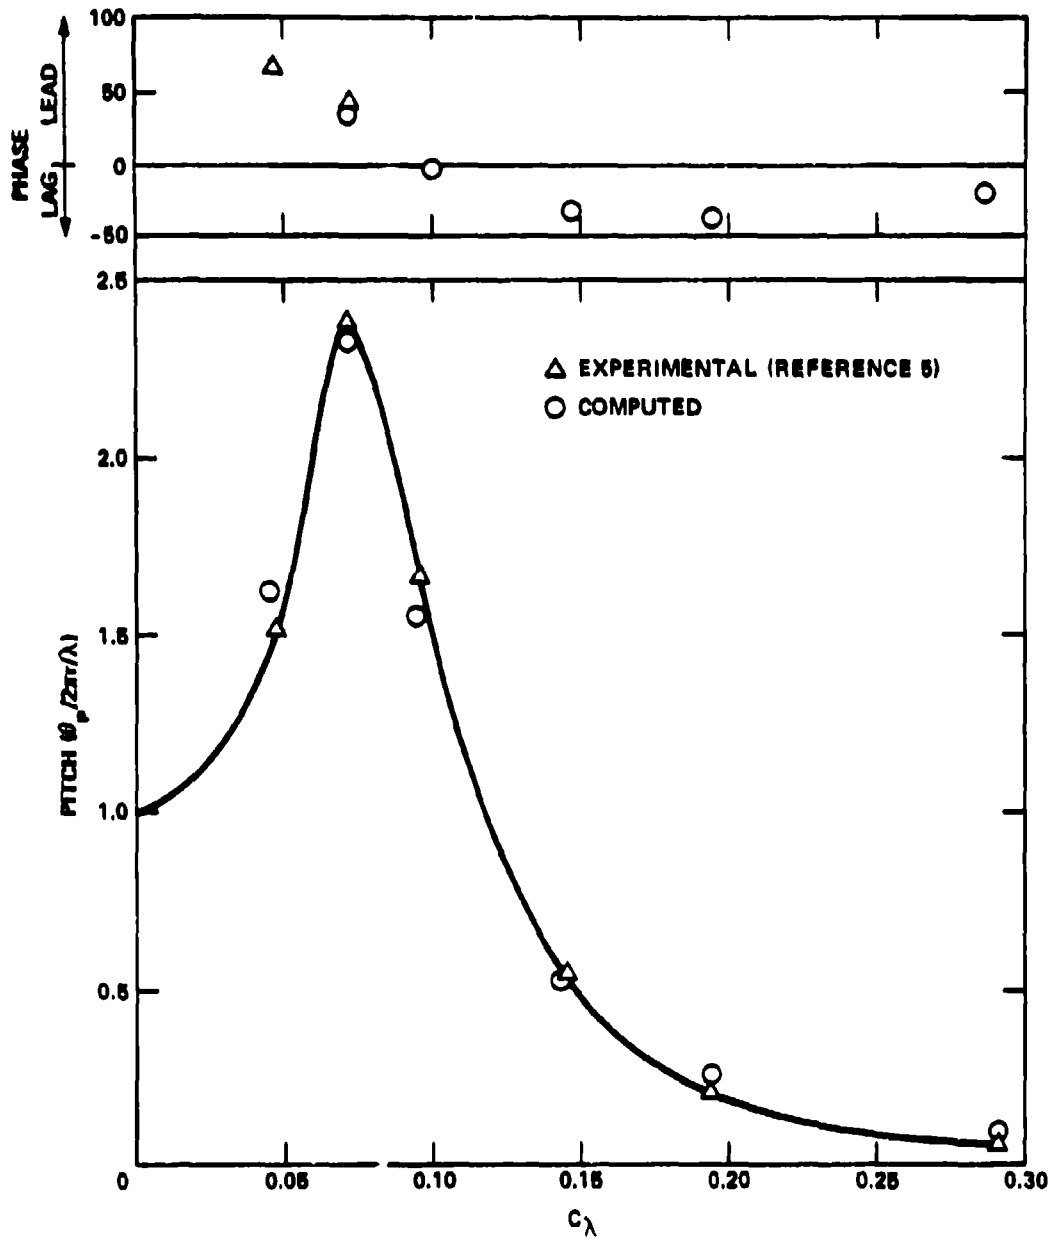


Figure 12 - Pitch Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

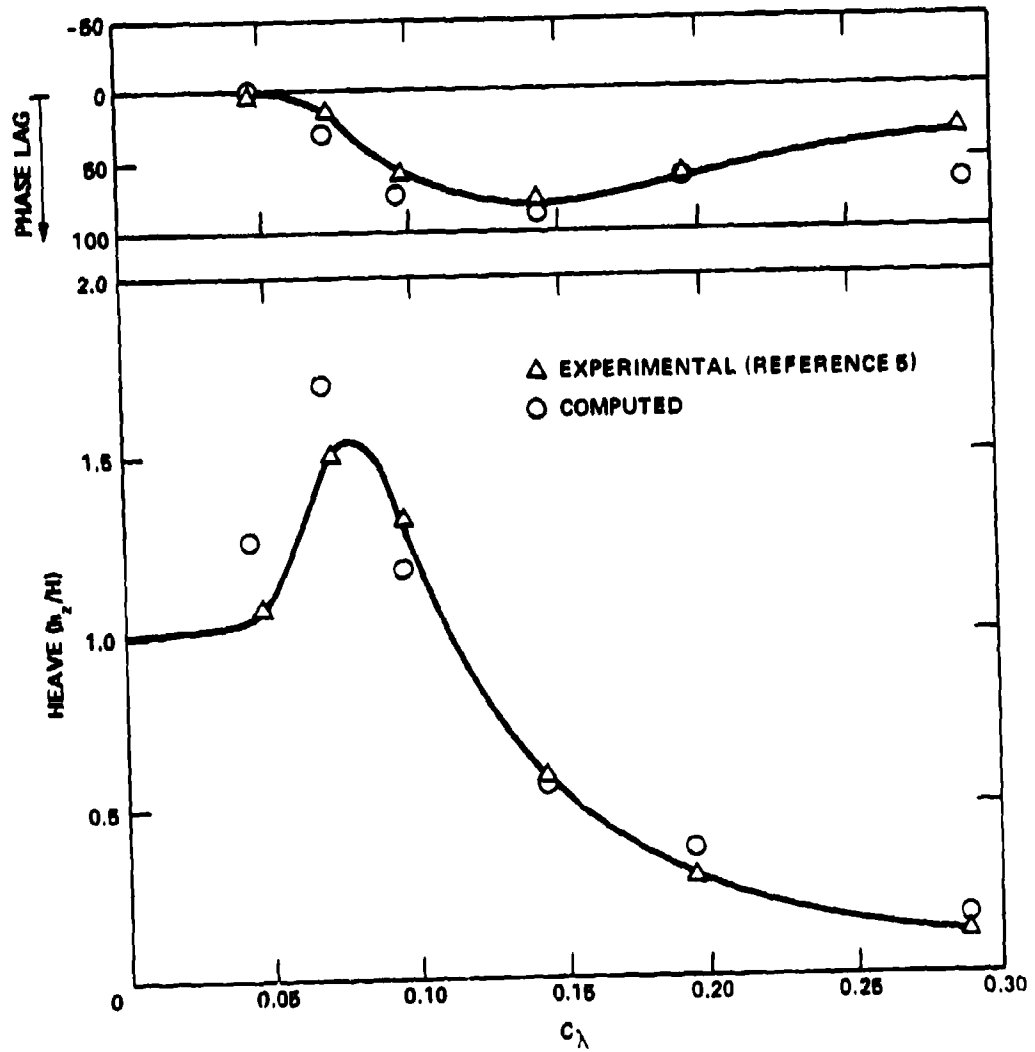


Figure 13 - Heave Response for 30-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

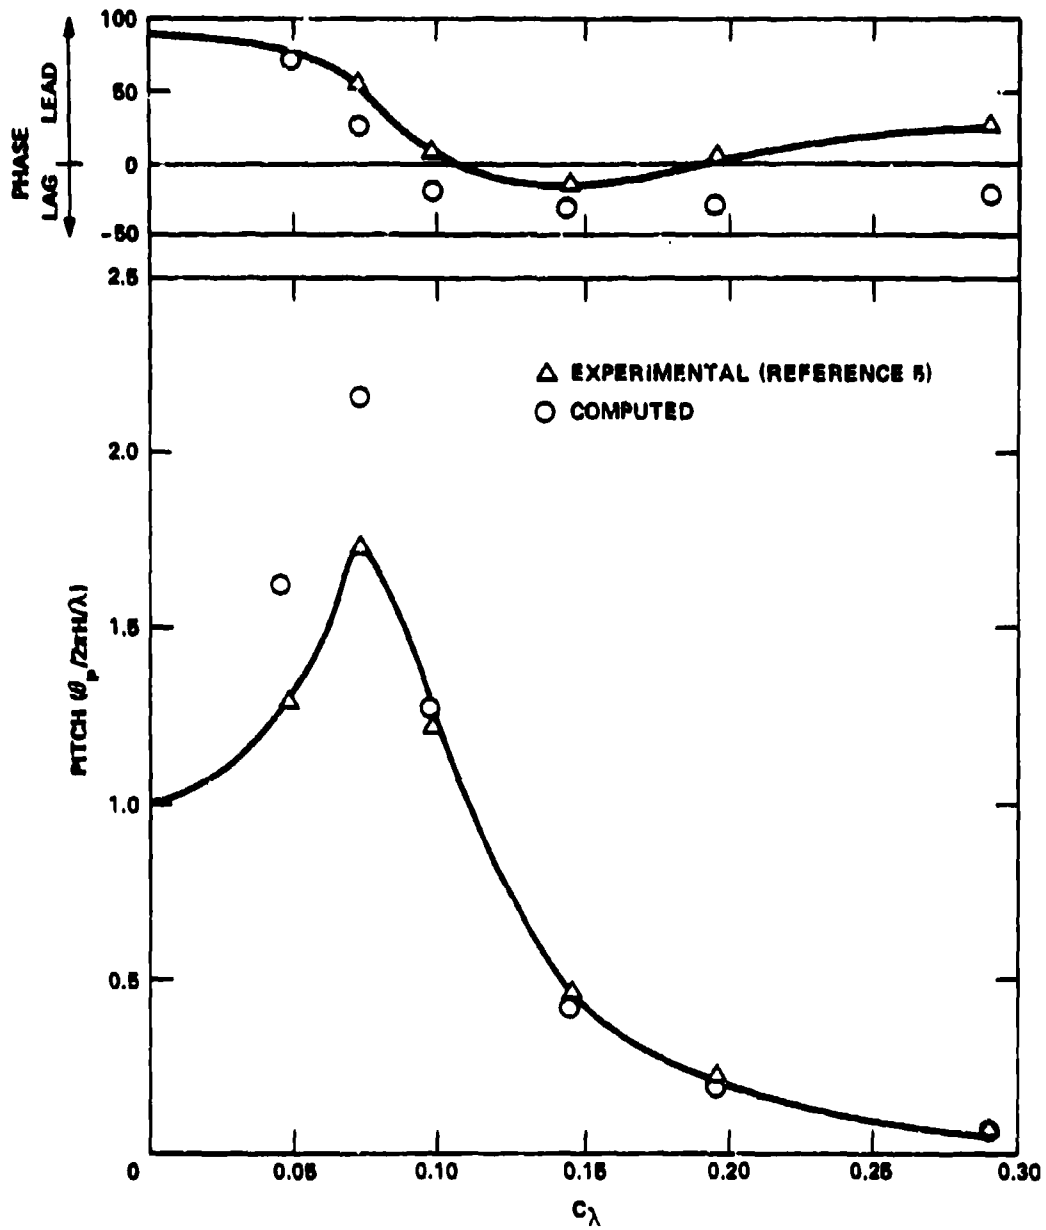


Figure 14 - Pitch Response for 30-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

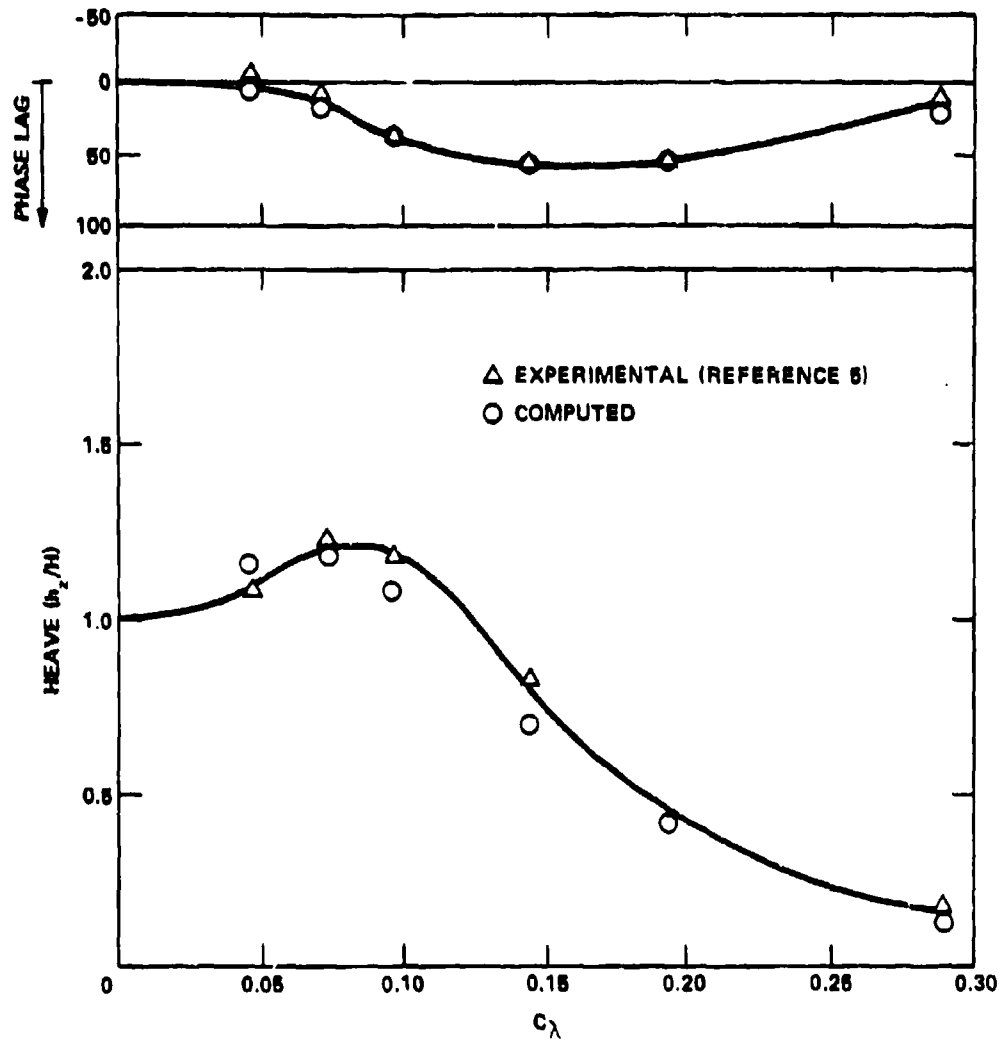


Figure 15 - Heave Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 4.0$

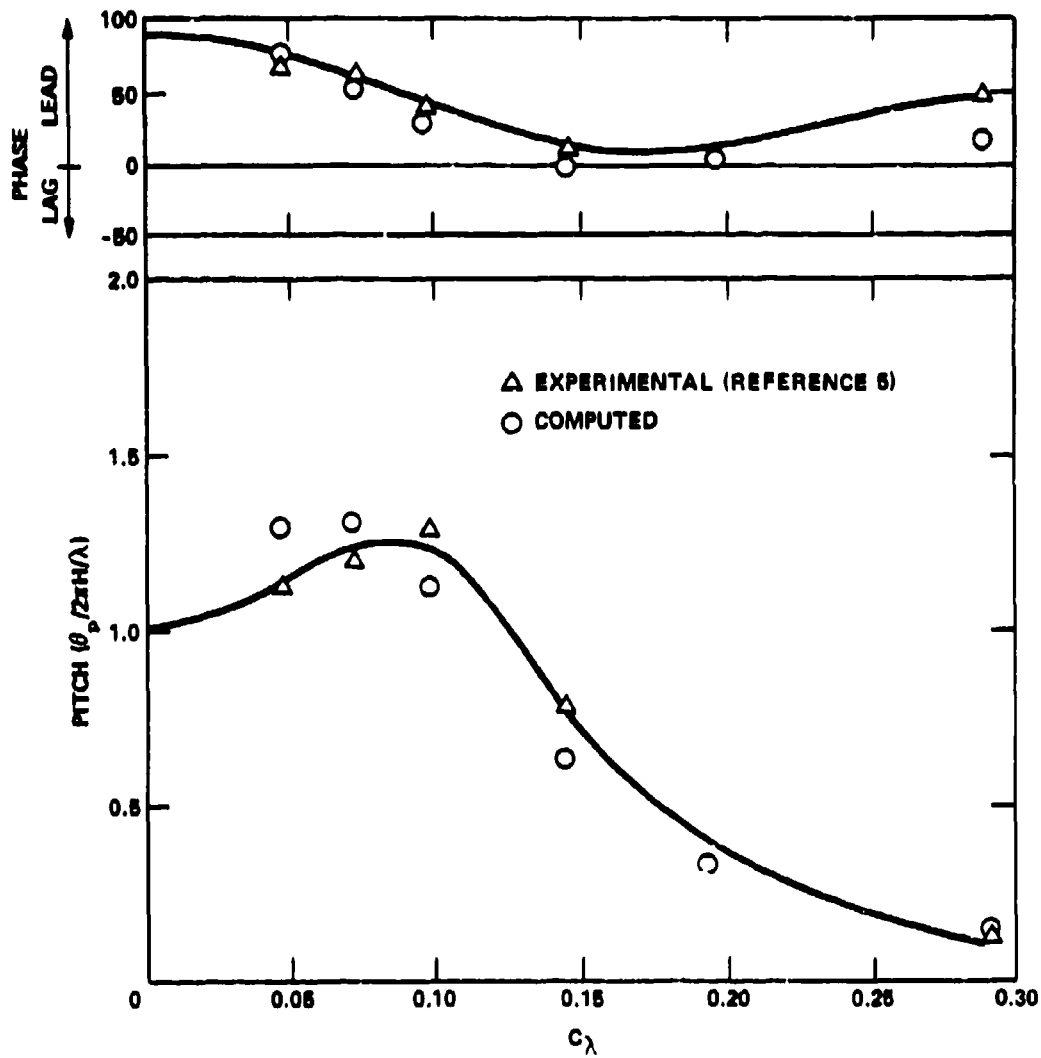


Figure 16 - Pitch Response for 20-Degree Deadrise Model at $V/\sqrt{L} = 4.0$

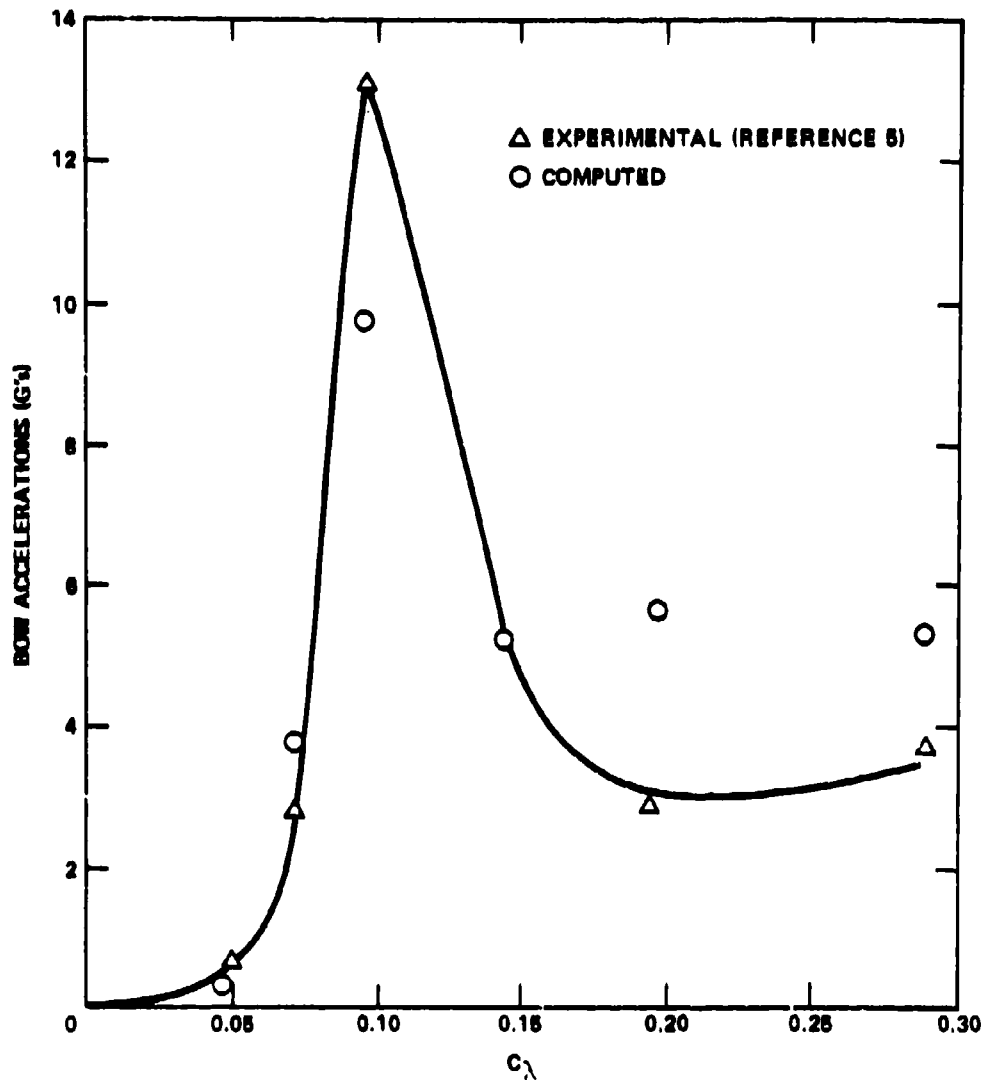


Figure 17 - Bow Acceleration for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

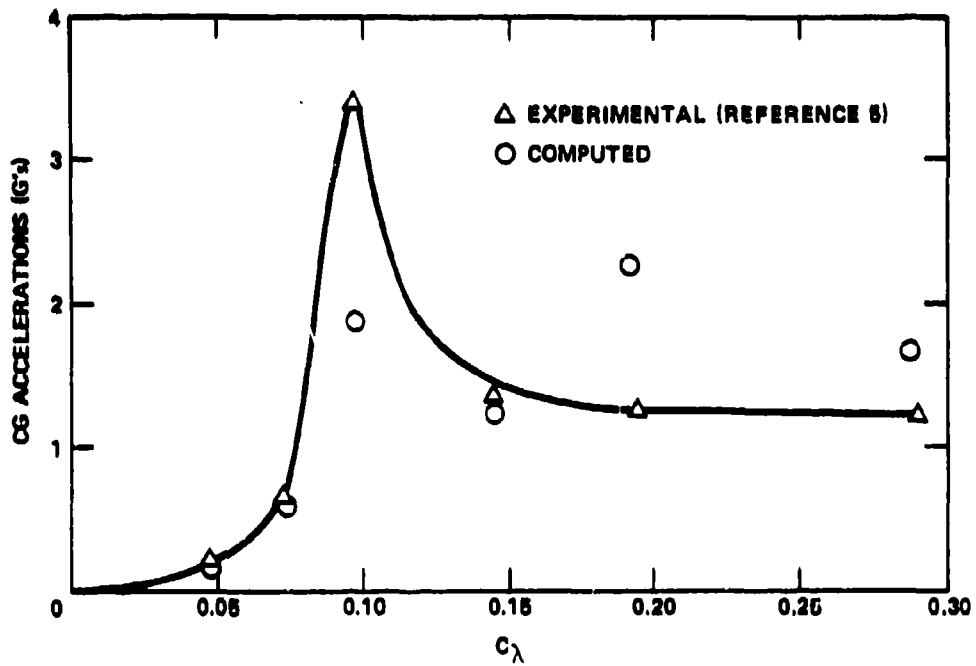


Figure 18 - Center of Gravity Acceleration for 10-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

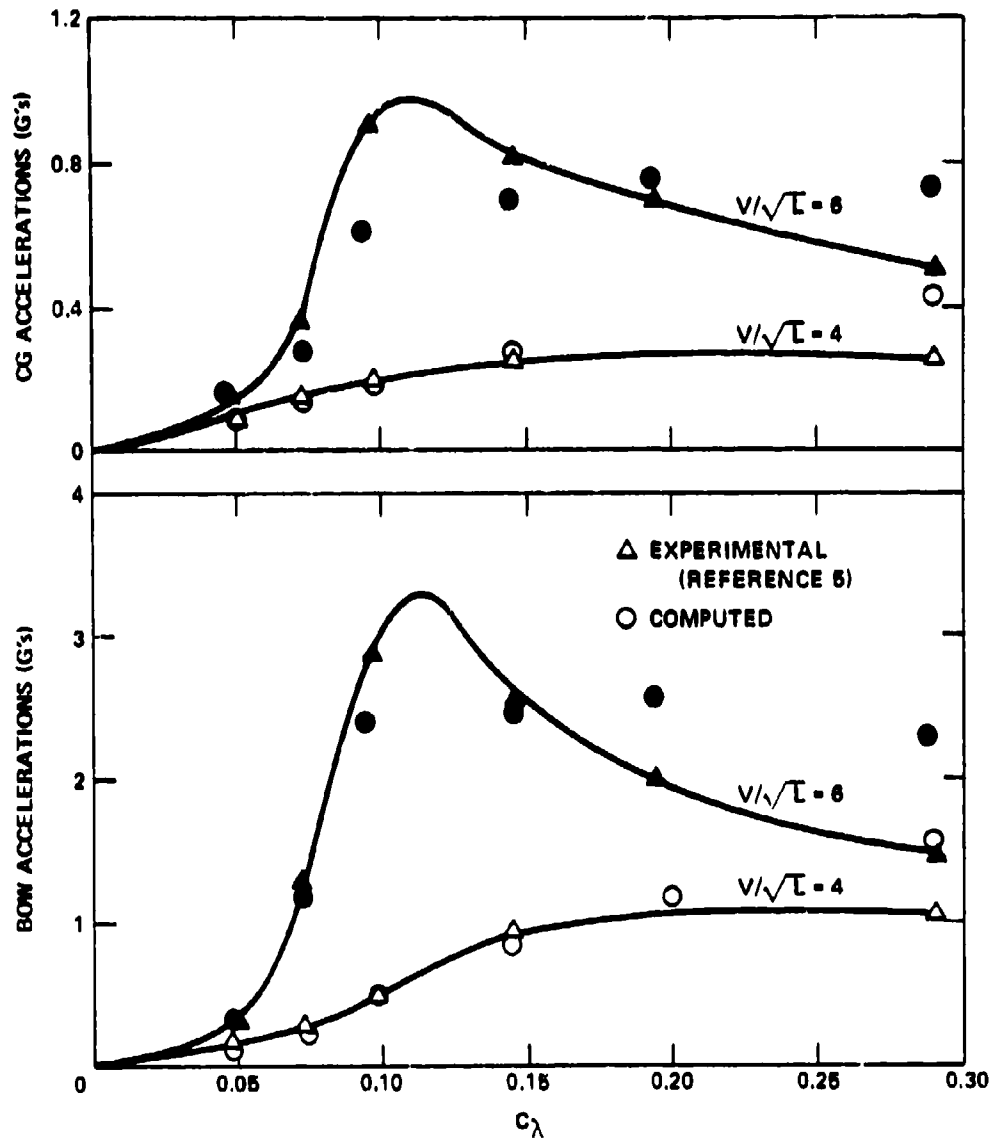


Figure 19 - Bow and Center of Gravity Accelerations for 20-Degree Dendrite Model at $v/\sqrt{L} = 4.0$ and $v/\sqrt{L} = 6.0$

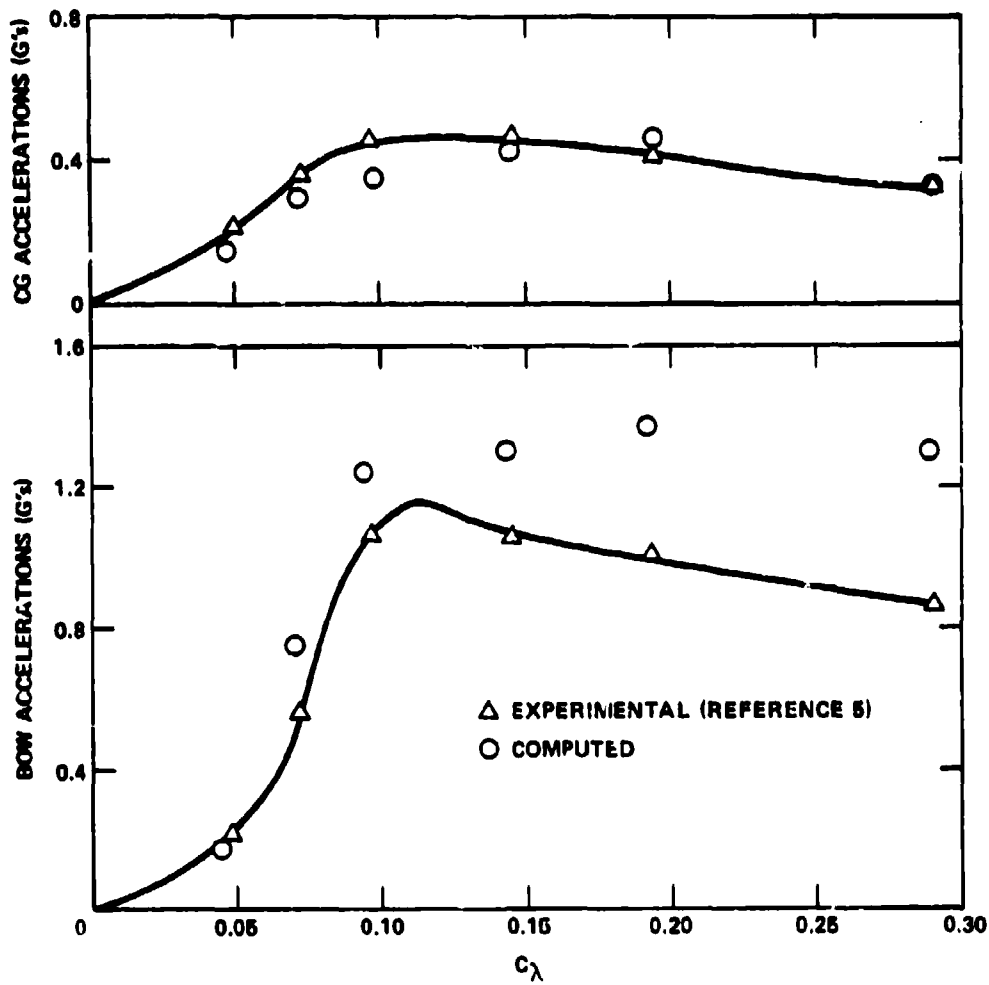


Figure 20 - Bow and Center of Gravity Accelerations for 30-Degree Deadrise Model at $V/\sqrt{L} = 6.0$

REFERENCES

1. Wagner, H., "*Landing of Seaplanes*," Zeitschrift für Flugtechnik und Motorluftschiffahrt, (14 Jan 1931); National Advisory Committee for Aeronautics TM 672 (May 1931).
2. Chuang, S.L., "*Slamming Tests of Three-Dimensional Models in Calm Water and Waves*," NSRDC Report 4095 (Sep 1973).
3. Martin, M., "*Theoretical Predictions of Motions of High-Speed Planing Boats in Waves*," DTNSRDC Report 76-0069 (Apr 1976).
4. Shuford, S.L., Jr., "*A Theoretical and Experimental Study of Planing Surfaces Including Effects of Cross Section and Plan Form*," National Advisory Committee for Aeronautics Report 1355 (1957).
5. Fridsma, G., "*A Systematic Study of the Rough-Water Performance of Planing Boats*," Davidson Laboratory, Stevens Institute of Technology Report R1275 (Nov 1969).

**APPENDIX A
EVALUATION OF HYDRODYNAMIC FORCE AND MOMENT INTEGRALS**

The hydrodynamic force the craft experiences in the vertical direction as derived in the text is:

$$F_z = - \int_{\ell} \left\{ m_a \dot{V} - U \frac{\partial m_a V}{\partial \xi} + \dot{m}_a V + C_D \rho b V^2 \right\} \cos \theta \, d\xi + \int_{\ell} a \rho g A \, d\xi$$

where $U = \dot{x}_{CG} \cos \theta - (\dot{z} - w_z) \sin \theta$

and

$$V = \dot{x}_{CG} \sin \theta + (\dot{z} - w_z) \cos \theta - \dot{\theta} \xi$$

Another force acting in the vertical direction is the weight of the craft.

The first two terms of the integral are evaluated by making the substitutions

$$\begin{aligned} \dot{V} &= \ddot{x}_{CG} \sin \theta - \ddot{\theta} \xi + \ddot{z}_{CG} \cos \theta - \dot{w}_z \cos \theta \\ &\quad + \dot{\theta} (\dot{x}_{CG} \cos \theta - \dot{z}_{CG} \sin \theta) + w_z \dot{\theta} \sin \theta \end{aligned}$$

$$\frac{\partial V}{\partial \xi} = -\dot{\theta} - \frac{\partial w_z}{\partial \xi} \cos \theta$$

$$\frac{\partial U}{\partial \xi} = \frac{\partial w_z}{\partial \xi} \sin \theta$$

$$\frac{dw_z}{dt} = \dot{w}_z - U \frac{\partial w_z}{\partial \xi}$$

and noting that

$$\int_{\ell} UV \frac{\partial m_a}{\partial \xi} \, d\xi = -UV m_a \Big|_{\text{stern}} - \int_{\ell} m_a \frac{\partial UV}{\partial \xi} \, d\xi$$

Using the previously described substitutions, the force becomes

Preceding Page BLANK -

$$\begin{aligned}
F_z = & \left\{ -M_a \cos \theta \dot{z}_{CG} - M_a \sin \theta \ddot{x}_{CG} + Q_a \ddot{\theta} + M_a \dot{\theta} (\dot{z}_{CG} \sin \theta - \dot{x}_{CG} \cos \theta) \right. \\
& + \int_{\ell} m_a \frac{dw_z}{dt} \cos \theta d\xi - \int_{\ell} m_a w_z \dot{\theta} \sin \theta d\xi \\
& - \int_{\ell} m_a V \frac{\partial w_z}{\partial \xi} \sin \theta d\xi + \int_{\ell} m_a U \frac{\partial w_z}{\partial \xi} \cos \theta d\xi \\
& \left. - UV m_a \Big|_{\text{stern}} - \int_{\ell} V \dot{m}_a d\xi - \rho \int_{\ell} C_{D,c} b V^2 d\xi \right\} \cos \theta \\
& + \int_{\ell} a \rho g A d\xi
\end{aligned}$$

where $M_a = \int_{\ell} m_a d\xi$

and

$$Q_a = \int_{\ell} m_a \xi d\xi$$

This is essentially the form in which the integrals have been computed in the program.

The rate of change of the sectional added mass in the third term of the integral expression is derived by relating it to the rate of change of depth of fluid penetration of the section. The added mass of a section is assumed to be equal to

$$m_a = k_a \pi/2 \rho b^2$$

for which the time derivative is

$$\dot{m}_a = k_a \pi \rho b \dot{b}$$

where b is the instantaneous half-beam of the section, and k_a is an added-mass coefficient, assumed to be constant. A value of $k_a = 1.0$ was used in the computations contained in this report. For sections with constant deadrise, which is an imposed limitation of this work, the half-beam is related to the depth of penetration by

$$b = d \cot \beta$$

where d is depth of penetration, and β is deadrise angle.

Taking into account the effect of water pileup, the effective depth of penetration d_e is, according to Wagner

$$d_e = \pi/2 d$$

and

$$b = d_e \cot \beta = \pi/2 d \cot \beta$$

where $\pi/2$ is the factor by which the wedge immersion is increased by the pileup. Using this expression for the half-beam, the rate of change of sectional added mass becomes

$$\dot{m}_a = k \pi \rho b (\pi/2 \cot \beta) \dot{d}$$

This expression is valid for penetration of the section up to the chine. When the immersion exceeds the chine, the sectional added mass is assumed to be constant, i.e.,

$$m_a = k \pi/2 \rho b_{\max}^2$$

$$\dot{m}_a = 0$$

where b_{\max} is the half-beam at chine.

The submergence of a section in terms of the motions is given by

$$h = z - r$$

where $z = z_{CG} - \xi \sin \theta + \zeta \cos \theta$

$$r = r_0 \cos \{v(x_{CG} + \xi \cos \theta + \zeta \sin \theta) + \omega t\}$$

For wavelengths which are long in comparison to the draft and for small wave slopes, the immersion of a section measured perpendicular to the baseline is approximately

$$d \approx \frac{z - r}{\cos \theta - v \sin \theta}$$

where v = wave slope

The rate change of submergence d is given by

$$\dot{d} = \frac{\dot{z} - \dot{r}}{\cos \theta - v \sin \theta} + \frac{(z - r)}{(\cos \theta - v \sin \theta)^2} \cdot \frac{\partial (\cos \theta - v \sin \theta)}{\partial t}$$

Since immersion $(z - r)$ is always small in the valid range of the previously described expression, the relationship can be further simplified to

$$\dot{d} \approx \frac{\dot{z} - \dot{r}}{\cos \theta - v \sin \theta}$$

and

$$\dot{m}_a \approx k_a \pi \rho b (\pi/2 \cot \beta) \frac{(\dot{z} - \dot{r})}{\cos \theta - v \sin \theta}$$

The expansion of the integral expression for the hydrodynamic moment in pitch follows the procedure used for the vertical force. The results are summarized as follows

$$\begin{aligned} F_\theta = & -I_a \ddot{\theta} + Q_a \cos \theta \ddot{z}_{CG} - Q_a \dot{\theta} (\dot{z}_{CG} \sin \theta - \dot{x}_{CG} \cos \theta) \\ & - \int_{\xi} m_a \cos \theta \frac{dw_z}{dt} \xi d\xi + \int_{\xi} m_a \dot{\theta} \sin \theta w_z \xi d\xi \\ & + \int_{\xi} V \dot{m}_a \xi d\xi + \int_{\xi} \rho C_D b V^2 \xi d\xi \\ & + m_a U V \xi \Big|_{\text{stern}} + \int_{\xi} m_a V U d\xi \\ & + \int_{\xi} m_a V \frac{\partial w_z}{\partial \xi} \sin \theta \xi d\xi \\ & - \int_{\xi} m_a U \frac{\partial w_z}{\partial \xi} \cos \theta \xi d\xi \\ & + \int_{\xi} a \rho g A \cos \theta \xi d\xi \end{aligned}$$

The only additional moments are the buoyancy moments. All other moments are considered to be zero for the specific problem considered in this report.

APPENDIX B COMPUTER PROGRAM DESCRIPTIONS

OVERVIEW

The equations of motions developed in the previous sections of this report have been solved by means of digital computer programs. Two major programs have been developed: the first (MAIN) solves the equations of motion using the Runge-Kutta-Merson integration algorithm and generates time histories that are stored on the system disk. The second (PLTHSP) generates California Computer Products Company (CALCOMP) pen plots from the disk files. All programs were designed to operate on the Control Data Corporation computer system, located at the David W. Taylor Naval Ship Research and Development Center in Carderock, Md.

Descriptions of input data required to execute the programs, job control cards, and programs follow. Sufficient detail is presented for this appendix to serve as a manual for use and maintenance.

JOB CONTROL CARDS FOR PROGRAM MAIN

Job control cards for program MAIN which computes time histories of the motion variables, are described as follows. If CALCOMP plots are not desired, TAPES need not be cataloged.

Job Control Language Card:	<u>Comment</u>
Job Card	Standard facility card
Charge Card	Standard facility card
REQUEST,TAPE9,*PF.	Reserves space for CALCOMP plot data
REQUEST,TAPE2,*PF.	Print output file 1 request
REQUEST,TAPE4,*PF.	Print output file 2 request
ATTACH,BINAR,SEFZARNICKNEWB, ID=XXXX.	Attaches binary run file
ATTACH,NSRDC.	Attaches library routines
LDSET(LIB=NSRDC).	Loads library routines
BINAR.	Loads and executes run file
REWIND,TAPE2. REWIND,TAPE4.	Rewinds time-history files for printing
COPY(TAPE2,OUTPUT)	Prints time-history file
COPY(TAPE4,OUTPUT)	Prints time-history file

Job Control Language Card:

Comment

CATALOG,TAPE9, SEFZARNICKDATA. . ,
ID=XXXX.

Catalogues file for plot.
(SEFZARNICKDATA CAN BE ANY NAME)

7/8/9 END OF RECORD

DATA CARDS (1-5)

6/7/8/9 END OF FILE

INPUT DATA CARDS FOR PROGRAM MAIN

Input data used by program MAIN are read from data cards in NAMELIST and in standard format. A description of the FORTRAN symbols appearing in NAMELIST follows. For simplicity in the text that follows, it is assumed that NAMELIST input occupies only one card. More cards can be used if necessary.

Card 1(NAMELIST FORMAT, / /)

A	The absolute error for KUTMER (six values)
NPRINT	If=1, print normal output If=2, matrix, inverse matrix, F-column matrix, and KUTMER results If=3, integral results If=4, calculated values constant for given input values
NPLOT	If=0, no plot If=1, printer plot of results
END	Number of runs to be made
W	Weight of craft in pounds
BL	Boat length in feet
TZ	Thrust component in z direction
TX	Thrust component in x direction
XECG	Distance from center of gravity to center of pressure for drag force in feet
XP	Moment arm of propeller thrust
XD	Distance from center of gravity to center
DRAG	Friction for drag force
RO	Wave height
LAMBDA	Wavelength
RG	Radius of gyration in feet
T	Propeller thrust in pounds
GAMMA	Propeller thrust angle in degrees

Card 1 (continued)

ECC	Longitudinal center of gravity
NCG	Vertical center of gravity, nondimensionalized by ship length
KAR	Added-mass coefficient
BETA(I)	Dead-rise angle in degrees
EST(I)	Station position in feet
NUM	Number of stations
XA	Initial time
XE	Stop time
HMIN	Minimum step size
HMAX	Maximum step size
EPS	Error criterion

Card 2 (Format 8F10.0)

(X(I), I=1,6)	Initial conditions
X(1)	Velocity
X(2)	Z
X(3)	0
X(4)	X
X(5)	Z
X(6)	θ degrees

Card 3 (8F10.0)

START	Time to turn on (RMP) function (see page 48)
RISE	Duration of RMP

Card 4 (8F10.0)

TME	Time at which integration interval is to be changed*
HMX	New maximum interval size after TME
HMN	New minimum interval size for KUTMER to subdivide

*If this option is not used set TME to stop time on run.

Card 5 (8F10.0)

PERCNT Percentage of boat length subtracted from longitudinal center of gravity to obtain X - point where acceleration computations are made

JOB CONTROL CARDS FOR PROGRAM PLTHSP

Job control cards for program PLTHSP which generates CALCOMP plots of time histories computed by program MAIN are described in this section.

Job Control Language Card:

Comment

Job Card	Standard facility card
Charge Card	Standard facility card
REQUEST,TAPE7,HI.	Tape for CALCOMP plot data
VSN(TAPE7=CK0323).	Volume serial number of tape for CALCOMP plot
ATTACH,CALC936.	Attaches CALCOMP library routine
ATTACH,BINAR,SEFZARNICKPLOTB, ID=XXXX.	Attaches plot program run file
LDSET(LIB=CALC936)	Loads CALCOMP library routines
BINAR.	Runs plot program
7/8/9 END OF RECORD	
DATA CARDS	
6/7/8/9 END OF FILE	

INPUT DATA CARDS FOR PROGRAM PLTHSP

Two or three data cards are made ready by PLTHSP, depending on the options selected. Standard input format is employed. A description of the necessary data cards follows.

Card 1 (8F10.0 Format)

XAXIS	Length of x axis in inches
YAXISP	Height of pitch component axis in inches
YAXISH	Height of heave component axis in inches
HT	Height of lettering in inches

Card 2 (I10 Format)

IA	If = 0, no plots for bow acceleration and center of gravity acceleration If = 1, plots previously mentioned information
----	--

Card 3 (8F10.0 Format) - Only Necessary If IA = 1.

YAXISB Height of bow acceleration axis in inches
YAXISC Height of CG acceleration axis in inches

PROGRAM MAIN

Program MAIN reads all necessary input data from cards, sets up initial values, computes constants, calls KUTMER to determine the state variables at TIME for the period from XA to XE in increments of HMAX. A table state variables is created for every PTIME-th value. The values for λ/H and $\theta_p/2\pi H/\lambda$ are calculated and printed. If the plot option is on, a printer plot will be produced.

Subroutine COMPUT(X)

This routine computes pitch moment NL and lift force FL, excluding added mass terms, using values of integrals computed in subroutine FUNCT. The argument X contains the state vector.

Subroutine DAUX

This subroutine is called from KUTMER or EULER. It determines the values of m_a , b , and $b1^*$, based on the following equations

$$h_w(t) = z_{CG} - \xi(t) \sin \theta + \zeta(t) \cos \theta - r(t)$$

where $r(t) = r_0 \cos k [x_{CG} + \xi(t) \cos \theta + \zeta(t) \sin \theta + ct]$

Then for

$$h_w(t) > 0,$$

$$d(t) = \frac{h_w(t)}{\cos \theta - (t) \sin \theta}$$

where $V(t) = -r_0 k \sin \theta [x_{CG} + \xi(t) \cos \theta + (t) \sin \theta + ct]$

If

$$d(t) > b_m(t) \tan (\beta(t) 2/\pi)$$

set

$$m_a(I) = m_{amax}(I)$$

$$b(I) = b_m(I)$$

$$b_l(I) = 0$$

$$m_{amax}(I) = k(I)(\rho/2)\pi b_m^2(I)$$

if

$$d(I) < b_m(I) \tan(\beta(I)) (2/\pi)$$

set

$$b(I) = d(I) \cot(\beta(I)) (\pi/2)$$

$$b_l(I) = b(I)$$

$$m_a(I) = k_a(I)(\rho/2)\pi b^2(I)$$

for

$$h_w(I) \leq 0;$$

$$m_a(I) = 0, \quad b(I) = 0, \quad b_l(I) = 0$$

This subroutine then calls FUNCT which in turn calls COMPUT to determine the values of N_L and F_L , the lift force and moment. The values of N_L and F_L are used to compute the following

$$F_1 = T_x + F_L \sin \theta - D \cos \theta$$

$$F_2 = T_z + F_L \cos \theta + D \sin \theta + W$$

$$F_3 = N_L - D_{x_d} + T_{x_p}$$

*b_l array is set up for integrations for portion of hull for which chine is not immersed.

The mass inertia matrix is

$$A_{11} = M + M_a \sin^2 \theta$$

$$A_{12} = M_a \sin \theta \cos \theta$$

$$A_{13} = -Q_a \sin \theta$$

$$A_{21} = A_{12}$$

$$A_{22} = M + M_a \cos^2 \theta$$

$$A_{23} = -Q_a \cos \theta$$

$$A_{31} = A_{13}$$

$$A_{32} = A_{23}$$

$$A_{33} = I + I_a$$

The matrix is inverted by the system routine MATINS. The inverted matrix is then used to solve the following equations which determine the state vectors.

$$\ddot{x}_{CG} = A_{11}^{-1} F_1 + A_{12}^{-1} F_2 + A_{13}^{-1} F_3$$

$$\ddot{z}_{CG} = A_{21}^{-1} F_1 + A_{22}^{-1} F_2 + A_{23}^{-1} F_3$$

$$\ddot{\theta} = A_{31}^{-1} F_1 + A_{32}^{-1} F_2 + A_{33}^{-1} F_3$$

Subroutine FUNCT (X)

This routine evaluates various integrals appearing in the force and moment mathematical models. The integrals are evaluated, using a trapezoidal integration algorithm. The argument x contains the state vector. A list of integrals that are evaluated is presented.

$\int_{\xi} m_a d\xi$	$\int_{\xi} m_a \xi d\xi$
$\int_{\xi} m_a \xi^2 d\xi$	$\int_{\xi} m_a UV d\xi$
$\int_{\xi} m_a w_z d\xi$	$\int_{\xi} m_a w_z \xi d\xi$
$\int_{\xi} m_a \frac{dw_z}{dt} d\xi$	$\int_{\xi} m_a \frac{dw_z}{dt} \xi d\xi$
$\int_{\xi} m_a V \frac{\partial w_z}{\partial \xi} d\xi$	$\int_{\xi} m_a V \frac{\partial w_z}{\partial \xi} \xi d\xi$
$\int_{\xi} m_a U \frac{\partial w_z}{\partial \xi} d\xi$	$\int_{\xi} m_a U \frac{\partial w_z}{\partial \xi} \xi d\xi$
$\int_{\xi} m_a V d\xi$	$\int_{\xi} m_a V \xi d\xi$
$\int_{\xi} b V^2 d\xi$	$\int_{\xi} b V^2 \xi d\xi$
$\int_{\xi} b \left(h - \frac{b}{2} \tan \beta \right) d\xi$	$\int_{\xi} b \left(h - \frac{b}{2} \tan \beta \right) \xi d\xi$

Subroutine INPUT

This routine reads in NAMELIST/HSP/ which contains the initial data concerning the craft and sea conditions pertinent to all the runs to be made. It is set up so that most of the data are given default values by means of data statements in subroutine INPUT. These data statements can be overridden during execution by reading values in on cards. For further explanation of the specific variables see section on the input data cards.

This routine also "initializes" constant such as π , ρ , and g . It uses the input values to calculate the keel profile and planform arrays, NO and BM, wave constants, system mass and inertia, and maximum mass and depth of chine at each station.

Subroutine KUTMER (NEQS, TIME, HMAX, X, EPSE, A, HMIN, FIRST)

This is a Runge-Kutta-Merson integration routine that is capable of changing the size of the interval over which it integrates to meet specified error criteria. It is therefore an

accurate method for a system that may oscillate more rapidly than the initial integration interval. A minimum step size prevents the routine from subdividing the interval indefinitely.

The input arguments are:

NEQS	Number of dependent variables in the x array
TIME	Actual time (independent variable)
HMAX	Increment for which the solution is to be returned
X	Vector of dependent variables
EPGE	Relative error criteria specified for each component of x and used for the components of x less than the absolute value of A
A	Absolute error criteria
HMIN	Minimum step size allowed
FIRST	Set to zero on first call; a value of 1 is assigned by KUTMER on subsequent calls for which the error criteria are satisfied, otherwise a value of 2 is assigned

Subroutine PLOT2 (F, FMIN, FMAX, NVAR, NFUN, N1, N, XO, DELX)

Data stored in the two-dimensional array F are plotted, using the printer by subroutine PLOT2. As many as 26 different functions, having evenly spaced abscissa values, can be plotted. The output is written on Unit 6. A description of variables follows.

F	Array containing data to be plotted; the Jth point of the Ith function is stored in F(I,J)
FMIN	An array of minimum functional values; the minimum of the Ith function is stored in FMIN(I)
FMAX	Same as FMIN only for maximum values
NVAR	An array of titles for each function to be plotted
NFUN	Number of functions to be plotted
N1	First dimension of array F
N	Number of points to be plotted
XO	First abscissa value
DELX	Abscissa increment

Subroutine PLOTER (FX, XA, HMAX, LAMBDA, IB, NWAVER)

The routine initializes various values required to generate printer plots and computes pitch-and-heave ratios. The printer plots that are generated consists of pitch-and-heave time histories. A description of input variables follows.

FX	A two-dimensional array, containing time histories to be plotted
XA	Initial time
HMAX	Time-interval increment; time interval between values in FX is given by HMAX*PTIME
LAMBDA	Wavelength
IB	Number of values to be plotted
NWAVE	Position in FX at which wave is completely turned on

Function RMP (T, START, RISE)

The RMP is a function that calculates a value between 0 and 1 corresponding to time T, based on a straight line from time START with a value of 0 to time START plus RISE with a value of 1. It is used to lower the initial wave amplitude to avoid large transients at start of the computations.

The arguments are:

T	Actual time
START	Time at which to begin the ramp from 0 to 1
RISE	Duration of rise from 0 to 1

The function reaches the value 1 at time START plus RISE, if the rise is 0.0, RMP will return a value of 0.5.

Subroutine TRAP (F, DX, NPTS, ANS)

This routine performs the evaluation of an integral using a trapezoidal approximation.

The argument variables are defined as follows:

F	Array of integrand values
DX	Increments at which F is evaluated
NPTS	Number of values in F
ANS	Result, which is equal to

$$DX \left\{ \sum_{i=1}^{NPTS} F(i) - 0.5 [F(1) + F(NPTS)] \right\}$$

PROGRAM PLTHSP

This program uses a data file created by program MAIN to create CALCOMP plots. The data are read from logical Unit 9 and are rewritten on Unit 7 for CALCOMP input. Program PLTHSP sets the tape output unit equal to 7 and calls SUBROUTINE CALPHI to execute the plot procedures.

Subroutine CALPLT

This subroutine manages all the I/O operations and performs the necessary calculations required to generate the plots. After reading the card data (two or three cards) subroutine READT is called to read the data file (Tape 9) created by program MAIN. The CALCOMP initializing routines are called next, after which a call to subroutine ESCALE calculates the necessary scaling factors. Subroutine EXAXIS is called next to determine the placement of the plot tick marks and identifying digits. The CALCOMP plot-generation subroutines are now called and, depending on the option defined by the IA parameter on card 2, plots of pitch and heave at the bow and CG location are generated as functions of time if IA = 1.

Subroutine EAXIS

The subroutine is analogous to the CALCOMP AXIS routine. The only exception is that the tick marks are not necessarily inch, and the height of the characters is defined by the input parameter HT. Function NDIGIT is called to determine the number of digits necessary to print an even increment of the plots functions on the axis.

Subroutine ESCALE, ADJUST, and FUNCTION UNIT

These subroutines find the scale to be used on the plot axis. Function UNIT is called to determine the axis increment size after which subroutine ADJUST is called to extend the minimum (AMIN) and maximum (AMAX) values so that they are even multiples of the axis increments.

FUNCTION NDIGIT

This function finds the number of digits necessary to print even increments of the function on the axis. Both the number of places in the entire number (NDIGIT) and the number of decimal places (ND) are determined, after which the value of each increment on the axis (ANUM) is calculated.

Subroutine READT

This subroutine reads the data file created by program MAIN. Data file records are read until the message end of file is encountered. Each record is read in the same format as it was written in MAIN. The information is printed to allow the user to inspect the created file.

BEST AVAILABLE COPY

LISTING OF COMPUTER PROGRAM FOR MOTION COMPUTATIONS

	PROGRAM MAIN(INPUT,OUTPUT,TAPE5=INPUT,TAPE6=OUTPUT,TAPE3=512,	MAIN	2
	• TAPE2=512,TAPE4=512,TAPE9)	MAIN	3
C	REAL IT,K,LAMBDA,M,MA,MMAX,N,NGO,NU,MASS,NL,IA,KAR	MAIN	4
	INTEGER END	MAIN	5
C		MAIN	6
	DIMENSION X(6),FX(2,400)	MAIN	7
C		MAIN	8
	COMMON /CONST/ NGO,ECO,PI,OPR,RPD,GRAVTY,RHO,K,NUM,MA(120),CD,TA,	MAIN	10
	• B(120),BETA,MW(120),T2,URAG,W,XD,T,XP,M,IT,	MAIN	11
	• DELTAS,TX,EST(120),C,RO,KAR,MMAX(10),TEST(120),	MAIN	12
	• N(120),PHALF	MAIN	13
	COMMON /SHIP/ MASS,CINT,GA,CE,CE2,CE3,DMU,E0MU,E20MU,E3DMU,BF,BMM,	MAIN	14
	• NL,FL,IA,E(120)	MAIN	15
	COMMON /IN/ BM(120),BI(120),VELIN	MAIN	16
	COMMON/OUT/NPRINT,NPLOT,END	MAIN	17
	COMMON/TERMS/T1,T2,T3,T4,T5,T6,T7,T8	MAIN	18
	COMMON /SEAWAVE/ START,RISE,RAMP	MAIN	19
	COMMON /INTER/ II,KTT(10),DIFF(10)	MAIN	20
	COMMON /IN2/ NO(120),XA,XE,MMAX,HMIN,A(6),EPSE(6),LAMBDA	MAIN	21
	COMMON /ACCEL / XACCL,BWACL,CGACL,BL	MAIN	22
C		MAIN	23
	CALL INPUT	MAIN	24
C		MAIN	25
C	COMPUTE INTEGRATION INTERVAL INFORMATION	MAIN	26
C		MAIN	27
	NLESS = NUM-1	MAIN	28
	I = 1	MAIN	29
	II = 1	MAIN	30
	DIFFER = EST(I+1)-EST(I)	MAIN	31
	KTT(II) = 1	MAIN	32
	DIFF(II) = DIFFER	MAIN	33
	DO 25 I=2,NLESS	MAIN	34
	DIFFER= EST(I+1)-EST(I)	MAIN	35
	KTT(II) = KTT(II)+1	MAIN	36
	IF(DIFFER,NE,DIFF(II))GO TO 24	MAIN	37
	GO TO 25	MAIN	38
24	II = II+1	MAIN	39
	KTT(II) = 1	MAIN	40
	DIFF(II) = DIFFER	MAIN	41
25	CONTINUE	MAIN	42
	KTT(II) = KTT(II)+1	MAIN	43
C	• • • CHECK IF NUMBER OF INTERVALS EXCEEDS DIMENSION	MAIN	44
	IF(II.GT.10) WRITE(6,28) (KTT(I),DIFF(I),I=1,II)	MAIN	45
	IF(II.GT.10) STOP 4	MAIN	46
C	• • • POINT AT WHICH MULTIPLE RUNS START	MAIN	47
	B CONTINUE	MAIN	48
	TIME=XA	MAIN	49
	KOUNT=1	MAIN	50
	END=END-1	MAIN	51
	WRITE(6,39)	MAIN	52
	39 FORMAT(1H1)	MAIN	53
C	• • • • • READ IN INITIAL CONDITIONS	MAIN	54
C	X(1) = VELOCITY, X(2) = Z DOT, X(3) = THETA DOT	MAIN	55
C	X(4) = X, X(5) = Z, X(6) = THETA	MAIN	56
C	THETA IS READ IN DEGREES THEN CONVERTED TO RADIAN IN PROGRAM	MAIN	57
C		MAIN	58
	READ(5,10)(X(I),I=1,6,	MAIN	59
C		MAIN	60

BEST AVAILABLE COPY

```

C          DATA , USED IN RAMP FUNCTION, TO TURN ON WAVE          MAIN 61
  READ(5,10) START,RISE                                          MAIN 62
C                                                                 MAIN 63
  10 FORMAT(8F10,4)                                             MAIN 64
C * * * * * WRITE OUT THE INPUT VALUES                          MAIN 65
  WRITE(6,19) START,RISE,KAR                                     MAIN 66
  19 FORMAT("   START = ",F10.4,/, "   RISE = ",F10.4,/, "   KAR = ",F10.4,/, "   MAIN 67
     .4)                                                         MAIN 68
C                                                                 MAIN 69
C          TME IS THE TIME AT WHICH THE INTEGRATION INTERVAL IS   MAIN 70
C          TO BE CHANGED                                         MAIN 71
C          MMX IS THE NEW MAXIMUM INTERVAL SIZE AFTER TIME TME   MAIN 72
C          HMN IS THE NEW MINIMUM INTERVAL SIZE FOR KUTHER TO SUB-DIVIDE MAIN 73
C          THE MAXIMUM INTERVAL UP TO                            MAIN 74
C          IF THIS OPTION IS NOT USED SET TME TO THE STOP TIME OF THE RUN MAIN 75
C                                                                 MAIN 76
  READ(5,10) TME,MMX,HMN                                         MAIN 77
  WRITE(6,11) TME,MMAX,MMX,MMIN,MMN                              MAIN 78
  11 FORMAT(" AT TIME *,F7.2,* THE MAXIMUM INTERVAL SIZE FOR INTEGRATION MAIN 79
     *ON WILL BE CHANGED FROM *,F10.4,* TO *,F10.4,/,
     * AND THE MINIMUM SIZE FOR HALVING CHANGES FROM *,F10.4,
     * TO *,F10.4)                                              MAIN 82
C          ADJUST THE TIME FOR CHANGE OF INTEGRATION INTERVAL   MAIN 83
C          FOR CHECK AGAINST TIME IN THE INTEGRATION LOOP       MAIN 84
C          TM = TME-(MMAX/2.)                                     MAIN 85
C          SET SWITCH FOR CALCULATION OF PITCH AND HEAVE RATIOS MAIN 86
C          ON NEXT CALL TO PLOTTER                               MAIN 87
  IPT = 0                                                         MAIN 88
  IF(TME,EQ,XE) IPT = 1                                          MAIN 89
C                                                                 MAIN 90
  READ(5,10) PERCNT                                             MAIN 91
  XACCL = ECG-PERCNT*BL                                          MAIN 92
  WRITE(6,12) PERCNT,XACCL                                       MAIN 93
  12 FORMAT(" THE X USED FOR THE BOW AND CG ACCELERATION COMPUTATIONS MAIN 94
     *IS EQUAL TO ECG=*,F10.4,7H*BL OR *,F10.4)                MAIN 95
C                                                                 MAIN 96
  WRITE(6,23)                                                    MAIN 97
  WRITE(6,47)                                                    MAIN 98
  23 FORMAT(1H,/)                                               MAIN 99
  47 FORMAT(" STATION NO.",3X,"DEAU RISE",8X,"EST",8X,"NO",
     * 10X,"BEAM")                                             MAIN 100
  WRITE(6,55) (I,BETA,EST(I),NU(I),BM(I),I=1,NUM)              MAIN 102
  55 FORMAT(6X,12.5X,F10.4,4X,F10.4,4X,F10.4,3X,F10.4)        MAIN 103
  WRITE(6,23)                                                    MAIN 104
  WRITE(6,56) (X(I),I=1,6)                                       MAIN 105
  56 FORMAT(" X VALUES",4X,6(F10.4,2X))                       MAIN 106
C * * * * * CHANGE INPUT FROM DEGREES TO RADIANs              MAIN 107
  X(3) = X(3)*RPD                                               MAIN 108
  X(6) = X(6)*RPD                                               MAIN 109
C                                                                 MAIN 110
  WAVE = STA-T*RISE                                             MAIN 111
  NWAVE = 0                                                      MAIN 112
C * * * * * WRITE OUT COMPUTED ARRAYS                          MAIN 113
  WRITE(6,57) M,IT,K,C,PHALF,P,GRAVITY                          MAIN 114
  IF(NPRINT,LT,4) GO TO 62                                       MAIN 115
  WRITE(6,58) (E(I),I=1,NUM)                                     MAIN 116
  WRITE(6,59) (N(I),I=1,NUM)                                     MAIN 117
  WRITE(6,64) (MMAX(I),I=1,NUM)                                  MAIN 118
  WRITE(6,64) (TEST(I),I=1,NUM)                                  MAIN 119

```

BEST AVAILABLE COPY

```

62 CONTINUE
WRITE(6,28) (KTT(I),DIFF(I),I=1,11)
28 FORMAT(* KTT,DIFF *,110,2X,F10.4)
57 FORMAT(4H M= ,F10.4,4H I= ,F10.4,4H K= ,F10.4,4H C= ,F10.4,11H PI=
RHO/2= ,F10.4,5H PI= ,F10.4,10H GRAVITY= ,F10.4)
58 FORMAT (" E(I)",10F10.4)
59 FORMAT (" N(I)",10F10.4)
64 FORMAT (" HMAX(I)",10F10.4)
66 FORMAT (" TEST(I)",10F10.4)
IB = 1
IPRINT = NPRINT
WRITE(4,91)
C * * * * * WRITE HEADINGS AND CONDITIONS AT TIME = 0.
91 FORMAT(1H1,2X,"TIME",9X,"XDOT",9X,"ZDOT",9X,"THETA DOT",6X,
6 1HX,9X,1HZ,9X,5MTHETA,9X,2MNL,9X,2MFL,
6 4X,8HBUV ACCL,4X,7HCG ACCL,/)
WRITE(4,92) TIME,(X(I),I=1,6),NL,FL,BWACL,COACL
WRITE(9) TIME,(X(I),I=4,6),BWACL,COACL
KOUNT = KOUNT+1
FX(1,IB)=X(5)
FX(2,IB)=X(6)
IKUTM=(XE-XA)/HMAX+.05
IKUTM = (TME-XA)/HMAX + (XE-TME)/HMX + .05
FIRST=0.0
NEQS=6
IKUTS=0
C
C START OF INTEGRATION LOUP
C
851 CONTINUE
NPRINT = IPRINT
C * * * * * CHECK PITCH .GT. .5236 RADIANS
IF(X(6).GT..5236)GO TO 853
C * * * * * PERFORM INTEGRATIONS
IF(TIME.LT.TM.OR.TME.EQ.XE) GO TO 98
IF(IPT.EQ.1) GO TO 98
HMIN = HMN
HMAX = HMX
FIRST = 0.0
98 CONTINUE
CALL KUTME=(NEQS,TIME,HMAX,X,EPSE,A,HMIN,FIRST)
IKUTS=IKUTS+1
IF(FIRST.EQ.2)GO TO 861
IF(KOUNT.NF.1.AND.KOUNT.NE.41) GO TO 99
WRITE(4,91)
KOUNT=1
C * * * * * WRITE OUT TIME INTERVAL RESULTS
99 WRITE(4,92) TIME,(X(I),I=1,6),NL,FL,BWACL,COACL
WRITE(6,93) T1,T2,T3,T4,T5,T6,T7,T8,BMM,BF
WRITE(9) TIME,(X(I),I=4,6),BWACL,COACL
IF(TIME.LT.TM.OR.TME.EQ.XE) GO TO 200
IF(IPT.EQ.1) GO TO 200
CALL PLUTE=(FX,XA,HMAX,LAMBDA,IB,NWAVE,IPT)
IPT = 1
I9 = 0
XA = TIME
FIRST = 0.0
HMIN = HMN
HMAX = HMX
MAIN 120
MAIN 121
MAIN 122
MAIN 123
MAIN 124
MAIN 125
MAIN 126
MAIN 127
MAIN 128
MAIN 129
MAIN 130
MAIN 131
MAIN 132
MAIN 133
MAIN 134
MAIN 135
MAIN 136
MAIN 137
MAIN 138
MAIN 139
MAIN 140
MAIN 141
MAIN 142
MAIN 143
MAIN 144
MAIN 145
MAIN 146
MAIN 147
MAIN 148
MAIN 149
MAIN 150
MAIN 151
MAIN 152
MAIN 153
MAIN 154
MAIN 155
MAIN 156
MAIN 157
MAIN 158
MAIN 159
MAIN 160
MAIN 161
MAIN 162
MAIN 163
MAIN 164
MAIN 165
MAIN 166
MAIN 167
MAIN 168
MAIN 169
MAIN 170
MAIN 171
MAIN 172
MAIN 173
MAIN 174
MAIN 175
MAIN 176
MAIN 177
MAIN 178

```

BEST AVAILABLE COPY

```

200 CONTINUE
    IB=IB+1
    FX(1,IB)=X(5)
    FX(2,IB)=X(6)
    93 FORMAT(" ",10E10.4)
    92 FORMAT(1X,11(F10.4,2X))
100 CONTINUE
    KOUNT=KOUNT+1
    IF(NWAVE.GT.0)GO TO 21
    IF(TIME.GT.WAVE)NWAVE=KOUNT
    21 CONTINUE
    IF(TIME.LE.XE.AND.IKUTS.LT.IKUTM)GO TO 851
    WRITE(2,852)
    854 CONTINUE
    852 FORMAT("      END OF KUTHER")
    853 CONTINUE
    CALL PLUTE?(FX,XA,HMAX,LAMBOA,IB,NWAVE,IPT)
C * * * * * CHECK FOR LAST RUN IF NOT CYCLE BACK TO READ
C   NEW DATA FOR NEXT RUN
    IF(END.NE.1)GO TO 8
    GO TO 999
C * * * * * KUTHER ERROR MESSAGES
    861 WRITE(6,862)
    862 FORMAT("      ERROR CRITERION IN KUTHER CAN NOT BE MET")
    WRITE(6,86) (X(I),I=1,6)
    WRITE(6,86) TIME
    86 FORMAT(" TIME =",F10.4)
    IF(END.NE.1)GO TO 8
    GO TO 853
    999 CONTINUE
    END FILE 9
    END
    SUBROUTINE PLUT2(F,FMIN,FMAX,NVAR,NFUN,N1,N,X0,DELX)
C
C   PLUT FIRST N POINTS OF UP TO 26 FUNCTIONS F(I)
C   F(I,J) CONTAINS THE VALUE FOR THE JTH POINT OF THE ITH FUNCTION
C   FMIN(I) AND FMAX(I) CONTAIN THE MIN AND MAX ORDINATE VALUES FOR
C   THE ITH FUNCTION.
C   NVAR(I)   AN ARRAY OF TITLES FOR THE VARIOUS FUNCTIONS
C             TO BE PLOTTED AGAINST THE ABSCISSA
C   NFUN      NUMBER OF FUNCTIONS TO BE PLOTTED - DIMENSION OF
C             NVAR, FMIN, FMAX
C   N1        USED ONLY IN F(N1,I) AS PASSED DIMENSION
C   N         NUMBER OF POINTS IN A SINGLE PLOT FRAME
C   X0       FIRST ABSCISSA VALUE
C   DELX     ABSCISSA INCREMENT
C
    DIMENSION ?STEP(26),F(N1,N),FMIN(NFUN),FMAX(NFUN),VLAST(26),
    1   VFIDST(26),HEAD(6),STEP(26)
    INTEGER CH(26),NVAR( NFUN),DOT,ASTER,PLUS,BLANK
    INTEGER C
    INTEGER A(101)
C
    DATA BLANK,DOT,ASTER,PLUS/1H ,1H.,1H.,1H./
    DATA CH(1),CH(2),CH(3),CH(4),CH(5),CH(6),CH(7),CH(8),CH(9),CH(10)
    2   / 1HA , 1HB , 1HC , 1HD , 1HE , 1HF , 1HG , 1HH , 1HI , 1HJ /
    DATA CH(11),CH(12),CH(13),CH(14),CH(15),CH(16),CH(17),CH(18)
    2   / 1HK , 1HL , 1HM , 1HN , 1HO , 1HP , 1HQ , 1HR/
    DATA CH(19),CH(20),CH(21),CH(22),CH(23),CH(24),CH(25),CH(26)
MAIN 179
MAIN 180
MAIN 181
MAIN 182
MAIN 183
MAIN 184
MAIN 185
MAIN 186
MAIN 187
MAIN 188
MAIN 189
MAIN 190
MAIN 191
MAIN 192
MAIN 193
MAIN 194
MAIN 195
MAIN 196
MAIN 197
MAIN 198
MAIN 199
MAIN 200
MAIN 201
MAIN 202
MAIN 203
MAIN 204
MAIN 205
MAIN 206
MAIN 207
MAIN 208
MAIN 209
MAIN 210
PLOT2 2
PLOT2 3
PLOT2 4
PLOT2 5
PLOT2 6
PLOT2 7
PLOT2 8
PLOT2 9
PLOT2 10
PLOT2 11
PLOT2 12
PLOT2 13
PLOT2 14
PLOT2 15
PLOT2 16
PLOT2 17
PLOT2 18
PLOT2 19
PLOT2 20
PLOT2 21
PLOT2 22
PLOT2 23
PLOT2 24
PLOT2 25
PLOT2 26
PLOT2 27
PLOT2 28

```

BEST AVAILABLE COPY

```

      2 / IMS , IMT , IMU , IMV , IMW , IMX , IMY , IMZ /
C
  IF(NFUN.LE.0.OR.N.LE.0) RETURN
C PRINT HEADINGS,
  WRITE(6,46)
  46 FORMAT (///)
  DO 40 I=1,NFUN
  30 TENM=ABS(FMAX(I)-FMIN(I))
  EXP=1.
  IF (TENM.EQ.0.) GO TO 2
C RRING TENM TO A VALUE BETWEEN 1 AND 10
  IF(TENM.LT.1.) GO TO 1
  3 IF(TENM.LT.10.) GO TO 2
  EXP=EXP*10.
  TENM=TENM*.1
  GO TO 3
  1 EXP=EXP*.1
  TENM=TENM*10.
  IF(TENM.GT.10.) GO TO 2
  GO TO 1
C SET UP VALUE BETWEEN GRID LINES, RSTEP.
  2 PSTEP=5.
  IF(TENM.GE.5.) PSTEP=10.
  IF(TENM.LT.2.) PSTEP=2.
  5 RSTEP(I)=PSTEP*EXP*.1
C COMPUTE VALUE OF STARTING LINE, VFIRST.
  FIRST=FMIN(I)/RSTEP(I)
  IF(FMIN(I).LT.0.) FIRST=FIRST-1.
  FIRST=AINT(FIRST)
  VFIRST(I)=FIRST*RSTEP(I)
C CHECK END LINE VALUE, VLAST.
  VLAST(I)=VFIRST(I)+10.*RSTEP(I)
  IF(VLAST(I).GT.FMAX(I)) GO TO 4
C IF GRAPH IS TOO SMALL TAKE NEXT LARGER STEP.
  AA=PSTEP
  IF(AA.LT.5.) PSTEP=5.
  IF(AA.EQ.5.) PSTEP=10.
  IF(AA.LT.10.) GO TO 5
  PSTEP=2.
  EXP=10.*EXP
  GO TO 5
C COMPUTE VALUE BETWEEN POINTS, STEP.
  4 STEP(I)=RSTEP(I)*.1
  RK=0.
  DO 6 KK=1,6
  HEAD(KK)=VFIRST(I)+2.*RK*RSTEP(I)
  6 RK=RK+1.
  40 WRITE (6,45) CH(I), NVAR(I), (HEAD(KK),KK=1,6)
  45 FORMAT (1X,A1,3H = ,A10,5X,1PE12.4,5(8X,1PE12.4))
  DO 50 J=1,101
  A(J)=BLANK
  IF(MOD(J,10).EQ.1) A(J)=DUT
  50 CONTINUE
  WRITE(6,55) A,A
  55 FORMAT (25X,101A1/15X,4HTIME,6X,101A1)
C PLOT EACH POINT
  DO 100 J=1,N
  B=X0+FLUAT(J-1)*DELX
  DO 70 K=1,101
    PLOT2 29
    PLOT2 30
    PLOT2 31
    PLOT2 32
    PLOT2 33
    PLOT2 34
    PLOT2 35
    PLOT2 36
    PLOT2 37
    PLOT2 38
    PLOT2 39
    PLOT2 40
    PLOT2 41
    PLOT2 42
    PLOT2 43
    PLOT2 44
    PLOT2 45
    PLOT2 46
    PLOT2 47
    PLOT2 48
    PLOT2 49
    PLOT2 50
    PLOT2 51
    PLOT2 52
    PLOT2 53
    PLOT2 54
    PLOT2 55
    PLOT2 56
    PLOT2 57
    PLOT2 58
    PLOT2 59
    PLOT2 60
    PLOT2 61
    PLOT2 62
    PLOT2 63
    PLOT2 64
    PLOT2 65
    PLOT2 66
    PLOT2 67
    PLOT2 68
    PLOT2 69
    PLOT2 70
    PLOT2 71
    PLOT2 72
    PLOT2 73
    PLOT2 74
    PLOT2 75
    PLOT2 76
    PLOT2 77
    PLOT2 78
    PLOT2 79
    PLOT2 80
    PLOT2 81
    PLOT2 82
    PLOT2 83
    PLOT2 84
    PLOT2 85
    PLOT2 86
    PLOT2 87

```

```

A(K)=BLANK
IF (MOD(K,10).EQ.1) A(K)=OUT
IF (MOD(J,5).EQ.1) A(K)=OUT
70 CONTINUE
DO 80 I=1,NFUN
LOC=((F(I,J)-VFIRST(I))/STEP(I)+1.5)
C=A(LOC)
A(LOC)=CH(I)
IF (C.NE.BLANK.AND.C.NE.DOT) A(LOC)=ASTER
80 CONTINUE
IF (MOD(J,10).EQ.1) GO TO 95
WRITE(6,85) A
85 FORMAT (25X,101A)
GO TO 100
95 WRITE(6,10) B,A
15 FORMAT (12X,1PE12.4,1X,101A)
100 CONTINUE
RETURN
END
SUBROUTINE KUTMER (ND,T,H,Y0,EPSE,A,MCX,FIRST)
DIMENSION Y0(6),Y1(6),Y2(6),F0(6),F1(6),F2(6),EPSE(6),A(6)
COMMON /OUT,NPRINT,NPLOT,END
COMMON /ACCEL / XACCL,BWACL,CGACL,HL
DATA NAMI,NAM2 /ZHY1,ZHY2 /
C ND = NUMBER OF EQUATIONS, NO. OF COMPONENTS OF Y0
C T = INDEPENDENT VARIABLE
C H = INCREMENT FOR WHICH SOLUTION IS TO BE RETURNED * OR -
C Y0 = THE VECTOR OF DEPENDENT VARIABLES. ENTER WITH INITIAL
C VALUES AT T AND RETURN WITH VALUES AT T+H
C EPSE = RELATIVE ERROR CRITERION FOR COMPONENTS OF Y0 ,GT ABS(A)
C A = ABSOLUTE ERROR CRITERION FOR COMPONENTS OF Y0 ,LT. ABS(A)
C NOTE-- EPSE AND A MUST BE SPECIFIED FOR EACH COMPONENT OF THE SYSTEM
C MCX = THE SMALLEST STEP SIZE USED IN THE INTEGRATION
C FIRST SHOULD BE 0 WHEN KUTMER IS ENTERED FOR THE FIRST TIME
C AFTER THAT FIRST IS 1 IF KUTMER IS ENTERED WITH THE SAME H OR
C IF IT IS ENTERED WITH A CHANGED H
C IF FIRST IS 2 THE ERROR CRITERIA CANNOT BE MEET AND THE STEP SIZE
C REDUCED TO H/128.
C
C IF (FIRST) 20,10,20
C - - - - - FIRST ENTRY
C 10 MC = H
C IPLUC = 1
C FIRST = 1.
C - - - - - OTHER ENTRY
C 20 LOC = 0
C MCX = MC
C IF (MC.NE.0.) GO TO 30
C WRITE(6,800)
C 800 FORMAT(5X,45H KUTMER ENTERED WITH ZERO INTEGRATION INTERVAL )
C FIRST = 2.
C RETURN
C - - - - - 5 CALLS TO DAUX
C 30 CALL DAUX(T,Y0,F0)
C IF (NPRINT.EQ.5) WRITE(6,400) Y0,T,F0
C 400 FORMAT(6(2X,F10.4),4HTIME,2X,F10.4)
C IF (NPRINT.FO.5) WRITE(6,400) MC
C 30 DO 40 I=1,ND

```

```

PLOT2 88
PLOT2 89
PLOT2 90
PLOT2 91
PLOT2 92
PLOT2 93
PLOT2 94
PLOT2 95
PLOT2 96
PLOT2 97
PLOT2 98
PLOT2 99
PLOT2100
PLOT2101
PLOT2102
PLOT2103
PLOT2104
PLOT2105
PLOT2106
KUTMER 2
KUTMER 3
KUTMER 4
KUTMER 5
KUTMER 6
KUTMER 7
KUTMER 8
KUTMER 9
KUTMER10
KUTMER11
KUTMER12
KUTMER13
KUTMER14
KUTMER15
KUTMER16
KUTMER17
KUTMER18
KUTMER19
KUTMER20
KUTMER21
KUTMER22
KUTMER23
KUTMER24
KUTMER25
KUTMER26
KUTMER27
KUTMER28
KUTMER29
KUTMER30
KUTMER31
KUTMER32
KUTMER33
KUTMER34
KUTMER35
KUTMER36
KUTMER37
KUTMER38
KUTMER39
KUTMER40
KUTMER41

```

BEST AVAILABLE COPY

```

40 Y1(I) = Y0(I) + (HC/3.) * F0(I)
   IF (NPRINT.EQ.5) WRITE(6,400) Y1,T
C
   CALL DAUX(T+HC/3.,Y1,F1)
   IF (NPRINT.FQ.5) WRITE(6,400) F1,T
   DO 50 I=1,ND
50 Y1(I) = Y0(I) + (HC/6.) * F0(I) + (HC/6.) * F1(I)
   IF (NPRINT.FQ.5) WRITE(6,400) Y1,T
C
   CALL DAUX(T+HC/3.,Y1,F1)
   IF (NPRINT.FQ.5) WRITE(6,400) F1,T
   DO 60 I=1,ND
60 Y1(I) = Y0(I) + (HC/8.) * F0(I) + .375*HC*F1(I)
   IF (NPRINT.EQ.5) WRITE(6,400) Y1,T
C
   CALL DAUX(T+HC/2.,Y1,F2)
   IF (NPRINT.FQ.5) WRITE(6,400) F2,T
   DO 70 I=1,ND
70 Y1(I) = Y0(I) + (HC/2.) * F0(I) - 1.5*HC*F1(I) + 2.*HC*F2(I)
   IF (NPRINT.FQ.5) WRITE(6,400) Y1,T
C
   CALL DAUX(T+HC,Y1,F1)
   IF (NPRINT.FQ.5) WRITE(6,400) F1,T
   DO 80 I=1,ND
80 Y2(I) = Y0(I) + HC/6.*F0(I) + (.2/3.) * HC*F2(I) + (HC/6.) * F1(I)
   IF (NPRINT.EQ.5) WRITE(6,400) Y2,T
   INC = 0
C - - - - - CHECK ERROR CRITERIA
   DO 110 I=1,ND
   ZZZ = ABS(Y1(I)) - A(I)
   IF (ZZZ) 84,87,87
C - - - - - ABSOLUTE ERROR
85 ERROR = ABS(.2*(Y1(I) - Y2(I)))
   IF (ERROR - A(I)) 100,100,90
C - - - - - RELATIVE ERROR
87 ERROR = ABS(.2*.2*Y2(I)/Y1(I))
   IF (ERROR - EPSE(I)) 100,100,90
C - - - - - SINCE ERROR .GT. ERROR CRITERIA CHECK IF HC.GT.H/KUTHER79
C - - - - - IF YES THEN HALVE INTERVAL, OTHERWISE STOP.
90 X = 128.*ABS(HC) - ABS(H)
   IF (X) 91,95,95
C - - - - - ERROR TOO LARGE
91 WRITE(6,92) I,T,ERROR*HC
92 FORMAT(/18H FOR EQUATION NO. 12,27H, THE RELATIVE ERROR AT T = ,
   * E15.8, 4H IS ,E15.8,13H STEP SIZE = ,E15.8)
   FIRST = 2.
   RETURN
C - - - - - HALVE INTERVAL
95 HC = HC/2.
   IPLOC = 2*IPLOC
   LOC = 2*LOC
   MCX = HC
   WRITE(2,71) T,I,ERROR*HC
710 FORMAT(/8H TIME = ,F10.3,5X,26H HALVE INTERVAL. EQUATION ,I3,
   *13H HAS ERROR = ,E16.8,6X,17H STEP SIZE NOW = ,E15.8)
   WRITE(2,72) NAM2,(Y2(J),J=1,ND)
   WRITE(2,72) NAM1,(Y1(J),J=1,ND)
720 FORMAT( 2X,A2 / 3(10E13.5/))
   GO TO 30

```

KUTHER42
 KUTHER43
 KUTHER44
 KUTHER45
 KUTHER46
 KUTHER47
 KUTHER48
 KUTHER49
 KUTHER50
 KUTHER51
 KUTHER52
 KUTHER53
 KUTHER54
 KUTHER55
 KUTHER56
 KUTHER57
 KUTHER58
 KUTHER59
 KUTHER60
 KUTHER61
 KUTHER62
 KUTHER63
 KUTHER64
 KUTHER65
 KUTHER66
 KUTHER67
 KUTHER68
 KUTHER69
 KUTHER70
 KUTHER71
 KUTHER72
 KUTHER73
 KUTHER74
 KUTHER75
 KUTHER76
 KUTHER77
 KUTHER78
 KUTHER79
 KUTHER80
 KUTHER81
 KUTHER82
 KUTHER83
 KUTHER84
 KUTHER85
 KUTHER86
 KUTHER87
 KUTHER88
 KUTHER89
 KUTHER90
 KUTHER91
 KUTHER92
 KUTHER93
 KUTHER94
 KUTHER95
 KUTHER96
 KUTHER97
 KUTHER98
 KUTHER99
 KUTHE100

BEST AVAILABLE COPY

```

C - - - - - TEST IF INTERVAL LENGTH CAN BE DOUBLED
100 IF (ERRUR=64,-EPSE(I)) 110,110,101
101 INC = 1
110 CONTINUE
C - - - - - UPDATE T AND SOLUTION
111 T = T+HC
DO 112 I=1,ND
112 Y0(I) = Y2(I)
C - - - - - GET SOLUTION IN NEXT INTERVAL
LOC = LOC*1
IF (LOC-IPLOC) 120,210,210
120 IF (INC)210,130,210
130 IF (LOC-(LOC/2)=2) 210,140,210
140 IF (IPLOC-1)210,210,200
C - - - - - DOUBLE INTERVAL LENGTH
200 HC = 2.*HC
LOC = LOC /2
IPLOC = IPLOC/2
210 IF (IPLOC-LOC) 30,320,30
320 BWACL = F0(2)-XACCL*F0(3)
COACL = F0(2)
RETURN
END
SUBROUTINE DAUX(TIME,X,RHS)
C
C TIME TIME AT WHICH SYSTEM IS TO BE EVALUATED
C X STATE VECTOR
C RHS THE RIGHT HAND SIDE OF THE EQUATION S = F A
C
REAL KAN
REAL IA,IT,M,K,MA,MASS,NGO,NL,N,MMA
INTEGER END,PTIME
DIMENSION X(6),RHS(6),F(3,1),A(3,3),INDEX(3,3),
R(120),V(120),D(120)
C
COMMON /SHIP/ MASS,CINT,QA,CE,CE2,CE3,DMU,EDMU,E2DMU,E3DMU,BF,BMM,
NL,FL,IA,E(120)
COMMON /CONST/ NCG,ECO,PI,OPR,RPD,GRAVY,RHO,K,NUM,MA(120),CO,TA,
B(120),BETA,HW(120),TZ,DHAG,N,XD,T,XP,M,IT,
DFLTAS,IX,EST(120),C,RO,KAR,MMA(1.0),TEST(120),
N(120),PHALF
COMMON /IN/ RM(120),R1(120),VELIN
COMMON /OUT/ NPRINT,NPLOT,END
COMMON /SEAWAVE/ START,RISE,RAMP
COMMON /WAVE/ R,PT(120),ZMA,ZWMA,EMAS,ZZWMA,ZWEMA,ZZWA,EZMAZ,
ZWDOT(120)
C
RAMP = RMP(TIME,START,RISE)
PIH = PI/2.
CT = C*TIME
CX6 = COS(X(6))
SX6 = SIN(X(6))
C*****SET VALUES OF MA AND B
DO 75 I=1,NUM
PT(I) = (X(6)*E(I)*CX6*N(I)*SAB*CT)*K
R(I) = RU*COS(PT(I))*RAMP
C * * * * * COMPUTE HW SUBSEQUENCE OF A POINT AND R THE WAVE
C HW(I) IS IN THE FIXED COOPINATE SYSTEM

```

```

KUTME101
KUTME102
KUTME103
KUTME104
KUTME105
KUTME106
KUTME107
KUTME108
KUTME109
KUTME110
KUTME111
KUTME112
KUTME113
KUTME114
KUTME115
KUTME116
KUTME117
KUTME118
KUTME119
KUTME120
KUTME121
KUTME122
KUTME123
KUTME124
DAUX 2
DAUX 3
DAUX 4
DAUX 5
DAUX 6
DAUX 7
DAUX 8
DAUX 9
DAUX 10
DAUX 11
DAUX 12
DAUX 13
DAUX 14
DAUX 15
DAUX 16
DAUX 17
DAUX 18
DAUX 19
DAUX 20
DAUX 21
DAUX 22
DAUX 23
DAUX 24
DAUX 25
DAUX 26
DAUX 27
DAUX 28
DAUX 29
DAUX 30
DAUX 31
DAUX 32
DAUX 33
DAUX 34
DAUX 35
DAUX 36

```

BEST AVAILABLE COPY

	HW(I) = X(4)-E(I)*SX6+N(I)*CX6-R(I)	DAUX 37
	IF(HW(I).GT.0) GO TO 65	DAUX 38
C	CRAFT IS NOT SUBMERGED	DAUX 39
	MA(I) = 0.	DAUX 40
	B1(I)=0.	DAUX 41
	M(I) = 0.	DAUX 42
	GO TO 75	DAUX 43
65	V(I) = -RU*K*SIN(PT(I))*RAMP	DAUX 44
	D(I) = MW(I)/(CX6-V(I)*SX6)	DAUX 45
C	D(I) IS IN THE BODY AXIS SYSTEM AND IS THE SUBMERGENCE	DAUX 46
	IF(D(I).GE.TEST(I)) GO TO 70	DAUX 47
C	CRAFT IS PARTLY SUBMERGED	DAUX 48
	M(I) = D(I)*(1./TA)*PIH	DAUX 49
	B1(I) = D(I)*(1./TA)*PIH	DAUX 50
	MA(I) = KAR*PHALF*P(R(I))*B(I)	DAUX 51
	GO TO 75	DAUX 52
C	CHINE IS IMMERSUED	DAUX 53
C	B1 ARRAY IS USED FOR THE INTEGRALS OVER THE PORTION	DAUX 54
C	OF THE HULL FOR WHICH THE CHINE IS NOT IMMERSUED	DAUX 55
	70 MA(I)=MMAX(I)	DAUX 56
	M(I)=UM(I)	DAUX 57
	M1(I)=0.	DAUX 58
	75 CONTINUE	DAUX 59
	IF(NPRINT.LT.4) GO TO 85	DAUX 60
	WRITE(6,74) TIME	DAUX 61
74	FORMAT(" TIME = ",F10.4)	DAUX 62
	WRITE(6,76) (X(I),I=1,6)	DAUX 63
	WRITE(6,77) (R(I),I=1,NUM)	DAUX 64
	WRITE(6,78) (MW(I),I=1,NUM)	DAUX 65
	WRITE(6,79) (B(I),I=1,NUM)	DAUX 66
	WRITE(6,80) (V(I),I=1,NUM)	DAUX 67
	WRITE(6,81) (D(I),I=1,NUM)	DAUX 68
	WRITE(6,82) (MA(I),I=1,NUM)	DAUX 69
	76 FORMAT(" X(I) ",6(2X,E12.6))	DAUX 70
	77 FORMAT(" R(I)",10F10.4)	DAUX 71
	78 FORMAT(" MW(I)",10F10.4)	DAUX 72
	79 FORMAT(" B(I)",10F10.4)	DAUX 73
	80 FORMAT(" V(I)",10F10.4)	DAUX 74
	81 FORMAT(" D(I)",10F10.4)	DAUX 75
	82 FORMAT(" MA(I) ",10F10.4)	DAUX 76
	85 CONTINUE	DAUX 77
C		DAUX 78
C	* * * * * COMPUTES NL AND FL AND THE ASSOCIATED INTEGRALS	DAUX 79
	CALL FUNCT(X)	DAUX 80
C		DAUX 81
	IF(NPRINT.LT.4)GO TO 17	DAUX 82
	WRITE(6,15) TX,FL,DRAG,TZ,W,NL,XD,T,XP	DAUX 83
	15 FORMAT(" ".10E12.6)	DAUX 84
	17 CONTINUE	DAUX 85
C	* * * * * COMPUTE THE F VECTOR	DAUX 86
	F(1,1) = TX+FL*SX6-DRAG*CX6	DAUX 87
	F(1,1)=0.0	DAUX 88
	F(2,1) = TZ+FL*CX6+DRAG*SX6+W	DAUX 89
	F(3,1)=NL-DRAG*XD*T*XP	DAUX 90
	IF(NPRINT.LT.3)GO TO 18	DAUX 91
	WRITE(6,10) (F(I,1),I=1,3)	DAUX 92
	18 CONTINUE	DAUX 93
C	* * * * * COMPUTE THE A MATRIX	DAUX 94
	A(1,1) = M*MASS*SX6*SX6	DAUX 95

BEST AVAILABLE COPY

```

A(1,2) = MASS*SX6*CX6
A(1,3) = -QA*SX6
A(1,2) = 0.
A(1,3) = 0.
A(2,1)=A(1,2)
A(2,2) = M*MASS*CX6*CX6
A(2,3) = -QA*CX6
A(3,1)=A(1,3)
A(3,2)=A(2,3)
A(3,3)=IT*IA
IF(NPRINT,LT,3)GO TO 25
WRITE(6,12) (A(I,1),I=1,3)
WRITE(6,13) (A(I,2),I=1,3)
WRITE(6,14) (A(I,3),I=1,3)
C * * * * * INVERT THE A MATRIX
25 CALL MATINV(A,3,3,F,1,1,DETERM,IO,INDEX)
IF (ID.EQ.2)WRITE(6,26)
26 FORMAT(" MATRIX IS SINGULAR ")
C*****A ON RETURN WILL CONTAIN THE INVERSE MATRIX
C IO=2 MATRIX IS SINGULAR
C =1 INVERSE WAS FOUND
C
C * * * * * COMPUTE THE RIGHT HAND SIDE
RHS(1) = F(1,1)
RHS(2) = F(2,1)
RHS(3) = F(3,1)
RHS(4) = 0.0
RHS(5) = X(1)
RHS(6) = X(2)
RHS(6) = X(3)
10 FORMAT(" F(1,1) ",3(2X,E12,4))
12 FORMAT(" A(1,1) ",3(2X,E12,4))
13 FORMAT(" A(1,2) ",3(2X,E12,4))
14 FORMAT(" A(1,3) ",3(2X,E12,4))
39 IF(NPRINT,LT,2) GO TO 40
WRITE(6,12) (A(I,1),I=1,3)
WRITE(6,13) (A(I,2),I=1,3)
WRITE(6,14) (A(I,3),I=1,3)
WRITE(6,35) (RHS(I),I=1,6)
35 FORMAT(" RHS(I) ",6(2X,E12,6))
40 CONTINUE
RETURN
END
SUBROUTINE FUNCT(X)
REAL KAR
REAL IA,IAA,IPART,K,KPI,MA,MASS,NL,NCG,IT,M,MMAX,N
INTEGER END
DIMENSION IPART(120),C1(120),C2(120),
. D1(120),D2(120),D3(120),D4(120),D5(120),D6(120),
. QPART(120),Z1(120),Z2(120),Z3(120),Z4(120),Z5(120),
. Z6(120),Z7(120)
. X(6),VHAA(120)
C
COMMON /SHIP/ MASS,CINT,QA,CE,CE2,CE3,DMU,EDMU,E2DMU,E3DMU,BF,BMM,
. NL,PL,IA,E(120)
COMMON /CONST/ NCG,ECO,PI,DPR,KPD,GRAVTY,RHO,K,NUM,MA(120),CD,TA,
. B(120),BETA,HV(120),T2,UHAG,W,XD,T,XP,M,IT,
. DELTAS,TX,EST(120),C,RU,KAR,MMAX(10),TEST(120),
. N(120),PHALF
DAUX 96
DAUX 97
DAUX 98
DAUX 99
DAUX 100
DAUX 101
DAUX 102
DAUX 103
DAUX 104
DAUX 105
DAUX 106
DAUX 107
DAUX 108
DAUX 109
DAUX 110
DAUX 111
DAUX 112
DAUX 113
DAUX 114
DAUX 115
DAUX 116
DAUX 117
DAUX 118
DAUX 119
DAUX 120
DAUX 121
DAUX 122
DAUX 123
DAUX 124
DAUX 125
DAUX 126
DAUX 127
DAUX 128
DAUX 129
DAUX 130
DAUX 131
DAUX 132
DAUX 133
DAUX 134
DAUX 135
DAUX 136
DAUX 137
DAUX 138
FUNCT 2
FUNCT 3
FUNCT 4
FUNCT 5
FUNCT 6
FUNCT 7
FUNCT 8
FUNCT 9
FUNCT 10
FUNCT 11
FUNCT 12
FUNCT 13
FUNCT 14
FUNCT 15
FUNCT 16
FUNCT 17

```

BEST AVAILABLE COPY

```

COMMON /IN/ BM(120),B1(120),VELIN
COMMON/OUT/NPRINT,NPLOT,END
COMMON /WAVE/ R(120),PT(120),ZMA,ZWMA,EMAS,ZZWMA,ZWEMA,ZZWMA,EZMAZ
      ,ZWDOT(120)
COMMON /INTER/ II,KTT(10),DIFF(10)
COMMON /SEAWAVE/ START,RISE,RAMP
COMMON /TEST/ VMA
C * * * * * INITIALIZE INTEGRAL SUMS
MASS = 0.0
GA = 0.0
IA = 0.0
CE = 0.0
CE2 = 0.0
DMU = 0.0
EDMU=0.0
EZDMU = 0.0
EZDMU = 0.0
WF = 0.0
BHM = 0.0
ZMA = 0.0
ZWMA = 0.0
EMAS = 0.0
ZZWMA = 0.0
ZWEMA = 0.0
ZZWMA = 0.0
EZMAZ = 0.0
VPART = X(1)*SIN(X(6))+X(2)*COS(X(6))
SX6 = SIN(X(6))
CX6 = COS(X(6))
W0 = K*C
C * * * * * SET UP THE FUNCTIONS FOR THE INTEGRALS (PAGE 4 OF NO
DO 90 I=1,NUM
IPART(I)=E(I)*E(I)*MA(I)
QPART(I)=E(I)*MA(I)
ZWOOT(I) = -RU*W0*SIN(PT(I))*HAMP
U = X(1)*CX6-X(2)*SX6+ZWDOT(I)*SX6
VEL = VPART-X(3)*E(I)-ZWDOT(I)*CX6
Z1(I) = MA(I)*ZWOOT(I)
Z2(I) = -MA(I)*COS(PT(I))*RAMP
Z3(I) = E(I)*Z2(I)
Z4(I) = E(I)*Z1(I)
Z5(I) = I*Z2(I)
Z6(I) = E(I)*Z5(I)
Z7(I) = MA(I)*VEL*U
IF (VEL.LE.0.) GO TO 60
IF (R1(I).LE.0.0) GO TO 50
DROT = ZWDOT(I)*(X(1)+C*X(3)*(N(I)*CX6-E(I)*SX6))/C
D1(I) = VEL*B1(I)*(X(2)-X(3)*(CX6*E(I)+SX6*N(I)) -DROT)
GO TO 51
50 D1(I) = 0.
91 CONTINUE
D2(I) = E(I)*D1(I)
C1(I) = VEL*VEL*B(I)
C2(I) = E(I)*C1(I)
GO TO 61
60 D1(I) = 0.
D2(I) = 0.
C1(I) = 0.
C2(I) = 0.

```

```

FUNCT 18
FUNCT 19
FUNCT 20
FUNCT 21
FUNCT 22
FUNCT 23
FUNCT 24
FUNCT 25
FUNCT 26
FUNCT 27
FUNCT 28
FUNCT 29
FUNCT 30
FUNCT 31
FUNCT 32
FUNCT 33
FUNCT 34
FUNCT 35
FUNCT 36
FUNCT 37
FUNCT 38
FUNCT 39
FUNCT 40
FUNCT 41
FUNCT 42
FUNCT 43
FUNCT 44
FUNCT 45
FUNCT 46
FUNCT 47
FUNCT 48
FUNCT 49
FUNCT 50
FUNCT 51
FUNCT 52
FUNCT 53
FUNCT 54
FUNCT 55
FUNCT 56
FUNCT 57
FUNCT 58
FUNCT 59
FUNCT 60
FUNCT 61
FUNCT 62
FUNCT 63
FUNCT 64
FUNCT 65
FUNCT 66
FUNCT 67
FUNCT 68
FUNCT 69
FUNCT 70
FUNCT 71
FUNCT 72
FUNCT 73
FUNCT 74
FUNCT 75
FUNCT 76

```

BEST AVAILABLE COPY

<pre> 61 CONTINUE D3(I) = Z2(I)*VEL D4(I) = E(I)*D3(I) PIH = PI/2. D5(I) = B(I)*(HW(I)-B(I)*TA/2.) 66 D6(I) = D5(I)*E(I)*.5 90 CONTINUE RHOG=RHU*GRAVTY C * * * * * SET UP THE FUNCTIONS FOR THE INTEGRALS (PAGE 5 OF NOTES) PIH = PI/2. KPI = KAR*PI C EVALUATE INTEGRALS USING TRAP METHOU I = 1 INDEX = 1 91 CALL TRAP(MA(INDEX),DIFF(I),KTT(I),THASS) CALL TRAP(OPART(INDEX),DIFF(I),KTT(I),QA1) CALL TRAP(C1(INDEX),DIFF(I),KTT(I),CEA) CALL TRAP(C2(INDEX),DIFF(I),KTT(I),CE2A) CALL TRAP(IPART(INDEX),DIFF(I),KTT(I),IAA) CALL TRAP(D1(INDEX),DIFF(I),KTT(I),DMUA) CALL TRAP(D2(INDEX),DIFF(I),KTT(I),EDMUA) CALL TRAP(D3(INDEX),DIFF(I),KTT(I),E2DMUA) CALL TRAP(D4(INDEX),DIFF(I),KTT(I),E3DMUA) CALL TRAP(D5(INDEX),DIFF(I),KTT(I),BFA) CALL TRAP(D6(INDEX),DIFF(I),KTT(I),BMMA) CALL TRAP(Z1(INDEX),DIFF(I),KTT(I),ZMAA) CALL TRAP(Z2(INDEX),DIFF(I),KTT(I),ZWMAA) CALL TRAP(Z3(INDEX),DIFF(I),KTT(I),EMASA) CALL TRAP(Z4(INDEX),DIFF(I),KTT(I),ZZWMAA) CALL TRAP(Z5(INDEX),DIFF(I),KTT(I),ZWEWMAA) CALL TRAP(Z6(INDEX),DIFF(I),KTT(I),Z2WMAA) CALL TRAP(Z7(INDEX),DIFF(I),KTT(I),E2MAZA) </pre>	<pre> FUNCT 77 FUNCT 78 FUNCT 79 FUNCT 80 FUNCT 81 FUNCT 82 FUNCT 83 FUNCT 84 FUNCT 85 FUNCT 86 FUNCT 87 FUNCT 88 FUNCT 89 FUNCT 90 FUNCT 91 FUNCT 92 FUNCT 93 FUNCT 94 FUNCT 95 FUNCT 96 FUNCT 97 FUNCT 98 FUNCT 99 FUNCT100 FUNCT101 FUNCT102 FUNCT103 FUNCT104 FUNCT105 FUNCT106 FUNCT107 FUNCT108 FUNCT109 FUNCT110 FUNCT111 FUNCT112 FUNCT113 FUNCT114 FUNCT115 FUNCT116 FUNCT117 FUNCT118 FUNCT119 FUNCT120 FUNCT121 FUNCT122 FUNCT123 FUNCT124 FUNCT125 FUNCT126 FUNCT127 FUNCT128 FUNCT129 FUNCT130 FUNCT131 FUNCT132 FUNCT133 FUNCT134 FUNCT135 </pre>
<pre> 93 CONTINUE MASS = MASS + THASS QA = QA + QA1 IA = IA + IAA CE = CE + CEA CE2 = CE2 + CE2A DMU = DM1 + DMUA EDMU = EDM1 + EDMUA E2DMU = E2DMU + E2DMUA E3DMU = E3DMU + E3DMUA BF = BF + DMUG*BFA BMM = BMM + RHOG*BMMA ZMA = ZMA + ZMAA ZWMA = ZWMA + ZWMAA EMAS = EMAS + EMASA ZZWMA = ZZWMA + ZZWMAA ZWEWA = ZWEWA + ZWEWMAA Z2WMA = Z2WMA + Z2WMAA E2MAZ = E2MAZ + E2MAZA 94 CONTINUE IF (I,GE,II)GO TO 92 INDEX = INDEX+KTT(I)-1 I = I+1 GO TO 91 92 CONTINUE </pre>	

BEST AVAILABLE COPY

```

C * * * * * CALL COMPUT TO FIND THE VALUE OF NL AND FL USING
C THE VALUES OF THE ABOVE INTEGRALS
CALL COMPUT(X)
C
  IF(NPRINT,LT.3) GO TO 111
  IF(NPRINT,EQ.3) GO TO 108
  IF(NPRINT,EQ.4) GO TO 108
  WRITE(6,97) (IPART(I),I=1,NUM)
  WRITE(6,98) (OPART(I),I=1,NUM)
  WRITE(6,99) (C1(I),I=1,NUM)
  WRITE(6,100) (C2(I),I=1,NUM)
  WRITE(6,101) (C3(I),I=1,NUM)
  WRITE(6,102) (D1(I),I=1,NUM)
  WRITE(6,103) (D2(I),I=1,NUM)
  WRITE(6,104) (D3(I),I=1,NUM)
  WRITE(6,105) (D4(I),I=1,NUM)
  WRITE(6,106) (D5(I),I=1,NUM)
  WRITE(6,112) (D6(I),I=1,NUM)
  WRITE(6,113) (Z1(I),I=1,NUM)
  WRITE(6,114) (Z2(I),I=1,NUM)
  WRITE(6,115) (Z3(I),I=1,NUM)
  WRITE(6,116) (Z4(I),I=1,NUM)
  WRITE(6,11A) (Z5(I),I=1,NUM)
  WRITE(6,119) (Z6(I),I=1,NUM)
  WRITE(6,120) (Z7(I),I=1,NUM)
  WRITE(6,107) KPI,RHOG,PIH
108 WRITE(6,109) MASS,CINT,QA,CE,CE2,CE3
  WRITE(6,121) IA
121 FORMAT(' IA ',E10.4)
  WRITE(6,110) DMU,EDMU,E2DMU,E3DMU,BF,BMM
  WRITE(6,117) ZMA,ZWMA,EMAS,ZZWMA,ZWEMA,ZZWMA,EZMAZ
C * * * * * FORMATS * * * * *
96 FORMAT(' CPART(I)',10(2X,E10.4))
97 FORMAT(' IPART(I)',10(2X,E10.4))
98 FORMAT(' OPART(I)',10(2X,E10.4))
99 FORMAT(' C1 ',10(2X,E10.4))
100 FORMAT(' C2 ',10(2X,E10.4))
101 FORMAT(' C3 ',10(2X,E10.4))
102 FORMAT(' D1 ',10(2X,E10.4))
103 FORMAT(' D2 ',10(2X,E10.4))
104 FORMAT(' D3 ',10(2X,E10.4))
105 FORMAT(' D4 ',10(2X,E10.4))
106 FORMAT(' D5 ',10(2X,E10.4))
112 FORMAT(' D6 ',10(2X,E10.4))
107 FORMAT(' KPHI ',E10.4,' RHOG ',E10.4,' PHIM ',E10.4)
109 FORMAT(' MASS ',E10.4,' CINT ',E10.4,' QA ',E10.4,' CE ',E10.4,
  ' CE2 ',E10.4,' CE3 ',E10.4)
110 FORMAT(' DMU ',E10.4,' EDMU ',E10.4,' E2DMU ',E10.4,' E3DMU ',
  ' E10.4,' BF ',E10.4,' BMM ',E10.4)
113 FORMAT(4H Z1 ,10(2X,E10.4))
114 FORMAT(4H Z2 ,10(2X,E10.4))
115 FORMAT(4H Z3 ,10(2X,E10.4))
116 FORMAT(4H Z4 ,10(2X,E10.4))
118 FORMAT(4H Z5 ,10(2X,E10.4))
119 FORMAT(4H Z6 ,10(2X,E10.4))
120 FORMAT(4H Z7 ,10(2X,E10.4))
117 FORMAT(5H ZMA ,E10.4,6H ZWMA ,E10.4,6H EMAS ,E10.4,
  7H ZZWMA ,E10.4,7H ZWEMA ,E10.4,7H ZZWMA ,E10.4,
  7H EZMAZ ,E10.4)
  
```

```

FUNCT136
FUNCT137
FUNCT138
FUNCT139
FUNCT140
FUNCT141
FUNCT142
FUNCT143
FUNCT144
FUNCT145
FUNCT146
FUNCT147
FUNCT148
FUNCT149
FUNCT150
FUNCT151
FUNCT152
FUNCT153
FUNCT154
FUNCT155
FUNCT156
FUNCT157
FUNCT158
FUNCT159
FUNCT160
FUNCT161
FUNCT162
FUNCT163
FUNCT164
FUNCT165
FUNCT166
FUNCT167
FUNCT168
FUNCT169
FUNCT170
FUNCT171
FUNCT172
FUNCT173
FUNCT174
FUNCT175
FUNCT176
FUNCT177
FUNCT178
FUNCT179
FUNCT180
FUNCT181
FUNCT182
FUNCT183
FUNCT184
FUNCT185
FUNCT186
FUNCT187
FUNCT188
FUNCT189
FUNCT190
FUNCT191
FUNCT192
FUNCT193
FUNCT194
  
```

BEST AVAILABLE COPY

```

111 CONTINUE
RETURN
END
SUBROUTINE COMPUT(X)
DIMENSION X(6)
REAL KAR,KPI
REAL NL,MASS,NGC,M,IT,IA,K,MA,MMAX,N
INTEGER END

C
COMMON /SHIP/ MASS,CINT,QA,CE,CE2,CE3,DMU,EDMU,E2DMU,E3DMU,BF,BMM,
NL,FL,IA,E(120)
COMMON /CONST/ NCG,ECG,PI,DPR,RPD,GRAVTY,RHU,K,NUM,MA(120),CD,TA,
B(120),BETA,MW(120),TZ,DNAG,W,XD,T,XP,M,IT,
DELTA5,TX,EST(120),C,RO,KAR,MMAX(10),TEST(120),
N(120),PHALF
COMMON/OUT/NPRINT,NPLOT,END
COMMON /TEPMS/ T1,T2,T3,T4,T5,T6,T7,T8
COMMON /WAVE/ R(120),PT(120),ZMA,ZWMA,EMAS,ZZWMA,ZWEMA,ZZWMA,
E2MAZ,ZWDOT(120)
COMMON /TEST/ VMA

C
C
CX6 = COS(X(6))
SX6 = SIN(X(6))
WO = K*C
PIH = PI/2.0
KPI = KAR*PI
CONS1 = RO*WO*WO*CX6
CONS2 = (KPI*RHU*PIH/TA)/CX6
CONS3 = RO*WO*K*CX6*SX6
CONS4 = RO*WO*K*CX6*CX6
TERM1 = X(1)*CX6
TERM2 = X(2)*SX6
UVNUM = (X(1)*CX6-(X(2)-ZWDOT(NUM))*SX6)*
(X(1)*SX6-X(3)*E(NUM)*(X(2)-ZWDOT(NUM))*CX6)

C
ZMA = ZMA*X(3)*SX6
ZZWMA = ZZWMA*X(3)*SX6
ZWMA = ZWMA*CONS1
EMAS = EMAS*CONS1
DMU = DMU*CONS2
EDMU = EDMU*CONS2
CE = CE*CD*RHU
CE2 = CE2*CD*RHU
E2DMU = E2DMU*CONS3
E3DMU = E3DMU*CONS3
ZWEMA = ZWEMA*CONS4
ZZWMA = ZZWMA*CONS4

C
20 T1 = QA*X(3)*(TERM1-TERM2)
T1 = T1 + ZZWMA - EMAS
T2 = EDMU
T3 = CE2
T4 = MA(NUM)*E(NUM)*UVNUM + E2MAZ + E3DMU - ZZWMA + BMM
NL = T1 + T2 + T3 + T4 + BMM
T5 = MASS*X(3)*(TERM2-TERM1)
T5 = T5 + ZWMA - ZMA
T6 = -DMU
T7 = -CE
FUNCT195
FUNCT196
FUNCT197
COMPUT 2
COMPUT 3
COMPUT 4
COMPUT 5
COMPUT 6
COMPUT 7
COMPUT 8
COMPUT 9
COMPUT10
COMPUT11
COMPUT12
COMPUT13
COMPUT14
COMPUT15
COMPUT16
COMPUT17
COMPUT18
COMPUT19
COMPUT20
COMPUT21
COMPUT22
COMPUT23
COMPUT24
COMPUT25
COMPUT26
COMPUT27
COMPUT28
COMPUT29
COMPUT30
COMPUT31
COMPUT32
COMPUT33
COMPUT34
COMPUT35
COMPUT36
COMPUT37
COMPUT38
COMPUT39
COMPUT40
COMPUT41
COMPUT42
COMPUT43
COMPUT44
COMPUT45
COMPUT46
COMPUT47
COMPUT48
COMPUT49
COMPUT50
COMPUT51
COMPUT52
COMPUT53
COMPUT54
COMPUT55
COMPUT56
COMPUT57

```

BEST AVAILABLE COPY

```

TB = -MA(NI/M)*UVNUM - E2DMU * ZWEMA
BF = BF/CXA
C
C FL=T5+T6+T7+T8-BF
C
C IF(NPRINT.LT.3)GO TO 30
25 CONTINUE
WRITE(6,10)NL,FL
10 FORMAT(" NL = ",E12.6," FL = ",E12.6)
30 RETURN
END
SUBROUTINE INPUT
C * * * * * DEFINITION OF INPUT VARIABLES
C XA = INITIAL TIME INPUT 2
C XE = FINAL TIME INPUT 3
C HMIN = MINIMUM STEP SIZE INPUT 4
C HMAX = MAXIMUM STEP SIZE INPUT 5
C EPSE = RELATIVE ERROR CRITERIUM USED FOR VALUES OF Y OT A INPUT 6
C EPS = ERROR CRITERION IN KUTHER INPUT 7
C A = ABSOLUTE ERROR CRITERIA USED IN KUTHER INPUT 8
C NPRINT = 1 FINAL PRINTOUT INPUT 9
C = 2 MATRIX INVERSE MATRIX,F COLUMN MATRIX,AND KUTHER INPUT 10
C RESULTS INPUT 11
C = 3 INTEGRAL VALUES INPUT 12
C = 4 CALCULATED VALUES-CONSTANT FOR GIVEN INPUT VALUES INPUT 13
C NPLOT = 0 NO PLOT INPUT 14
C = 1 PRINTER PLOT INPUT 15
C END = NUMBER OF RUNS INPUT 16
C INPUT 17
C INPUT 18
C INPUT 19
C M = MASS OF CRAFT INPUT 20
C W = WEIGHT OF CRAFT INPUT 21
C TZ = THRUST COMPONENT IN Z DIRECTION INPUT 22
C TX = THRUST COMPONENT IN X DIRECTION INPUT 23
C XCG = DISTANCE FROM CG TO CENTER OF PRESSURE FOR NURMAL FORCE INPUT 24
C XP = MOMENT ARM OF PROPELLER THRUST INPUT 25
C XD = DISTANCE FROM CC TO CENTER OF PRESSURE FOR DRAG FORCE INPUT 26
C KA(I) = ADDED MASS COEFFICIENT INPUT 27
C AN ARRAY GIVEN THE VALUE KAR WHICH IS READ IN INPUT 28
C BM(I) = BEAM AT FREE SURFACE OR AT CHINE INPUT 29
C DRAG = FRICTION DRAG INPUT 30
C K = WAVE NUMBER INPUT 31
C RO = WAVE HEIGHT INPUT 32
C NU = WAVE SLOPE INPUT 33
C NUM = NUMBER OF STATIONS INPUT 34
C BL = BOAT LENGTH INPUT 35
C LAMBDA = WAVE LENGTH INPUT 36
C RG = RADIUS OF GENERATION IN FEET INPUT 37
C T = PROPELLED THRUST IN LBS INPUT 38
C GAMMA = PROPELLER THRUST ANGLE IN DEGREES INPUT 39
C DELTA = STATION SPACING IN FEET INPUT 40
C ECG = LONGITUDINAL CENTER OF GRAVITY INPUT 41
C NCG = VERTICAL CG INPUT 42
C BETA(I) = DEAD RISE INPUT 43
C NO(I) = HEIGHT OF MEAN BUTTOCK INPUT 44
C RHO = DENSITY OF WATER INPUT 45
C GRAVITY = GRAVITY FT/SEC**2 INPUT 46
C DPR = DEGREES PER RADIAN INPUT 47
C RPD = RADIANS PER DEGREE INPUT 48
C PI = 3.14159 . . . . . INPUT 49

```


BEST AVAILABLE COPY

```

C EST(I) = STATION POSITION INPUT 50
C START = START TIME OF THE RAMP FUNCTION FOR SEA WAVE INPUT 51
C RISE = DURATION OF THE RISE FROM ZERO TO ONE OF THE HAMP INPUT 52
C INPUT 53
C * * * * * IC OPTIONS INPUT 54
C INPUT 55
C IC(I) = 1 USE WAVE Z DISTANCE IN COMPUTING LIFT COMPONENT INPUT 56
C OF NL AND FL INPUT 57
C INPUT 58
C REAL IT,K,LAMBDA,M,MA,HMAX,NU,N,NCG,NO,MASS,NL,IA,KAR INPUT 59
C INTEGER END INPUT 60
C INPUT 61
C INPUT 62
C COMMON /CONST/ NCG,ECG,PI,OPR,RPD,GRAVITY,RHO,K,NUM,MA(120),CD,TA, INPUT 64
C R(120),BETA,HW(120),TZ,DRAG,W,XD,T,XP,M,IT, INPUT 65
C DELTAS,TX,EST(120),C,RO,KAR,HMAX(120),TEST(120), INPUT 66
C N(120),PHALF INPUT 67
C COMMON /SHIP/ MASS,CINT,GA,CE,CE2,CE3,DMU,EDMU,EZDMU,EJDMU,BF,BMM, INPUT 68
C NL,FL,IA,E(120) INPUT 69
C COMMON /IN/ BM(120),B1(120),VELIN INPUT 70
C COMMON /IN2/ NO(120),XA,XE,HMAX,HMIN,A(6),EPSE(6),LAMBDA INPUT 71
C COMMON/OUT/NPRINT,NPLOT,END INPUT 72
C COMMON /ACCEL/ XACCL,BWACL,CGACL,BL INPUT 73
C INPUT 74
C NAMELIST/HSP/A,NPRINT,NPLUT,END,W,RL,TZ,TX,XECG,XP,XD, INPUT 75
C DRAG,RO,T,GAMMA,ECG,NCG,KAR,RO,LAMBDA,NUM,BETA,EST INPUT 76
C ,XA,XE,HMIN,HMAX,EPS,VELIN INPUT 77
C INPUT 78
C DATA A /.01,.0001,.00001,.1,.0001,.00001/ INPUT 79
C DATA NPRINT,NPLUT,END/1,1,1/ INPUT 80
C DATA W,RL,TZ,TX,XECG,XP,XD,DRAG,RO,LAMBDA,RO,T,GAMMA, INPUT 81
C ECG,NCG,KAR /16.,3.75,6*0.0,.0416,22.5,.9562,2*0.0, INPUT 82
C 2.325,0.0,1.0/ INPUT 83
C DATA NUM,BETA,EST /77,20.0, INPUT 84
C 0.0000,.03125,.06250,.09375,.12500,.15625,.18750,.21875, INPUT 85
C .25000,.28125,.31250,.34375,.37500,.40625,.43750,.46875, INPUT 86
C .50000,.53125,.56250,.59375,.62500,.65625,.6875,.71875, INPUT 87
C .75000,.78125,.81250,.84375,.87500,.90625,.93750,.96875,1.000, INPUT 88
C 1.06250,1.12500,1.18750,1.25000,1.3125,1.37500,1.4375, INPUT 89
C 1.500,1.5625,1.625,1.6875,1.75,1.8125,1.875,1.9375,2.0, INPUT 90
C 2.0625,2.125,2.1875,2.25,2.3125,2.375,2.4375,2.5,2.5625,2.625, INPUT 91
C 2.6875,2.75,2.8125,2.8750,2.9375,3.0,3.0625,3.125,3.1875, INPUT 92
C 3.2500,3.3125 ,3.375,3.4375,3.5,3.5625,3.625,3.6875,3.75 / INPUT 93
C DATA XA,XE,HMIN,HMAX,EPS /0.0,20.0,.025,.1,.15/ INPUT 94
C DATA VELIN /19.62/ INPUT 95
C INPUT 96
C * * * * * READ IN AND WRITE OUT KUTNER PARAMETERS AND PROGRAM INPUT 97
C OPTIONS INPUT 98
C READ(5,HSP) INPUT 99
C WRITE(6,HSP) INPUT 100
C DO 10 I=1,4 INPUT 101
C 10 EPSE(I) = FPS INPUT 102
C INPUT 103
C * * * * * SET UP CONSTANTS INPUT 104
C PI = 3.141592653589 INPUT 105
C GRAVITY=32.18 INPUT 106
C OPR=57.29577951308 INPUT 107
C RPD=.017453292519 INPUT 108

```

BEST AVAILABLE COPY

```

IF (EST(NUM),LT,3.75) STOP 3
C
C      COMPUTE NO AND RM ARRAYS
C
DO 32 I=1,NUM
IF (EST(I),GE,0.75) GO TO 30
NO(I)=-0.46875*(1.0-SQRT(EST(I)/0.375-(EST(I)/0.75)**2.0))
BM(I)=.375*SQRT(1.0-(EST(I)/.75-1.0)**2.0)
GO TO 32
30 NO(I)=0.0
   BM(I) = 0.175
32 CONTINUE
C*****COMPUTE CONSTANTS AND INITIALIZE ARRAYS
M=M/GRAVY
RHO=1.99
IT=M*RO*RO
K = 2.*PI/LAMBDA
C=SQRT(GRAVY/K)
NU=RO*K
PHALF = (PI/2.)*RHO
C
BETA = BETA*RPD
CD = COS(BETA)
TA = TAN(BETA)
DO 60 I=1,NUM
E(I) = ECG-EST(I)
N(I) = NCG*NO(I)
MMAX(I) = KAR*PHALF*BM(I)*BM(I)
TEST(I) = (2.*BM(I)*TA)/PI
60 CONTINUE
END=END+1
RETURN
END
SUBROUTINE PLUTER(FX,XA,HMAX,LAMBDA,IB,NWAVE,IPT)
C
C INPUT:
C   FX          A TWO DIMENSIONAL ARRAY CONTAINING PITCH AND
C               HEAVE VALUES AT EACH TIME STEP
C   XA          INITIAL TIME
C   HMAX        TIME INTERVAL, PTIME*HMAX = INTERVAL BETWEEN
C               FX VALUES
C   LAMBDA      WAVELENGTH USED IN CALCULATING PITCH AND
C               HEAVE RATIOS
C   IB          NUMBER OF FX VALUES
C   NWAVE       START OF VALUES AFTER WAVE IS COMPLETELY ON
C
REAL IT,K,LAMBDA,M,MA,MMAX,N,NCG
INTEGER END
C
DIMENSION FX(2,400),FMIN(2),FMAX(2),NVAR(2)
C
COMMON /CONST/ NCG,ECG,PI,DPR,RPD,GRAVY,RHO,K,NUM,MA(120),CD,TA,
.      B(120),BETA,MW(120),T2,DRAG,W,XD,T,XP,M,IT,
.      DELTAS,TX,EST(120),C,RO,KA,MMAX(120),TEST(120),
.      N(120),PHALF
COMMON/OUT/NPRINT,NPLOT,END
C
C ***** SET UP VALUES FOR PLOT AND CREATE PLOT
INPUT109
INPUT110
INPUT111
INPUT112
INPUT113
INPUT114
INPUT115
INPUT116
INPUT117
INPUT118
INPUT119
INPUT120
INPUT121
INPUT122
INPUT123
INPUT124
INPUT125
INPUT126
INPUT127
INPUT128
INPUT129
INPUT130
INPUT131
INPUT132
INPUT133
INPUT134
INPUT135
INPUT136
INPUT137
INPUT138
INPUT139
INPUT140
INPUT141
PLOTER 2
PLOTER 3
PLOTER 4
PLOTER 5
PLOTER 6
PLOTER 7
PLOTER 8
PLOTER 9
PLOTER10
PLOTER11
PLOTER12
PLOTER13
PLOTER14
PLOTER15
PLOTER16
PLOTER17
PLOTER18
PLOTER19
PLOTER20
PLOTER21
PLOTER22
PLOTER23
PLOTER24
PLOTER25
PLOTER26
PLOTER27

```

```

NFUN=2
C . . . . . SET UP MIN AND MAX LIMITS FOR PLOT
  FMIN(1)=FX(1,1)
  FMIN(2)=FX(2,1)
  FMAX(1)=FX(1,1)
  FMAX(2)=FX(2,1)
C . . . . . SET UP MIN AND MAX LIMITS FOR PITCH AND HEAVE RATIO
  FMNP=FX(2,NWAVE)
  FMXP=FX(2,NWAVE)
  FMNH=FX(1,NWAVE)
  FMXH=FX(1,NWAVE)
C
DO 200 I=1,IB
  IF (FX(1,I).LT.FMIN(1)) FMIN(1)=FX(1,I)
  IF (FX(1,I).GT.FMAX(1)) FMAX(1)=FX(1,I)
  IF (FX(2,I).LT.FMIN(2)) FMIN(2)=FX(2,I)
  IF (FX(2,I).GT.FMAX(2)) FMAX(2)=FX(2,I)
  IF (I.LE.NWAVE) GO TO 200
  IF (FX(1,I).LT.FMNH) FMNH=FX(1,I)
  IF (FX(1,I).GT.FMXH) FMXH=FX(1,I)
  IF (FX(2,I).LT.FMNP) FMNP=FX(2,I)
  IF (FX(2,I).GT.FMXP) FMXP=FX(2,I)
200 CONTINUE
  IF (IPT.EQ.0) GO TO 800
C . . . . . COMPUTE RATIOS
  COL3 = (FMXH-FMNH)/(2.*RO)
  COL4 = (FMXP-FMNP)/((4.*PI*RO)/LAMBDA)
  WRITE(4,700) COL3,COL4
700 FORMAT(1H1," HEAVE AMPLITUDE/WAVEHEIGHT = ",E12.6,/,2X,
.      " PITCH AMPLITUDE/(2.*PI*WAVEHEIGHT/LAMBDA) = ",E12.6)
C
800 CONTINUE
  NVAR(1)=10H HEAVE
  NVAR(2)=10H PITCH
  N1=2
  X0=XA
  DELX = HMAX
  IF (NPLOT.EQ.1) CALL PLOT2(FX,FMIN,FMAX,NVAR,NFUN,N1,IB,X0,DELX)
  RETURN
END
SUBROUTINE TRAP(F,DX,NPTS,ANS)
C
C
C INPUT:
  F          ARRAY OF FUNCTIONAL VALUES OF THE INTEGRAND
  DX         THE X INTERVAL BETWEEN VALUES
  NPTS       THE NUMBER OF VALUES GIVEN
C
C OUTPUT:
  ANS        THE VALUE OF THE INTEGRAL
C
  DIMENSION F(NPTS)
  ANS=0.0
  IF (NPTS.LT.2) GO TO 999
  DO 1 I=1,NPTS
1  ANS=ANS+F(I)
  ANS=DX*(ANS-0.5*(F(1)+F(NPTS)))
999 CONTINUE
  RETURN
END
FUNCTION RMP(T,START,RISE)
PLOT290
PLOT291
PLOT292
PLOT293
PLOT294
PLOT295
PLOT296
PLOT297
PLOT298
PLOT299
PLOT300
PLOT301
PLOT302
PLOT303
PLOT304
PLOT305
PLOT306
PLOT307
PLOT308
PLOT309
PLOT310
PLOT311
PLOT312
PLOT313
PLOT314
PLOT315
PLOT316
PLOT317
PLOT318
PLOT319
PLOT320
PLOT321
PLOT322
PLOT323
PLOT324
PLOT325
PLOT326
PLOT327
PLOT328
PLOT329
PLOT330
PLOT331
PLOT332
PLOT333
PLOT334
PLOT335
PLOT336
PLOT337
PLOT338
PLOT339
PLOT340
PLOT341
PLOT342
PLOT343
PLOT344
PLOT345
PLOT346
PLOT347
PLOT348
PLOT349
PLOT350
PLOT351
PLOT352
PLOT353
PLOT354
PLOT355
PLOT356
PLOT357
PLOT358
PLOT359
PLOT360
PLOT361
PLOT362
PLOT363
PLOT364
PLOT365
PLOT366
PLOT367
TRAP 2
TRAP 3
TRAP 4
TRAP 5
TRAP 6
TRAP 7
TRAP 8
TRAP 9
TRAP 10
TRAP 11
TRAP 12
TRAP 13
TRAP 14
TRAP 15
TRAP 16
TRAP 17
TRAP 18
TRAP 19
RMP 2

```

BEST AVAILABLE COPY

```
C * * * * * THIS FUNCTION IS USED TO GRADUALLY IMPLIMENT THE WAVE RMP 3
C C C C C T CURRENT TIME RMP 4
C START TIME TO START RAMP FROM 0.0 TO 1.0 RMP 5
C RISE THE LENGTH OF THE RISE FROM 0.0 TO 1.0 RMP 6
C RMP 7
C RMP 8
C RMP 9
M=0.0 RMP 10
IF(T.LT.START)GO TO 99 RMP 11
IF(RISE.EQ.0.0)GO TO 80 RMP 12
TOP=T-START RMP 13
M=1.0 RMP 14
IF(TOP.LT.RISE)M=TOP/RISE RMP 15
GO TO 99 RMP 16
80 M=1. RMP 17
IF(T.EQ.START)M=0.5 RMP 18
99 RMP=H RMP 19
RETURN RMP 20
END
```

BEST AVAILABLE COPY

LISTING OF COMPUTER PROGRAM FOR CALCOMP PLOTS

PROGRAM PLTHSP(INPUT,OUTPUT,TAPES=INPUT,TAPE6=OUTPUT,TAPE7,TAPE9)	MAIN	2
ITAPE = 7	MAIN	3
CALL CALPLT(ITAPE)	MAIN	4
STOP	MAIN	5
END	MAIN	6
SUBROUTINE CALPLT(ITAPE)	CALP	2
DIMENSION TIME(4003),PITCH(4003),HEAVE(4003)	CALP	3
*,IBUF(1000),BWACL(4003),CGACL(4003)	CALP	4
LOGICAL ACCEL	CALP	5
C	CALP	6
C	CALP	7
C	CALP	8
CAL COMP PLOT OF PITCH AND HEAVE VERSUS TIME	CALP	9
IREAD = 5	CALP	10
READ(IREAD,10) XAXIS,YAXISP,YAXISH,MT	CALP	11
10 FORMAT(8F10.0)	CALP	12
ACCEL = .FALSE.	CALP	13
READ(IREAD,20) IA	CALP	14
20 FORMAT(I10)	CALP	15
IF(IA.EQ.1) ACCEL = .TRUE.	CALP	16
IF(ACCEL) READ(IREAD,10) YAXISH,YAXISC	CALP	17
CALL READ(TIME,HEAVE,PITCH,BWACL,CGACL,NPTS)	CALP	18
CALL PLOTS(IBUF,1000,7)	CALP	19
CALL PLOT(0.5,1,0,-3)	CALP	20
CALL ESCALE(TIME,XAXIS,NPTS,1)	CALP	21
CALL ESCALE(HEAVE,YAXISH,NPTS,1)	CALP	22
CALL ESCALE(PITCH,YAXISP,NPTS,1)	CALP	23
IF(ACCEL) CALL ESCALE(BWACL,YAXISH,NPTS,1)	CALP	24
IF(ACCEL) CALL ESCALE(CGACL,YAXISC,NPTS,1)	CALP	25
N1 = NPTS+1	CALP	26
N2 = NPTS+2	CALP	27
N3 = NPTS+3	CALP	28
CALL EAXIS(0.0,0.0,0.15)TIME IN SECONDS,-15,XAXIS,0.0,	CALP	29
TIME(N1),TIME(N2),TIME(N3),MT)	CALP	30
CALL EAXIS(0.0,0.0,0.13)HEAVE IN FEET,13,YAXISH,90.0,	CALP	31
HEAVE(N1),HEAVE(N2),HEAVE(N3),MT)	CALP	32
TEMP = TIME(N2)	CALP	33
TIME(N2) = TIME(N2)/TIME(N3)	CALP	34
HEAVE(N2) = HEAVE(N2)/HEAVE(N3)	CALP	35
CALL LINE(TIME,HEAVE,NPTS,1,0,0)	CALP	36
TIME(N2) = TEMP	CALP	37
XNEW = XAXIS*3.	CALP	38
YNEW = 1.0	CALP	39
CALL PLOT(XNEW,0.0,-3)	CALP	40
CALL EAXIS(0.0,0.0,0.15)TIME IN SECONDS,-15,XAXIS,0.0,	CALP	41
TIME(N1),TIME(N2),TIME(N3),MT)	CALP	42
CALL EAXIS(0.0,0.0,0.13)PITCH IN RAU,13,YAXISP,90.0,	CALP	43
PITCH(N1),PITCH(N2),PITCH(N3),MT)	CALP	44
TIME(N2) = TIME(N2)/TIME(N3)	CALP	45
PITCH(N2) = PITCH(N2)/PITCH(N3)	CALP	46
CALL LINE(TIME,PITCH,NPTS,1,0,0)	CALP	47
IF(.NOT.ACCEL) GO TO 30	CALP	48
TIME(N2) = TEMP	CALP	49
CALL PLOT(XNEW,0.0,-3)	CALP	50
CALL EAXIS(0.0,0.0,0.15)TIME IN SECONDS,-15,XAXIS,0.0,TIME(N1),	CALP	51
TIME(N2),TIME(N3),MT)	CALP	52
CALL EAXIS(0.0,0.0,0.16)HORIZONTAL ACCELERATION,16,YAXISH,90.0,BWACL(N1),	CALP	53
BWACL(N2),BWACL(N3),MT)	CALP	54
TIME(N2) = TIME(N2)/TIME(N3)	CALP	55
BWACL(N2) = BWACL(N2)/BWACL(N3)	CALP	55

BEST AVAILABLE COPY

	CALL LINE (TIME, BWACL, NPTS, 1, 0, 0)	CALP 56
	TIME (N2) = TEMP	CALP 57
	CALL PLUT (XNEW, 0, 0, -3)	CALP 58
	CALL EAXIS (0, 0, 0, 0, 15, HTIME IN SECONDS, -15, XAXIS, 0, 0, TIME (N1),	CALP 59
	TIME (N2), TIME (N3), HT)	CALP 60
	• CALL EAXIS (0, 0, 0, 0, 15, HCG ACCELERATION, 15, YAXIS, 90, 0, CGACL (N1),	CALP 61
	CGACL (N2), CGACL (N3), HT)	CALP 62
	• TIME (N2) = TIME (N2) / TIME (N3)	CALP 63
	CGACL (N2) = CGACL (N2) / CGACL (N3)	CALP 64
	CALL LINE (TIME, CGACL, NPTS, 1, 0, 0)	CALP 65
30	CONTINUE	CALP 66
	CALL PLUT (70, 0, 0, 0, 999)	CALP 67
	RETURN	CALP 68
	END	CALP 69
	SUBROUTINE READT (TIME, HEAVE, PITCH, BWACL, CGACL, NPTS)	CALP 70
	DIMENSION X (6), HEAVE (1), PITCH (1)	HEAD 2
	• TIME (1), BWACL (1), CGACL (1)	HEAD 3
	I = 0	HEAD 4
5	CONTINUE	HEAD 5
	I = I + 1	HEAD 6
	READ (9) TIME (I), (X (I), I = 4, 6), BWACL (I), CGACL (I)	HEAD 7
	IF (EOF (9)) GO TO 15	HEAD 8
15	CONTINUE	HEAD 9
	WRITE (6, 20) TIME (I), (X (J), J = 4, 6), BWACL (I), CGACL (I)	HEAD 10
20	FORMAT (1H .6 (F7.2, 2X))	HEAD 11
	HEAVE (I) = X (5)	HEAD 12
	PITCH (I) = X (6)	HEAD 13
	IF (1.0E-4000) GO TO 10	HEAD 14
	GO TO 5	HEAD 15
10	CONTINUE	HEAD 16
	NPTS = I - 1	HEAD 17
	RETURN	HEAD 18
	END	HEAD 19
	SUBROUTINE EAXIS (XPAGE, YPAGE, IBCD, NCHAR, AXLEN, ANGLE, FIRSTV,	HEAD 20
	DELTA V, DELTA U, HT)	EAXIS 2
	DIMENSION IBCD (1)	EAXIS 3
		EAXIS 4
		EAXIS 5
		EAXIS 6
		EAXIS 7
		EAXIS 8
		EAXIS 9
		EAXIS 10
		EAXIS 11
		EAXIS 12
		EAXIS 13
		EAXIS 14
		EAXIS 15
		EAXIS 16
		EAXIS 17
		EAXIS 18
		EAXIS 19
		EAXIS 20
		EAXIS 21
		EAXIS 22
		EAXIS 23
		EAXIS 24
		EAXIS 25
		EAXIS 26

C C C C	<p>THIS ROUTINE WORKS LIKE THE CALCUMP AXIS WITH THE EXCEPTION THAT THE TICK MARKS ARE NOT NECESSARILY EVERY INCH AND THE HEIGHT OF THE CHARACTERS IS INPUTTED</p>	
	CALL PLUT (XPAGE, YPAGE, 3)	
	ISN = ISON (1, NCHAR)	
	ISON = SIGN (1., DELTA V)	
	AMIN = FIRSTV	
	X = XPAGE	
	Y = YPAGE	
	XNUM = FIRSTV - DELTA V	
	N = AXLEN / DELTA U	
	IF (N * DELTA U .LT. AXLEN) N = N + 1	
	AMAX = AMIN + (N * DELTA V)	
	NDIG = NDIGIT (AMIN, AMAX, DELTA U, ND)	
10	CONTINUE	
	TEST = (NDIG * HT) * HT	
	IF (TEST .GT. DELTA U) HT = HT / 2.	
	IF (TEST .GT. DELTA U) GO TO 10	
	AYN = (1.5 * HT)	
	BYN = ((NDIG - 2) * HT) / 2. + .5 * HT	

```

N = N*1
TANG = (90.+ANGLE)/57.2958
ANG = ANGLE/57.2958
ST = SIN(TANG)
CT = COS(TANG)
S = SIN(ANG)
C = COS(ANG)
DO 30 I=1,N
  IF(I,EQ.1) GO TO 20
  X = X*DELTAU*C
  Y = Y*DELTAU*S
  CALL PLOT(X,Y,2)
  IF(I,EQ.N) GO TO 20
  XT = X+(.1*CT*ISN)
  YT = Y+(.1*ST*ISN)
  CALL PLOT(XT,YT,2)
20  XN = X+AYN*CT*ISN-AYN*C
  YN = Y+AYN*ST*ISN-BYN*S
  XNUM = XNUM*DELTAU
  CALL NUMBER(XN,YN,HT,XNUM,ANGLE,ND)
  CALL PLOT(X,Y,3)
30  CONTINUE
  XSP = (((AXLEN/HT)/2.)-(IABS(NCHAR)/2.))*HT
  YSP = 3.5*HT
  XT = XPAGE + XSP*C + ISN*YSP*CT
  YT = YPAGE + XSP*S + ISN*YSP*ST
  CALL SYMBOL(XT,YT,HT,IRCD,ANGLE,IABS(NCHAR))
  RETURN
END
FUNCTION NDIGIT(AMIN,AMAX,ANUM,ND)
  FINDS THE NUMBER OF DIGITS NECESSARY TO PRINT
  EVEN INCREMENT OF THE FUNCTION ON THE AXIS

  NDIGIT  THE NUMBER OF PLACES IN THE ENTIRE NUMBER
  ND      THE NUMBER OF DECIMAL PLACES
  ANUM   THE VALUE GIVEN TO EACH INCREMENT ON THE AXIS

  IF(ABS(AMIN),LT,ABS(AMAX)) GO TO 20
  IF(ABS(AMIN),EQ,ABS(AMAX),AND,AMAX,NE,0) GO TO 20
  IF(ABS(AMIN),GT,ABS(AMAX)) GO TO 10
  AMAX = 1.
  AMIN = -1.
  GO TO 20
10  AMAX = ABS(AMIN)
20  IF(AMAX,LE,1.) GO TO 50
  NDIV = 10
  I = 1
30  IF(AMAX/NDIV,LT,1) GO TO 40
  I = I+1
  NDIV = NDIV*10
  GO TO 30
40  NDIGIT = I+3
  ND = 2
  GO TO 60
50  NDIV = 10
  I = 1
60  IF(AMAX*NDIV,GT,1.) GO TO 70
  I = I+1

```

```

EAXIS 27
EAXIS 28
EAXIS 29
EAXIS 30
EAXIS 31
EAXIS 32
EAXIS 33
EAXIS 34
EAXIS 35
EAXIS 36
EAXIS 37
EAXIS 38
EAXIS 39
EAXIS 40
EAXIS 41
EAXIS 42
EAXIS 43
EAXIS 44
EAXIS 45
EAXIS 46
EAXIS 47
EAXIS 48
EAXIS 49
EAXIS 50
EAXIS 51
EAXIS 52
EAXIS 53
EAXIS 54
EAXIS 55
NDIG  2
NDIG  3
NDIG  4
NDIG  5
NDIG  6
NDIG  7
NDIG  8
NDIG  9
NDIG 10
NDIG 11
NDIG 12
NDIG 13
NDIG 14
NDIG 15
NDIG 16
NDIG 17
NDIG 18
NDIG 19
NDIG 20
NDIG 21
NDIG 22
NDIG 23
NDIG 24
NDIG 25
NDIG 26
NDIG 27
NDIG 28
NDIG 29
NDIG 30
NDIG 31

```

BEST AVAILABLE COPY

	<pre> NDIV = NDIV*10 GO TO 60 70 NDIGIT = I*2 ND = I 80 DD = FLUAT(ND) X = ANUM*(10**DD) IX = X IF(X-FLUAT(IX).LT..0001) GO TO 90 DD = DD+1 ND = ND+1 NDIGIT = NDIGIT+1 GO TO 80 90 CONTINUE RETURN END SUBROUTINE ESCALE (ARRAY,AXLEN,NPTS,INC) </pre>	<pre> NDIG 32 NDIG 33 NDIG 34 NDIG 35 NDIG 36 NDIG 37 NDIG 38 NDIG 39 NDIG 40 NDIG 41 NDIG 42 NDIG 43 NDIG 44 NDIG 45 NDIG 46 ESCAL 2 ESCAL 3 ESCAL 4 ESCAL 5 ESCAL 6 ESCAL 7 ESCAL 8 ESCAL 9 ESCAL 10 ESCAL 11 ESCAL 12 ESCAL 13 ESCAL 14 ESCAL 15 ESCAL 16 ESCAL 17 ESCAL 18 ESCAL 19 ESCAL 20 ESCAL 21 ESCAL 22 ESCAL 23 ESCAL 24 ESCAL 25 ESCAL 26 ESCAL 27 ESCAL 28 ESCAL 29 ESCAL 30 ESCAL 31 </pre>
<pre> C C C C C C C C </pre>	<pre> FINDS THE SCALE TO BE USED ON THE AXIS - ARRAY MUST HAS THREE UNUSED POSITIONS AR=AY(NPTS+1) = FIRSTV AR=AY(NPTS+2) = DELTAV (THE INCREMENT BETWEEN TICK MARKS VALUES = NUMBERS) AR=AY(NPTS+3) = DELTAU (THE INCREMENT IN INCHES BETWEEN TICK MARKS) DIMENSION ARRAY(1) AMIN = ARRAY(1) AMAX = ARRAY(1) ISGN = ISIGN(1,INC) INC = IABS(INC) DO 10 I=1,NPTS,INC IF (ARAY(I).LT,AMIN) AMIN=ARAY(I) IF (ARAY(I).GT,AMAX) AMAX=ARAY(I) 10 CONTINUE 20 AUNIT = IUNIT(AMIN,AMAX,AXLEN,N,ANUM) CALL ADJUST(AMIN,AMAX,AUNIT,AXLEN,N,ANUM) ARRAY(NPTS+1) = AMIN ARRAY(NPTS+2) = ANUM*ISGN IF (ISGN,PQ.-1)ARRAY(NPTS+1) = AMAX ARRAY(NPTS+3) = AUNIT IF (ABS(ANUM).EQ,AUNIT) ARRAY(NPTS+2) = 1.*ISGN IF (ABS(ANUM).EQ,AUNIT) ARRAY(NPTS+3) = 1. RETURN END SUBROUTINE ADJUST(AMIN,AMAX,AUNIT,AXLEN,N,ANUM) </pre>	<pre> JUST 2 JUST 3 JUST 4 JUST 5 JUST 6 JUST 7 JUST 8 JUST 9 JUST 10 JUST 11 JUST 12 JUST 13 JUST 14 JUST 15 </pre>
<pre> C C C C </pre>	<pre> GIVEN AMIN AND AMAX WHICH ARE DISTINCT VALUES, ADJUST THEM SO THAT THEY ARE EVEN MULTIPLES OF AUNIT K = 1 MIN = AMIN/ANUM IF (AMIN.LT,MIN*ANUM) MIN = MIN+1 AMIN = MIN*ANUM MAX = AMAX/ANUM IF (AMAX.GT,MAX*ANUM) MAX = MAX+1 AMAX = MAX*ANUM 10 TERM = AMIN+(N-K)*ANUM IF (TERM.LT,AMAX) GO TO 20 </pre>	<pre> </pre>

BEST AVAILABLE COPY

	K = K+1	JUST 16
	GO TO 10	JUST 17
20	AUNIT = AXLEN/(N-K+1)	JUST 18
	N = AXLEN/AUNIT+1	JUST 19
	RETURN	JUST 20
	END	JUST 21
	FUNCTION UNIT(AMIN,AMAX,AXLEN,N,ANUM)	UNIT 2
C		UNIT 3
C	FINDS THE INCREMENT BETWEEN VALUES TO BE USED ON THE	UNIT 4
C	AXIS IN AS FAR AS LABELING THE TICK MARKS	UNIT 5
C	FINDS THE NUMBER OF DIVISIONS TO BE MADE ON THE AXIS	UNIT 6
C	FINDS THE SIZE IN INCHES OF THESE DIVISIONS	UNIT 7
		UNIT 8
	IF(AMIN.NE,AMAX) GO TO 10	UNIT 9
	AMIN = AMIN-1	UNIT 10
	AMAX = AMAX+1	UNIT 11
10	IF(AMAX.LT.1.AND,AMIN.GT,-1)GO TO 110	UNIT 12
30	MIN = AMIN	UNIT 13
	MAX = AMAX	UNIT 14
	IF(AMAX.GT,MAX) MAX=MAX+1	UNIT 15
	IF(AMIN.LT,MIN) MIN=MIN-1	UNIT 16
	IF(MIN.LT,0) NWID = MAX-IABS(MIN)	UNIT 17
	IF(MIN.GE,0) NWID = MAX-MIN	UNIT 18
	NUM = 10	UNIT 19
40	IF(NWID.LT,NUM) GO TO 60	UNIT 20
	NUM = NUM*10	UNIT 21
	GO TO 40	UNIT 22
50	N = NWID/(NUM/10)	UNIT 23
	IF(MIN.LT,0.AND,MAX.GT,0) GO TO 70	UNIT 24
	IF(N*(NUM/10).LT,NWID) N=N+1	UNIT 25
	ANUM = NUM/10.	UNIT 26
	AUNIT = AXLEN/N	UNIT 27
	GO TO 160	UNIT 28
70	NN = IABS(MIN)/(NUM/10)	UNIT 29
	IF(NN*(NUM/10).LT,IABS(MIN)) NN = NN+1	UNIT 30
	N = MAX/(NUM/10)	UNIT 31
	IF(N*(NUM/10).LT,MAX) N = N+1	UNIT 32
	N = N*NN	UNIT 33
	ANUM = NUM/10.	UNIT 34
	AUNIT = AXLEN/N	UNIT 35
	GO TO 160	UNIT 36
110	NUM=10	UNIT 37
120	IF(AMAX*NUM.GT,1) GO TO 130	UNIT 38
	NUM = NUM*10	UNIT 39
	GO TO 120	UNIT 40
130	UNITT = 1./NUM	UNIT 41
140	N1 = AMIN*NUM	UNIT 42
	N2 = AMAX*NUM	UNIT 43
	IF(AMIN*NUM.LT,N1) N1=N1-1	UNIT 44
	IF(AMAX*NUM.GT,N2) N2=N2+1	UNIT 45
	IF(N1.NE,N2) GO TO 150	UNIT 46
	AMIN = AMIN-UNITT	UNIT 47
	AMAX = AMAX-UNITT	UNIT 48
	GO TO 140	UNIT 49
150	N = N2-N1	UNIT 50
	ANUM = UNITT	UNIT 51
	IF(AMIN.LT,0.AND,AMAX.LT,0) N=N1-N2	UNIT 52
	IF(AMIN.LT,0.AND,AMAX.GE,0) N=N2-N1	UNIT 53
	AUNIT = AXLEN/N	UNIT 54

160 IF (N.GT.5) GO TO 170
N = N*2
ANUM = ANUM/2.
AUNIT = AUNIT/2.
GO TO 160
170 UNIT = AUNIT
RETURN
END

UNIT 55
UNIT 56
UNIT 57
UNIT 58
UNIT 59
UNIT 60
UNIT 61
UNIT 62

INITIAL DISTRIBUTION

Copies		Copies	
1	WES	2	NAVSHIPYD MARE
1	CHONR/438 Cooper	1	1 Library
2	NRL	1	1 Code 250
	1 Code 2027	1	NAVSHIPYD BREM/Lib
	1 Code 2829	1	NAVSHIPYD PEARL/Code 202.32
1	ONR/Boston	8	NAVSEC
1	ONR/Chicago	1	1 SEC 6034B
1	ONR/Pasadena	1	1 SEC 6110
1	NORDA	1	1 SEC 6114H
4	USNA	1	1 SEC 6120
	1 Tech Lib	1	1 SEC 6136
	1 Nav Sys Eng Dept	1	1 SEC 6140B
	1 B. Johnson	1	1 SEC 6144G
	1 Bhattacheryya	1	1 SEC 6148
3	NAVPGSCOL	1	NAVSEC, NORVA/6660.03 Blount
	1 Library	12	DDC
	1 T. Sarpkaya	1	AFOSR/NAM
	1 J. Miller	1	AFFOL/FYS, J. Olsen
1	NADC	1	NSF/Eng Lib
3	NOSC	1	LC/Sci and Tech
	1 Library	1	DOT/Lib TAD-491.1
	1 Fabula	1	MMA, Library
	1 Hoyt	1	U. of BRIDGEPORT/E. Uram
1	NCSL/712 D. Humphreys	1	U. of CAL/Dept Naval Arch, Berkeley
1	NCEL/Code L31	4	1 Library
1	NSWC, Dahlgren	1	1 Webster
1	NUSC/Lib	1	1 Pauling
7	NAVSEA	1	1 Wehausen
	1 SEA 0322	2	U. of CAL, San Diego
	1 SEA 033	1	1 A.T. Ellis
	1 SEA 03612/Pierce	1	1 Scripps Inst Lib
	1 SEA 037	3	CIT
	3 SEA 09G32	1	1 Aero Lib
1	NAVFAC/Code 032C	1	1 T.Y. Wu
1	NAVSHIFYD PTSMH/Lib	1	1 A. Acosta
1	NAVSHIPYD PHILA/Lib	1	CATHOLIC U. of AMER/CIVIL MECH ENG
1	NAVSHIPYD NORVA/Lib	1	COLORADO STATE U./ENG RES CEN
1	NAVSHIPYD CHASN/Lib	1	U. of CONNECTICUT/Scottron
1	NAVSHIPYD LBEACH/Lib	1	CORNELL U./Sears

Copies

2 FLORIDA ATLANTIC U.
1 Tech Lib
1 S. Dunne

2 HARVARD U.
1 G. Carrier
1 Gordon McKay Lib

1 U. of HAWAII/Bretschneider

1 U. of ILLINOIS/J. Robertson

3 U. of IOWA
1 Library
1 Landweber
1 Kennedy

1 JOHN HOPKINS U./Phillips

1 KANSAS STATE U./Nesmith

1 U. of KANSAS/Civil Eng Lib

1 LEHIGH U./Fritz Eng Lab Lib

5 MIT
1 Library
1 Leehey
1 Mandel
1 Abkowitz
1 Newman

4 U. of MIN/ST. ANTHONY FALLS
1 Silberman
1 Schiebe
1 Wetzell
1 Song

3 U. of MICH/NAME
1 Library
1 Ogilvie
1 Hammitt

2 U. of NOTRE DAME
1 Eng Lib
1 Strandhagen

1 PENN STATE/ARL/B. Parkin

1 PRINCETON U./Mellor

5 SIT
1 Library
1 Breslin
1 Savitsky
1 P.W. Brown
1 Fridama

1 U. of TEXAS/ARL Lib

1 UTAH STATE U./Jeppson

Copies

2 SOUTHWEST RES INST
1 Applied Mech Rev
1 Abramson

2 STANFORD U.
1 Eng Lib
1 R. Street

1 STANFORD RES INST/Lib

1 U. of WASHINGTON/ARL Tech Lib

3 WEBB INST
1 Library
1 Lewis
1 Ward

1 WOODS HOLE/Ocean Eng

1 WORCHESTER PI/Tech Lib

1 SNAME/Tech Lib

1 BETHLEHEM STEEL/Sparrows Point

1 BETHLEHEM STEEL/New York/Lib

1 BOLT, BERANEK and NEWMAN/Lib

1 GENERAL DYNAMICS, EB/Boatwright

1 GIBBS and COX/Tech Info

5 HYDRONAUTICS
1 Library
1 E. Miller
1 A. Goodman
1 V. Johnson
1 C.C. Hsu

1 LOCKHEED, Sunnyvale/Waid

2 McDONNELL DOUGLAS, Long Beach
1 J. Hess
1 T. Cebeci

1 NEWPORT NEWS SHIPBUILDING/Lib

1 NIELSEN ENG and RES

1 OCEANICS

1 ROCKWELL INTERNATIONAL/B.
Ujihara

1 SPERRY RAND/Tech Lib

1 SUN SHIPBUILDING/Chief Naval Arch

1 ROBERT TAGGART

1 TRACOR

CENTER DISTRIBUTION

Copies	Code	Name
1	1500	W.E. Cummins
1	1504	V.J. Monacella
1	1506	M.K. Ochi
1	1507	D. Cieslowski
1	1512	J.B. Hadler
1	1520	R. Wermter
1	1521	P. Pien
1	1524	Y.T. Shen
1	1524	W.C. Lin
1	1532	G. Dobay
1	1532	R. Roddy
1	1540	W.B. Morgan
1	1552	J. McCarthy
1	1552	N. Salvesen
1	1560	G. Hagen
1	1560	N. Hubble
10	1562	M. Martin
1	1564	J. Feldman
1	1568	G. Cox
1	1572	M.D. Ochi
1	1572	C.M. Lee
1	1576	W.E. Smith
10	5214.1	Reports Distribution
1	522.1	Unclassified Library (C)
1	522.2	Unclassified Library (A)

DTNSRDC ISSUES THREE TYPES OF REPORTS

1. DTNSRDC REPORTS, A FORMAL SERIES, CONTAIN INFORMATION OF PERMANENT TECHNICAL VALUE. THEY CARRY A CONSECUTIVE NUMERICAL IDENTIFICATION REGARDLESS OF THEIR CLASSIFICATION OR THE ORIGINATING DEPARTMENT.

2. DEPARTMENTAL REPORTS, A SEMIFORMAL SERIES, CONTAIN INFORMATION OF A PRELIMINARY, TEMPORARY, OR PROPRIETARY NATURE OR OF LIMITED INTEREST OR SIGNIFICANCE. THEY CARRY A DEPARTMENTAL ALPHANUMERICAL IDENTIFICATION.

3. TECHNICAL MEMORANDA, AN INFORMAL SERIES, CONTAIN TECHNICAL DOCUMENTATION OF LIMITED USE AND INTEREST. THEY ARE PRIMARILY WORKING PAPERS INTENDED FOR INTERNAL USE. THEY CARRY AN IDENTIFYING NUMBER WHICH INDICATES THEIR TYPE AND THE NUMERICAL CODE OF THE ORIGINATING DEPARTMENT. ANY DISTRIBUTION OUTSIDE DTNSRDC MUST BE APPROVED BY THE HEAD OF THE ORIGINATING DEPARTMENT ON A CASE-BY-CASE BASIS.