

A Novel TEM Waveguide Using Uniplanar Compact Photonic-Bandgap (UC-PBG) Structure

Fei-Ran Yang, *Student Member, IEEE*, Kuang-Ping Ma, Yongxi Qian, *Member, IEEE*,
and Tatsuo Itoh, *Life Fellow, IEEE*

Abstract—A novel waveguide using a photonic bandgap (PBG) structure is presented. The PBG structure is a two-dimensional square lattice with each cell consisting of metal pads and four connecting lines, which are etched on a conductor-backed Duroid substrate. This uniplanar compact PBG structure realizes a magnetic surface in the stopband and is used in the waveguide walls to provide magnetic boundary conditions. A relatively uniform field distribution along the cross section has been measured at frequencies from 9.4 to 10.4 GHz. Phase velocities close to the speed of light have also been observed in the stopband, indicating that TEM mode has been established. A recently developed quasi-Yagi antenna has been employed as a broad-band and efficient waveguide transition. Meanwhile, full-wave simulations using the finite-difference time-domain method provide accurate predictions for the characteristics of both the perfect magnetic conductor impedance surface and the waveguide structure. This novel waveguide structure should find a wide range of applications in different areas, including quasi-optical power combining and the electromagnetic compatibility testing.

Index Terms—Perfect magnetic conductor, phase velocity, photonic bandgap, quasi-Yagi antenna, TEM waveguide.

I. INTRODUCTION

PHOTONIC bandgap (PBG) materials have been exclusively investigated for their versatility in controlling the propagation of electromagnetic waves [1], [2]. The fact that PBG structures are scalable makes them useful not only in the optical regime, but also in the microwave or millimeter-wave domain. Practical applications in microwave frequency such as microstrip antenna [3]–[6] and power amplifiers [7] have been presented. Two-dimensional PBG materials have also been applied as planar reflectors, which can be used in antennas and waveguide structures [8]–[10]. Recently, several PBG structures have been proposed and demonstrated to be useful in enhancing performances of microwave circuits or antennas. For example, a high-impedance ground plane has been realized using metal plates with vertical vias [11]. A uniplanar compact photonic bandgap (UC-PBG) structure

has also been presented for various applications [12], [13]. This novel PBG structure has several advantages, including compact size, planar feature, low loss, and broad stopband. While many existing PBG materials focus on the applications of bandgaps, the UC-PBG structure can be exploited for multiple purposes. For instance, the passband of a UC-PBG structure has been used as a slow-wave medium, which reduces dimensions of the circuits integrated on it [14]. The wide stopband has been applied to suppress spurious transmission of filters [15] and leakage of guided-wave structures, including conductor-backed coplanar waveguides (CB CPW's) [16], and striplines [17]. Furthermore, a UC-PBG structure can realize a magnetic surface at the stopband frequency when using it as a planar reflector [18].

The quasi-optical amplifiers is of great interest for its potential to efficiently combine the output power generated from a large number of active device [19]. Power combining using waveguides becomes a popular approach because the diffraction loss can be avoided [20] and the broad-band responses can be achieved [21]. Dielectric-loaded or oversized waveguides are often used in spatially combined amplifier arrays since uniform aperture field distribution are required [10], [21]. However, for a dielectric-loaded waveguide with small size, it shows no advantage over a conventional empty waveguide [22]. The performance can be improved using high dielectric constant material or longitudinal corrugations, but the bandwidth will be smaller as a consequence [22]. The unique characteristic of the UC-PBG structure allows for the possibility of building a TEM waveguide with a uniform field distribution.

The UC-PBG reflector has been demonstrated to behave like a PMC at the stopband frequency where the periodic loading changes the surface impedance to an open-circuit condition [18]. The concept of the PMC surface can be applied to build a TEM waveguide with a uniform field distribution. When the two sidewalls of a rectangular waveguide are replaced by UC-PBG structures, a parallel-plate mode will be established by the magnetic boundary conditions. This novel PBG waveguide is a promising candidate as a feeding structure in the quasi-optical power-combining amplifier array. The UC-PBG structure can be fabricated on a thin substrate using the standard etching technique, which is easier than the manufacturing process of conventional hard horns with high dielectric-constant materials or corrugations.

Manuscript received March 19, 1999; revised July 9, 1999. This work was supported by the Army Research Office Multidisciplinary Research Initiative on Low-Power/Low-Noise Electronics Technology under Contract DAAH04-96-1-0005, and by the Army Research Office Multidisciplinary Research Initiative Photonic Band Engineering under Contract DAAH04-96-1-0389.

F.-R. Yang, Y. Qian, and T. Itoh are with the Electrical Engineering Department, University of California at Los Angeles, Los Angeles, CA 90095 USA.

K.-P. Ma is with the Apple Computer Company, Cupertino, CA 95129 USA.

Publisher Item Identifier S 0018-9480(99)08785-2.

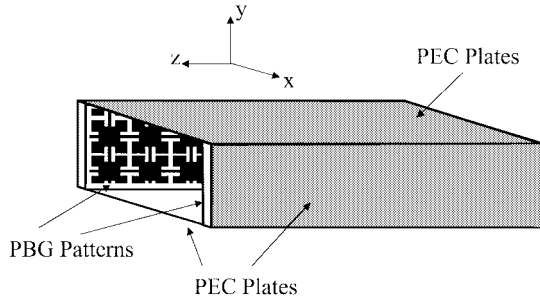


Fig. 1. Schematic of a UC-PBG waveguide.

This paper proposes a novel TEM waveguide using a UC-PBG structure, which accomplishes a PMC surface at the stopband frequency. Characteristics of the UC-PBG structure is introduced in Section II and the realization of a PMC surface is presented. Analysis of the PBG waveguide is performed in Section III, where a simple circuit model and full-wave simulation are applied. Section IV shows the experimental results of the PBG waveguide, including phase velocities and field profiles at different frequencies along the cross section. The performance of the microstrip-to-waveguide transition is also mentioned in Section IV and is followed by conclusions in Section V.

II. CHARACTERISTICS OF THE NOVEL PBG STRUCTURE

Fig. 1 shows the proposed TEM-waveguide using the UC-PBG structures in two sidewalls. The UC-PBG structure is a two-dimensional periodic lattice patterned on a conductor-backed dielectric substrate. The unit cell of the PBG lattice consists of square pads and narrow lines with insets, as displayed in Fig. 2(a). The gaps between adjacent cells provide capacitive coupling and the narrow branches have inductive behavior, which is further enhanced by insets. The surface impedance of the proposed structure is frequency-sensitive since the PBG structure actually forms a distributed LC network with specific resonant frequencies. At the frequencies where the periodic loading becomes an open circuit, an equivalent magnetic surface is created. This interesting phenomenon can be explained using a simple transmission-line model, shown in Fig. 2(b). The UC-PBG surface is modeled by an LC tank with a resonant frequency corresponding to the center frequency of the stopband. As frequency approaches the resonant frequency, the imaginary part of the input impedance becomes infinity, indicating a perfect magnetic surface, as illustrated in Fig. 2(b).

The characteristics of the PMC behavior of a PBG surface can be verified by measuring the reflection coefficient for a uniform incident plane wave. The phase of the reflection coefficient of a PMC plane should exhibit a difference of 180° compared to that of a perfect electric conductor (PEC) plane. Fig. 3(a) shows the experimental setup of a scattering measurement. X -band horn antennas A and B are used for transmitting and receiving, respectively. Plastic foam with a relative dielectric constant of 1.0 is inserted between two horns as a holder for the scatterer. Two types of scatterer used in this experiment are an intact copper sheet (PEC) and a UC-

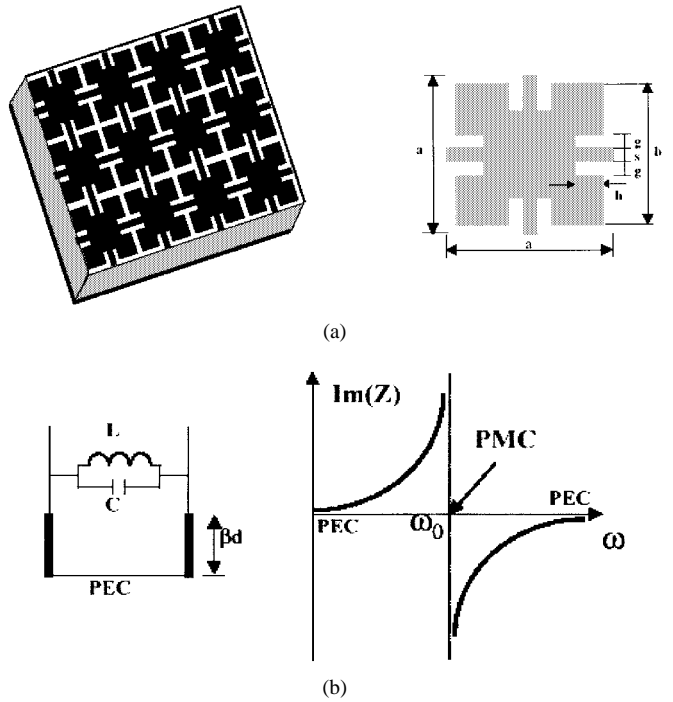


Fig. 2. (a) Schematic of a two-dimensional UC-PBG lattice on the Duroid substrate with the outline of a unit cell. (b) Equivalent-circuit model of the UC-PBG structure and the input impedance.

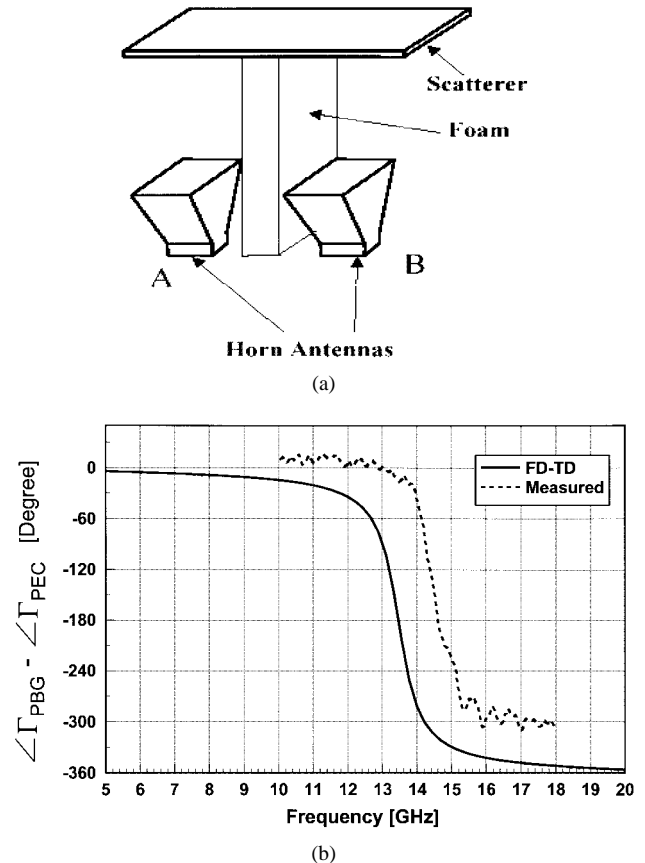


Fig. 3. (a) Setup for the reflection coefficient measurement. (b) Measured and simulated results of phase differences in reflection coefficients between the PBG and PEC surface.

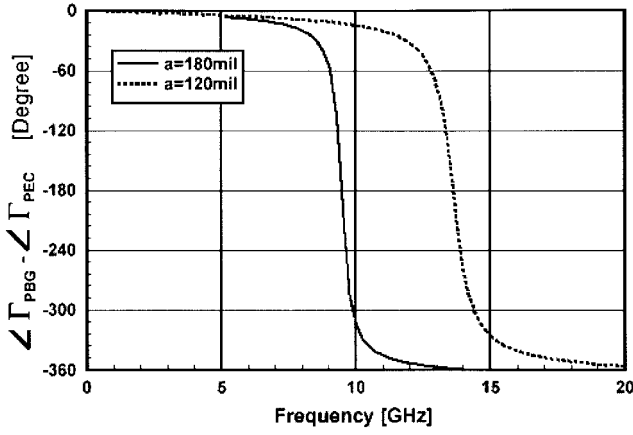


Fig. 4. Frequency scaling of the UC-PBG structure.

PBG surface, both fabricated on a conductor-backed Duroid substrate (Duroid 6010) with dielectric constant of 10.2 and thickness of 25 mil. The UC-PBG structure is a 40×60 array with a period (a) of 120 mil.

Fig. 3(b) shows the phase difference in reflection coefficients between PBG and PEC surfaces. As can be seen, a 180° phase difference occurs around 14.5 GHz, indicating that a magnetic surface has been successfully realized. The PBG surface is inductive below 14.5 GHz and becomes capacitive above the resonant frequency. Finite-difference time-domain (FDTD) simulation shows a close agreement with an error of 6%, which might be caused by the finite substrate and overetching effects. Several measurements with different spacing between two horns and different distances from the PBG surface to antennas have been performed. The results are insensitive to those variations, implying the robustness of the realized magnetic surface.

The PBG structure is scalable and can be applied in different frequency bands. Fig. 4 shows the simulated result of a UC-PBG structure with a linearly scaled lattice built on the same substrate. The scaled PBG structure with a period of 180 mil has a resonant frequency of 9.5 GHz and will be used in the following waveguide experiments.

III. ANALYSIS OF PBG WAVEGUIDE

The prototype of the PBG waveguide is an X-band waveguide (WR-90) loaded by the UC-PBG structures, as shown in Fig. 1. The UC-PBG structure used here has the same dimensions as those of the scaled version introduced at the end of Section II. The LC circuit model is applied again to provide the first-order approximation. Fig. 5 shows the cross section of the PBG waveguide and an equivalent circuit. The transverse resonance technique is applied to obtain the dispersion relation and the condition of a resonant line is satisfied when [23]

$$Z_{in}^r(x) + Z_{in}^l(x) = 0, \quad \text{for any } x. \quad (1)$$

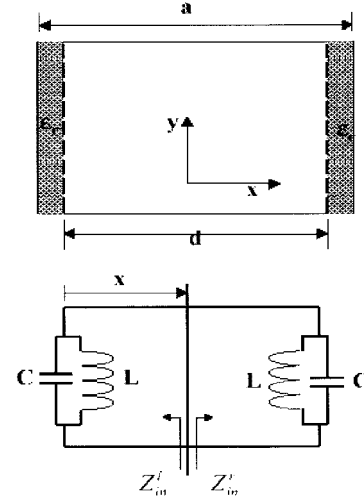


Fig. 5. The cross section (xy -plane) and an equivalent-circuit model of the PBG waveguide where $a = 900$ mil and $d = 850$ mil.

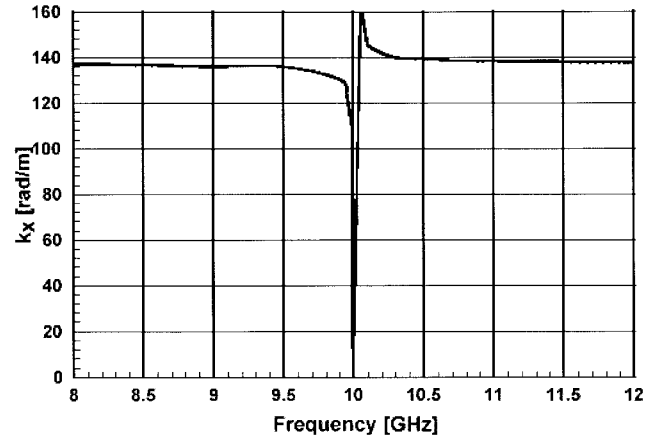


Fig. 6. Calculated wavenumber in the x -direction (k_x) of the PBG waveguide by the transverse resonance technique.

The following transcendental equation is then obtained after plugging the L and C into (1) as the load:

$$\tan(k_x d) = \frac{2Z_0 \cdot \frac{\omega L}{1 - \omega^2 LC}}{\left(\frac{\omega L}{1 - \omega^2 LC}\right)^2 - Z_0^2}, \quad \text{where } Z_0 = \frac{\omega \mu_0}{k_x}. \quad (2)$$

Fig. 6 shows the wavenumber in the x -direction (k_x) calculated from (2), with the values of L and C chosen to resonate at 10 GHz. As can be seen, k_x is decreased as frequency increases and it experiences a singularity when the LC load becomes open, indicating that a phase velocity equal to the speed of light (c) has been achieved at that frequency. However, this lumped-element model can only provide the conceptual understanding of the waveguide nature owing to its simplicity. In order to perform a rigorous analysis, full-wave simulations using the FDTD method is applied to characterize the PBG waveguide.

Fig. 7 shows the simulated result for the phase velocity of the PBG waveguide with the velocity of a standard metallic waveguide plotted as a reference. The PBG waveguide has a

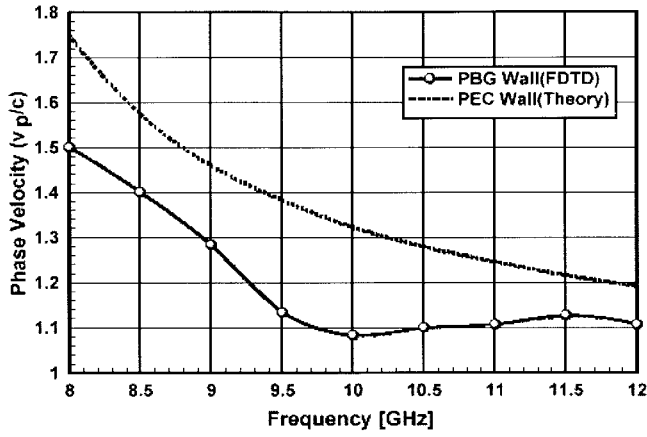


Fig. 7. Simulated phase velocity of the PBG waveguide and a theoretical value of phase velocity for a regular waveguide.

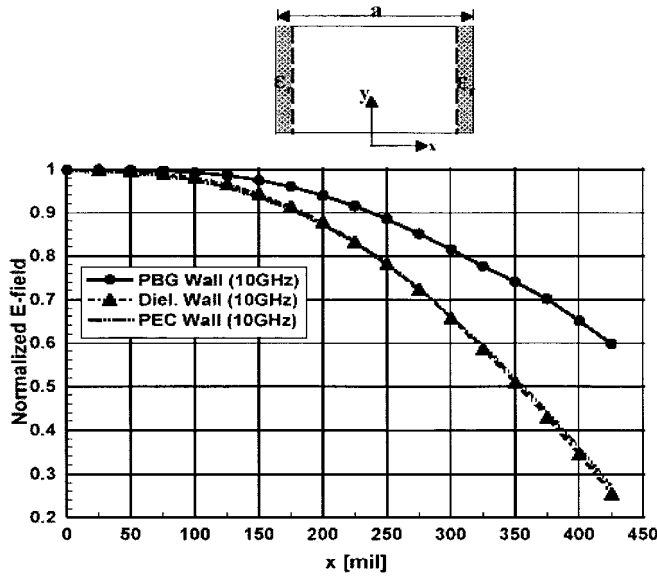


Fig. 8. Simulated field profile in the PBG waveguide.

significantly lower phase velocity over entire X -band and a smooth transition from the inductive to capacitive region. E -field distributions in the waveguides with different sidewalls have been simulated at the frequency of 10 GHz, as displayed in Fig. 8. As can be seen, the PBG waveguide has a relatively uniform field distribution compared to a standard waveguide. A dielectric-loaded (without PBG surface) waveguide is also analyzed for comparison and its field profile has a similar shape as that of a standard waveguide, implying that the more uniform field of the PBG waveguide is indeed generated by the PBG structure, not from the dielectric loading effect.

IV. EXPERIMENTAL RESULTS

A. Excitation Mechanism

Since the PBG waveguide has different characteristic impedance from that of a conventional rectangular waveguide, a special waveguide transition must be designed for an efficient excitation. A quasi-Yagi antenna has been proposed and successfully applied as a TE wave launcher for an X -band

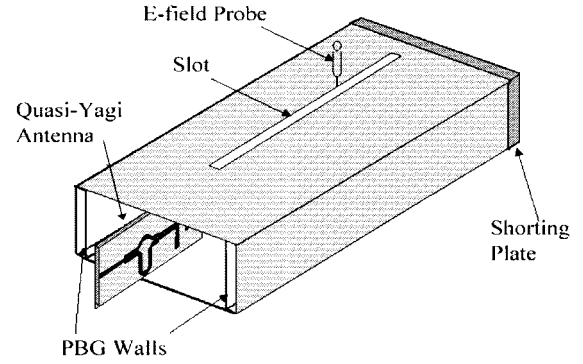


Fig. 9. Drawing of the PBG waveguide used in phase velocity and field profile measurements.

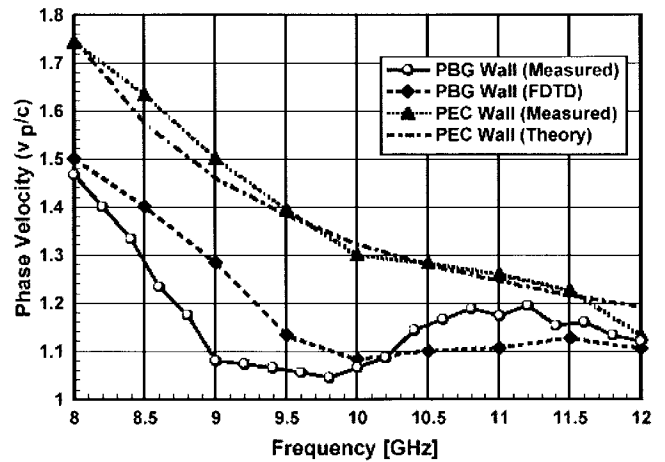


Fig. 10. Measured phase velocity with the FDTD result repeated for comparison.

waveguide [24], [25]. A broad-band response (40%) with a low return loss (< -12 dB) has been reported in [25]. Fig. 9 shows the schematic of the PBG waveguide used for measurements. The quasi-Yagi antenna with a substrate width equal to the waveguide height is inserted in the E -plane of the waveguide to launch a TE wave.

B. Measurement of Phase Velocity

The PBG waveguide with a narrow slot on the top plate is built for the phase velocity measurement. An HP 8350B sweep oscillator is connect to the quasi-Yagi antenna to generate the modulated signal and the E -field probe is connected to an HP 415E SWR meter for determining the guided wavelength, λ_g , from which the phase velocity can be calculated. The measured result is shown in Fig. 10, where the simulated data of the PBG waveguide is repeated here for comparison. The measured phase velocity is 20% slower than that of a regular waveguide and reaches a minimum of $3.14 \cdot 10^8$ m/s at 9.8 GHz. The velocity curve is relatively flat and close to the speed of light from 9 to 10.2 GHz, indicating that a TEM mode is generated. The experimental results agree well with the FDTD simulation, except for a frequency offset. The fact that the antenna structure and over-etching of the PBG

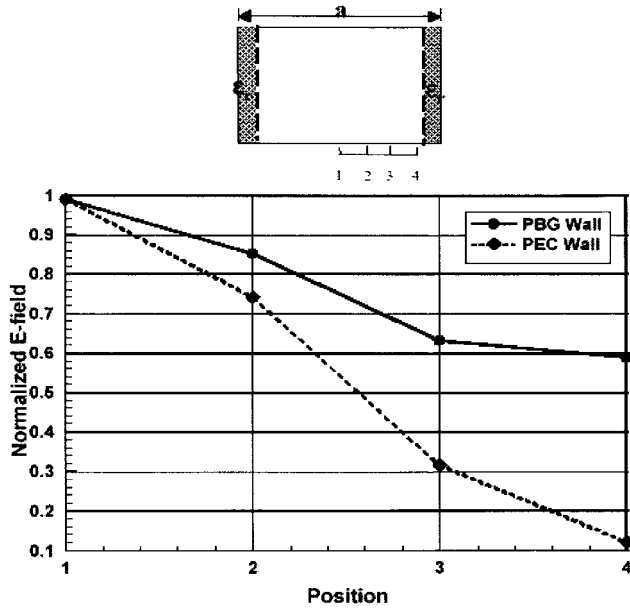


Fig. 11. Measured E -field strength of a PBG waveguide with a standard waveguide as a reference.

lattice are not considered in the simulation may explain the discrepancy.

C. Measurement of Field Profile

The PBG waveguide used in the previous experiment has been slightly modified for the E -field profile measurement. The top plate is replaced by a solid cover and a conductor-backed dielectric slab with a small iris is attached at the end of the waveguide as a shorting plate. The E -field probe is placed above the surface of the dielectric slab so that it does not disturb the field inside the waveguide, and the image problem is avoided. Shorting plates with the iris at different locations along the x -axis have been used to measure the field profile. The same sweep oscillator used in the velocity measurement again serves as a signal generator and the probe is connected to a power meter. Fig. 11 shows the measured E -field strength of a PBG waveguide with the data of a standard waveguide plotted as a reference. For the standard waveguide, E -field strength decreases substantially as the probe moves toward the wall. At the location near the sidewall ($x = 25$ mil), the field strength decreases to 10% of the maximum value measured at the center. On the other hand, the E -field in the PBG waveguide shows a more uniform distribution and the field strength is 60% of the peak value when probing close to the wall. One thing that should be pointed out here is that the peak value of the E -field in the PBG waveguide is lower than that in the PEC waveguide due to the field flattening and metallic loss. Fig. 12(a) and (b) displays the measured field strength with respect to frequency for a standard and PBG waveguide, respectively. The curve number represents the position where the E -field was probed. As can be seen in Fig. 12(b), spacing between curves is much smaller than that in Fig. 12(a), especially from 9.5 to 10.4 GHz, corresponding to the frequency range where the PBG walls behave like PMC surfaces. The optimum operating point is at 9.8 GHz and the

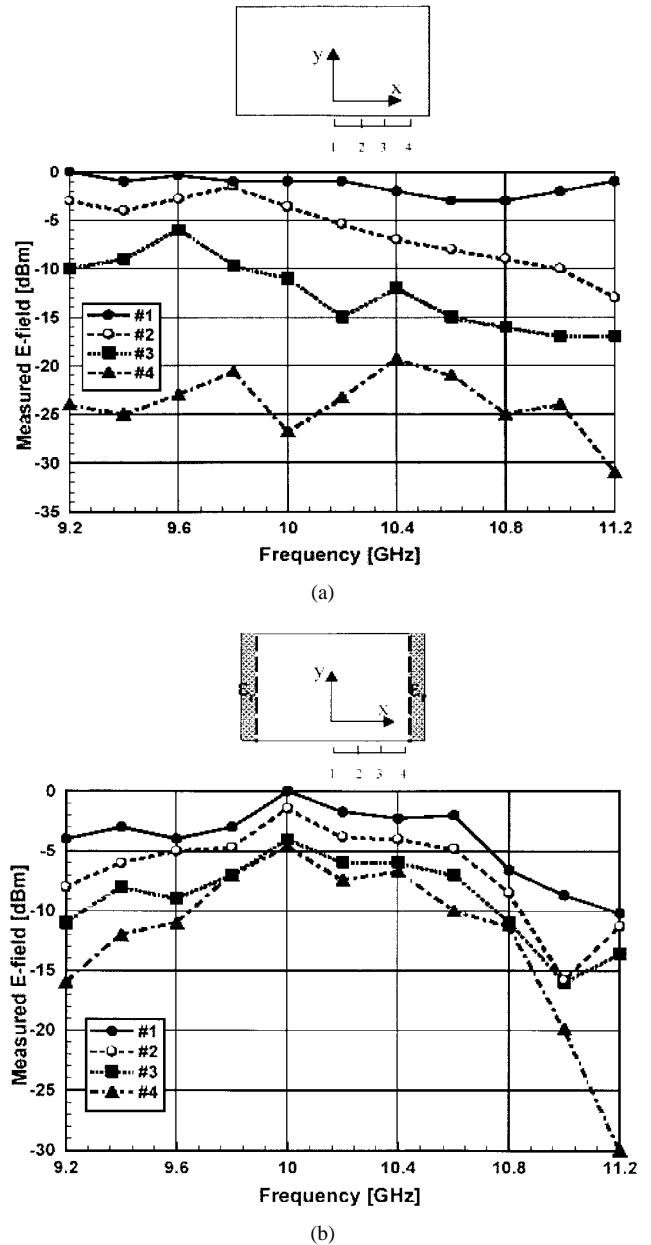


Fig. 12. Measured E -field profile of (a) a standard metallic waveguide and (b) the PBG waveguide, with respect to frequency.

difference between the maximum and minimum field strength is only 4 dB. The results show that a fairly uniform field distribution along the x -direction has been obtained and the experimental data agree well with out FDTD simulation.

V. CONCLUSIONS

A novel TEM-waveguide using the PBG structure has been presented. The proposed waveguide was constructed using PBG structure as the sidewalls. The UC-PBG structure has been demonstrated to behave as a PMC surface at the stopband frequency. The PBG waveguide generates a relatively uniform field distribution from 9.4 to 10.4 GHz. Phase velocities close to the speed of light have been measured and the velocity curve is flat at operating frequencies, indicating a TEM mode has been established. Numerical simulation using FDTD show

good agreement with experiments both in phase velocity and field profile. A quasi-Yagi antenna has been used as an efficient wave launcher for the entire *X*-band. This new type of PBG waveguide should find several applications, such as a feeding structure for quasi-optical power combining amplifiers and TEM cells in EMC measurements.

ACKNOWLEDGMENT

The authors are grateful to N. Kaneda for providing the antenna hardware.

REFERENCES

- [1] E. Yablonovitch, "Photonic band-gap structures," *J. Opt. Soc. Amer. B, Opt. Phys.*, vol. 10, pp. 283–295, Feb. 1993.
- [2] J. D. Joannopoulos, R. D. Meade, and J. N. Winn, *Photonic Crystals*. Princeton, NJ: Princeton Univ. Press, 1995.
- [3] E. R. Brown, C. D. Parker, and E. Yablonovitch, "Radiation properties of a planar antenna on a photonic-crystal substrate," *J. Opt. Soc. Amer. B, Opt. Phys.*, vol. 10, pp. 404–407, Feb. 1993.
- [4] M. M. Sigalas, R. Biswas, and K. M. Ho, "Theoretical study of dipole antennas on photonic band-gap materials," *Microwave Opt. Technol. Lett.*, vol. 13, pp. 205–209, Nov. 1996.
- [5] H. Y. D. Yang, N. G. Alexopoulos, and E. Yablonovitch, "Photonic band-gap materials for high-gain printed circuit antennas," *IEEE Trans. Antennas Propagat.*, vol. 45, pp. 185–187, Jan. 1997.
- [6] Y. Qian, D. Sievenpiper, V. Radisic, E. Yablonovitch, and T. Itoh, "A novel approach for gain and bandwidth enhancement of patch antennas," in *IEEE RAWCON Symp. Dig.*, Colorado Springs, CO, Aug. 9–12, 1998, pp. 221–224.
- [7] V. Radisic, Y. Qian, and T. Itoh, "Broad-band power amplifier integrated with slot antenna and novel harmonic tuning structure," in *IEEE MTT-S Microwave Symp. Dig.*, Baltimore, MD, June 7–12, 1998, pp. 1895–1898.
- [8] M. Kesler, J. Maloney, B. Shirley, and G. Smith, "Antenna design with the use of photonic band-gap materials as all-dielectric planar reflectors," *Microwave Opt. Technol. Lett.*, vol. 11, pp. 169–174, Nov. 1996.
- [9] J. Maloney, M. Kesler, B. Shirley, and G. Smith, "A simple description for waveguiding in photonic bandgap materials," *Microwave Opt. Technol. Lett.*, vol. 14, pp. 261–266, Nov. 1997.
- [10] M. Kim, J. B. Hacker, A. L. Sailer, S. Kim, D. Sievenpiper, and J. A. Higgins, "A rectangular TEM waveguide with photonic crystal walls for excitation of quasi-optical amplifiers," in *IEEE MTT-S Microwave Symp. Dig.*, Anaheim, CA, June 13–19, 1999, pp. 543–546.
- [11] D. Sievenpiper, L. Zhang, R. F. J. Broas, N. G. Alexopoulos, and E. Yablonovitch, "High-impedance electromagnetic surfaces in a forbidden frequency band," this issue, pp. 2059–2074.
- [12] Y. Qian, F. R. Yang, and T. Itoh, "Characteristics of microstrip lines on a uniplanar compact PBG ground plane," in *Asia-Pacific Microwave Conf. Dig.*, Dec. 1998, pp. 589–598.
- [13] Y. Qian and T. Itoh, "Planar periodic structures for microwave and millimeter wave circuit applications," in *IEEE MTT-S Microwave Symp. Dig.*, Anaheim, CA, June 13–19, 1999, pp. 1533–1536.
- [14] F. R. Yang, Y. Qian, R. Coccioli, and T. Itoh, "A novel low loss slow-wave microstrip structure," *IEEE Microwave Guided Wave Lett.*, vol. 8, pp. 372–374, Nov. 1998.
- [15] F. R. Yang, Y. Qian, and T. Itoh, "A novel compact microstrip bandpass filter with intrinsic spurious suppression," in *Asia-Pacific Microwave Conf. Dig.*, Dec. 1998, pp. 593–596.
- [16] K. P. Ma, F. R. Yang, Y. Qian, and T. Itoh, "Nonleaky conductor-backed CPW using a novel 2-D PBG lattice," in *Asia-Pacific Microwave Conf. Dig.*, Dec. 1998, pp. 509–512.
- [17] K. P. Ma, J. Kim, F. R. Yang, Y. Qian, and T. Itoh, "Leakage suppression in stripline circuits using a 2-D photonic bandgap lattice," in *IEEE MTT-S Microwave Symp. Dig.*, Anaheim, CA, June 13–19, 1999, pp. 73–76.
- [18] K. P. Ma, K. Hirose, F. R. Yang, Y. Qian, and T. Itoh, "Realization of magnetic conducting surface using novel photonic bandgap structure," *Electron. Lett.*, vol. 34, pp. 2041–2042, Nov. 1998.
- [19] A. Perkons, Y. Qian, and T. Itoh, "TM surface-wave power combining by a planar active-lens amplifier," *IEEE Trans. Microwave Theory Tech.*, vol. 46, pp. 775–783, June 1998.
- [20] Y. Kwon, E. A. Sovero, D. S. Deakin, and J. A. Higgins, "A 44-GHz monolithic waveguide plane-wave amplifier with improved unit cell design," *IEEE Trans. Microwave Theory Tech.*, vol. 46, pp. 1237–1241, Sept. 1998.
- [21] A. Alexanian and R. A. York, "Broad-band spatially combined amplifier array using tapered slot transitions in waveguide," *IEEE Microwave Guided Wave Lett.*, vol. 7, pp. 42–44, Feb. 1997.
- [22] W. Zienitycz and P. Kildal, "Study of wall region and dielectric losses in a square hard horn," *Proc. Inst. Elect. Eng.*, vol. 139, pp. 139–142, Apr. 1992.
- [23] N. Marcuvitz, *Waveguide Handbook*. New York: McGraw-Hill, 1951.
- [24] Y. Qian, W. Deal, N. Kaneda, and T. Itoh, "Microstrip-fed quasi-Yagi antenna with broadband characteristics," *Electron. Lett.*, vol. 34, pp. 2194–2196, Nov. 1998.
- [25] N. Kaneda, Y. Qian, and T. Itoh, "A broad-band microstrip-to-waveguide transition using quasi-Yagi antenna," *IEEE MTT-S Microwave Symp. Dig.*, Anaheim, CA, June 13–19, 1999, pp. 1431–1434.

Fei-Ran Yang (S'96) was born in Taichung, Taiwan, R.O.C., in 1972. He received the B.S. degree in communication engineering from the National Chiao Tung University, Hsinchu, Taiwan, R.O.C., in 1993, the M.S. degree from The University of Michigan at Ann Arbor, in 1996, and is currently working toward the Ph.D. degree in electrical engineering at the University of California at Los Angeles.

His research interests include microwave/millimeter-wave circuits and devices.

Mr. Yang was the co-recipient of the Japan Microwave Prize presented at the 1998 Asia-Pacific Microwave Conference.

Kuang-Ping Ma was born in Miao-Li, Taiwan, R.O.C., in 1967. He received the B.S. degree in aeronautics and aerospace engineering from National Chen Kung University, Taiwan, R.O.C., in 1989, the M.S. degree in mechanical engineering from National Taiwan University, Taiwan, in 1991, the M.S. degree in electrical engineering from the University of Missouri, Rolla, in 1995, and Ph.D. degree in electrical engineering from the University of California at Los Angeles, in 1999.

He is currently a Senior Communication Engineer/Scientist at Apple Computer Company, Cupertino, CA. His research has been in the area of wireless technology.



Yongxi Qian (S'91–M'93) was born in Shanghai, China, in 1965. He received the B.E. degree from Tsinghua University, Beijing, China, in 1987, and the M.E. and Ph.D. degrees from the University of Electro-Communications, Tokyo, Japan, in 1990 and 1993, respectively, all in electrical engineering.

From 1993 to 1996, he was an Assistant Professor at the University of Electro-Communications, Tokyo, Japan. He joined the University of California at Los Angeles, in April 1996, and is currently an Assistant Research Engineer in the Electrical Engineering Department. He has been involved with various numerical techniques for microwave and millimeter-wave circuits and antennas, generation and transmission of picosecond electrical pulses, crosstalk problems in high-density monolithic microwave integrated circuits (MMIC's), miniature circuits for mobile communications, and millimeter-wave focal plane imaging arrays. He has authored or co-authored over 110 refereed journal and conference papers, two book chapters, and one book. His current research interests include broad-band planar antennas, reconfigurable multiband/multifunction apertures (RECAP's), RF interconnect for mixed-signal silicon MMIC's, quasi-optical power combining, PBG structures, high-efficiency microwave amplifiers, active integrated antennas for multimedia communication systems, and high-power broad-band RF photonic devices for millimeter and submillimeter-wave photomixing.

Dr. Qian was the recipient of the 1998 Japan Microwave Prize presented at the Asia-Pacific Microwave Conference.



Tatsuo Itoh (S'69-M'69-SM'74-F'82-LF'94) received the Ph.D. degree in electrical engineering from the University of Illinois at Urbana-Champaign, in 1969.

From September 1966 to April 1976, he was with the Electrical Engineering Department, University of Illinois at Urbana-Champaign. From April 1976 to August 1977, he was a Senior Research Engineer in the Radio Physics Laboratory, SRI International, Menlo Park, CA.

From August 1977 to June 1978, he was an

Associate Professor at the University of Kentucky, Lexington. In July 1978, he joined the faculty at The University of Texas at Austin, where he became a Professor of electrical engineering in 1981 and Director of the Electrical Engineering Research Laboratory in 1984. During the summer of 1979, he was a Guest Researcher at AEG-Telefunken, Ulm, Germany. In September 1983, he was selected to hold the Hayden Head Centennial Professorship of Engineering at The University of Texas at Austin. In September 1984, he was appointed Associate Chairman for Research and Planning of the Electrical and Computer Engineering Department, The University of Texas at Austin. In January 1991, he joined the University of California at Los Angeles, as Professor of electrical engineering and holder of the TRW Endowed Chair in Microwave and Millimeter Wave Electronics. He was an Honorary Visiting Professor at Nanjing Institute of Technology,

China, and the Japan Defense Academy. In April 1994, he was appointed as Adjunct Research Officer for the Communications Research Laboratory, Ministry of Post and Telecommunication, Japan. He currently holds a Visiting Professorship at The University of Leeds, Leeds, U.K., and is an External Examiner of the Graduate Program of City University of Hong Kong, Hong Kong. He has authored or co-authored over 250 journal publications, 475 refereed conference presentations, and over 26 books/book chapters in the area of microwaves, millimeter-waves, antennas and numerical electromagnetics. He has also produced 42 Ph.D. students. He was the chairman of USNC/URSI Commission D from 1988 to 1990, the vice chairman of Commission D of the International URSI for 1991-1993 and chairman of the same Commission for 1993-1996. He is on Long Range Planning Committee of URSI. He serves on advisory boards and committees of a number of organizations.

Dr. Itoh is a member of the Institute of Electronics and Communication Engineers of Japan, and Commissions B and D of USNC/URSI. He served as the Editor-in-Chief of the IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES from 1983 to 1985 and of the IEEE MICROWAVE AND GUIDED WAVE LETTERS from 1991 to 1994. He serves on the Administrative Committee of IEEE Microwave Theory and Techniques Society (MTT-S). He was vice president of the IEEE MTT-S in 1989 and president in 1990. He has received a number of awards, including the 1998 Shida Award from the Japanese Ministry of Post and Telecommunications and the 1998 Japan Microwave Prize.