

Utah State University

DigitalCommons@USU

Reports

Utah Water Research Laboratory

January 1994

A Spatially Distributed Energy Balance Snowmelt Model

David G. Tarboton

Tanveer G. Chowdhury

Thomas H. Jackson

Follow this and additional works at: https://digitalcommons.usu.edu/water_rep



Part of the [Civil and Environmental Engineering Commons](#), and the [Water Resource Management Commons](#)

Recommended Citation

Tarboton, David G.; Chowdhury, Tanveer G.; and Jackson, Thomas H., "A Spatially Distributed Energy Balance Snowmelt Model" (1994). *Reports*. Paper 60.

https://digitalcommons.usu.edu/water_rep/60

This Report is brought to you for free and open access by the Utah Water Research Laboratory at DigitalCommons@USU. It has been accepted for inclusion in Reports by an authorized administrator of DigitalCommons@USU. For more information, please contact digitalcommons@usu.edu.



A Spatially Distributed Energy Balance Snowmelt Model

David G. Tarboton
Tanveer G. Chowdhury
Thomas H. Jackson

*Submitted for publication in IAHS
Proceedings of Symposium on
Biogeochemistry of Seasonally Snow
Covered Catchments, June 3-14, 1995,
Boulder, CO.*

Working Paper WP-94-HWR-DGT/003

November 1994

A Spatially Distributed Energy Balance Snowmelt Model

DAVID G. TARBOTON, TANVEER G. CHOWDHURY

Utah Water Research Laboratory, Utah State University, Logan, Utah 84322-8200, USA

THOMAS H. JACKSON

Turner Collie & Braden, Houston, Texas, USA

Abstract This paper describes an energy balance snowmelt model developed for the prediction of rapid snowmelt rates responsible for soil erosion and water input to a distributed water balance model. The model uses a lumped representation of the snowpack with two primary state variables, namely, water equivalence and energy content relative to a reference state of water in the ice phase at 0°C. This energy content is used to determine snowpack average temperature or liquid fraction. This representation of the snowpack is used in a distributed version of the model with each of these state variables modeled at each point on a rectangular grid corresponding to a digital elevation model. Inputs are air temperature, precipitation, wind speed, humidity and radiation at hourly time steps. The model uses physically-based calculations of radiative, sensible, latent and advective heat exchanges. An equilibrium parameterization of snow surface temperature accounts for differences between snow surface temperature and average snowpack temperature without having to introduce additional state variables. Melt outflow is a function of the liquid fraction, using Darcy's law. This allows the model to account for continued outflow even when the energy balance is negative. A detailed description of the model is given together with results of tests against data collected at the Central Sierra Snow Laboratory, California; Reynolds Creek Experimental Watershed, Boise Idaho; and at the Utah State University drainage and evapotranspiration research farm, Logan Utah. The testing includes comparisons against melt outflow collected in melt lysimeters, surface snow temperatures collected using infrared temperature sensors and depth and water equivalence measured using snow core samplers.

INTRODUCTION

Snowmelt is a significant surface water input of importance to many aspects of hydrology including water supply, erosion and flood control. Snowmelt is driven primarily by energy

exchanges at the snow-air interface. The model described here was developed initially to predict the rapid melt rates responsible for erosion. It has also been used to provide the spatially distributed surface water input in a water balance study. In developing a new snowmelt model our goal was to incorporate ideas from the many existing models and parameterize the processes involved in as simple, yet physically correct a manner as possible. We hoped to develop a parsimonious, physically-based model that could be driven by readily available inputs and applied anywhere with no (or minimal) calibration. The striving for simplicity led us to parameterize a snowpack in terms of lumped (depth averaged) state variables so as to avoid having to model the complex processes that occur within a snowpack. We have still, however, attempted to capture important physical differences between bulk (depth averaged) properties and the surface properties that are important for surface energy exchanges. We have relied heavily on an understanding of snowmelt processes gleaned from Gray and Male (1981) and the descriptions of existing models (Anderson, 1973; 1976; Morris, 1982; Leavesley *et al.*, 1983; Kondo and Yamazaki, 1990). We first give a detailed description of the model. We then describe the data sets we used to test the model and show results comparing model calculations to observations.

MODEL DESCRIPTION

The snowpack is characterized by state variables, water equivalence W [m], energy content U , [kJ/m²] and the age of the snow surface which is only used for albedo calculations. These are, we believe, sufficient to characterize the snowpack for the surface water inputs of interest. The state variable, energy content U , is defined relative to a reference state of water at 0°C in the ice (solid) phase. U greater than zero means the snowpack (if any) is isothermal with some liquid content and U less than zero can be used to calculate the snowpack average temperature T [°C]. Energy content is defined as the energy content of the snowpack plus a top layer of soil with depth D_e [m]. We discuss below the choice of D_e and the role it plays in the model.

The model is designed to be driven by inputs of air temperature T_a [°C], wind speed V [m/s], relative humidity RH , precipitation P [m/hr], incoming solar Q_{si} and longwave Q_{li} radiation [kJ/m²/hr], and ground heat flux Q_g [kJ/m²/hr] (taken as 0 when not known) at each time step. Time steps of 0.5, 1 and 6 hours have been used in data comparisons here. When incoming solar radiation is not available it is estimated as an extra terrestrial radiation (from sun angle and solar constant) times an atmospheric transmission factor Tr , estimated from the daily temperature range

using the procedure given by Bristow and Campbell (1984). When incoming longwave radiation is not available it is estimated based on air temperature, the Stefan-Boltzman equation and a parameterization of air emissivity due to Satterlund (1979), adjusted for cloudiness using Tr .

Given the state variables U and W , their evolution in time is determined by solving energy and mass balance equations.

$$\frac{dU}{dt} = Q_{sn} + Q_{li} + Q_p + Q_g - Q_{le} + Q_h + Q_e - Q_m \quad (1)$$

$$\frac{dW}{dt} = P_r + P_s - M_r - E \quad (2)$$

In the energy balance equation terms are (all in $\text{kJ/m}^2/\text{hr}$): Q_{sn} , net shortwave radiation; Q_{li} , incoming longwave radiation; Q_p , advected heat from precipitation; Q_g , ground heat flux; Q_{le} , outgoing longwave radiation; Q_h , sensible heat flux; Q_e , latent heat flux due to sublimation/condensation; and Q_m , advected heat removed by meltwater. In the mass balance equation (all in m/hr of water equivalence) terms are: P_r , rainfall rate; P_s , snowfall rate; M_r , meltwater outflow from the snowpack; and E , sublimation from the snowpack. Many of these fluxes depend functionally on the state and input driving variables. We elaborate on the parameterization of these functional dependencies below. Equations (1) and (2) form a coupled set of first order, nonlinear ordinary differential equations. They can be summarized in vector notation as:

$$\frac{d\mathbf{X}}{dt} = \mathbf{F}(\mathbf{X}, \text{driving variables}) \quad (3)$$

where $\mathbf{X} = (U, W)$ is a state vector describing the snowpack. With \mathbf{X} specified initially, this is an initial value problem. A large variety of numerical techniques are available for solution of initial value problems of this form. Here we have adopted a Euler predictor-corrector approach (Gerald, 1978).

$$\mathbf{X}' = \mathbf{X}_i + \Delta t \mathbf{F}(\mathbf{X}_i, \text{driving variables}) \quad (4)$$

$$\mathbf{X}_{i+1} = \mathbf{X}_i + \Delta t \frac{\mathbf{F}(\mathbf{X}_i, \text{driving variables}) + \mathbf{F}(\mathbf{X}', \text{driving variables})}{2} \quad (5)$$

where Δt is the time step, \underline{X}_i refers to the state at time t_i and \underline{X}_{i+1} refers to the state at time $t_{i+1}=t_i+\Delta t$. This is a second order finite difference approximation, with global error proportional to Δt^2 (Gerald, 1978, p257). Numerical instabilities sometimes occur under melting conditions when the snowpack is shallow due to the nonlinear nature of the melt outflow parameterization. To deal with this we compare \underline{X}_{i+1} to \underline{X}' and if they differ by more than a specified tolerance (0.025 m for W and 2000 kJ/m² for U) iterate up to four times setting \underline{X}' to \underline{X}_{i+1} then recalculating \underline{X}_{i+1} at each iteration. If convergence is still not achieved we take the solution that would keep the liquid fraction of the snow constant. Following we describe how each of the processes involved in equations (1) and (2) are parameterized.

Depth averaged temperature - T

The snow and interacting soil layer average temperatures are obtained from the energy content and water equivalence, relative to 0°C ice phase.

$$\text{If } U < 0 \quad T = U / (\rho_w W C_s + \rho_g D_e C_g) \quad \text{All solid phase} \quad (6)$$

$$\text{If } 0 < U < \rho_w W h_f \quad T = 0^\circ\text{C}. \quad \text{Solid and liquid mixture} \quad (7)$$

$$\text{If } U > \rho_w W h_f \quad T = \frac{U - \rho_w W h_f}{\rho_g D_e C_g + \rho_w W C_w} \quad \text{All liquid} \quad (8)$$

In the above the heat required to melt all the snow water equivalence is $\rho_w W h_f$ [kJ] where h_f is the heat of fusion [333.5 kJ kg⁻¹] and U in relation to this determines the solid-liquid phase mixtures. The heat capacity of the snow is $\rho_w W C_s$ [kJ/°C] where ρ_w is the density of water [1000 kg m⁻³] and C_s the specific heat of ice [2.09 kJ kg⁻¹ °C⁻¹]. The heat capacity of the soil layer is $\rho_g D_e C_g$ [kJ/°C] where ρ_g is the soil density and C_g the specific heat of soil. These together determine the T when $U < 0$. The heat capacity of liquid water, $\rho_w W C_w$, where C_w is the specific heat of water [4.18 kJ kg⁻¹ °C⁻¹], is included in (8) for numerical consistency during time steps when the snowpack completely melts.

The parameter D_e is intended to quantify the depth of soil that interacts thermally with the snowpack. Heat flow in snow and soil is governed by Laplace's equation. The depth of penetration of changes in surface temperature can be evaluated from the expression (Rosenberg, 1974):

$$\frac{R_z}{R_s} = \exp\left(-z \left(\frac{\pi}{\alpha P}\right)^{\frac{1}{2}}\right) \quad (9)$$

where R_s is the range of temperature oscillation at the surface, R_z the range of temperature oscillation at depth z , P the period of oscillation, and α the thermal conductivity. For soil α is typically in the range 0.004 to 0.006 cm²/s. Fig. 1 shows R_z/R_s versus z for $\alpha = 0.005$ cm²/s for various periods. This figure shows that for oscillations less than one week the effect at 0.4 m is damped to less than 30% and even for monthly oscillations is still damped 50% at 0.4 m depth. This result suggests using $D_e = 0.4$ m in our model since the time scale of interest is the seasonal accumulation then melting of snow. The state variable U represents energy content above this level. The ground heat flux represents heat transport at this depth and is therefore a long-term average. Oscillating, high frequency, ground heat fluxes above this depth are absorbed into U , the energy stored in the snow and soil above depth D_e . This procedure provides a simple approximation of the effects of frozen ground, or snow falling on warm ground.

Radiation

Net shortwave radiation is calculated as

$$Q_{sn} = Q_{si} (1-A) \quad (10)$$

where albedo A , is calculated based on the age of the snow surface using a parameterization due to Dickinson et al. (1993). The age of the snow surface is retained as a state variable, and is updated with each time step, dependent on snow surface temperature and snowfall. When the snowpack is shallow (depth $z < h = 0.1$ m) the albedo is taken as $r A_{bg} + (1-r) A$ where $r = (1-z/h)e^{-z/2h}$. This interpolates between the snow albedo and bare ground albedo with the exponential term approximating the exponential extinction of radiation penetration of snow.

Outgoing longwave radiation is

$$Q_{le} = \epsilon_s \sigma T_s^4 \quad (11)$$

where ϵ_s is emissivity, σ the Stefan Boltzmann constant [$2.07 \times 10^{-7} \text{ kJ m}^{-2} \text{ hr}^{-1} \text{ K}^{-4}$] and T_s is absolute temperature [K].

Snow fall accumulation and heat with precipitation

Measured precipitation rate P , is partitioned into rain P_r , and snow P_s , (both in terms of water equivalence depth) using the following rule based on air temperature T_a , (U.S. Army Corps of Engineers, 1956)

$$\begin{aligned} P_r &= P & T_a &\geq T_r = 3 \text{ }^\circ\text{C} \\ P_r &= P(T_a - T_b)/(T_r - T_b) & T_b &< T_a < T_r \\ P_r &= 0 & T_a &\leq T_b = -1 \text{ }^\circ\text{C} \\ P_s &= (P - P_r) F \end{aligned} \quad (12)$$

where T_r is a threshold air temperature above which all precipitation is rain and T_b a threshold air temperature below which all precipitation is snow. The accumulation of snow is sometimes subject to considerable wind redistribution with drifts forming on lee slopes. We account for this in the model through a snow drift factor, F , dependent on location. Ideally F needs to be related to topography. In the application to Reynolds Creek, F was estimated by calibrating the snow water equivalences obtained from the snow model (with $F = 1$) at each cell, W_m , against the observed values, W_o . The discrepancy between observations and predictions over an interval between measurements is attributed to drifting and suggests $F = 1 + (W_o - W_m)/P_s$ where P_s is the gage snowfall (calculated from P with $F = 1$) during the interval. Values of F less than one correspond to locations of depletion or wind scour. This approach models drifting which actually occurs after snowfall as concurrent with snowfall. The calibration of F assumes that the snowmelt model correctly accounts for all other processes (melt, sublimation, condensation, etc.) affecting the accumulation and ablation of snow water equivalence. Further details are given in Jackson (1994).

The temperature of rain is taken as the greater of the air temperature and freezing point and the temperature of snow is the lesser of air temperature and freezing point. The advected heat is the energy required to convert this precipitation to the reference state (0°C ice phase).

$$Q_p = P_s C_s \rho_w \min(T_a, 0^\circ\text{C}) + P_r \left[h_f \rho_w + C_w \rho_w \max(T_a, 0^\circ\text{C}) \right] \quad (13)$$

Turbulent fluxes, Q_h , Q_e , E

Sensible and latent heat fluxes between the snow surface and air above are modeled using the concept of flux proportional to temperature and vapor pressure gradients with constants of proportionality, the so called turbulent transfer coefficients or diffusivity a function of windspeed and surface roughness. Considering a unit volume of air, the heat content is $\rho_a C_p T_a$ and the vapor content $\rho_a q$, where ρ_a is air density (determined from atmospheric pressure and temperature), C_p air specific heat capacity [$1.005 \text{ kJ kg}^{-1} \text{ }^\circ\text{C}^{-1}$], and q specific humidity [kg water vapor per kg air]. Heat transport towards the surface, Q_h [$\text{kJ/m}^2/\text{hr}$] is given by:

$$Q_h = K_h \rho_a C_p (T_a - T_s) \quad (14)$$

where K_h is heat conductance [m/hr] and T_s is the snow surface temperature. Vapor transport away from the surface (sublimation), M_e [kg/hr] is:

$$M_e = K_e \rho_a (q_s - q) \quad (15)$$

where q_s is the surface specific humidity and K_e the vapor conductance [m/hr].

By comparison with the usual expressions for turbulent transfer in a logarithmic boundary layer profile (Male and Gray, 1981; Anderson, 1976; Brutsaert, 1982) for neutral condition, one obtains the following expression:

$$K_h = K_e = \frac{k^2 V}{\left[\ln(z/z_o) \right]^2} = K \quad (16)$$

where V is wind speed [m/hr] at height z [m]; z_o is roughness height at which the logarithmic boundary layer profile predicts zero velocity [m]; and k is von Karman's constant [0.4]. Recognizing that the latent heat flux towards the snow is:

$$Q_e = -h_v M_e \quad (17)$$

and using the relationship between specific humidity and vapor pressure and the ideal gas law, one obtains:

$$Q_e = K_e \frac{h_v 0.622}{R_d T_a^{\text{abs}}} (e_a - e_s(T_s)) \quad (18)$$

where e_s is the vapor pressure at the snow surface snow, assumed saturated at T_s , and calculated using a polynomial approximation (Lowe, 1977); e_a is air vapor pressure, R_d is the dry gas constant [$287 \text{ J kg}^{-1} \text{ K}^{-1}$] and h_v the latent heat of sublimation [2834 kJ/kg]. The water equivalence depth of sublimation is:

$$E = -\frac{Q_e}{\rho_w h_v} \quad (19)$$

When there is a temperature gradient near the surface, buoyancy effects may enhance or dampen the turbulent transfers. This effect can be quantified in terms of the Richardson number or Monin-Obukhov length. Adjustments to the neutral transfer coefficients to account for these effects exist and were tried based on the temperature difference between the air and snow surface. However we found that it was quite common that large temperature differences and low wind speeds resulted in unreasonable correction factors, beyond the range for which they had been developed, so for the purposes of the results presented here we have used neutral transfer coefficients.

Snow Surface Temperature, T_s

Since snow is a relatively good insulator, T_s is in general different from T . This difference is accounted for using an equilibrium approach that balances energy fluxes at the snow surface. Heat conduction into the snow is calculated using the temperature gradient and thermal diffusivity of snow, approximated by:

$$Q = \kappa \rho_s C_s (T_s - T)/Z_e = K_s \rho_s C_s (T_s - T) \quad (20)$$

where κ is snow thermal diffusivity [$\text{m}^2 \text{hr}^{-1}$] and Z_e [m] an effective depth over which this thermal gradient acts. The ratio κ/Z_e is denoted by K_s and termed snow surface conductance, analogous to the heat and vapor conductances. A value of K_s is obtained by assuming a depth Z_e equal to the depth of penetration of a diurnal temperature fluctuation calculated from equation (9) (Rosenberg, 1974). Z_e should be chosen so that R_z/R_s is small. Here K_s is used as a tuning parameter, with this calculation used to define a reasonable range. Then assuming equilibrium at the surface, the surface energy balance gives.

$$Q = Q_{\text{sn}} + Q_{\text{li}} + Q_{\text{h}}(T_s) + Q_{\text{e}}(T_s) + Q_{\text{p}} - Q_{\text{le}}(T_s) \quad (21)$$

where the dependence of Q_{h} , Q_{e} , and Q_{le} on T_s is through equations (14), (18) and (11).

Analogous to the derivation of the Penman equation for evaporation the functions of T_s in this energy balance equation are linearized about a reference temperature T^* , and the equation is solved for T_s :

$$T_s = \frac{Q_{\text{sn}} + Q_{\text{li}} + Q_{\text{p}} + K T_a \rho_a C_p - 0.622 K h_v \rho_a (e_s(T^*) - e_a - T^* \Delta) / P_a + 3 \epsilon_s \sigma T^{*4} + \rho_s C_s T K_s}{\rho_s C_s K_s + K \rho_a C_p + 0.622 \Delta K h_v \rho_a / P_a + 4 \epsilon_s \sigma T^{*3}} \quad (22)$$

where $\Delta = de_s/dT$ and all temperatures are absolute [K]. This equation is used in an iterative procedure with an initial estimate $T^* = T_a$, in each iteration replacing T^* by the latest T_s . The procedure converges to a final T_s which if less than freezing is used to calculate surface energy fluxes. If the final T_s is greater than freezing it means that the energy input to the snow surface cannot be balanced by thermal conduction into the snow. Surface melt will occur and the infiltration of meltwater will account for the energy difference and T_s is then set to 0°C .

Meltwater Outflux, M_r and Q_m

The energy content state variable U determines the liquid content of the snowpack. This result, together with Darcy's law for flow through porous media, is used to determine the outflow rate.

$$M_r = K_{\text{sat}} S^*{}^3 \quad (23)$$

where K_{sat} is the snow saturated hydraulic conductivity and S^* is the relative saturation in excess of water retained by capillary forces. This expression is based on Male and Gray (1981, p. 400, eqn 9.45). S^* is given by:

$$S^* = \frac{\text{liquid water volume} - \text{capillary retention}}{\text{pore volume} - \text{capillary retention}} = \left(\frac{L_f}{1 - L_f} - L_c \right) / \left(\frac{\rho_w}{\rho_s} - \frac{\rho_w}{\rho_i} - L_c \right) \quad (24)$$

where $L_f = U / (\rho_w h_f W)$ denotes the mass fraction of total snowpack (liquid and ice) that is liquid, L_c [0.05] the capillary retention as a fraction of the solid matrix water equivalence, and ρ_i the density of ice [917 kg m⁻³]. This melt outflow is assumed to be at 0°C so the heat advected with it, relative to the solid reference state is:

$$Q_m = \rho_w h_f M_r \quad (25)$$

Forest Cover

The presence of vegetation, especially forests, significantly influences energy exchanges at the snow surface. A forest canopy reduces windspeed, thus reducing sensible and latent heat transfers. It also affects the radiation exchanges. The penetration of radiation through vegetation has been widely studied (Sellers *et al.*, 1986; Verstraete, 1987a; 1987b; Verstraete *et al.*, 1990; Dickinson *et al.*, 1993), and models developed that discretize the canopy into layers treating the energy balance of each layer separately (Bonan, 1991). Here we avoid these complexities and adopt a pragmatic parameterization modeled after the representation of snowmelt used by the WEPP winter routines (Young *et al.*, 1989; Hendrick *et al.*, 1971). Forest cover is parameterized by the canopy density parameter F_c , representing the canopy closure fraction (between 0 and 1). Windspeed, and therefore the corresponding heat and vapor fluxes, are reduced by a factor $(1 - 0.8F_c)$. Radiative fluxes Q_{SN} , Q_{li} and Q_{le} in equation (1) are reduced by a factor $(1 - F_c)$. Adjustments are also made to the radiation terms in the calculation of snow surface temperature (equation 22).

DATA

In this paper data collected at the Central Sierra Snow Laboratory (CSSL); Utah State University drainage and evapotranspiration research farm and Reynolds Creek Experimental Watershed are used to calibrate and test the model.

Central Sierra Snow Laboratory

The CSSL located 1 km east of Soda Springs, California, measures and archives comprehensive data relevant to snow. It is at latitude 39°19'N and at elevation 2100m. We obtained the meteorological and snow observation data for the winter of 1985 - 1986. The meteorological data is reported each hour and consists of temperature, radiation, humidity, precipitation, and wind measurements at two levels in a 40 x 50 m clearing and in a mixed conifer fir forest with 95% forest cover. Only data from the clearing are used here. Snow depths and water equivalence are measured daily (except on weekends) and eight lysimeters record melt outflow each hour. We used the temperature, precipitation, radiation (incoming solar and net), humidity and wind measurements to drive our model and compared model output to measurements of snow water equivalence, melt outflow and snow surface temperature (infrared sensor).

USU drainage and evapotranspiration research farm

An experiment to measure snow energy balance and sublimation from snow the winter of 1992 - 1993 is described more fully by Tarboton (1994). Data from this work included measurements of snow water equivalence, snow surface temperature and the meteorological variables necessary to drive our model. The USU drainage and irrigation experimental farm is located in Cache Valley near Logan, Utah, USA (41.6° N, 111.6° W, 1350m elevation). The weather station and instrumentation are in a small fenced enclosure at the center of a large open field. There are no obstructions to wind in any direction for at least 500m. Cache valley is a flat bottomed enclosed valley surrounded by mountains that reach elevations of 3000m. During the period of this experiment the ground was snow covered from November 20, 1992 to March 22, 1993. Air temperatures ranged from -23 °C to 16 °C and there was 190 mm of precipitation (mostly snow,

but some rain). The snow accumulated to a maximum depth of 0.5 m with maximum water equivalent of 0.14 m.

Reynolds Creek Experimental Watershed

Upper Sheep Creek is a 26 ha catchment within the semi-arid Reynolds Creek experimental watershed. Snowmelt is the main hydrologic input and its areal distribution is heavily influenced by wind induced drifting. Detailed descriptions of the various features of the area are given in Flerchinger et al. (1992) and references therein. Snow water equivalence measurements are made biweekly (as weather permits) on a 30.48 m (100 ft) grid over the watershed. A digital elevation model (DEM) was constructed from a 1:1200 map with 0.61 m (2 ft) contour interval developed from low-level aerial photography. The DEM grid was constructed to coincide with the grid used for field measurements and provided slope and aspect inputs to the model radiation calculations. Fig. 2 shows the topography and grid over Upper Sheep Creek together with locations of the instrumentation. Data from the winters of 1985 - 1986 and 1992 - 1993 were used in this study to test the model running in a distributed mode at each grid cell. Snow melt outputs were used as hydrologic inputs for a water balance study (Jackson, 1994; Tarboton *et al.*, 1995).

RESULTS

The model was calibrated against the CSSL data for the winter 1985 - 1986. The energy balance and overall accumulation and ablation of the snowpack is governed primarily by surface energy exchange processes. The adjustable parameters involved in these are z_o and K_s , which were adjusted to obtain a match between modeled and observed water equivalence (shown in Fig. 3), and modeled and observed snow surface temperatures (Fig. 4), with the model driven by the measured net radiation input. We then used measured incoming solar radiation to drive the model and found that the melt is delayed (Fig. 3). Discrepancies were analyzed and attributed to differences in daytime net radiation, primarily affected by albedo. The albedo parameterization (Dickinson et al., 1993) has parameters $A_{VO} = 0.95$ and $A_{nir} = 0.65$ which represent the albedo of new snow in the visible and infrared ranges. A_{VO} was reduced to 0.85 to match the daytime net radiation when compared to measured CSSL 1985 - 1986 data (Fig. 5). The resulting snow water equivalence comparison (Fig. 3) indicates that some early season melt is not modeled resulting in

slight over accumulation, but the main melt is well modeled. In all results except the line indicated on Fig. 3, $A_{VO} = 0.85$ was used. Melt outflow rate was compared to the average from the eight melt lysimeters, with K_{sat} adjusted to get a good fit. Results are shown in Fig. 6.

Table 1 lists the adjustable parameters that were calibrated against the CSSL data. Table 2 lists the remaining model parameters which were held fixed at their nominal values. The model was tested against the data from Reynolds Creek and USU drainage and evapotranspiration research farm without further adjustment of parameters. The Reynolds Creek study applied the model to each 30.48 x 30.48 m grid cell over Upper Sheep Creek (Fig. 2). The drift factor to adjust snow input was estimated from the observed grided snow data for 1985-1986 (Jackson, 1994). Fig. 7 shows the drift factors and Fig. 8 compares measured and modeled spatial distribution of snow about halfway through the snowmelt phase in 1992-1993. Due to space limitations not all of the comparisons are shown. These results indicate that the model correctly represents the spatial accumulation and melt patterns. Fig. 9 compares measured and modeled snow water equivalence at the USU drainage and evapotranspiration research farm.

CONCLUSIONS

The tests described have shown that this simple, depth averaged, mass and energy balance snowmelt model is able to capture the essential physics of the snow accumulation and melt processes and provide distributed hydrologic inputs. Using parameter values calibrated against CSSL data the model performed well when tested at other locations. This comparison suggests that the model is transportable and parameter values listed may be acceptable for wider application. However, further testing against additional data is necessary. In particular we need to test the parameterization of forest cover and further evaluate the parameterization of albedo and the effect of atmospheric stability on turbulent fluxes.

The model is available electronically on the internet from David Tarboton (dtarb@cc.usu.edu).

Acknowledgements Thank you Bruce McGurk for access to the CSSL data, and Keith Cooley and the USDA ARS Northwest Watershed Research Center staff for access to and collaboration in Reynolds Creek. This work was funded in part by the US Department of the Interior, Geological Survey, under USGS Grant No. 14-08-0001-G2110, and the US Department of Agriculture,

Forest Service joint venture agreement INT-92660-RJVA. The views and conclusions are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the U.S. Government.

REFERENCES

- Anderson, E. A. (1973) National Weather Service River Forecast System-Snow Accumulation and Ablation Model. NOAA Technical Memorandum NWS HYDRO-17, U.S. Dept of Commerce.
- Anderson, E. A. (1976) A Point Energy and Mass Balance Model of a Snow Cover. NOAA Technical report NWS 19, U.S. Department of Commerce.
- Bonan, G. B. (1991) A Biophysical Surface Energy Budget Analysis of Soil Temperature in the Boreal Forests of Interior Alaska. *Water Resources Research*. 27(5): 767-781.
- Bristow, K. L. and Campbell, G. S. (1984) On the Relationship Between Incoming Solar Radiation and the Daily Maximum and Minimum Temperature. *Agricultural and Forest Meteorology*. 31: 159-166.
- Brutsaert, W. (1982) *Evaporation into the Atmosphere*, Kluwer Academic Publishers.
- Dickinson, R. E., Henderson-Sellers, A. and Kennedy, P. J. (1993) Biosphere-Atmosphere Transfer Scheme (BATS) Version 1e as Coupled to the NCAR Community Climate Model. NCAR/TN-387+STR, National Center for Atmospheric Research.
- Flerchinger, G. N., Cooley, K. R. and Ralston, D. R. (1992) Groundwater Response to Snowmelt in a Mountainous Watershed. *Journal of Hydrology*. 133: 293-311.
- Gerald, C. F. (1978) *Applied Numerical Analysis*, 2nd Edition, Addison Wesley, Reading, Massachusetts.
- Gray, D. M. and Male, D. H. ed. (1981) *Handbook of Snow, Principles, processes, management & use*. Pergamon Press, 776 p.
- Hendrick, R. L., Filgate, B. D. and Adams, W. M. (1971) Application of Environmental Analysis to Watershed Snowmelt. *Journal of Applied Meteorology*. (10): 418-429.
- Jackson, T. H. R. (1994) A Spatially Distributed Snowmelt-Driven Hydrologic Model applied to the Upper Sheep Creek Watershed. Ph.D Thesis, Civil and Environmental Engineering, Utah State University.
- Kondo, J. and Yamazaki, T. (1990) A prediction model for snowmelt, snow surface temperature

- and freezing depth using a heat balance method. *Journal of applied meteorology*. 29: 375-384.
- Leavesley, G. H., Lichty, R. W., Troutman, B. M. and Saindon, L. G. (1983) Precipitation-runoff modeling system--Users manual:. Water resources Investigations Report 83-4238, U.S. Geological Survey.
- Lowe, P. R. (1977) An Approximating Polynomial for the Computation of Saturation Vapour Pressure. *Journal of Applied Meteorology*. 16: 100-103.
- Male, D. H. and Gray, D. M. (1981) Snowcover Ablation and Runoff. Chapter 9 in *Handbook of Snow, Principles, Processes, Management and Use*, Edited by D. M. Gray and D. H. Male, Pergamon Press, p.360-436.
- Morris, E. M. (1982) Sensitivity of the European Hydrological System snow models. *Hydrological Aspects of Alpine and High Mountain Areas*, Proceedings of the Exeter Symposium, IAHS Publ no 138, 221-231.
- Rosenberg, N. J. (1974) *Microclimate The Biological Environment*, John Wiley & Sons, Inc.
- Satterlund, D. R. (1979) An Improved Equation for Estimating Long-wave Radiation From the Atmosphere. *Water Resources Research*. 15: 1643-1650.
- Sellers, P. J., Mintz, Y., Sud, Y. C. and Dalcher, A. (1986) A simple biosphere model (SiB) for use with general circulation models. *Journal of the Atmospheric Sciences*. 43(6): 505-531.
- Tarboton, D. G. (1994) Measurement and Modeling of Snow Energy Balance and Sublimation From Snow. *Proceedings, International Snow Science Workshop*, Snowbird, Utah, October 31 to November 2, Utah Water Research Laboratory working paper no. WP-94-HWR-DGT/002.
- Tarboton, D. G., Jackson, T. H., Liu, J. Z., Neale, C. M. U., Cooley, K. R. and McDonnell, J. J. (1995) A Grid Based Distributed Hydrologic Model: Testing Against Data from Reynolds Creek Experimental Watershed. Preprint submitted for presentation at AMS Conference on Hydrology, 15-20 January, Dallas, Texas.
- U.S. Army Corps of Engineers (1956) Snow Hydrology, Summary report of the Snow Investigations. , U.S. Army Corps of Engineers, North Pacific Division, Portland, Oregon.
- Verstraete, M. M. (1987a) Radiation Transfer in Plant Canopies: Scattering of Solar Radiation and Canopy Reflectance. *Journal of Geophysical Research*. 93(D8): 9483-9494.
- Verstraete, M. M. (1987b) Radiation Transfer in Plant Canopies: Transmission of Direct Solar Radiation and the Role of Leaf Orientation. *Journal of Geophysical Research*. 92(D9): 10985-10995.

- Verstraete, M. M., Pinty, B. and Dickinson, R. E. (1990) A physical model of the bidirectional reflectance of vegetation canopies, 1. Theory. *Journal of Geophysical Research*. 95(D8): 11755-11765.
- Young, R. A., Benoit, G. R. and Onstad, C. A. (1989) Snowmelt and frozen soil. Chapter 3 in *USDA Water Erosion Prediction Project, Hillslope profile model documentation*, Edited by L. J. Lane and M. A. Nearing, NSERL Report #2, USDA-ARS National Soil Erosion Research Laboratory, West Lafayette, Indiana, 47907.

Table 1. Adjustable parameter recommended values.

Parameter	Notation	Calibrated Value
Surface aerodynamic roughness	z_O	0.005 m
Surface conductance	K_S	0.02 m/hr
Saturated hydraulic conductivity	K_{sat}	20 m/hr
New snow visible albedo	A_{vO}	0.85

Table 2. Snowmelt model fixed parameters.

Parameter	Notation	Reference Value
Ground heat capacity	C_g	2.09 kJ kg ⁻¹ °C ⁻¹
Density of soil layer	ρ_g	1700 kg m ⁻³
Snow density	ρ_s	450 kg m ⁻³
Capillary retention fraction	L_c	0.05
Emissivity of snow	ϵ_s	0.99
Temperature above which precipitation is rain	T_r	3°C
Temperature below which precipitation is snow	T_s	-1°C
Wind/air temperature measurement height	z	2 m
Soil effective depth	D_e	0.4 m
Bare ground albedo	A_{bg}	0.25
Albedo extinction depth	h	0.1 m

Figure Captions

Figure 1. Depth of penetration of temperature fluctuations into soil with thermal conductivity $\alpha = 0.005 \text{ cm}^2/\text{s}$.

Figure 2. Upper Sheep Creek topography and instrumentation.

Figure 3. Comparison between observed and modeled snow water equivalence, CSSL.

Figure 4. Comparison between observed and modeled snow surface temperatures, CSSL. Net indicates model driven by measured net radiation. Solar indicates model driven by measured solar radiation.

Figure 5. Comparison between observed and modeled net radiation, CSSL. Measured solar radiation is input.

Figure 6. Comparison between observed and modeled melt outflow rate, CSSL. Measured solar radiation is input.

Figure 7. Drift factor from Jackson (1994). Contours at 0.5, 0.9, 1.5, 2.5, 4 and 6.

Figure 8. Observed and modeled spatial distribution of snow at Upper Sheep Creek, April 8, 1993.

Figure 9. Observed and modeled snow water equivalence, USU research farm.

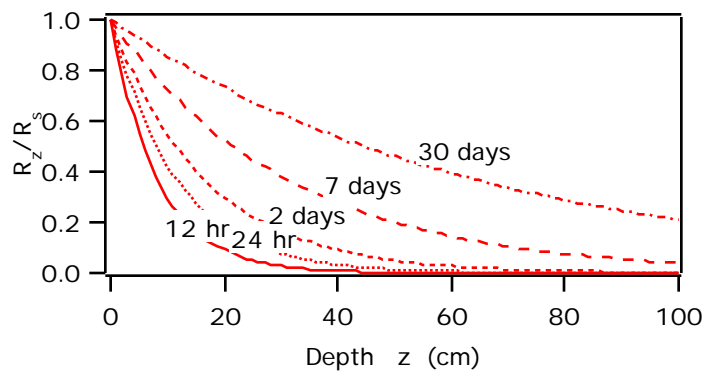


Figure 1.

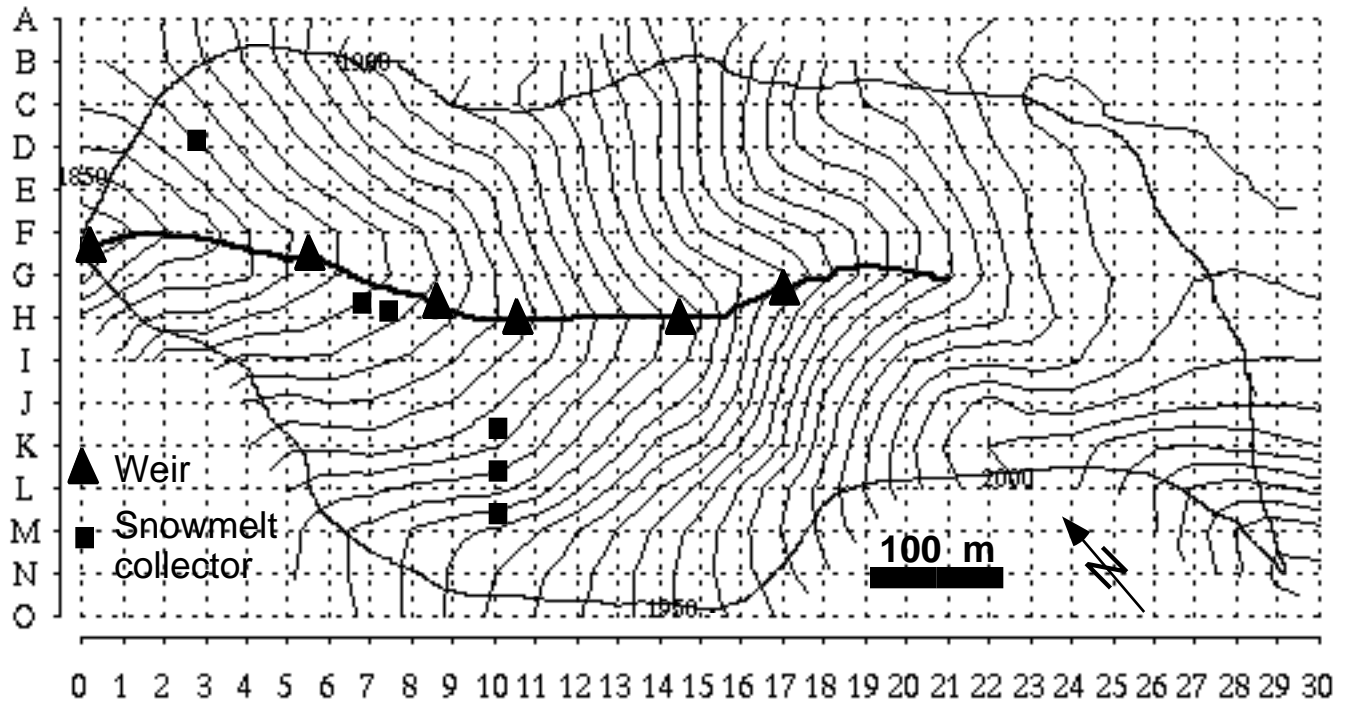


Figure 2.

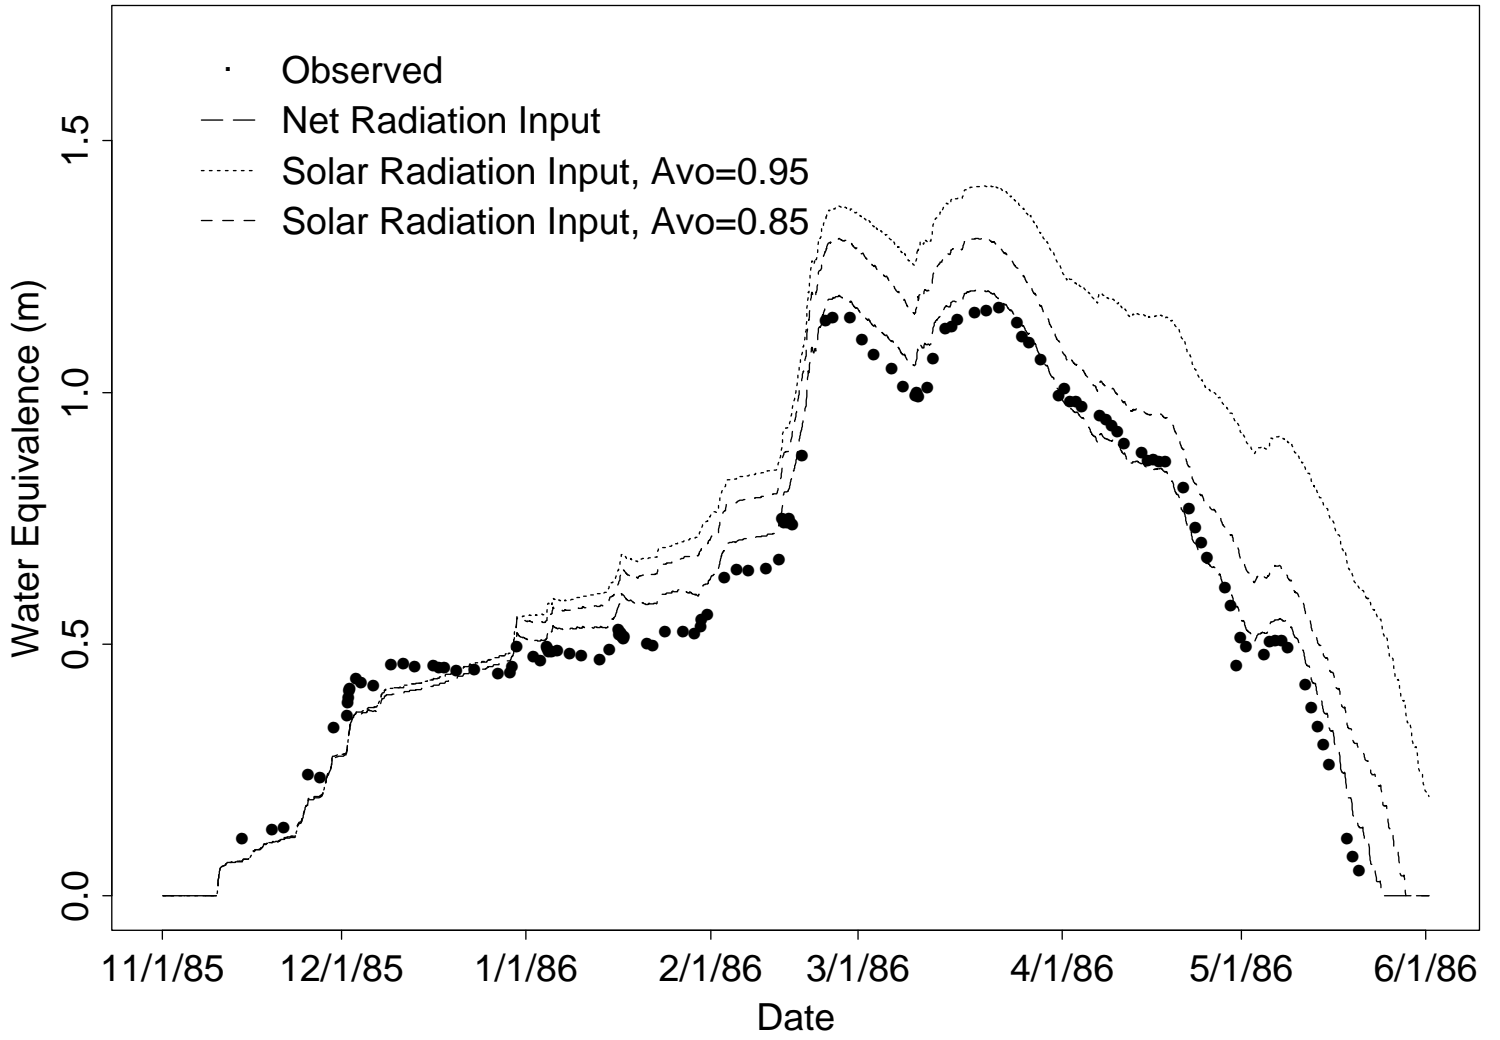
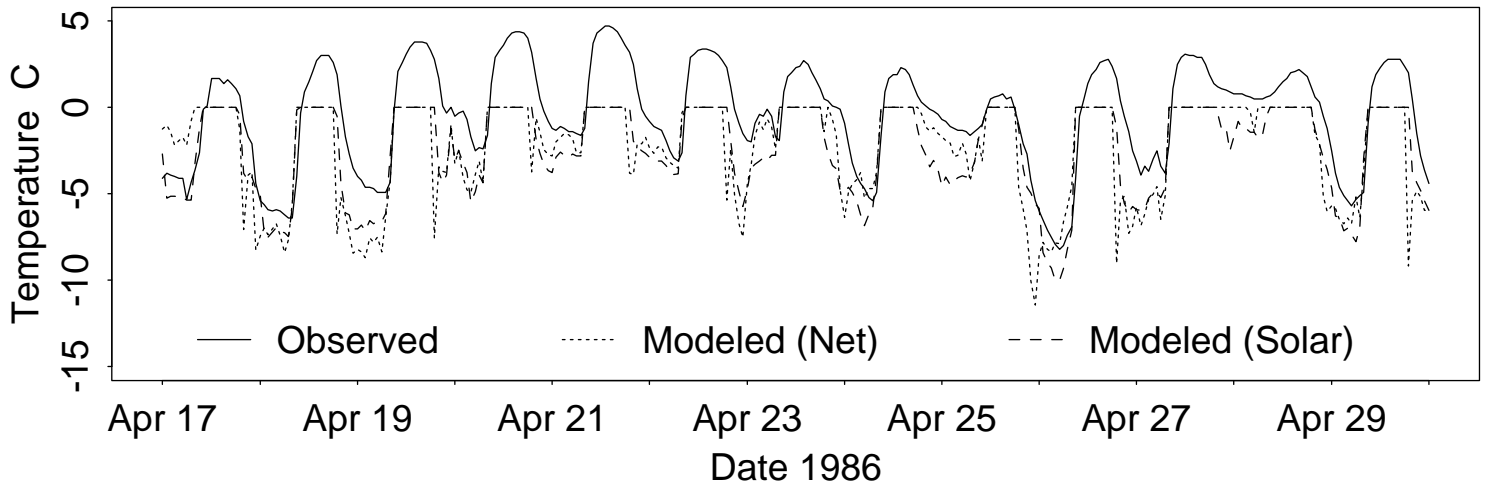
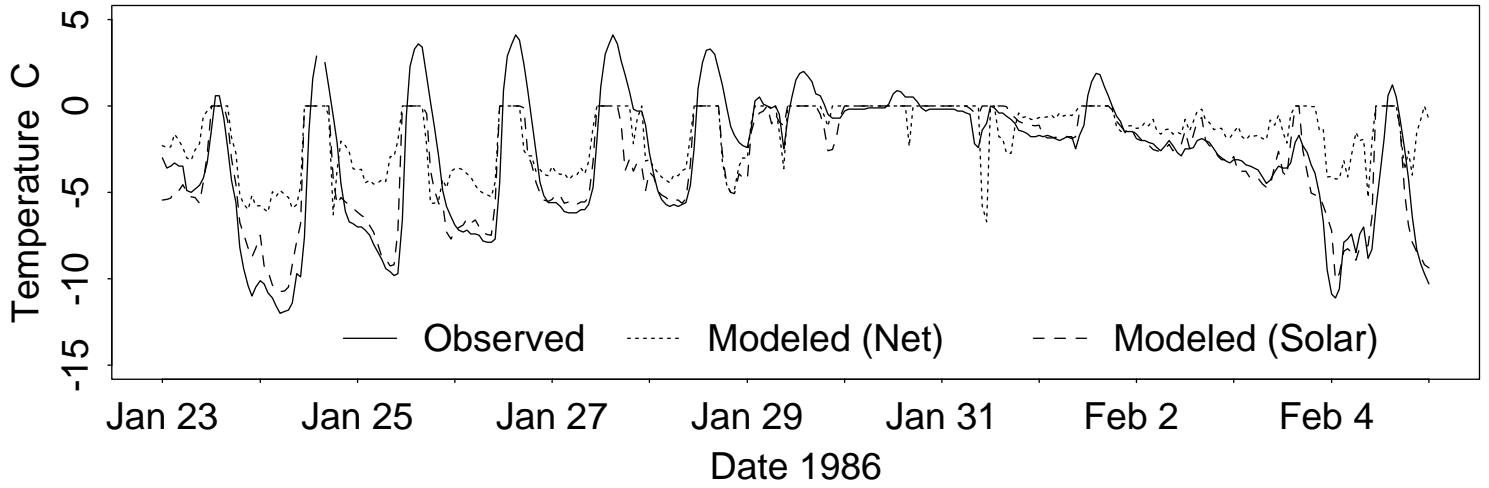


Figure 3.



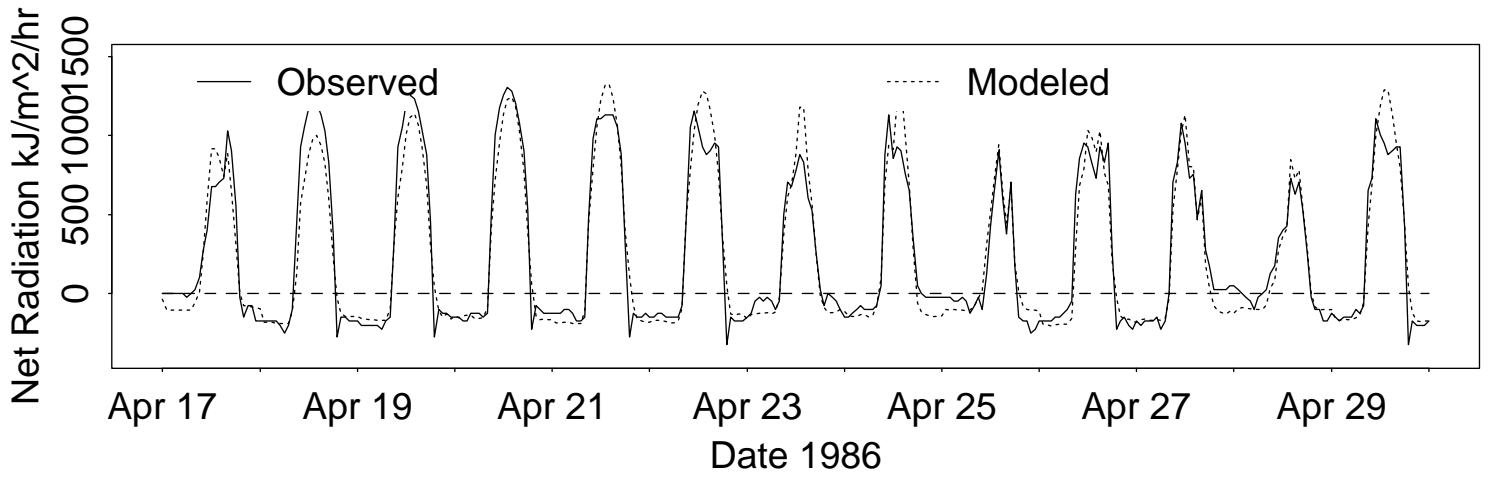


Figure 5.

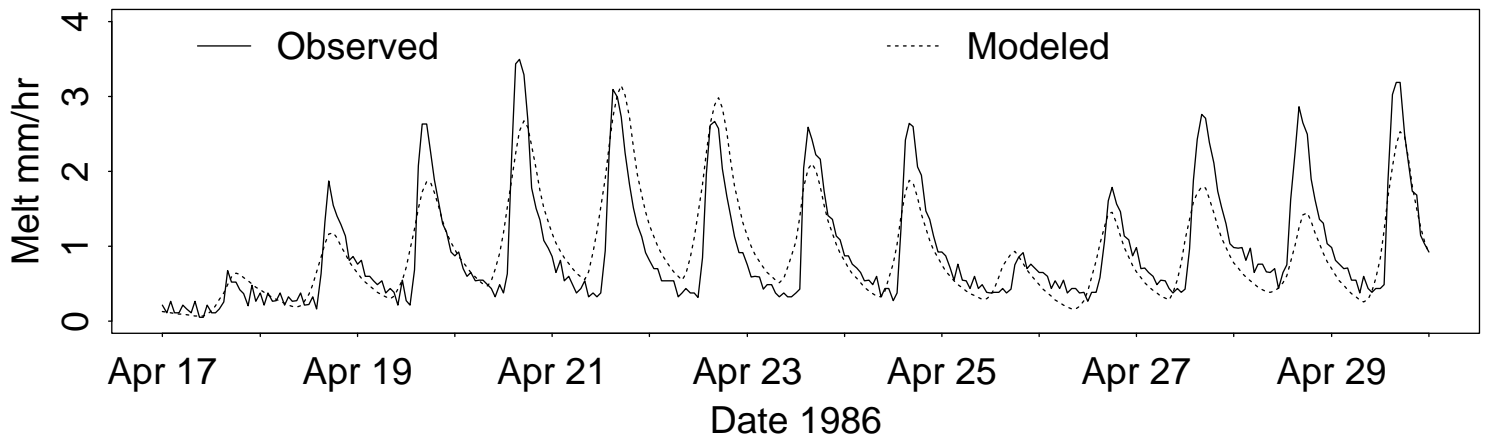


Figure 6.

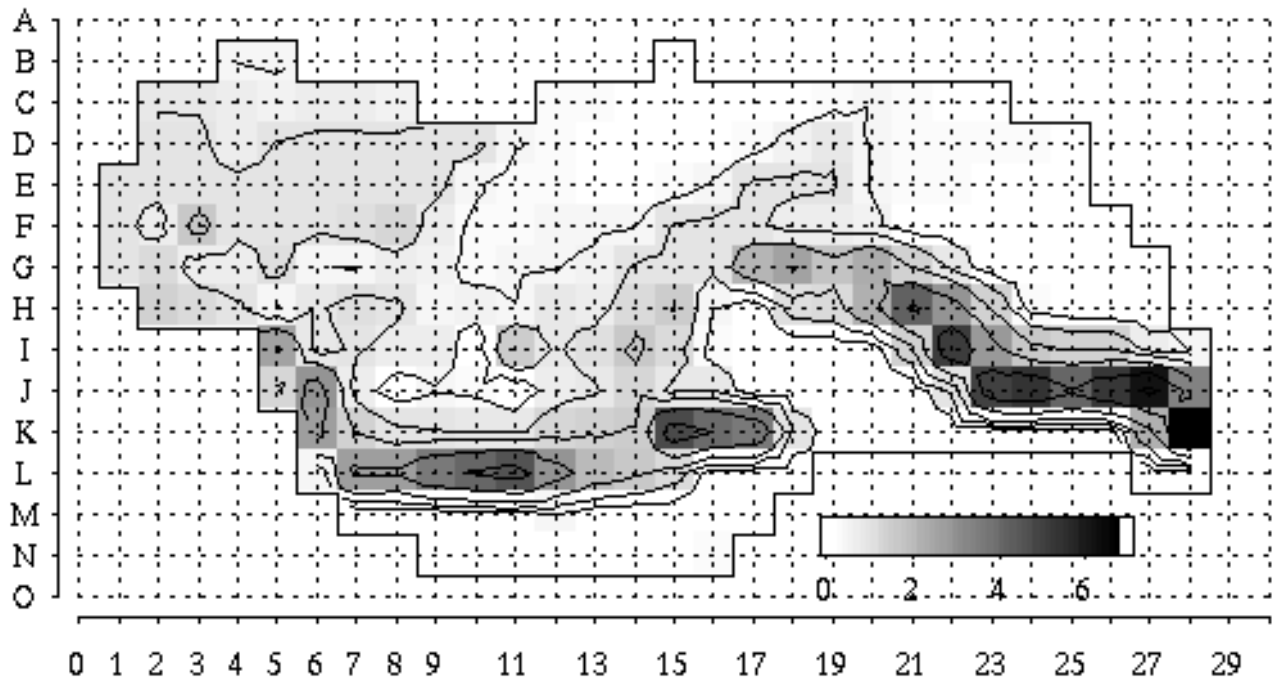


Figure 7.


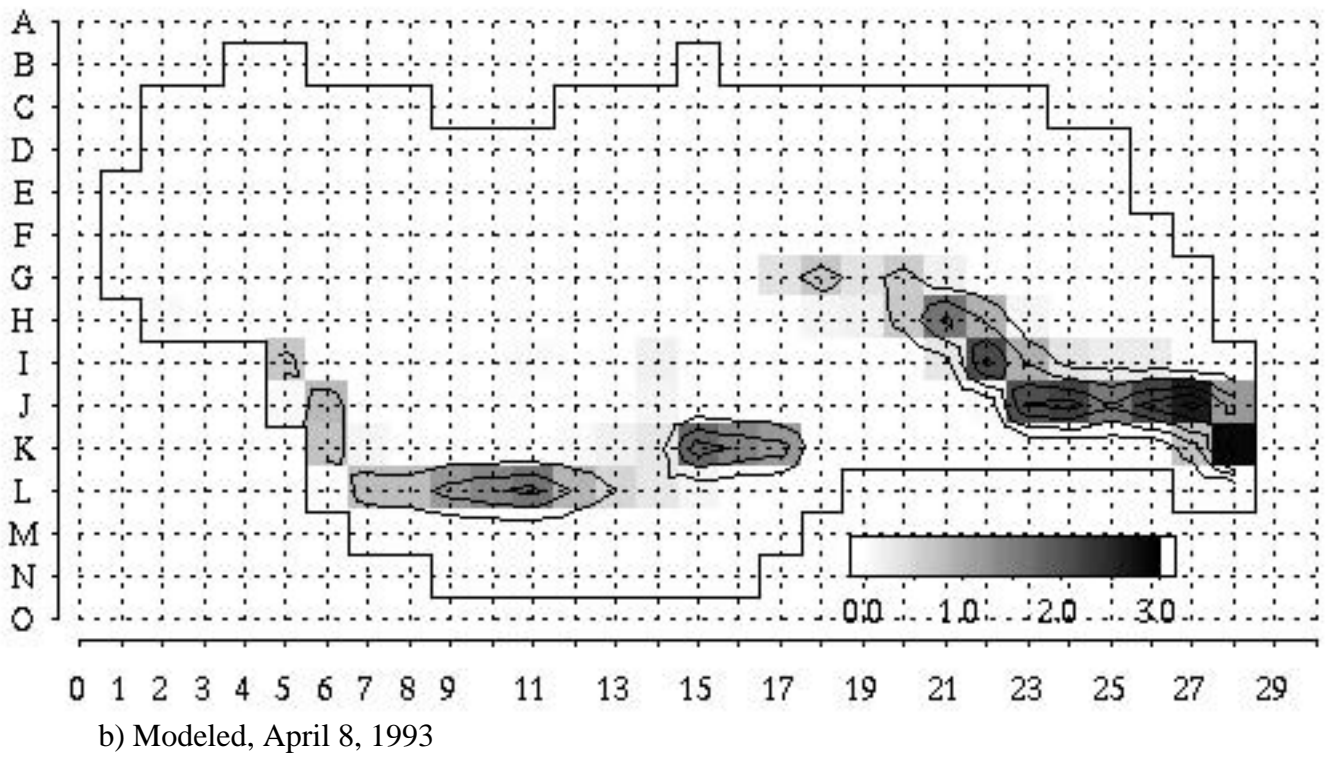


Figure 8.

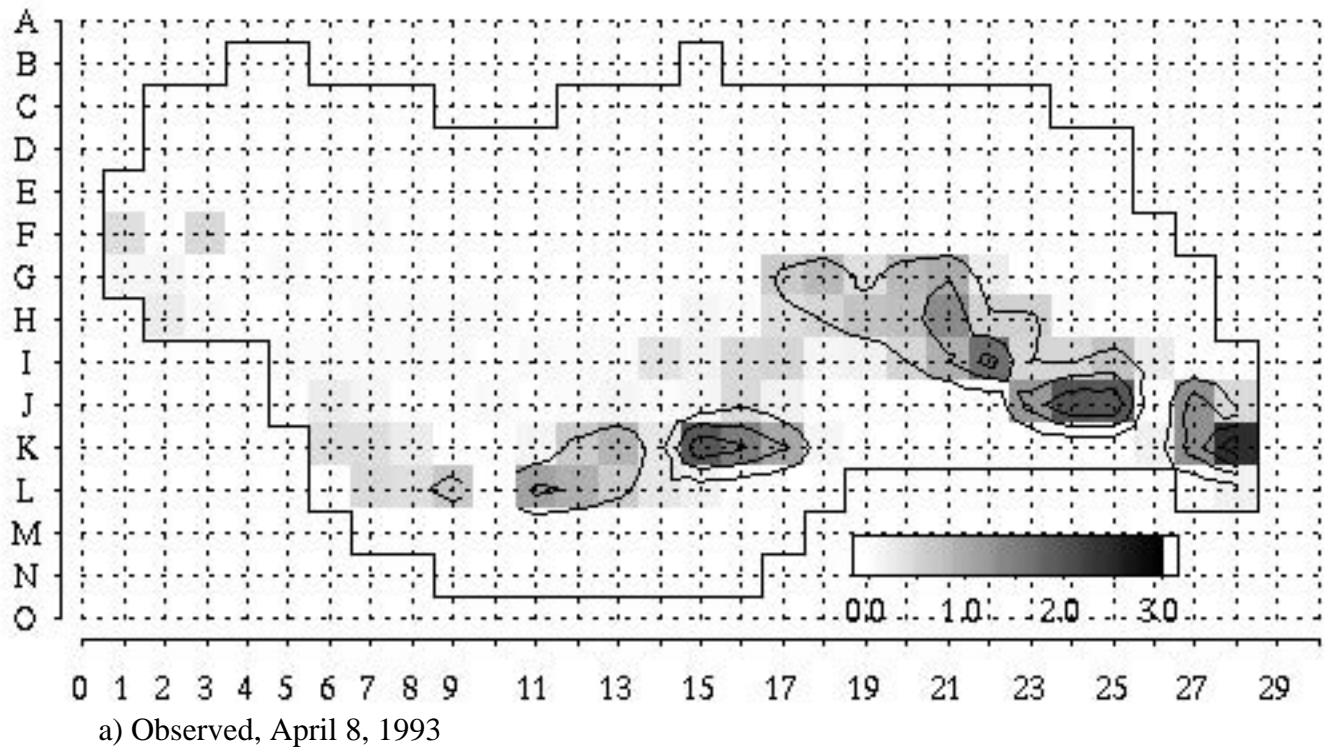