

# A Study on Distributed/Centralized Scheduling for Wireless Mesh Network

Shin-Ming Cheng  
Dept. of Comp. Sci. & Info. Eng.  
National Taiwan University  
shimi@pcs.csie.ntu.edu.tw

Di-Wei Huang  
Dept. of Comp. Sci. & Info. Eng.  
National Taiwan University  
dwhuang@pcs.csie.ntu.edu.tw

Phone Lin  
Dept. of Comp. Sci. & Info. Eng.  
National Taiwan University  
plin@csie.ntu.edu.tw

Shun-Ren Yang  
Dept. of Comp. Sci. & Inst. of Commun. Eng.  
National Tsing Hua University  
sryang@cs.nthu.edu.tw

## ABSTRACT

The IEEE 802.16 standard proposes the *Media Access Control* (MAC) protocol for the *Wireless Metropolitan Area Network* (WMAN). Two transmission modes are defined in the IEEE 802.16, including *Point-to-Multipoint* (PMP) mode and mesh mode. In the 802.16 mesh mode, allocation of minislots can be handled by the centralized and distributed scheduling mechanisms. This paper proposes the *Combined Distributed and Centralized* (CDC) scheme to combine the distributed scheduling and centralized scheduling mechanisms so that the minislot allocation can be more flexible, and the utilization is increased. Two scheduling algorithms, Round Robin (RR) and Greedy, are proposed as the baseline algorithms for the centralized scheduling mechanism. We conduct simulation experiments to investigate the performance of the CDC scheme with the RR and Greedy algorithms. Our study indicates that with CDC scheme, the minislot utilization can be significantly increased.

## Categories and Subject Descriptors

C.2.1 [Computer-Communication Networks]: Network Architecture and Design—*centralized networks, distributed networks, wireless communication*; D.2.8 [Software Engineering]: Metrics—*performance measures*

## General Terms

Experimentation, Measurement, Performance

## Keywords

802.16, mesh, performance, scheduling, wireless

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

IWCMC'06, July 3–6, 2006, Vancouver, British Columbia, Canada.

Copyright 2006 ACM 1-59593-306-9/06/0007 ...\$5.00.

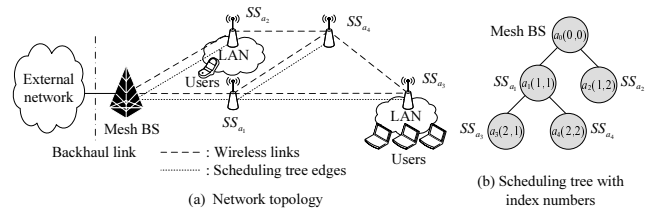



Figure 1: The IEEE 802.16 mesh network architecture

## 1. INTRODUCTION


The IEEE 802.16 standard [1] (also known as WiMax) defines the *Media Access Control* (MAC) protocol for the *Wireless Metropolitan Area Network* (WMAN). It provides fixed broadband wireless access with the same level of QoS as the traditional cabled access network. Compared with the traditional cabled access network (where high deployment and maintenance costs are required), IEEE 802.16 provides a cheaper and more ubiquitous solution to connect home and business to Internet.

IEEE 802.16 operates at 10-66 GHz for *Line-Of-Sight* (LOS) and 2-11 GHz for non-LOS. Typically, channel bandwidth is 25 MHz or 28 MHz. The data transmission rate is up to 134.4 Mbits/s. An IEEE 802.16 network consists of *Base Station* (BS) and *Subscriber Station* (SS). The BS serves as a gateway between the IEEE 802.16 network and the external network. The SS acts like a client-side terminal, through which mobile users can access the network through air interface. IEEE 802.16 defines two wireless transmission modes between SSs and BS, including *Point-to-Multipoint* (PMP) mode and mesh mode. The PMP mode is designed for high data rate transmission service with support of various QoS. It requires all SSs to be within clear LOS transmission range of the BS. On the other hand, in the mesh mode, the SSs can communicate with each other within non-LOS transmission range of the SSs. In this paper, we converge our study on the mesh mode. To simplify our description, hereafter, IEEE 802.16 with the mesh mode is called as the wireless mesh network [2].

Figure 1 (a) depicts the architecture of a wireless mesh network. The mesh BS interfaces the external network with

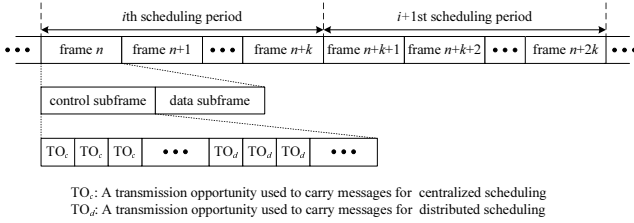

**Figure 2: The frame structure of the IEEE 802.16 mesh network**



**Figure 3: An example for the minislot reuse property**

backhaul links. Any SS pair without direct links can relay the data to each other through other SSs. The users connect to the SS by adopting various existing *local area network* (LAN) technologies, e.g., IEEE 802.3 (Ethernet) or IEEE 802.11 (WiFi). In this paper, we focus on the MAC protocol between SSs and between the SS and mesh BS.

The wireless mesh network adopts the *Time Division Multiplexing* (TDM) radio access technology between SSs and between the SS and the mesh BS, where a radio channel is divided into *physical slots* (PSs) using time sharing, and multiple PSs are grouped as a frame. Figure 2 shows the frame structure. A frame is divided into a control subframe and a data subframe. The control subframe consists of Transmission Opportunities (TOs) used to carry signaling messages for centralized scheduling<sup>1</sup> and distributed scheduling, which are denoted as  $TO_c$  and  $TO_d$ , respectively. The numbers of  $TO_c$ s and  $TO_d$ s in a control subframe are configured by the operator. The data subframe carries the user data and is further divided into 256 minislots. The transmission rate  $r$  bits/sec (that a minislot can provide) depends on several factors (e.g., channel coding, modulation, frequency band, and so on). Due to the page limitation, we do not include the discussion for these factors in this paper, and readers may refer to [1] for more details. A minislot can be reused by multiple SSs (i.e., multiple SSs may be allowed to transmit in the same minislot) as long as the SSs are geographically separated (i.e., they do not interfere each other) [11][7]. For example, in Figure 3,  $SS_{a_1}$  and  $SS_{a_4}$  can transmit data to  $SS_{a_2}$  and  $SS_{a_3}$  in the same minislot, respectively. This property is called as “*minislot reuse*” in TDM.

The data traffics in the wireless mesh network can be divided into two categories: intranet traffic and Internet traffic, which are the traffic between two SSs in the same wireless mesh network and the traffic between the SS and the application server in Internet, respectively. A data subframe can simultaneously carry the intranet traffic data and the Internet traffic data. The IEEE 802.16 proposes the distributed scheduling mechanism for minislot allocation for the intranet traffic and the centralized scheduling mechanism for the Internet traffic. The details of the two mechanisms are given

<sup>1</sup>The scheduling is to schedule minislots to serve different SSs.

in Section 2. The distributed scheduling targets on data delivery between two SSs in the same wireless mesh network, while the centralized scheduling enables the communication between the mesh BS and the SS. It is important to carefully schedule the minislots in a data subframe for both kinds of traffics to optimize minislot utilization.

IEEE 802.16 suggests to partition a data subframe into two parts for the two scheduling mechanism which is known as the “Partition” scheme. However, this may not be the best solution due to the fact that the partitioned boundary may not precisely capture the traffic patten, and the minislots may not be fully utilized. This paper proposes the *Combined Distributed and Centralized* (CDC) scheme to combine the distributed scheduling and centralized scheduling mechanisms so that the minislot allocation can be more flexible, and the minislot utilization is increased. We conduct simulation experiments to investigate the performance for the Partition and CDC schemes.

## 2. CENTRALIZED AND DISTRIBUTED SCHEDULING MECHANISMS

This section first illustrates the distributed and centralized scheduling in the wireless mesh network. Then, we propose the CDC scheme to combine the two scheduling mechanisms.

### 2.1 Distributed Scheduling

Before two neighboring SSs start to exchange data, they exercise a three-way handshaking procedure to select the minislots for data transmission, which is known as the distributed scheduling. In this scheduling, the SSs use the control subframe to transmit control messages. The SSs compete for control message transmission based on a pseudo-random election algorithm. The details of the algorithm can be found in [1]. When an SS joins the wireless mesh network, the SS obtains a node ID by exercising the registration procedure, whose details can be found in [1]. In this paper, to simplify our description, we denote an SS with the node ID  $a_i$  as  $SS_{a_i}$ . Figure 4 illustrates the message flow for the distributed scheduling, where  $SS_{a_s}$  has data to be transmitted with transmission rate  $R$  to its neighbor,  $SS_{a_r}$ . Let  $n_{f,a_s}$  denote the number of  $SS_{a_s}$ ’s free minislots. The  $SS_{a_s}$  first checks whether  $n_{f,a_s}$  is smaller than  $\lceil \frac{R}{r} \rceil$ . If so,  $SS_{a_s}$  quits the distributed scheduling. Otherwise, the following three steps are executed to reserve minislots for data transmission.

**Step D1.**  $SS_{a_s}$  sends a Mesh Distributed Scheduling (MSH-DSCH) Request message to  $SS_{a_r}$ , which is carried in the control subframe and contains the transmission rate  $R$  and the IDs of all free minislots.

**Step D2.** Upon receipt of the message,  $SS_{a_r}$  determines if the number  $n_{f,a_r}$  of its free minislots is smaller than  $\lceil \frac{R}{r} \rceil$ . If so,  $SS_{a_r}$  quits this procedure without sending additional messages. Otherwise,  $SS_{a_r}$  compares the IDs of its free minislots with the IDs carried in MSH-DSCH Request message. If the number of matched IDs is larger than or equal to  $\lceil \frac{R}{r} \rceil$ , then  $SS_{a_r}$  selects  $\lceil \frac{R}{r} \rceil$  matched minislots, sets the states of these minislots as **busy**, and sends the IDs of the selected minislots to  $SS_{a_s}$  through the MSH-DSCH Grant message. Otherwise,  $SS_{a_r}$  exits the distributed scheduling.

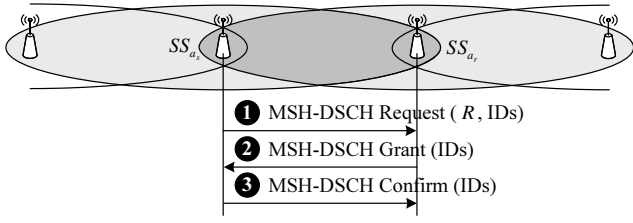


Figure 4: Message flow for the distributed scheduling

**Step D3.** The  $SS_{a_s}$  confirms the minislot reservation by sending  $SS_{a_r}$  the MSH-DSCH Confirm message.

After the execution of the distributed scheduling,  $SS_{a_s}$  can transmit data to  $SS_{a_r}$  in the reserved minislots in the data subframe without collision.

## 2.2 Centralized Scheduling

IEEE 802.16 specifies the centralized scheduling for the communication between the mesh BS to SSs, where the mesh BS acts as a scheduler and determines transmission and reception minislots for each SS. A scheduling tree rooted at the mesh BS is established for the routing path between each SS and the mesh BS. Denote a scheduling tree as  $T = \{a_0(k_{a_0}, n_{a_0}), a_1(k_{a_1}, n_{a_1}), a_2(k_{a_2}, n_{a_2}), \dots, a_i(k_{a_i}, n_{a_i}), \dots\}$ , where  $k_{a_i}$  is the layer number,  $n_{a_i}$  is the position number in layer  $k_{a_i}$ , and  $(k_{a_i}, n_{a_i})$  is the index number of the SS. Without loss of generality, the index number of the mesh BS is  $(0,0)$ . Figure 1 (b) shows an example of the scheduling tree for Figure 1 (a). Before an SS executes the registration procedure to join the wireless mesh network, it selects a network node with smallest layer number from all neighboring network nodes as the *candidate node*. Then the SS sends the registration message to the mesh BS through the candidate node. Upon receipt of the registration message, the mesh BS sets the SS as the child of the candidate node in the scheduling tree, updates the scheduling tree, and then broadcasts the scheduling tree to all SSs. Readers may refer to [1] for more details of the registration procedure. The SSs negotiate with the mesh BS for bandwidth request and grant by routing signaling messages according to the scheduling tree. The centralized scheduling reserves bandwidth for an SS all the way to the mesh BS.

The centralized scheduling consists of two stages. In the first stage, the mesh BS collects bandwidth requests from all SSs. In the second stage, the mesh BS calculates and then distributes the transmission and reception schedule to all SSs. The time period for exercising the two stages is called as *scheduling period*. The schedule assigned in the  $i$ th scheduling period is referenced in the  $i + 1$ st scheduling period as shown in Figure 2. Take Figure 1 as an example, where  $SS_{a_i}$  ( $i = 1, 2, 3, 4$ ) requests transmission rates,  $R_{u,a_i}$  and  $R_{d,a_i}$  for data transmission to and data receipt from the mesh BS, respectively. The  $SS_{a_i}$  first checks whether the number  $n_{f,a_i}$  of free minislots is smaller than  $\left\lceil \frac{R_{u,a_i}}{r} \right\rceil + \left\lceil \frac{R_{d,a_i}}{r} \right\rceil$ . If so,  $SS_{a_i}$  quits the centralized scheduling. Otherwise, the centralized scheduling exercises as follows: Based on the scheduling tree, the SS with larger  $k_{a_i}$  and smaller  $n_{a_i}$  transmits the uplink signaling messages first, while the SS with smaller  $k_{a_i}$  and smaller  $n_{a_i}$  relays the downlink signaling message first. Figure 5 illustrates

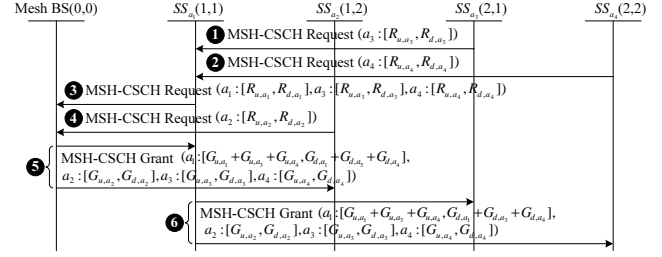


Figure 5: Message flow for the centralized scheduling

the message flow for the centralized scheduling mechanism with the following steps, where we consider the example in Figure 1 (a).

**Step C1.**  $SS_{a_3}$  sends a Mesh Centralized Scheduling (MSH-CSCH) Request message to  $SS_{a_1}$  where  $R_{u,a_3}$ ,  $R_{d,a_3}$ , and its node ID,  $a_3$ , are carried in this message.

**Step C2.**  $SS_{a_4}$  sends  $SS_{a_1}$  an MSH-CSCH Request message carrying  $R_{u,a_4}$ ,  $R_{d,a_4}$ , and its node ID,  $a_4$ .

**Step C3.**  $SS_{a_1}$  sends the mesh BS an MSH-CSCH Request message containing  $R_{u,a_1}$ ,  $R_{d,a_1}$ , and its node ID,  $a_1$ , and the parameters obtained in Steps C1 and C2, i.e.,  $a_3 : [R_{u,a_3}, R_{d,a_3}]$  and  $a_4 : [R_{u,a_4}, R_{d,a_4}]$ .

**Step C4.**  $SS_{a_2}$  sends an MSH-CSCH Request message to the mesh BS, where  $R_{u,a_2}$ ,  $R_{d,a_2}$ , its node ID,  $a_2$ , are carried in the message.

**Step C5.** Upon receptions of the MSH-CSCH Request messages from all SSs, the mesh BS obtains the requested bandwidth of all SSs. The mesh BS exercises a scheduling algorithm to allocate the transmission and reception minislots for each SS. Depending on the execution result of the algorithm, the mesh BS replies an MSH-CSCH Grant message to its children. Let  $G_{u,a_i}$  and  $G_{d,a_i}$  denote the granted data transmission rate and receipt rate for  $SS_{a_i}$ , respectively. The grant message carries the parameters  $a_1 : [G_{u,a_1} + G_{u,a_3} + G_{u,a_4}, G_{d,a_1} + G_{d,a_3} + G_{d,a_4}]$ ,  $a_2 : [G_{u,a_2}, G_{d,a_2}]$ ,  $a_3 : [G_{u,a_3}, G_{d,a_3}]$ ,  $a_4 : [G_{u,a_4}, G_{d,a_4}]$ . Based on these parameters,  $SS_{a_i}$  determines the minislots allocated for it to transmit/receive data, whose details are not described in this paper, and can be found in [1].

**Step C6.** Upon receipt of the MSH-CSCH Grant message,  $SS_{a_1}$  forwards the MSH-CSCH Grant message to its children.

After the execution of the centralized scheduling,  $SS_{a_1}$ ,  $SS_{a_2}$ ,  $SS_{a_3}$ , and  $SS_{a_4}$  can transmit and receive data in the reserved minislots during the next scheduling period.

Note that in Step C5, the scheduling algorithm may affect the minislot utilization. Several previous studies [6][5][8] have been contributed for this issue. It has been shown that scheduling algorithm is an *NP-hard* problem, that is, we may not find the optimal solution for it when the number of SSs in a wireless mesh network is sufficiently large. In this study, we use two algorithms, Round Robin (RR) and Greedy, as the baseline algorithms to investigate the performance of the centralized scheduling. The two algorithms will be described in Section 3.

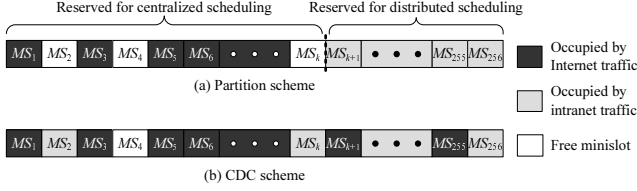


Figure 6: The examples for minislot allocation for Partition and CDC schemes

### 2.3 The CDC Scheme

The distributed scheduling is designed for data delivery between two SSs in the same wireless mesh network, while the centralized scheduling is designed for communication between the mesh BS and the SS. For the Internet traffic, the packets must be routed to the external network through the mesh BS. On the other hand, intranet traffic occurs between two SSs. Thus, in [1], it is suggested to adopt the centralized scheduling and distributed scheduling to allocate minislots for the Internet traffic and intranet traffic, respectively.

The IEEE 802.16 standard proposes a Partition scheme that partitions the minislots in a data subframe into two parts. The minislots in one part are scheduled by the centralized scheduling, and the minislots in the other part are scheduled by the distributed scheduling. When the wireless mesh network is initially configured, the Partition scheme broadcasts the maximum percentage of minislots (in a data subframe) for the centralized scheduling through the Mesh Network Configuration (MSH-NCFG) message delivery. Figure 6 (a) shows an example for the partition result with the Partition scheme, where the minislots in a data subframe are labeled as  $MS_1, MS_2, \dots, MS_{256}$ . In the Partition scheme, once the wireless mesh network is configured, the minislots can not be flexibly reserved for the centralized scheduling and distributed scheduling until the next configuration. We propose the *Combined Distributed and Centralized* (CDC) scheme to release the above limitation, whose details are given below.

The CDC scheme utilizes the MSH-CSCH Grant message in Step C5 of the centralized scheduling to notify all SSs the minislots reserved for the centralized scheduling. When an SS receives the MSH-CSCH Grant message, it calculates minislots scheduled by the centralized scheduling for transmitting/receiving data for Internet traffic in the next scheduling period. In the next scheduling period, the SS can determine the free minislots that can be scheduled by the distributed scheduling. Figure 6 (b) shows an example for minislot allocation with the CDC scheme.

## 3. THE RR AND GREEDY ALGORITHMS

This section describes the scheduling algorithms, RR and Greedy, adopted in Step C5 for centralized scheduling. Let  $(a_u, a_v)$  denote the wireless link between the two nodes with node IDs  $a_u$  and  $a_v$ , respectively, and  $E$  be the set of wireless links among SSs and mesh BS. For the  $j$ th minislot in a data subframe, the variable  $s_j$  is maintained to indicate the status of the minislot.  $s_j = F$  indicates that the minislot is free,  $s_j = TX$  indicates that the minislot serves for data transmission, and  $s_j = RX$  indicates that the minislot serves for data reception. For each SS,  $SS_{a_i}$ , an array  $\mathbf{S}_{a_i} = \{s_1, s_2, s_3, \dots, s_{256}\}$  is maintained to store the status of

### Algorithm 1 ROUND ROBIN

```

1: generate the ordered list  $L$  as  $(a'_1, a'_2, \dots, a'_N)$ 
2:  $j \leftarrow 1$ 
3: for  $i \leftarrow 1$  to  $N$  do
4:   if  $N_{d,a'_i} > 0$  then
5:     for  $p \leftarrow 1$  to  $k_{a'_i}$  do
6:       for  $q \leftarrow 1$  to  $N_{d,a'_i}$  do
7:         SET( $A_{a'_i}[p], j + q - 1, RX$ )
8:         if  $A_{a'_i}[x] \neq a'_i$  then
9:           SET( $A_{a'_i}[p], j + N_{d,a'_i} + q - 1, TX$ )
10:         $j \leftarrow j + N_{d,a'_i} - 1$ 
11:        if  $j > 256$  then
12:          return fail
13:   if  $N_{u,a'_i} > 0$  then
14:     for  $p \leftarrow k_{a'_i}$  downto 1 do
15:       for  $q \leftarrow 1$  to  $N_{u,a'_i}$  do
16:         SET( $A_{a'_i}[x], j + q - 1, TX$ )
17:         if  $A_{a'_i}[x] \neq a'_i$  then
18:           SET( $A_{a'_i}[x], j - N_{u,a'_i} + q - 1, RX$ )
19:          $j \leftarrow j + N_{u,a'_i} - 1$ 
20:         if  $j > 256$  then
21:           return fail
22: return success

```

Figure 7: The pseudo code for the RR algorithm

each minislot in a data subframe. The operation  $GET(a_i, j)$  is used to get the status of the  $j$ th minislot from  $\mathbf{S}_{a_i}$ , and  $SET(a_i, j, \{TX, RX, F\})$  sets the status of the  $j$ th minislot serving for  $SS_{a_i}$ . When “collision” occurs, the transmission between network nodes (the mesh BS or SS) fails [5], which is lead by one of the following two conditions: Consider the three nodes with node IDs,  $a_u$ ,  $a_v$ , and  $a_w$  where  $(a_u, a_v)$  and  $(a_v, a_w) \in E$ .

**Condition 1.** If there exists the  $k$ th minislot such that  $GET(a_u, k) = TX$  and  $GET(a_w, k) = RX$ , then the collision occurs. In this condition,  $SS_{a_u}$  can not transmit and receive data in the same minislot.

**Condition 2.** If there exists the  $k$ th minislot such that  $GET(a_u, k) = GET(a_w, k) = TX$ , then the collision occurs. In this condition,  $SS_{a_u}$  and  $SS_{a_w}$  send data to  $SS_{a_v}$  in the same minislot, and the collision occurs.

The scheduling algorithms schedule each minislot to guarantee the requested transmission data rate and reception data rate without collision.

Suppose that the wireless mesh network consists of  $N$  SSs with the scheduling tree  $T = \{a_0(k_{a_0}, n_{a_0}), a_1(k_{a_1}, n_{a_1}), a_2(k_{a_2}, n_{a_2}), \dots, a_N(k_{a_N}, n_{a_N})\}$ . In the two algorithms, we maintain an array  $A_{a_i}$  for each SS,  $SS_{a_i}$ , to store the node IDs of the mesh BS and SSs along the routing path from the mesh BS to  $SS_{a_i}$  in the increasing order of their layer numbers. Assume that  $SS_{a_i}$  requests the data transmission rate  $R_{u,a_i}$  and the data reception rate  $R_{d,a_i}$ . Then the numbers of minislots required by  $SS_{a_i}$  for data transmission and data reception are  $N_{u,a_i} = \lceil \frac{R_{u,a_i}}{r} \rceil$  and  $N_{d,a_i} = \lceil \frac{R_{d,a_i}}{r} \rceil$ , respectively. Initially, the status of all minislots are set as F. The RR and Greedy algorithms exercise as follows.

**Algorithm RR.** Figure 7 shows the pseudo code for the RR algorithm. The RR algorithm does not use the minislot reuse property in TDM, and each minislot is allocated to at most one SS. Due to the page limitation, the description for the RR algorithm is not shown in this paper.

**Algorithm 2** GREEDY

---

```

1: generate the ordered list  $L$  as  $(a'_1, a'_2, \dots, a'_N)$ 
2:  $j \leftarrow 1$ 
3: for  $i \leftarrow 1$  to  $N$  do
4:   if  $N_{d,a'_i} > 0$  then
5:     for  $p \leftarrow 1$  to  $k_{a'_i}$  do
6:       for  $q \leftarrow 1$  to  $N_{d,a'_i}$  do
7:         for  $j \leftarrow 1$  to 257 do
8:           if  $j > 256$  then
9:             return fail
10:          if COLLISION( $A_{a'_i}[p-1], A_{a'_i}[p], j$ ) = FALSE then
11:            SET( $A_{a'_i}[p], j, \text{RX}$ )
12:            if  $k_{A_{a'_i}[p]} \neq 1$  then
13:              SET( $A_{a'_i}[p-1], j, \text{TX}$ )
14:            break
15:          if  $N_{u,a'_i} > 0$  then
16:            for  $p \leftarrow k_{a'_i}$  downto 1 do
17:              for  $q \leftarrow 1$  to  $N_{u,a'_i}$  do
18:                for  $j \leftarrow 1$  to 257 do
19:                  if  $j > 256$  then
20:                    return fail
21:                  if COLLISION( $A_{a'_i}[p], A_{a'_i}[p-1], j$ ) = FALSE then
22:                    SET( $A_{a'_i}[p], j, \text{TX}$ )
23:                    if  $k_{A_{a'_i}[p]} \neq 1$  then
24:                      SET( $A_{a'_i}[p-1], j, \text{RX}$ )
25:                    break
26: return success

```

---

Figure 8: The pseudo code for the Greedy algorithm

**Algorithm Greedy.** Figure 8 illustrates the pseudo code for the Greedy algorithm. In the Greedy algorithm, we adopt the minislot reuse technology. In this algorithm, we implement the COLLISION to determine whether allocation of the  $j$ th minislot to  $SS_{a_u}$  for transmitting data to its neighbor  $SS_{a_v}$  will cause collision, which is shown below:

```

COLLISION( $a_u, a_v, j$ )
if GET( $a_u, j$ )  $\neq$  F or GET( $a_v, j$ )  $\neq$  F then
  return TRUE
end if
for  $i \leftarrow 1$  to  $N$  do
  if  $((a_i, a_u) \in E$  and GET( $a_i, j$ ) = RX) or  $((a_i, a_v) \in E$  and GET( $a_i, j$ ) = TX) then
    return TRUE
  end if
end for
return FALSE

```

## 4. PERFORMANCE EVALUATION

This section conducts simulation experiments to investigate the performance for the Partition and CDC schemes with the RR and Greedy algorithms. To simplify our description, we use Partition\_RR and Partition\_Greedy to denote the Partition scheme with the RR and Greedy algorithms and CDC\_RR and CDC\_Greedy to denote the CDC scheme with the RR and Greedy algorithms, respectively. We adopt the event-driven based simulation technique [9], which has been widely adopted to simulate the wireless networks [10][3]. The details are not presented here. In the simulation model, we assume that the SSs are identical. A wireless mesh network is modeled as a regular hexagonal topology as show in Figure 9, which is the same as that in IEEE 802.16 standard [1]. In this configuration, the SS node is located on each corner of each hexagon. Following the registration mentioned in Section 2, in this topology, if an SS is  $k$  hops way from the mesh BS, then the SS is in the

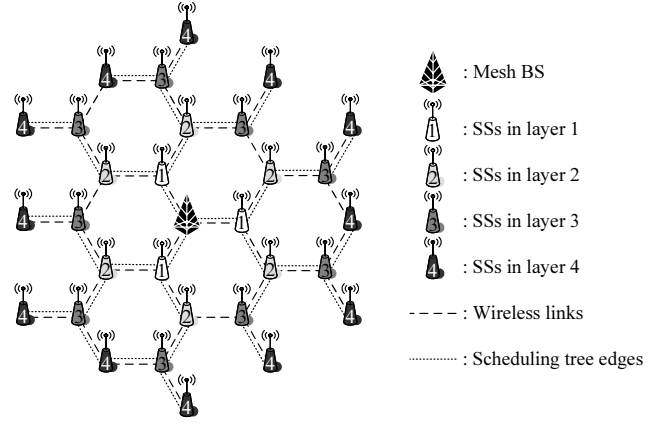


Figure 9: A 4-layer wireless mesh network layout structure

layer  $k$  of the scheduling tree. There are  $3k$  SSs in layer  $k$ . An  $l$ -layer wireless mesh network covers one mesh BS and SSs from layer 1 to layer  $l$ . Our simulation model has been validated by an analytical model. Due to page limitation, the details of the analytical model are not shown in this paper, and we will treat it in the extended version of this paper [4].

Suppose that the arrivals of Internet session requests in an SS form a Poisson process with rate  $\lambda_I$ , and the elapse times of the Internet sessions are exponentially distributed with the mean  $\frac{1}{\mu_I}$ . Define  $\rho = \frac{\lambda_I}{\mu_I}$  as the traffic load to an SS. To simplify our discussion, we assume that the number of minislots requested by an Internet session for data transmission or reception is one. Let  $\alpha$  be the maximum percentage of minislots (that can be allocated for Internet sessions) in a data subframe,  $M$  be the number of minislots in a data subframe ( $M = 256$  in our study), and  $t_s$  be the scheduling period. In each experiment, we simulate  $N_I = 10^7$  Internet sessions to ensure the convergence of our simulation. Let  $N_{d,I}$  be the number of the dropped Internet session requests in a each experiment. Then, the blocking probability  $P_{b,I}$  for the Internet sessions (i.e., the probability that the Internet session request is dropped due to no available minislot) is obtained by using

$$P_{b,I} = \frac{N_{d,I}}{N_I}$$


Let  $U_{i,a_i}$  be the minislot utilization in  $SS_{a_i}$  for the intranet sessions. For the Partition scheme, since the minislots in a data subframe are partitioned into two groups to serve Internet sessions and intranet sessions, respectively, we have

$$U_{i,a_i}(\text{Partition}) = 1 - \alpha \quad (1)$$

Let  $M_{I,a_i}$  be the number of minislots in a data subframe in  $SS_{a_i}$  occupied by the Internet sessions, and  $M_{r,a_i}$  be the number of minislots in  $SS_{a_i}$  that can not be reused due to occurrence of collision between  $SS_{a_i}$  and its neighboring SS. Then  $U_{i,a_i}$  for the CDC scheme can be obtained by using

$$U_{i,a_i}(\text{CDC}) = \frac{M - M_{I,a_i} - M_{r,a_i}}{M} \quad (2)$$

Then by using (1) and (2), the mean of the  $U_{i,a_i}$  for the

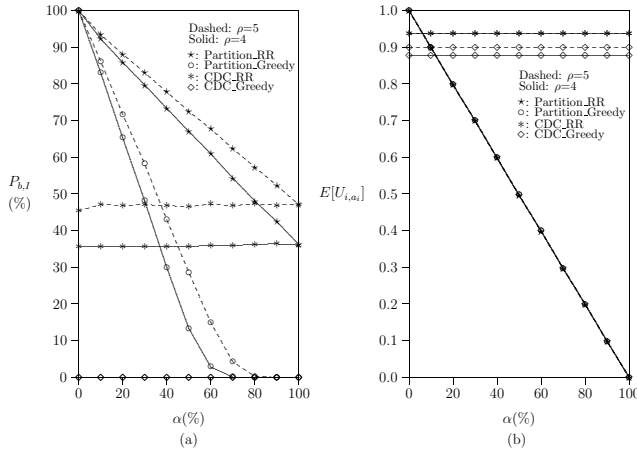

**Figure 10: Effects of  $\alpha$  and  $\rho$  on  $P_{b,I}$  and  $E[U_{i,a_i}]$  ( $t_s = \frac{1}{\lambda_I}$ )**

Partition scheme and the CDC scheme can be calculated by

$$E[U_{i,a_i}](\text{Partition}) = 1 - \alpha$$

and

$$E[U_{i,a_i}](\text{CDC}) = \frac{\sum_{i=1}^N U_{i,a_i}(\text{CDC})}{N}$$

where  $N$  is the total number of SSs in the wireless mesh network.

In this study, we use  $P_{b,I}$  and  $E[U_{i,a_i}]$  to measure the QoS of the wireless mesh network for the Internet sessions and the intranet sessions. A smaller  $P_{b,I}$  value implies that the Internet sessions have better chance to be served. On the other hand, a larger  $E[U_{i,a_i}]$  value indicates that there are more minislots that can be allocated to the intranet sessions. In the following, we study the effects of  $\alpha$  and  $\rho$  on the  $P_{b,I}$  and  $E[U_{i,a_i}]$  performances for the the Partition\_RR, Partition\_Greedy, CDC\_RR, and CDC\_Greedy schemes, where we consider a 4-layer wireless mesh network.

**Effects of  $\alpha$  and  $\rho$  on  $P_{b,I}$ :** Figure 10 (a) plots  $P_{b,I}$  against  $M$  with various  $\rho$  setups for the four schemes. This figure indicates that as for the Partition\_RR and Partition\_Greedy schemes,  $P_{b,I}$  decreases as  $M$  increases. For the CDC\_RR and CDC\_Greedy schemes,  $M$  does not affect the  $P_{b,I}$  performance. The figure also shows that as the Internet traffic load (i.e.,  $\rho$ ) increases, the  $P_{b,I}$  performance for the four schemes become worse. Moreover, we observe that the CDC\_Greedy scheme outperforms other three schemes in terms of the  $P_{b,I}$  performance in all cases. The  $P_{b,I}$  values for CDC\_Greedy scheme approach to 0%. When  $\alpha < 40\%$ , CDC\_RR has better  $P_{b,I}$  performance than that for Partition\_Greedy. On the other hand,  $\alpha > 40\%$ , Partition\_Greedy outperforms CDC\_RR.

**Effects of  $\alpha$  and  $\rho$  on  $E[U_{i,a_i}]$ :** Figure 10 (b) plots  $E[U_{i,a_i}]$  as functions of  $\alpha$  for the four schemes. The figure indicates that for Partition\_RR and Partition\_Greedy,  $E[U_{i,a_i}]$  decreases as  $\alpha$  increases. On the other hand, for CDC\_RR and CDC\_Greedy,  $\alpha$  has no effect on the  $E[U_{i,a_i}]$  performance. This figure also shows that the Internet traffic load  $\rho$  only affects the  $E[U_{i,a_i}]$

performance for the CDC\_Greedy scheme. For other three schemes, the effect of  $\rho$  is insignificant. The CDC\_RR has the best  $E[U_{i,a_i}]$  performance among the four schemes.

## 5. CONCLUSION

This paper proposed the *Combined Distributed and Centralized* (CDC) scheme to combine the distributed scheduling and centralized scheduling mechanisms in the IEEE 802.16 to more flexibly allocate the minislots in a data subframe to serve Internet sessions and intranet sessions in the wireless mesh network, while IEEE 802.16 proposed the Partition scheme for minislot allocation for two kinds of traffic. We conducted simulation experiments to compare the performance of the CDC and Partition schemes, where we used the Round Robin (RR) and Greedy algorithms as baseline algorithms for the centralized scheduling mechanism. Our study indicate that the CDC scheme outperforms the Partition scheme in most of cases.

## 6. REFERENCES

- [1] IEEE standard for local and metropolitan area networks part 16: Air interface for fixed broadband wireless access systems, May 2004.
- [2] I. Akyildiz and X. Wang. A survey on wireless mesh networks. *IEEE Commun. Mag.*, 43(9):S23–S30, Sept. 2005.
- [3] R.-G. Cheng, S.-M. Cheng, and P. Lin. Power-efficient routing PER mechanism for odma systems. *IEEE Trans. Veh. Technol.*, May 2006. to be published.
- [4] S.-M. Cheng, P. Lin, and D.-W. Huang. Minislot allocation for wireless mesh network. Under preparation.
- [5] I. Chlamtac and A. Farago. Making transmission schedules immune to topology changes in multi-hop packet radio networks. *IEEE/ACM Trans. Networking*, 2(1):23–29, Feb. 1994.
- [6] I. Chlamtac and A. Lerner. Fair algorithms for maximal link activation in multihop radio networks. *IEEE Trans. Commun.*, 35(7):739–746, July 1987.
- [7] A.-M. Chou and V. O. K. Li. Slot allocation strategies for tdma protocols in multihop packet radio networks. In *INFOCOM '92*, volume 2, pages 710–716, 1992.
- [8] S. Gandham, M. Dawande, and R. Prakash. Link scheduling in sensor networks: distributed edge coloring revisited. In *INFOCOM '05*, volume 4, pages 2492 – 2501, 2005.
- [9] A. M. Law and W. D. Kelton. *Simulation Modeling and Analysis, Third Edition*. McGRAW-Hill, 2000.
- [10] P. Lin, C.-H. Gan, and C.-C. Hsu. OVFSF code channel assignment with dynamic code set and buffering adjustment fo UMTS. *IEEE Trans. Veh. Technol.*, (2):591–602, Mar. 2005.
- [11] R. Nelson and L. Kleinrock. Spatial TDMA: A collision-free multihop channel access protocol. *IEEE Trans. Commun.*, 33(9):934–944, Sept. 1985.