

---

## **Accelerated Aging Studies and Environmental Stability of Prototype Tamper Tapes**

**B. W. Wright  
A. R. Bunk  
G. E. Pickett**

**C. W. Wright  
B. A. Metz**

---

**May 1995**

**Prepared for the U.S. Department of Energy  
Office of Research and Development (NN-20)  
under Contract DE-AC06-76RLO 1830**

**Pacific Northwest Laboratory  
Operated for the U.S. Department of Energy  
by Battelle Memorial Institute**



PNL-10562

**DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED**

**RECEIVED**

**JUN 06 1995**

**OSTI**

## DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor Battelle Memorial Institute, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or Battelle Memorial Institute. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

PACIFIC NORTHWEST LABORATORY  
*operated by*  
BATTELLE MEMORIAL INSTITUTE  
*for the*  
UNITED STATES DEPARTMENT OF ENERGY  
*under Contract DE-AC06-76RLO 1830*

Printed in the United States of America

Available to DOE and DOE contractors from the  
Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831;  
prices available from (615) 576-8401. FTS 626-8401.

Available to the public from the National Technical Information Service,  
U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.



The contents of this report were printed on recycled paper

ACCELERATED AGING STUDIES AND  
ENVIRONMENTAL STABILITY OF PROTOTYPE  
TAMPER TAPES

B. W. Wright  
C. W. Wright  
A. R. Bunk\*  
B. A. Metz\*  
G. E. Pickett\*

May 1995

Prepared for  
the U.S. Department of Energy  
Office of Research and Development (NN-20)  
under Contract DE-AC06-76RLO 1830

Pacific Northwest Laboratory  
Richland, Washington 99352

\* Battelle Columbus Laboratory  
Columbus, Ohio

 DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

**MASTER**




## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

## ABSTRACT

This report describes the results of accelerated aging experiments (weathering) conducted on prototype tamper tapes bonded to a variety of surface materials. The prototype tamper tapes were based on the patented Confirm<sup>®</sup> tamper-indicating technology developed and produced by 3M Company. Tamper tapes bonded to surfaces using pressure sensitive adhesive (PSA) and four rapid-set adhesives were evaluated. The configurations of the PSA-bonded tamper tapes were 1.27-cm-wide Confirm<sup>®</sup> 1700 windows with vinyl underlay and 2.54-cm-wide Confirm<sup>®</sup> 1700 windows with vinyl and polyester underlays. The configurations of the rapid-set adhesive-bonded tamper tapes were 2.54-cm-wide Confirm<sup>®</sup> (1700, 1500 with and without primer, and 1300) windows with vinyl underlay. Surfaces used for bonding included aluminum, steel, stainless steel, Kevlar<sup>®</sup>, brass, copper, fiberglass/resin with and without gel coat, polyurethane-painted steel, acrylonitrile:butadiene:styrene plastic, polyester fiberglass board, Lexan polycarbonate, and cedar wood. Weathering conditions included a QUV cabinet (ultraviolet light at 60°C, condensing humidity at 40°C), a thermal cycling cabinet (-18°C to 46°C), a Weather-O-Meter (Xenon lamp), and exposure outdoors in Daytona Beach, Florida. Environmental aging exposures lasted from 7 weeks to 5 months. After exposure, the tamper tapes were visually examined and tested for transfer resistance. Tamper tapes were also exposed to a variety of chemical liquids (including organic solvents, acids, bases, and oxidizing liquids) to determine chemical resistance and to sand to determine abrasion resistance.



## EXECUTIVE SUMMARY

A tamper tape is an adhesive-backed label that possesses various tamper-indicating, transfer-resistant, or counterfeit-resistant properties. Ongoing research has been conducted to develop tamper tapes that combine the best features of commercially-available tamper tapes with state-of-the-art design, unique identification, and counterfeit-resistant features. As part of this development, numerous prototype tamper tapes adhered to different surfaces were evaluated under various environmental aging conditions. The exposed tamper tapes were visually inspected and evaluated for transfer resistance to determine the effects of the weathering conditions.

The prototype tamper tapes are based on the patented Confirm<sup>®</sup> tamper-indicating technology developed and produced by 3M Company (Safety and Security Systems Division, 3M Center, St. Paul, Minnesota). Several interim prototype designs have been produced as more advanced features are developed. The complete tamper tape consists of a top layer of Confirm<sup>®</sup> bonded to an underlay material (vinyl or polyester) that provides support around three sides of the tamper tape to allow the fragile Confirm<sup>®</sup> to be efficiently applied to a surface. The area where the underlay is not present is known as the Confirm<sup>®</sup> window. The Confirm<sup>®</sup> is made of glass beads embedded in a brittle bonding material. If transfer is attempted, the logo pattern reflected from beneath the glass beads is distorted as the beads are disrupted from the bonding layer.

Weathering studies were performed using prototype tamper tapes applied to surfaces using both pressure sensitive adhesives (PSA) and reactive, rapid-set adhesives. Size configurations were approximately 5.1 cm by 10.2 cm with 1.27-cm- and 2.54-cm-wide Confirm<sup>®</sup> windows. Surfaces for bonding included aluminum, steel, stainless steel, Kevlar<sup>®</sup>, brass, copper, fiberglass/resin with and without gel coat, acrylonitrile:butadiene:styrene (ABS) plastic, polyurethane-painted steel, polyester fiberglass board, Lexan polycarbonate, and cedar wood. Weathering conditions included a QUV cabinet (ultraviolet light at 60°C for 4 hours, condensing humidity at 40°C for 4 hours), a thermal cycling cabinet (12 hours at -18°C, followed by a 3-hour warming to 46°C, 6 hours at 46°C, and, finally, a 3-hour cooling to -18°C), a Weather-O-Meter (Xenon lamp, continuous light, no water spray), and outdoor exposure at Daytona Beach, Florida (vertical south orientation). Environmental aging exposures lasted from 7 weeks to 5 months. After exposure, the tamper tapes were visually examined and tested for transfer resistance.

In initial studies, tamper tapes with PSA, 1.27-cm-wide Confirm<sup>®</sup> 1700 windows, and a vinyl underlay were subjected to weathering in the QUV chamber, at Florida, and in the thermal cycling cabinet. Surfaces to which the tamper tapes were bonded included aluminum, steel, stainless steel, Kevlar<sup>®</sup>, brass, copper, fiberglass/resin/gel coat, fiberglass/resin, and ABS plastic.



QUV results were as follows: slight yellowing of the tamper tapes was noted after the first day or two of exposure; the steel panels rusted, resulting in staining of the tamper tapes; adhesion to the rough fiberglass/resin surface was poor; the security feature appeared to "dim" over time; and cracks appeared in the window areas near the conclusion of the test. Thermal cycling had no visual effects on the tamper tapes. After 7 weeks of exposure in Florida, the tamper tapes showed slight yellowing and some showed cracks in the upper corner. After 20 weeks, mildew was growing on some of the tamper tapes, and some tapes were beginning to "flake" in small areas and appeared to be losing adhesion to the surface.

Tamper tapes were evaluated for transfer resistance with and without exposure to weathering. Methods of tape removal included exposure to temperature extremes, sharp instruments, and chemicals/liquids. The results indicated that with care and patience, the tamper tapes (PSA, 1.27-cm-wide Confirm<sup>®</sup> window) could be removed using a razor blade and were, therefore, not secure against this threat.

The chemical compatibility of the Confirm<sup>®</sup> tamper tapes was investigated by applying tapes to aluminum plates and then soaking them in various chemical liquids. The tamper tapes were visually evaluated immediately after exposure and again after 24 hours. Organic solvents used were ethanol (no change), methylene chloride (adhesive softened), chloroform (adhesive softened), carbon tetrachloride (no change), hexane (discoloration after 24 hours), and dimethyl sulfoxide (printing discolored, adhesive softened). Acids included concentrated nitric acid (discoloration, ink destroyed, easily peeled from surface) and sulfuric acid (discoloration, ink degradation, easily scratched). Bases included two molar strengths of sodium hydroxide (0.1 M, easily scratched, and 6 M, easily scratched and ink/printing destroyed). In addition, an oxidizing agent, hypochlorite (bleach, no change), was used.

In later studies, weathering studies were performed on tamper tapes with PSA, 2.54-cm-wide Confirm<sup>®</sup> 1700 windows, and both polyester and vinyl underlay. The tamper tapes with polyester underlay (12/93) were bonded to four surfaces, i.e., aluminum, steel, polyester fiberglass board, and a Military Specification (Mil. Spec.) polyurethane-painted steel. They were exposed to weathering conditions at Florida, in the Weather-O-Meter, in the QUV chamber, and in the thermal cycling cabinet. The tamper tapes with vinyl underlay were bonded to six surfaces, i.e., wood and Lexan polycarbonate in addition to those listed above, and were exposed to the same weathering conditions (with the exception of the Weather-O-Meter).

The evaluation/examination of tamper tapes after weathering was done by two or three persons who provided a descriptive commentary on the tamper tapes' appearance (with and without the 3M security illuminator) and evaluated the adhesion of the tamper tapes to the surfaces.

After 138 days under the Weather-O-Meter conditions, the general appearance of the tamper tapes was fair to good, the security emblem appeared to be strong, and there was less than 2% debonding. After 5 months under the Florida exposure conditions, the general appearance of the tamper tapes was good to very good (except on steel where it was fair to good), the security emblem appeared to be strong in the window area, and there was less than 2% debonding. Under the QUV cabinet exposure conditions for 100 days, the general appearance of the tamper tapes was fair or fair to good, the security emblem was not visible (the area turned black), and greater than 25% debonding occurred on steel and aluminum. Few to no effects occurred from thermal cycling exposure for 126 days.

The transfer resistance of the 12/93 prototype tamper tapes on four surfaces (roughened aluminum, roughened steel, fiberglass board, and polyurethane-painted steel) was evaluated after 14 days of exposure to QUV, thermal cycling, and control (23°C, 50% relative humidity) conditions. All of the tapes could be removed from the test surfaces, although adhesive transfer occurred and residue remained on the roughened steel and polyurethane-painted steel surfaces.

The abrasion resistance of the 12/93 tamper tapes using sand was also evaluated. The evaluation indicated that the ink faded more and more in the bar code area after two passes of 2 kg each of sand. The ink was sufficiently removed after six passes of sand to prevent the bar code from being read with a reader. After three passes of sand, one-half of the security emblem was gone as determined with the security light. The entire emblem was destroyed after five passes of sand.

As development of the tamper tapes progressed, it was determined that increased security performance could be achieved by eliminating the PSA on the tamper tapes and substituting a more suitable reactive, rapid-set adhesive for surface bonding. Four candidate rapid-set adhesives (two epoxies, one polyurethane, and one commercial acrylic) were chosen for weathering evaluation. Two weathering studies using tamper tapes bonded to surfaces using the rapid-set adhesives were performed.

In the first study using rapid-set adhesives, tamper tapes with 2.54-cm-wide Confirm<sup>®</sup> windows were made in the laboratory out of Confirm<sup>®</sup> 1700 and vinyl underlay materials bonded together using a PSA supplied by 3M. Each of the four candidate rapid-set adhesives were used to bond these tamper tapes to six surfaces; i.e., roughened steel, roughened aluminum, cedar wood, polyester fiberglass board, Lexan polycarbonate, and Mil. Spec. polyurethane-painted steel. The tamper tapes were cured for several days and then were tested in the QUV cabinet, the thermal cycling cabinet, in a constant temperature room (23°C, 50% relative humidity), and at Florida.

The tamper tapes were then visually examined to assess their appearance, the appearance of the security feature with the 3M security illuminator, and the adhesion of the tamper tapes to the surfaces. After 2 months of Florida exposure, neither of the epoxy adhesive-bonded tamper tapes showed loss of adhesion or changes to the appearance of their security features. The security features in the window area of the tamper tapes bonded with the polyurethane or the acrylic adhesive had faded substantially or completely degraded, with no loss of adhesion. The results of the 56 days of QUV exposure indicated that all of the rapid-set adhesives had very good to excellent adhesion on all surfaces (except for the epoxy 1 adhesive on Lexan polycarbonate); the acrylic adhesive attacked the Confirm<sup>®</sup> material, causing the security features to be faded and barely visible and the window area to be black or grayish-black at the beginning of the exposure; the security features of the tamper tapes bonded with the polyurethane adhesive were very faded after 4 to 7 weeks of exposure; the security features of the tamper tapes bonded with the epoxy 1 adhesive became badly faded after 2 to 8 weeks of exposure, depending on the surface; and the epoxy 2 adhesive-bonded tamper tapes had the best overall performance on all surfaces. The results of thermal cycling exposure for 56 days showed little or no effects to the security features of the tamper tapes (the acrylic-bonded tamper tapes did show slight to moderate fading of their security feature). The tapes displayed excellent adhesion, and their appearance with the acrylic and epoxy adhesive 1 changed only slightly. The tamper tapes held under control exposure conditions showed no change in appearance, adhesion, or security features during the 7 weeks of storage.

In the second study using rapid-set adhesives, tamper tapes with 2.54-cm-wide Confirm<sup>®</sup> windows were made in the laboratory to determine if another 3M Confirm<sup>®</sup> material might perform better than the 1700 series previously used in all other weathering studies. Three Confirm<sup>®</sup> materials, i.e., Confirm<sup>®</sup> 1500 with primer, Confirm 1500<sup>®</sup> without primer, and Confirm 1300<sup>®</sup>, were used. The tamper tapes were prepared as described for the first study using the same four candidate rapid-set adhesives. They were bonded to four surfaces, i.e., roughened aluminum, roughened steel, wood, and Mil. Spec. polyurethane-painted steel. They were tested at Florida, in the QUV cabinet, and in the thermal cycling cabinet.

After exposure, the tamper tapes were examined as they were for the first study using reactive adhesives. The results from 2 months exposure at Florida indicated there was little to no change in adhesion, however, significant changes occurred in the security feature of the tamper tapes (the tamper tapes made of the Confirm<sup>®</sup> 1500 materials turned black). The epoxy 2 adhesive produced the least amount of change in the visibility of the security features. The results from 42 days of exposure in the QUV cabinet indicated that, in general, the candidate adhesives performed better on tamper tapes prepared with the Confirm<sup>®</sup> 1300 material than they did on the other

Confirm® materials. The acrylic adhesive did not attack the 1300 material. The most loss in visibility of the security features was with the acrylic adhesive bonded to fiberglass board; otherwise, there was only slight or no change. Adhesion, in general, was very good. The epoxy 2 adhesive essentially displayed no change. The results of thermal cycling indicated that changes in temperature did not appear to affect the security feature or the adhesion of the tamper tapes nearly as much as did the conditions in the QUV cabinet. The tamper tapes, in general, held up very well in this exposure.

The overall results of the rapid-set adhesive weathering studies indicated that the epoxy 2 adhesive weathered better than the other adhesives on tamper tapes prepared with any of the Confirm® materials.



## CONTENTS

ABSTRACT . . . . .	iii
EXECUTIVE SUMMARY . . . . .	v
1.0 INTRODUCTION . . . . .	1
2.0 BACKGROUND AND TEST PROCEDURE . . . . .	3
3.0 TAMPER TAPES WITH PRESSURE SENSITIVE ADHESIVE . . . . .	7
3.1 1.27-CM-WIDE CONFIRM® WINDOW PROTOTYPE TAMPER TAPES . . . . .	7
3.1.1 Weathering . . . . .	7
3.1.2 Performance Evaluation . . . . .	8
3.1.3 Chemical Compatibility . . . . .	14
3.2 2.54-CM-WIDE CONFIRM® WINDOW PROTOTYPE TAMPER TAPES . . . . .	16
3.2.1 Weathering . . . . .	17
3.2.2 Transfer Resistance . . . . .	27
3.2.3 Abrasion Resistance . . . . .	28
4.0 TAMPER TAPES WITH RAPID-SET ADHESIVES . . . . .	31
4.1 WEATHERING OF CONFIRM® 1700 TAMPER TAPES . . . . .	31
4.1.1 Florida Exposure Results . . . . .	32
4.1.2 QUV Cabinet Exposure Results . . . . .	32
4.1.3 Thermal Cycling Exposure Results . . . . .	40
4.1.4 Control Exposure Results . . . . .	45
4.2 WEATHERING OF TAMPER TAPES MADE WITH THREE DIFFERENT CONFIRM® PRODUCTS . . . . .	45
4.2.1 Florida Exposure Results . . . . .	45
4.2.2 QUV Cabinet Exposure Results . . . . .	55
4.2.3 Thermal Cycling Exposure Results . . . . .	65
4.3 SUMMARY . . . . .	65

## LIST OF FIGURES

2.1	Schematic Diagram of Basic Tamper Tape Design. . . . .	3
3.1	Sand Abrasion Apparatus . . . . .	29
3.2	Photograph of Daytona Beach, Florida Exposure Site . . . . .	33

## LIST OF TABLES

3.1	Results of Weathering in QUV Cabinet for 1.27-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive Bonded to Various Surfaces . . . . .	9
3.2	Results of Weathering in QUV Cabinet for 1.27-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive Bonded to Various Surfaces, 8/23/91 . . . . .	10
3.3	Results of Weathering in Thermal Cycling Cabinet for 1.27-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive Bonded to Various Surfaces, 8/23/91 . . . . .	11
3.4	Results of Attempts to Remove the 1.27-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive from Various Surfaces . . . . .	12
3.5	Results of Attempts to Remove the 1.27-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive from Various Surfaces After QUV Weathering for at Least Seven Weeks . . . . .	15
3.6	Results of Attempts to Remove the 1.27-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive from Various Surfaces After Hot and Cold Thermal Cycling for at Least Seven Weeks . . . . .	15
3.7	Effects of Chemical Exposure to Confirm <sup>®</sup> Tamper Tape Material . . . . .	16
3.8	Numerical Ranking Code for Assessing Tamper Tapes . . . . .	17
3.9	Results of Weather-O-Meter Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay . . . . .	18
3.10	Results of Daytona Beach, Florida Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay . . . . .	20
3.11	Results of QUV Cabinet Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay. . . . .	21
3.12	Results of Thermal Cycling Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay. . . . .	23

TABLES (Continued)

3.13	Results of Daytona Beach, Florida Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Vinyl Underlay . . . . .	24
3.14	Results of QUV Cabinet Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Vinyl Underlay . . . . .	24
3.15	Results of Thermal Cycling Exposure for 2.54-Centimeter-Wide Confirm <sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Vinyl Underlay . . . . .	26
3.16	Summary of Transfer Resistance of 12/93 Prototype Tamper Tapes . . . . .	28
3.17	Abrasion Resistance of 12/93 Prototype Tamper Tape with Sand . . . . .	30
4.1	Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in Daytona Beach, Florida at 90° South . . . . .	34
4.2	Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet . . . . .	36
4.3	Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in Thermal Cycling Cabinet . . . . .	41
4.4	Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives Held Under Control Conditions . . . . .	46
4.5	Evaluation of Tamper Tapes Prepared from Different Confirm <sup>®</sup> Materials, Applied with Candidate Rapid-Set Adhesives, and Exposed in Daytona Beach, Florida . . . . .	49
4.6	Evaluation of Confirm <sup>®</sup> 1500 Without Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet . . . . .	56
4.7	Evaluation of Confirm <sup>®</sup> 1500 With Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet . . . . .	59
4.8	Evaluation of Confirm <sup>®</sup> 1300 Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet . . . . .	62
4.9	Evaluation of Confirm <sup>®</sup> 1500 Without Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in the Thermal Cycling Cabinet . . . . .	66
4.10	Evaluation of Confirm <sup>®</sup> 1500 With Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in the Thermal Cycling Cabinet . . . . .	69
4.11	Evaluation of Confirm <sup>®</sup> 1300 Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in the Thermal Cycling Cabinet . . . . .	72



## 1.0 INTRODUCTION

A tamper tape is an adhesive-backed label that possesses various tamper-indicating, transfer-resistant, or counterfeit-resistant properties. Tamper tapes are appealing for many applications because they are easy to use and are relatively robust. Readily and reliably applied to surfaces like an adhesive bandage, the tamper tape is practical and desirable for many scenarios. Applications include seals for temporary area denial, protection of sensitive equipment, chain-of-custody audit trails, and inventory control practices.

For the past few years, the Pacific Northwest Laboratory (PNL)<sup>a</sup> has investigated the development of tamper tapes for many applications. The objective of this ongoing work is to combine the best features of commercially-available tamper tapes with state-of-the-art design, unique identification, and counterfeit-resistant features. The PNL tamper tape is based on the patented Confirm<sup>®</sup> tamper-indicating technology developed and produced by 3M Company (Safety and Security Systems Division, 3M Center, St. Paul, Minnesota). Several interim prototype designs have been produced as more advanced features are developed. As part of this development, numerous prototype tamper tapes adhered to different surfaces have been evaluated under a various environmental aging conditions. The exposed tamper tapes were visually inspected and evaluated for transfer resistance to determine the effects of the weathering conditions. This report provides the results of these inspections and evaluations.

---

<sup>a</sup> Pacific Northwest Laboratory is operated by Battelle Memorial Institute for the U.S. Department of Energy under Contract DE-AC06-76RLO 1830.



## 2.0 BACKGROUND AND TEST PROCEDURES

The basic layout and design of the tamper-indicating material of a Confirm<sup>®</sup> tamper tape is shown in Figure 2.1. The complete tamper tape consists of a top layer of Confirm<sup>®</sup> bonded to an underlay material (vinyl or polyester). The Confirm<sup>®</sup> top layer is made of glass beads embedded in a brittle bonding material. If transfer is attempted, the logo pattern reflected from beneath the

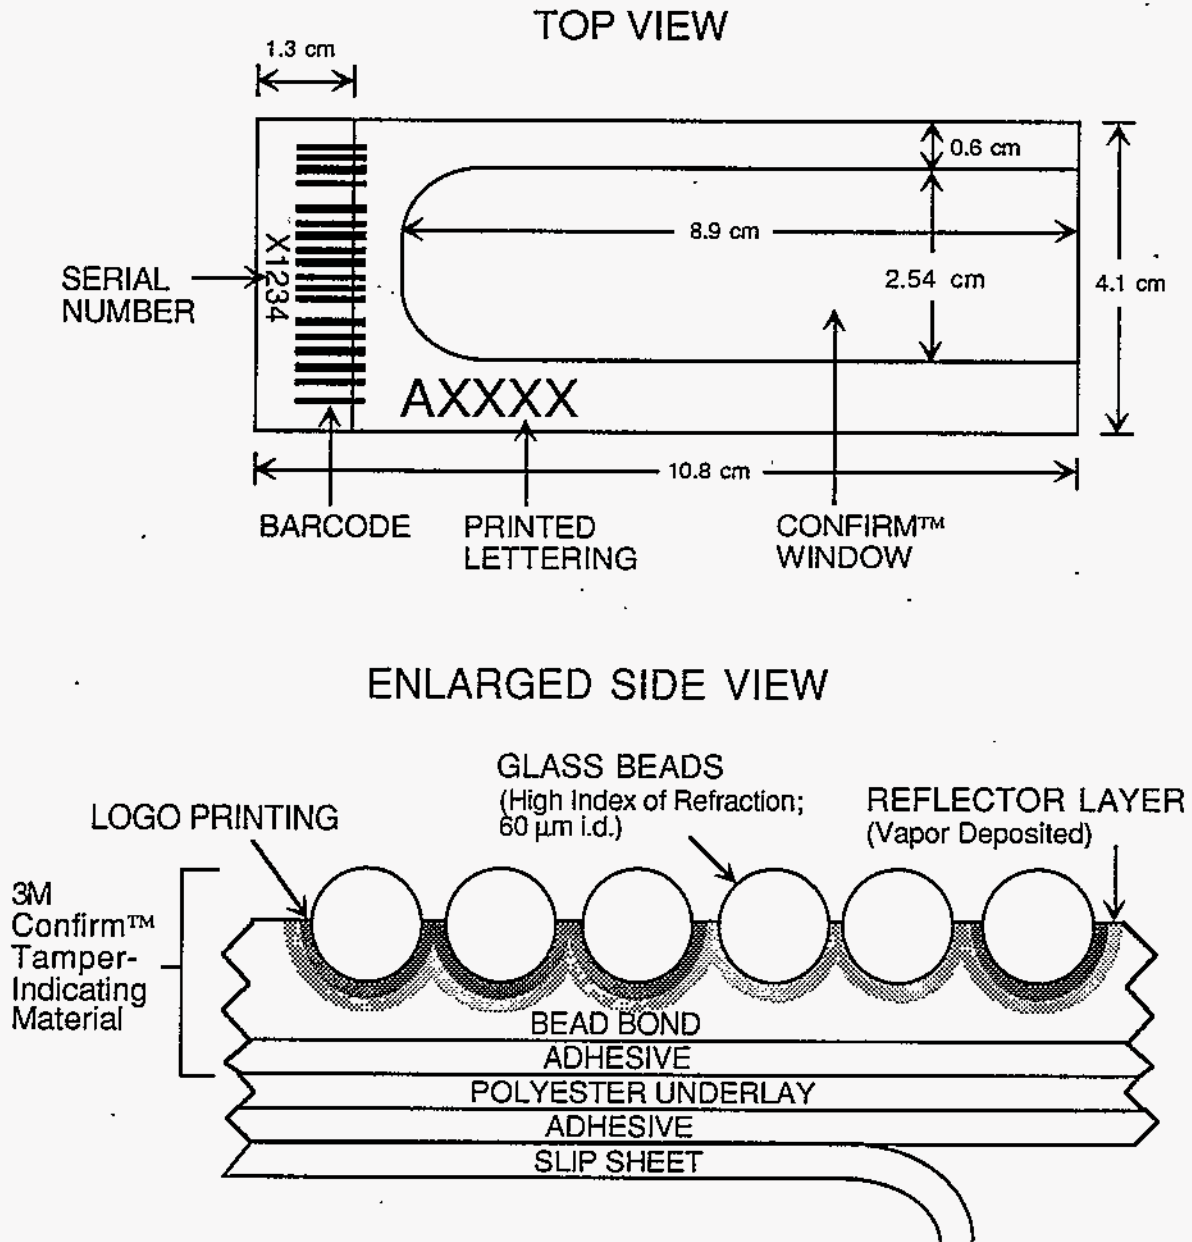


Figure 2.1 Schematic Diagram of Basic Tamper Tape Design

glass beads is distorted as the beads are disrupted from the bonding layer. The integrity of the logo pattern is easily verified by visual observation when the tamper tape is illuminated with a light source (e.g., a flashlight) held perpendicular to the tape surface. Alterations to the tamper-indicating material can be detected by examining the integrity of the logo printing.

The vinyl or polyester underlay material provides support around three sides of the tamper tape to allow the fragile Confirm<sup>®</sup> to be efficiently applied to a surface. The area where the polyester underlay is not present is known as the Confirm<sup>®</sup> window. The Confirm<sup>®</sup> window shown in Figure 2.1 is 2.54 cm wide with a narrow support frame. This is the current configuration that was chosen after several iterations of size and shape were evaluated for ease-of-use and acceptable transfer resistance. Weathering studies were performed on prototype tamper tapes of this or a similar configuration (5.1 cm by 10.2 cm), as well as a previous configuration (5.1 cm by 10.2 cm) with a narrower Confirm<sup>®</sup> window (1.27 cm) and a wider support frame. Larger window regions render the tamper tape more transfer resistant, but also more difficult to apply.

In the configuration shown in Figure 2.1, the tamper tape is applied to a surface by removing the slip sheet and bonding with a pressure-sensitive adhesive (PSA). The PSA provides user-friendly application and generally bonds well to a wide variety of surface materials. Weathering studies were performed on tamper tapes of different configurations that used PSA for surface bonding. In initial studies, tamper tapes with PSA, 1.27-cm-wide Confirm<sup>®</sup> windows (Confirm<sup>®</sup> 1700), and a vinyl underlay were subjected to weathering in a QUV chamber, an outdoor exposure in a vertical south orientation in Daytona Beach, Florida, and cycling between hot and cold conditions (thermal cycling). The QUV chamber was set for cycling between 4 hours of simulated sunlight at 60°C and 4 hours of condensing humidity/moisture at 40°C. The thermal cycling conditions were 12 hours at -18°C, followed by a 3-hour warming to 46°C, 6 hours at 46°C, and, finally, a 3-hour cooling to -18°C. Surfaces to which the tamper tapes were bonded included aluminum, steel, stainless steel, Kevlar<sup>®</sup>, brass, copper, fiberglass/resin/gel coat, fiberglass/resin, and acrylonitrile:butadiene:styrene (ABS) plastic.

After weathering, the tamper tapes were visually inspected to determine the effects of the various environmental aging conditions. They were inspected at different time intervals for at least 7 weeks (up to 20 weeks) of exposure. The QUV- and thermal cycling-exposed tamper tapes were also subjected to a transfer resistance/performance evaluation to determine if they could be removed from the surfaces without disrupting the security feature. Methods used to determine transfer resistance included temperature extremes, sharp instruments, and chemicals/liquids. Tamper tapes of the same configuration (PSA, 1.27 cm-wide Confirm<sup>®</sup> window, and vinyl underlay) bonded to

a variety of surfaces but not exposed to any weathering conditions were also subjected to the same transfer resistance/performance evaluation.

The chemical compatibility of the Confirm<sup>®</sup> tamper tapes was investigated by applying the tapes to aluminum plates and then soaking them in various chemical liquids. Organic solvents used were ethanol, methylene chloride, chloroform, carbon tetrachloride, hexane, and dimethyl sulfoxide. Acids included concentrated nitric and sulfuric. Bases included two molar strengths of sodium hydroxide (0.1 M and 6 M). In addition, an oxidizing agent, hypochlorite (bleach), was used. The tamper tapes were visually evaluated immediately after exposure and again after 24 hours.

In later studies, after it was determined that a larger Confirm<sup>®</sup> window was necessary for adequate transfer resistance, weathering studies were performed on tamper tapes with PSA, 2.54-cm-wide Confirm<sup>®</sup> windows (Confirm<sup>®</sup> 1700), and both polyester and vinyl underlay. The tamper tapes with polyester underlay (12/93) were bonded to four surfaces, i.e., aluminum, steel, polyester fiberglass board, and a Military Specification (Mil. Spec.) polyurethane-painted steel. They were exposed to weathering conditions in Daytona Beach, Florida, a Weather-O-Meter (continuous light but no water spray), the QUV chamber, and the thermal cycling cabinet. The tamper tapes with vinyl underlay were bonded to six surfaces, i.e., wood and Lexan polycarbonate in addition to those listed above, and were exposed to the same weathering conditions (with the exception of the Weather-O-Meter). These tamper tapes were also visually inspected to determine the effects of the various environmental aging conditions at different time intervals for at least 56 days to up to 5 months of exposure. The evaluation/examination of tamper tapes was done by two or three persons who provided a descriptive commentary on the tamper tapes' appearance (with and without the 3M security illuminator) and an evaluation of the adhesion of the tamper tapes' to the surfaces. The transfer resistance of the 12/93 prototype tamper tapes on four surfaces (aluminum, steel, fiberglass board, and polyurethane-painted steel) was evaluated after 14 days of exposure to QUV, thermal cycling, and control (23°C, 50% relative humidity) conditions. The abrasion resistance of the 12/93 tamper tapes using sand was also evaluated.

As further tamper tape development progressed, it was determined that increased security performance could be achieved by eliminating the PSA on the tamper tapes and substituting a more suitable reactive, rapid-set adhesive for surface bonding. Extensive adhesive formulation work was performed to obtain a rapid-set adhesive that had the best balance of (1) fast cure time, (2) good adhesion to a wide range of test surfaces, and (3) resistance to mechanical, heat, and solvent attack that may be used by an adversary to remove the tamper tape without damaging it. Formulation work was carried out using commercially available resin and hardening components

that included three types of reactive adhesives: polyurethanes, epoxies, and acrylics. The rapid-set adhesives were evaluated by bonding tamper tapes to a wide variety of surfaces. Commercially-available, two-component adhesives were also evaluated. As a result of these evaluations, four candidate rapid-set adhesives (two epoxies, one polyurethane, and one commercial acrylic) were chosen for weathering evaluation. Two weathering studies using tamper tapes bonded to surfaces using the four candidate rapid-set adhesives were performed.

In the first study using rapid-set adhesives, tamper tapes with 2.54-cm-wide Confirm<sup>®</sup> windows were made in the laboratory out of Confirm<sup>®</sup> 1700 and vinyl underlay materials bonded together using a PSA supplied by 3M. Each of the four candidate rapid-set adhesives were used to bond these tamper tapes to six surfaces, i.e., roughened steel, roughened aluminum, cedar wood, polyester fiberglass board, Lexan polycarbonate, and Mil. Spec. polyurethane-painted steel. The tamper tapes were cured for several days and then were tested in the QUV cabinet, the thermal cycling cabinet, in a constant temperature room (23°C, 50% relative humidity), and in Florida. The tamper tapes were then visually examined to assess their appearance, the appearance of the security feature with the 3M security illuminator, and the adhesion of the tamper tapes to the surfaces.

In the second study using rapid-set adhesives, tamper tapes with 2.54-cm-wide Confirm<sup>®</sup> windows were made in the laboratory to determine if another 3M Confirm<sup>®</sup> material might perform better than the 1700 series previously used in all other weathering studies. Three Confirm<sup>®</sup> materials, i.e., Confirm<sup>®</sup> 1500 with primer, Confirm 1500<sup>®</sup> without primer, and Confirm 1300<sup>®</sup>, were used. The primary differences between these 3M products were in the bead-bond layers used. The 1700 products contained an "alkyd" layer, the 1500 products contained a polyurethane layer, and the 1300 product contained a "latex" layer. The tamper tapes were prepared as described for the first study using the same four candidate rapid-set adhesives. They were bonded to four surfaces, i.e., roughened aluminum, roughened steel, wood, and Mil. Spec. polyurethane-painted steel. They were tested in Florida, in the QUV cabinet, and in the thermal cycling cabinet. After exposure, the tamper tapes were examined just as they were in the first study using reactive adhesives.

Results of all of the weathering studies using tamper tapes with PSA (1.27- and 2.54-cm-wide Confirm<sup>®</sup> windows, vinyl and polyester underlay) and tamper tapes with rapid-set adhesives (2.54-cm-wide Confirm<sup>®</sup> window, vinyl underlay) for surface bonding are given in the following sections.

### 3.0 TAMPER TAPES WITH PRESSURE SENSITIVE ADHESIVE

During the course of the project, various prototype designs of Confirm<sup>®</sup> tamper tapes using PSA were evaluated. In initial studies, the Confirm<sup>®</sup> window was 1.27 cm wide, whereas in later studies, the Confirm<sup>®</sup> window was increased to 2.54 cm for added security reasons (i.e., the 1.27-cm-wide windows proved to have inadequate transfer-resistance characteristics). For most of the studies, a vinyl underlay material was used. However, for one prototype using PSA (12/93), a polyester underlay material was used. Various prototype tamper tapes bonded to many different surfaces were subjected to a variety of environmental aging conditions after which they were visually examined and tested for transfer resistance.

#### 3.1 1.27-CM-WIDE CONFIRM<sup>®</sup> WINDOW PROTOTYPE TAMPER TAPES

Two weathering studies of tamper tapes (5.1 cm by 10.2 cm) with 1.27-cm-wide Confirm<sup>®</sup> 1700 windows that used PSA for surface bonding were performed. After weathering, the tamper tapes were visually inspected to determine the effects of the environmental aging conditions. In addition, their tamper-resistance performance was evaluated.

##### 3.1.1 Weathering

In the first sample set (7/23/91), two different tamper tapes, one with rounded corners and one with square corners (corresponding to different PSA), were each attached to the surfaces of panels made of aluminum, steel, and Kevlar<sup>®</sup>. Several of the panels with attached tamper tapes were placed in a QUV chamber, which was set for cycling between 4 hours of simulated sunlight at 60°C and 4 hours of condensing humidity/moisture at 40°C. Exposure lasted for 11 weeks. One of the aluminum panels was sent to the Battelle-Columbus, Daytona Beach, Florida laboratory for outdoor exposure in a vertical south orientation for 20 weeks.

In the second sample set (8/23/91), similar tamper tapes identified with (1) a larger letter "A" and (2) numbers only were attached to the surfaces of panels made from painted aluminum, painted steel, stainless steel, brass, copper, fiberglass/resin/gel coat (smooth front surface), fiberglass/resin (rough back surface), and ABS plastic. Part of these panels with attached tamper tapes were then exposed to the QUV conditions. The other part of the panels (exclusive of the painted aluminum and steel surfaces) were cycled between hot and cold conditions in a thermal cycling cabinet. The thermal cycling exposures involved 12 hours at -18°C, followed by a 3-hour warming to 46°C, 6 hours at 46°C, and finally a 3-hour cooling to -18°C. Exposures lasted for 7 weeks.

Data showing the results of visual inspection of the first sample set exposures in the QUV chamber are given in Table 3.1. Data showing the results of visual inspection of the second sample set exposures in the QUV chamber are given in Table 3.2. Data showing the results of visual inspection of the second sample set exposures in the thermal cycling cabinet are given in Table 3.3. The data are summarized as follows:

- Slight yellowing of the tamper tapes was noted after the first day or two of exposure in the QUV cabinet. The amount of yellowing did not increase in the subsequent exposure time period.
- Under the QUV conditions, the steel panels rusted, as might be expected, and stained the tamper tapes.
- Adhesion to the rough fiberglass/resin surface without the gel coat (back) appeared to be poor under QUV conditions.
- On the tamper tapes exposed in the QUV cabinet, the security feature (3M's Confirm<sup>®</sup>) appeared to "dim" over time and cracks appeared in the window areas near the conclusion of the tests.
- Hot/cold cycling had no effects that could be visually observed on the tamper tapes.
- The tamper tapes exposed in Florida showed slight yellowing, similar to the QUV-exposed tamper tapes, and the square-cornered tamper tapes showed cracking in the upper corner after about 7 weeks.

An examination of the panel exposed to salt air at the Daytona, Florida laboratory after 20 weeks found that (1) the tamper tapes with the rounded corners remained as previously reported but mildew was growing on them, and (2) the tamper tapes with the square corners were beginning to "flake" in small areas and appeared to be losing adhesion to the surface.

### 3.1.2 Performance Evaluation

A variety of methods were investigated to determine if the prototype tamper tapes (1.27-cm-wide Confirm<sup>®</sup> window, bonded with PSA) could be removed from various surfaces without disrupting the security feature. These methods included the use of temperature extremes, sharp instruments, and chemicals/liquids. The transfer resistance of the tamper tapes with and without exposure to weathering conditions was evaluated.

#### Transfer Evaluations of Tamper Tapes Without Weathering

In the evaluation of the tamper resistance of the tamper tapes without weathering, no attempts were made to evaluate the influence of set time. Tamper resistance was attempted by numerous



**Table 3.1. Results of Weathering in QUV Cabinet for 1.27-Centimeter-Wide Confirm<sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive Bonded to Various Surfaces, 7/23/91**

Surface (Ident. No. <sup>b</sup> )	Exposure Time <sup>a</sup>													
	1 Day	6 Days	8 Days	10 Days	13 Days	3 Wks	4 Wks	5 Wks	6 Wks	7 Wks	8 Wks	9 Wks	10 Wks	11 Wks
Aluminum (A41)	SY	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
Aluminum (A42)	NC	SY	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
Kevlar <sup>®</sup> (K41)	SY	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
Kevlar <sup>®</sup> (K42)	NC	SY	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
Steel (S51)	SY,R	NC,R	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
Steel (S52)	NC,R	SY,R	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC

<sup>a</sup> S = slight; Y = yellowing; NC = no change from previous evaluation; R = rusting

<sup>b</sup> 41 and 51 indicate tamper tapes with rounded corners; 42 and 52 indicate tamper tapes with square corners

**Table 3.2. Results of Weathering in QUV Cabinet for 1.27-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive Bonded to Various Surfaces, 8/23/91**

Surface (Ident. No. <sup>b</sup> )	Exposure Time <sup>a</sup>						
	12 Days	17 Days	23 Days	30 Days	5 Weeks	6 Weeks	7 Weeks
Painted Aluminum (A31)	SY	NC	NC	NC	NC	NC	NC
Painted Aluminum (A32)	SY	NC	NC	NC	NC	NC	NC
Painted Steel (S11)	SY	NC	NC	NC	NC	NC	NC
Painted Steel (S12)	SY	NC	NC	NC	NC	NC	NC
Stainless Steel (SS1AQ)	SY	NC	NC	NC	NC	NC	NC
Stainless Steel (SS1BQ)	SY	NC	NC	NC	NC	NC	NC
Brass (B1AQ)	SY	NC	NC	NC	NC	NC	NC
Brass (B1BQ)	SY	NC	NC	NC	NC	NC	NC
Copper (C1AQ)	SY	NC	NC	NC	NC	NC	NC
Copper (C1BQ)	SY	NC	NC	NC	NC	NC	NC
Fiberglass/resin, back (P1AQB)	SY	NC	PA	NC	NC	NC	NC
Fiberglass/resin, back (P1BQB)	SY	NC	PA	NC	SPL	NC	NC
Fiberglass/resin, front (P2AQF)	SY	NC	NC	NC	NC	NC	NC
Fiberglass/resin, front (P2BQF)	SY	NC	NC	NC	NC	NC	NC
ABS Plastic (ABS1AQ)	SY	NC	NC	NC	NC	NC	NC
ABS Plastic (ABS1BQ)	SY	NC	NC	NC	NC	NC	NC

<sup>a</sup> PA = poor adhesion; SPL = window was split lengthwise above bar code; SY = slight yellowing; NC = no change from previous evaluation

<sup>b</sup> Identified as follows: A = aluminum; S = steel; SS = stainless steel; B = brass; C = copper; P = fiberglass/resin; ABS = acrylonitrile:butadiene:styrene plastic; 1A = tamper tapes with a large "A"; 1B = tamper tapes with numbers only; Q = panels from QUV evaluations; B = back of panel; F = front of panel; 31 = tamper tapes with rounded corners; 32 and 12 = tamper tapes with square corners; and 11 = tamper tapes with large "A"

**Table 3.3. Results of Weathering in Thermal Cycling Cabinet for 1.27-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive Bonded to Various Surfaces, 8/23/91**

Surface (Ident. No. <sup>b</sup> )	Exposure Time <sup>a</sup>						
	12 Days	17 Days	23 Days	30 Days	5 Weeks	6 Weeks	7 Weeks
Stainless Steel (SS2AC)	NC	NC	NC	NC	NC	NC	NC
Stainless Steel (SS2BC)	NC	NC	NC	NC	NC	NC	NC
Brass (B2AC)	NC	NC	NC	NC	NC	NC	NC
Brass (B2BC)	NC	NC	NC	NC	NC	NC	NC
Copper (C2AC)	NC	NC	NC	NC	NC	NC	NC
Copper (C2BC)	NC	NC	NC	NC	NC	NC	NC
Fiberglass/resin, back (P1ACB)	NC	NC	NC	NC	NC	NC	NC
Fiberglass/resin, back (P1BCB)	NC	NC	NC	NC	NC	NC	NC
Fiberglass/resin, front (P2ACF)	NC	NC	NC	NC	NC	NC	NC
Fiberglass/resin, front (P2BCF)	NC	NC	NC	NC	NC	NC	NC
ABS Plastic (ABS2AC)	NC	NC	NC	NC	NC	NC	NC
ABS Plastic (ABS2BC)	NC	NC	NC	NC	NC	NC	NC

<sup>a</sup> NC = no change

<sup>b</sup> Identified as follows: SS = stainless steel; B = brass; C = copper; P = fiberglass/resin; ABS = acrylonitrile:butadiene:styrene plastic; 1A and 2A = tamper tapes with a large "A"; 1B and 2B = tamper tapes with numbers only; C = panels from cold cycling; B = back of panel; F = front of panel

methods of removal from various steel and aluminum surfaces as listed in Table 3.4. The results of the evaluations are also given in Table 3.4.

In general, the most straightforward method for removing the tamper tapes was to use a razor blade and carefully peel the tamper tape off the surface. On the aluminum, the tamper tape could be removed with the adhesive layer intact and without destroying the security feature. Therefore, it was possible to re-adhere the removed tamper tape to another surface. It was slightly more

**Table 3.4.** Results of Attempts to Remove the 1.27-Centimeter-Wide Tamper Tapes with Pressure Sensitive Adhesive from Various Surfaces

Method of Removal	Type of Surface (Ident.)	Security Feature Destroyed	Caused <sup>a</sup> Tamper Tape Release	Caused <sup>b</sup> Adhesive Release	Destroyed <sup>c</sup> Printing	Destroyed Tamper Tapes	Tamper Tapes Applied In Lab	Overall <sup>d</sup> Rating
Hotplate	steel (S6)	yes	yes	no		yes		3
Freezer	aluminum (A7)	no	no	slight		no		4
Quick freeze	aluminum (A6)	no	no	no		yes		5
Hot air gun	steel (S6)	no	no	no	no	no	*	5
Heat/Quick freeze	steel (S6)	no	no	no		no		5
Razor blade	aluminum (A6)	no	no	yes		no		1
	steel (S6)	no	no	yes	no	yes	*	2
Hot soapy water	aluminum (A7)	no	no	slight	yes, black	no	*	4
Hot coffee/creamer	aluminum (A6)	no	no	slight	yes, black	no	*	4
Tilex	steel (S6)	no	no	slight		no		4
Acetone	aluminum (A6)	yes	no	yes		yes		5
	steel (S6)	yes	no	yes		yes	*	5
Methyl Ethyl Ketone	aluminum (A6)	yes	no	yes		yes		5
	steel (S6)	yes	no	yes		yes	*	5
Xylene	aluminum (A6)	yes	no	yes		yes		5
	steel (S6)	yes	no	yes		yes	*	5

<sup>a</sup> Tamper tapes separated from adhesive which remained on surface

<sup>b</sup> Adhesive separated from surface (entire tamper tapes' structure removed)

<sup>c</sup> Some tamper tapes did not have printing

<sup>d</sup> A quick reference for method of removal: 1, most advantageous (i.e., easiest to remove), through 5, least advantageous (i.e., most difficult to remove)

Table 3.4. Continued

Method of Removal	Type of Surface (Ident.)	Security Feature Destroyed	Caused <sup>a</sup> Tamper Tape Release	Caused <sup>b</sup> Adhesive Release	Destroyed <sup>c</sup> Printing	Destroyed Tamper Tapes	Tamper Tapes Applied In Lab	Overall <sup>d</sup> Rating
Methylene chloride	aluminum (A7)	yes	no	yes	yes	yes	*	5
Tetrahydrofuran	aluminum (A7)	yes	yes	yes	yes	yes	*	5
Turpsol	aluminum (A7)	yes	no	slight	yes	yes	*	5
Aromatic 100	aluminum (A7)	yes	yes	no	yes	yes	*	5
Dimethyl formamide	steel (S6)	yes	yes	no	yes	yes	*	5
Mineral oil	aluminum (S6)	no	no	slight	no	no		4
Silicone oil	aluminum (S6)	no	no	no	no	no	*	5
Mold release	aluminum (S6)	no	no	no	no	no	*	5
1% NaOH	aluminum (A7)	yes	no	slight	yes	yes	*	5
1% Sulfuric acid	aluminum (A7)	yes	no	no	yes	yes	*	5
Methanol	aluminum (A6)	yes	no	no		yes	*	5
Isopropyl alcohol	aluminum (A6)	yes	no	no		yes	*	5
Razor <i>blarin</i>	sand blasted aluminum	no	no	yes	no	no	*	1

<sup>a</sup> Tamper tapes separated from adhesive which remained on surface

<sup>b</sup> Adhesive separated from surface (entire tamper tapes structure removed)

<sup>c</sup> Some tamper tapes did not have printing

<sup>d</sup> A quick reference for method of removal: 1, most advantageous (i.e., easiest to remove), through 5, least advantageous (i.e., most difficult to remove)

difficult to remove the tamper tape from the steel. In this attempt, the window area was slightly damaged. However, the results indicated that with care and patience these prototype tamper tapes most likely could be removed and are, therefore, not secure against this threat.

Various readily-accessible chemicals and liquids were evaluated to determine if they improved the ease with which the tamper tape could be removed. A variety of solvents, oils, and acidic and caustic solutions were applied to the tamper tape adhesive interface while peeling the tamper tape from the substrate. None of the evaluated materials significantly enhanced the removal process. In addition, many of the materials caused the inks on the printed tamper tapes to bleed.

The use of heat and extreme cold were also investigated to determine if they aided in the removal of the tamper tapes. These conditions did not make it easier to remove the tamper tapes to any significant extent.

#### Transfer Evaluation of Weathered Tamper Tapes

Tamper tapes exposed to the weathering conditions of the QUV and thermal cycling cabinets were also subjected to transfer resistance/performance evaluation analyses after the exposure time period (a minimum of 7 weeks, up to 11 weeks). The tamper tapes that were exposed in the QUV cabinet were evaluated while they were still wet from the condensation cycle and again after they had dried. The QUV results are listed in Table 3.5. All of the tamper tapes (except on the copper) were damaged during the removal attempts using a razor blade. It appeared that the damage was due to the weathering effects. The tamper tapes became very fragile and brittle during the exposure in the QUV cabinet. The weathering was severe enough, in some cases, to cause cracking around the transparent window. These cracks could be incorrectly perceived as a tampering attempt when interrogated during use in the field.

The results of the transfer-resistance evaluations for the tamper tapes exposed to the hot and cold cycles in the thermal cycling cabinet are given in Table 3.6. Most of the tamper tapes were damaged during the removal attempts with a razor blade. However, these tamper tapes did not appear to become fragile like the tamper tapes exposed in the QUV cabinet. It may have been more difficult to remove these tamper tapes just because they were on the surface for a longer period of time.

#### 3.1.3 Chemical Compatibility

The chemical compatibility of the Confirm<sup>®</sup> tamper tapes was investigated by applying the tapes to aluminum plates and then soaking the plates in various chemicals. Chemicals included organic solvents, acids, bases, and oxidizing liquids. The tamper tapes were visually examined

**Table 3.5.** Results of Attempts to Remove the 1.27-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive from Various Surfaces After QUV Weathering for at Least Seven Weeks

Ident. No.	Surface (Weeks of Exposure)	Method of Removal	Removed Tamper Tape	Damaged <sup>a</sup>
45881-9-1	Brass (7)	razor	yes	yes
45881-9-2	Stainless Steel (7)	razor	yes	yes
45881-9-3	ABS Plastic (7)	razor	yes	yes
45881-10-1	Fiberglass back (7)	razor	yes	yes
45881-10-2	Painted Aluminum (7)	razor	yes	yes
45881-10-3	Kevlar® (11)	razor	yes	yes
45881-10-4	Copper (7)	razor	yes	no
45881-11-1	Steel (11)	razor	yes	yes
45881-11-2	Painted Steel (7)	razor	yes	yes
45881-11-3	Fiberglass front (7)	razor	yes	yes
45881-11-4	Aluminum (11)	razor	yes	yes

<sup>a</sup> The accelerated weathering affected all the samples in that it diminished the brightness of the security feature, caused cracking in the transparent strip, and made the strip brittle

**Table 3.6.** Results of Attempts to Remove the 1.27-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive from Various Surfaces After Hot and Cold Thermal Cycling for at Least Seven Weeks

Surface	Method of Removal	Removed Tamper Tape	Damaged
Brass	razor	yes	yes
Copper	razor	yes	yes
ABS Plastic	razor	yes	no
Stainless Steel	razor	yes	yes
Fiberglass/resin back (rough)	razor	yes	yes
Fiberglass/resin (smooth)	razor	yes	no

immediately after exposure and after 24 hours of exposure to determine the effects of the various chemicals. The results are summarized in Table 3.7.

### 3.2 2.54-CM-WIDE CONFIRM® WINDOW PROTOTYPE TAMPER TAPES

Since transfer-resistance/performance evaluations of the 1.27-cm-wide Confirm® window prototype tamper tapes indicated it was likely they could be removed without evidence of tampering, prototype tamper tapes with a larger Confirm® window were developed and evaluated. Two prototype tamper tapes with 2.54-cm-wide Confirm® 1700 windows were subjected to environmental aging exposures. One had a polyester underlay and the other a vinyl underlay.

Table 3.7. Effects of Chemical Exposure to Confirm® Tamper Tape Material

Exposure Chemical	Immediate Effect	After 24 Hour Exposure
Ethanol	No discoloration or deformation, no softening of adhesive	No change
Methylene Chloride	No discoloration or deformation, significant softening of adhesive	No change
Chloroform	No discoloration or deformation, significant softening of adhesive	No change
Carbon Tetrachloride	No discoloration or deformation, no softening of adhesive	No change
Hexane	No discoloration or deformation, no softening of adhesive	Discoloration, no adhesive softening
Dimethylsulfoxide	Printing discolored, adhesive softened	No additional damage
0.1 M Sodium Hydroxide	Easily scratched after several minutes	No additional damage
6 M Sodium Hydroxide	Easily scratched, ink/printing destroyed	No additional damage
5% Hypochlorite (bleach)	No discoloration or deformation, no softening of adhesive	No change
Concentrated Sulfuric Acid	Yellow discoloration, ink degradation, easily scratched	Brownish-yellow adhesive/surface, destroyed where contacted by acid
Concentrated Nitric Acid	Light yellow discoloration, ink destroyed, easily peeled from surface	Brownish yellow adhesive/surface, destroyed when contacted



### 3.2.1 Weathering

A prototype tamper tape (12/93) with a 2.54-cm-wide Confirm<sup>®</sup> window, PSA, and a polyester underlay was applied to four surfaces, i.e., bare, roughened aluminum; bare, roughened steel; smooth polyester fiberglass board; and Mil. Spec. polyurethane-painted steel panels. The 12/93 tamper tapes were exposed in Daytona Beach, Florida (90° south) for 5 months, in the Weather-O-Meter (Xenon lamp) for 138 days, in the QUV cabinet (cycling exposure to ultraviolet light at 60°C and condensing humidity at 40°C) for 85 days, and in the thermal cycling cabinet (cycling between -18°C and 46°C) for 161 days.

In addition to the studies with the 12/93 tamper tapes, another 2.54-cm-wide Confirm<sup>®</sup> window prototype tamper tape similar to the 12/93 PSA tamper tape (except with a vinyl underlay) was tested later in the program. The exposures were the same as with the 12/93 prototype except the Weather-O-Meter exposures were not done, the Florida exposure lasted 2 months, and both the QUV cabinet and thermal cycling cabinet exposures lasted 56 days. Six surfaces were used with these tamper tapes, i.e., wood and Lexan polycarbonate in addition to the four listed above.

Visual evaluation/examination of the weathered tamper tapes was done at different time intervals by two or three persons who described the tamper tapes' appearance (with and without the 3M security illuminator) and evaluated the adhesion of the tamper tapes to the surface. A key to the numerical ranking codes used for assessing the weathered tamper tapes is given in Table 3.8.

**Table 3.8.** Numerical Ranking Code<sup>a</sup> for Assessing Tamper Tapes

Appearance <sup>b</sup>	Security Emblem <sup>c</sup>	Adhesive <sup>d</sup>
1 = Poor	1 = Emblem not visible - area black	1 = >40% Debonding
2 = Fair	2 = Emblem barely visible-area grayish black	2 = 26-40% debonding
3 = Fair-Good	3 = Emblem grayish black and faded	3 = 11-25% debonding
4 = Good	4 = Emblem slightly faded	4 = 3-10% debonding
5 = Very Good	5 = Emblem had strong appearance	5 = 2% or less debonding

<sup>a</sup> Refers to numbers used in Tables 3.9 to 3.15, and all Section 4.0 Tables

<sup>b</sup> Appearance was judged by a combination of inspections with and without the 3M illuminator. Some of the adhesive often attacked the Confirm<sup>®</sup>, which in turn caused dark areas that were judged for how bad they appeared.

<sup>c</sup> Security emblem appearance was assessed with the 3M illuminator. Again, if the adhesive attacked the Confirm<sup>®</sup>, the security emblems were damaged and the area appeared black or gray. In other instances the emblem was faded, barely visible, or not visible at all.

<sup>d</sup> Adhesion was based on an estimate of the amount of area that was debonded.

Little or no change in visibility occurred with the tamper tapes' security features and the adhesion of the tamper tapes was excellent for the 12/93 tamper tapes exposed in Florida (5 months) and in the Weather-O-Meter (138 days). The results of the tamper tapes exposed in the Weather-O-Meter are given in Table 3.9. Under these conditions, the tamper tapes turned brownish yellow to light brown with those on the polyurethane paint looking the worst. For the Florida-exposed tamper tapes, there was only a slight change in appearance and in the visibility of the security features, but only on the polyester portion of the tamper tape (Table 3.10).

The greatest change in the 12/93 tamper tapes was observed in those from the QUV cabinet exposures. After 85 days of exposure, the security features were no longer visible on all surfaces (Table 3.11). On the steel and aluminum surfaces, adhesion in the window area was poor after 85 days of exposure. For the other two surfaces, adhesion remained good. All tamper tapes had some change in appearance.

The results of the 12/93 tamper tapes exposed to thermal cycling are given in Table 3.12. There was no change in the visibility of the security features or in adhesion, and there were only slight changes in appearance for the tamper tapes exposed to hot and cold for 161 days.

The results from the weathering of the PSA tamper tapes with vinyl underlay are given in Tables 3.13 through 3.15. After 2 months of exposure in Florida, there was no change in

**Table 3.9.** Results of Weather-O-Meter (Xenon Lamp) Exposure for 2.54-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay (12/93)

Surface (Ident. No.)	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
1A Steel (A1196)	0	5	5	5	5	5	5
	54	5	5	5	5	5	5
	68	3	4	5	5	5	5
	82	3	3	5	5	5	5
	96	3	3	5	5	5	5
	138	3	3	5	5	5	5
1B Steel (A1193)	0	5	5	5	5	5	5
	54	5	5	5	5	5	5
	68	4	4	5	5	5	5
	82	3	3	5	5	5	5
	96	3	3	5	5	5	5
	138	3	3	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 3.9. (Continued)

Surface (Ident. No.)	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
2A Aluminum (A1195)	0	5	5	5	5	5	5
	68	5	5	5	5	5	5
	82	4	4	5	5	5	5
	96	3-4	3-4	5	5	5	5
	138	3-4	3-4	5	5	5	5
2B Aluminum (A1194)	0	5	5	5	5	5	5
	68	5	5	5	5	5	5
	82	4	4	5	5	5	5
	96	3-4	3-4	5	5	5	5
	138	3-4	3-4	5	5	5	5
3A Mil. Spec. Polyurethane Painted Steel (A11097)	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	44	4	5	5	5	5	5
	68	4	4	5	5	5	5
	82	3	3	5	5	5	5
	96	3	3	5	5	5	5
138	3	3	5	5	5	5	
3B Mil. Spec. Polyurethane Painted Steel (A1200)	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	44	4	5	5	5	5	5
	54	4	4	5	5	5	5
	68	3	4	5	5	5	5
	82	2-3	3	5	5	5	5
	96	2-3	3	5	5	5	5
	138	2-3	2-3	5	5	5	5
4A Fiberglass Board (A1198)	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	44	4-5	4-5	5	5	5	5
	54	3-4	4	5	5	5	5
	68	3	4	5	5	5	5
	82	3	3-4	5	5	5	5
	96	3	3-4	5	5	5	5
	138	3	3	5	5	5	5
4B Fiberglass Board (A1199)	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	44	4-5	4-5	5	5	5	5
	54	3-4	4	5	5	5	5
	68	3	4	5	5	5	5
	82	3	3-4	5	5	5	5
	96	3	3-4	5	5	5	5
	138	3	3	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes

**Table 3.10. Results of Daytona Beach, Florida Exposure for 2.54-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay (12/93)**

Surface (Ident. No.)	Months Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel (A1189)	0	4-5	5	5	5	5	5
	1	4	4	b	-	5	5
	2	4	4	-	-	5	5
	3	4	4	5	5	5	5
	4	4	4	-	-	5	5
	5	4	4	5	4	5	5
Steel (A1190)	0	3	4-5	5	5	5	5
	1	2-3	4	-	-	5	5
	2	2-3	4	-	-	5	5
	3	2-3	4	5	5	5	5
	4	2-3	4	-	-	5	5
	5	2-3	4	5	4	5	5
Aluminum (A1186)	0	4-5	4-5	5	5	5	5
	1	4-5	4-5	-	-	5	5
	2	4-5	4-5	-	-	5	5
	3	4-5	4-5	5	5	5	5
	4	4-5	4-5	-	-	5	5
	5	4-5	4-5	4	4	5	5
Aluminum (A1187)	0	4-5	5	5	5	5	5
	1	4-5	5	-	-	5	5
	2	4-5	5	-	-	5	5
	3	4-5	5	5	5	5	5
	4	4-5	5	-	-	5	5
	5	4-5	4-5	4	4	5	5
Mil. Spec. Polyurethane Painted Steel (A1185)	0	4-5	5	5	5	5	5
	1	4-5	5	-	-	5	5
	2	4-5	5	-	-	5	5
	3	4-5	4-5	5	5	5	5
	4	4-5	4-5	-	-	5	5
	5	4-5	4-5	5	4	5	5
Mil. Spec. Polyurethane Painted Steel (A1188)	0	4-5	5	5	5	5	5
	1	4-5	5	-	-	5	5
	2	4-5	5	-	-	5	5
	3	4-5	4-5	5	5	5	5
	4	4-5	4-5	-	-	5	5
	5	4-5	4-5	5	4	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

Table 3.10. (Continued)

Surface (Ident. No.)	Months Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Polyester	0	5	5	5	5	5	5
Fiberglass	1	5	5	b	-	5	5
Board	2	5	5	-	-	5	5
(A1191)	3	5	5	5	5	5	5
	4	5	5	-	-	5	5
	5	4-5	4-5	5	4	5	5
Polyester	0	5	5	5	5	5	5
Fiberglass	1	5	5	-	-	5	5
Board	2	5	5	-	-	5	5
(A1192)	3	5	5	5	5	5	5
	4	5	5	-	-	5	5
	5	4-5	4-5	5	4	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

Table 3.11. Results of QUV Cabinet Exposure for 2.54-Centimeter-Wide Confirm<sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay (12/93)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Steel	0	5	5	5	5	5	5
	7	5	5	5	5	5	5
	14	4-5	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	4-5	5	5	5	5
	42	3-4	4	5	5	4	4-5
	56	3	3	3-4	4	3	4
	70	3	3	3	3	3	4
	85	3	3	1	1	2	3
	91	2	2	1	1	2	2
100	2	2	1	1	1	1	
Aluminum	0	5	5	5	5	5	5
	7	5	5	5	5	5	5
	14	4	5	5	5	5	5
	21	3-4	4-5	5	5	5	5
	28	3-4	4-5	5	5	4	4-5
	42	3	4	5	5	3-4	4-5
	56	2	3	4	4	3	4
	70	2	3	3	3	2-3	3
	85	2	3	1	1	2	2-3
	91	2	2	1	1	1-2	2
100	2	2	1	1	1-2	2	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 3.11. (Continued)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Mil. Spec.	0	5	5	5	5	5	5
Polyurethane	7	5	5	5	5	5	5
Painted	14	5	5	5	5	5	5
Steel	21	5	5	5	5	5	5
	28	4-5	4-5	5	5	5	5
	42	4-5	4-5	5	5	5	5
	56	3	4	4	4	5	5
	70	3	3-4	3	3	5	5
	85	2	3	1	1	5	5
	91	2	3	1	1	5	5
	100	2	3	1	1	5	5
Polyester	0	5	5	5	5	5	5
Fiberglass	7	5	5	5	5	5	5
Board	14	5	5	5	5	5	5
	21	5	5	5	5	5	5
	28	4-5	4-5	5	5	5	5
	42	4-5	4-5	5	5	5	5
	56	4	4	3	3	5	5
	70	3	3-4	3	3	5	5
	85	2-3	3	1	1	5	5
	91	2-3	3	1	1	5	5
	100	2-3	3	1	1	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

visibility of the security features and no loss of adhesion, with only slight changes in appearance (Table 3.13). For the tamper tapes exposed in the QUV cabinet, there was no loss in adhesion after 56 days on any of the surfaces. After 21 to 42 days, there was a slight change in the visibility of the security features, increasing to a moderate change after 49 days (Table 3.14). Usually, only the vinyl portion of the tamper tape was affected. After 56 days, the tamper tape bonded to wood had the worst appearance, probably because of the weathered wood showing through the tamper tape. For the tamper tapes exposed in the thermal cycling cabinet, there were essentially no changes noted after 56 days (Table 3.15).

To compare the prototype 2.54-cm-wide Confirm<sup>®</sup> window tamper tapes with polyester underlay (12/93) to those with vinyl underlay, weathering periods of 2 months in Florida and 56 days in the QUV and thermal cycling cabinet must be used. (The PSA tamper tape with the

**Table 3.12.** Results of Thermal Cycling Exposure (-54°C to 46°C) for 2.54-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive and Polyester Underlay (12/93)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Steel	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	42	4-5	4-5	5	5	5	5
	56	4-5	4-5	5	5	5	5
	112	4-5	4-5	5	5	5	5
	126	4-5	4-5	5	5	5	5
Aluminum	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	42	4-5	4-5	5	5	5	5
	112	4-5	4-5	5	5	5	5
	126	4-5	4-5	5	5	5	5
Mil. Spec. Polyurethane Painted Steel	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	42	4-5	4-5	5	5	5	5
	56	4-5	4-5	5	5	5	5
	112	4-5	4-5	5	5	5	5
	126	4-5	4-5	5	5	5 <sup>b</sup>	5 <sup>b</sup>
Polyester Fiberglass Board	0	5	5	5	5	5	5
	28	5	5	5	5	5	5
	42	4-5	4-5	5	5	5	5
	112	4-5	4-5	5	5	5	5
	126	4-5	4-5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Adhesion of polyurethane paint to which tamper tape was adhered was peeling badly, therefore, it was difficult to determine if there was a loss of adhesion.

2.54-cm-wide Confirm® window and vinyl underlay was tested for only 2 months in Florida and only 56 days in the QUV and thermal cycling cabinets, whereas the 12/93 tamper tape was tested for longer periods of time.) After 2 months in Daytona Beach, Florida, there was no loss of adhesion and no change in the visibility of the security features on any of the tamper tapes. They did yellow somewhat in that period of time. In the QUV cabinet, the two types of tamper tapes performed similarly in terms of visibility of the security features; they were within the slight-to-moderate change range. The 12/93 tamper tapes had some loss of adhesion in the window area on steel and aluminum compared to the vinyl underlay tamper tapes. In addition, the vinyl underlay tamper tapes had a slightly better appearance. Essentially no changes to any of the tamper tapes occurred in the thermal cycling cabinet.

**Table 3.13.** Results of Daytona Beach, Florida Exposure for 2.54-Centimeter-Wide Confirm<sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Vinyl Underlay (Number and Bar Code, ATM Oceanfront 90° South)

Surface	Months Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel	1	4-5	5	- <sup>b</sup>	-	5	5
	2	4-5	5	5	5	5	5
Aluminum	1	4-5	5	-	-	5	5
	2	4-5	5	5	5	5	5
Wood	1	4-5	5	-	-	5	5
	2	4-5	4-5	4	4	5	5
Polyester Fiberglass Board	1	4-5	5	-	-	5	5
	2	4-5	5	5	5	5	5
Lexan Polycarbonate	1	4-5	5	-	-	5	5
	2	4-5	5	5	5	5	5
Mil. Spec. Polyurethane Painted Steel	1	4-5	5	-	-	5	5
	2	4-5	5	4	4	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

**Table 3.14.** Results of QUV Cabinet Exposure for 2.54-Centimeter-Wide Confirm<sup>®</sup> Window Tamper Tapes with Pressure Sensitive Adhesive and Vinyl Underlay (Number and Bar Code)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel	0	4	5	5	5	5	5
	7	3	5	5	5	5	5
	14	3	5	5	5	5	5
	21	3	5	5	5	5	5
	28	3	5	5	5	5	5
	35	3	5	5	5	5	5
	42	3	5	5	4	5	5
	49	3	5	4	3	5	5
	56	3	4	4	3	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.



Table 3.14. (Continued)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	4	4	4	5	5
	28	4	4	4	4	5	5
	35	4	4	4	4	5	5
	42	4	4	4	4	5	5
	49	4	4	4	4	5	5
56	4	4	4	4	5	5	
Wood	0	4	5	5	5	5	5
	7	3	5	5	5	5	5
	14	2	5	5	5	5	5
	21	2	5	4	4	5	5
	28	2	5	4	4	5	5
	35	2	5	4	4	5	5
	42	2	5	4	4	5	5
	49	2	4	4	3	5	5
56	2	3	3	3	5	5	
Polyester Fiberglass Board	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	4	3	5	5
	42	4	5	4	3	5	5
	49	4	5	4	3	5	5
56	4	4	4	3	5	5	
Lexan Polycarbonate	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	4	4	5	5
	28	4	5	4	4	5	5
	35	4	5	4	4	5	5
	42	4	5	4	4	5	5
	49	4	5	4	3	5	5
56	4	4-5	4	3	5	5	
Mil. Spec. Polyurethane Painted Steel	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	5	4	5	5
	42	4	5	5	4	5	5
	49	4	5	5	3	5	5
56	4	4-5	5	3	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper-tapes.

**Table 3.15.** Results of Thermal Cycling Exposure (-54°C to 46°C) for 2.54-Centimeter-Wide Confirm® Window Tamper Tapes with Pressure Sensitive Adhesive and Vinyl Underlay (Number and Bar Code)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Steel	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	5	5	5	5
	42	4	5	5	5	5	5
	56	4	5	5	5	5	5
Aluminum	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	5	5	5	5
	42	4	5	5	5	5	5
	56	4	5	5	4	5	5
Wood	0	5	5	5	5	5	5
	7	5	5	5	5	5	5
	14	5	5	5	5	5	5
	21	5	5	5	5	5	5
	28	5	5	5	5	5	5
	35	5	5	5	5	5	5
	42	5	5	5	5	5	5
	56	5	5	5	5	5	5
Polyester Fiberglass Board	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	5	5	5	5
	42	4	5	5	5	5	5
	56	4	5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 3.15. (Continued)

Surface	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
		Appearance		Security Emblem		Adhesion to Surface	
		Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Lexan Polycarbonate	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	5	5	5	5
	42	4	5	5	5	5	5
	49	4	5	5	5	5	5
	56	4	5	5	5	5	5
Mil. Spec. Polyurethane Painted Steel	0	4	5	5	5	5	5
	7	4	5	5	5	5	5
	14	4	5	5	5	5	5
	21	4	5	5	5	5	5
	28	4	5	5	5	5	5
	35	4	5	5	5	5	5
	42	4	5	5	5	5	5
	49	4	5	5	5	5	5
	56	4	5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

### 3.2.2 Transfer Resistance

Three additional sets of the 12/93 PSA prototype tamper tape were bonded to four surfaces (roughened aluminum, roughened steel, fiberglass board, and polyurethane-painted steel) after which their transfer resistance was evaluated after 14 days. One set was the control kept at 23°C and 50% relative humidity, the second set was kept in the QUV cabinet, and the third set was exposed in the thermal cycling cabinet. Another set of two 12/93 tamper tapes were each allowed to set for 30 minutes at room temperature before trying to remove them from the four surfaces. This test was designed to evaluate the transfer resistance of the 12/93 prototype tamper tapes and determine whether the adhesion of the PSA improves with time.

The data on the removal of the 12/93 tamper tapes is given in Table 3.16. After 30 minutes, the tamper tapes could be removed from all four of the surfaces, with damage to the Confirm<sup>®</sup> occurring only on the smooth fiberglass board surface. Comparing the adhesion of the tamper tapes at room temperature 30 minutes after application to those aged for 14 days shows that time improved adhesion on the polyurethane-painted surface, i.e., after 14 days adhesive transfer occurred or residue was left on the surface. No change was observed on the other smooth surface

Table 3.16. Summary of Transfer Resistance of 12/93 Prototype Tamper Tapes

Surface	30 minutes 23°C	14 days Control <sup>a</sup>	14 days QUV Cabinet <sup>b</sup>	14 days Thermal Cycling Cabinet <sup>c</sup>
Roughed Aluminum	Both tamper tapes removed, no damage	Tamper tape removed, no damage	Tamper tape removed, slight damage to Confirm <sup>®</sup>	Tamper tape removed, no damage
Roughened Steel	Both tamper tapes removed, no damage	Tamper tape removed, adhesive transfer and adhesive residue on surface	Tamper tape removed, slight damage to Confirm <sup>®</sup> , adhesive transfer and residue on surface	Tamper tape removed, Confirm <sup>®</sup> damaged, adhesive transfer and residue on surface
Polyester Fiberglass Board	Both tamper tapes removed, slight damage to Confirm <sup>®</sup>	Tamper tape removed, slight damage to Confirm <sup>®</sup>	Tamper tape removed, slight damage to Confirm <sup>®</sup>	Tamper tape removed, some damage to Confirm <sup>®</sup>
Polyurethane Painted Steel	Both tamper tapes removed, no damage	Tamper tape removed, adhesive residue on paint surface, slight damage to Confirm <sup>®</sup>	Tamper tape removed, adhesive transfer occurred	Tamper tape removed, slight damage to Confirm <sup>®</sup> , adhesive transfer and residue on surface

<sup>a</sup> 23°C, 50% relative humidity

<sup>b</sup> Cycling of UV light at 60°C with condensing humidity at 40°C

<sup>c</sup> Cycling between -18°C to 46°C

(fiberglass board), i.e., the tamper tapes were removed after aging with no adhesive or residue left on the surface. Improved adhesion with age also occurred on the roughened steel surface, as adhesive transfer and adhesive residue were found after removal of the aged tamper tape. However, no change was observed after aging on the other roughened surface (aluminum). These results indicate that the adhesion of the PSA increases with time, improving the transfer resistance of the tamper tapes on some surfaces. However, the PSA is still inadequate as it allows transfer without indication of tampering on some surfaces.

### 3.2.3 Abrasion Resistance

A modification of ASTM Method D968, "Abrasion Resistance of Coatings of Paint, Varnish, Lacquer, and Related Products by the Falling Sand Method," was used to evaluate the abrasion

resistance of the 12/93 prototype tamper tapes. In this evaluation, flowing sand from a tube contacted the tamper tape at an angle of  $75^{\circ}$  to  $80^{\circ}$  such that the sand was in contact with the entire bar code area and over an entire security emblem of the Confirm<sup>®</sup>. The purpose of the test was to determine the amount of sand needed to make the bar code unreadable by a bar code reader, or the amount of sand needed to destroy the security emblem as determined by a 3M Company security light.

A photograph of the sand abrasion apparatus is shown in Figure 3.1. Two kg of sand were placed in the funnel at the top of the apparatus for each pass. For each pass, the sand exited the bottom of the 0.9-m sand dropping tube and landed on the tamper tape. Table 3.17 gives the



Figure 2.1. Sand Abrasion Apparatus

Table 3.17. Abrasion Resistance of 12/93 Prototype Tamper Tape with Sand

Number of Passes (2 kg/pass)	Results	
	Bar Code <sup>a</sup>	Confirm <sup>®</sup> Area <sup>b</sup>
3	Some fading of bar code	Security emblem half gone
4	More fading of bar code	
5	More fading of bar code	Security emblem destroyed
6	Bar code unreadable <sup>c</sup>	

<sup>a</sup> Using a bar code reader.

<sup>b</sup> Using 3M Company security light.

<sup>c</sup> More of the bar code was removed on the Confirm<sup>®</sup> than on the vinyl portion of the tamper tape.

results of the test. For the bar code area, there was indication that the ink faded more and more after two passes of sand. The ink was sufficiently removed after six passes of sand to prevent the bar code from being read with a reader. The abrasion resistance of the Confirm<sup>®</sup> was evaluated over one of the security emblems in the window area of the tamper tape. After three passes of sand, one-half of the emblem was gone as determined with the security light. The entire emblem was destroyed after five passes of sand.

#### 4.0 TAMPER TAPES WITH RAPID-SET ADHESIVES

One of the findings of the previous work with prototype tamper tapes with PSA was that the PSA did not sufficiently adhere to provide the level of tamper resistance desired. It was determined that the security performance of the tamper tapes could be increased by eliminating the PSA on the tamper tapes and substituting a more suitable reactive, rapid-set adhesive. Extensive adhesive formulation work was performed to obtain a rapid-set adhesive with the best balance of (1) fast cure time, (2) good adhesion to a wide range of test surfaces, and (3) resistance to any method of mechanical, heat, and solvent attack that an adversary could use to remove the tamper tape without damaging it. Formulation work was carried out using commercially-available resin and hardening components that included three types of reactive adhesives: polyurethanes, epoxies, and acrylics. The rapid-set adhesives were evaluated by bonding tamper tapes to a wide variety of surfaces. Commercially-available, two-component adhesives were also evaluated. As a result of these evaluations, four candidate rapid-set adhesives (two epoxies, one polyurethane, and one commercial acrylic) were chosen for further evaluation in weathering studies.

Two weathering studies with tamper tapes bonded to surfaces using the four candidate rapid-set adhesives were performed. In the first study, tamper tapes with 2.54-cm-wide windows made of Confirm<sup>®</sup> 1700 material were evaluated. In the second study, tamper tapes with 2.54-cm-wide windows made of three alternate Confirm<sup>®</sup> materials were evaluated.

#### 4.1 WEATHERING OF CONFIRM<sup>®</sup> 1700 TAMPER TAPES

Tamper tapes with 2.54-cm-wide Confirm<sup>®</sup> windows were made in the laboratory out of Confirm<sup>®</sup> 1700 and vinyl underlay materials bonded using a PSA supplied by 3M Company. The PSA was applied to the vinyl, the window area was cut out, and the vinyl was then bonded to the Confirm<sup>®</sup> material. PSA was used to bond the Confirm<sup>®</sup> and underlay material since it was found in previous studies that poor weathering characteristics occurred when reactive, rapid-set adhesives were used to bond the vinyl to the Confirm<sup>®</sup> material. Using a rapid-set adhesive for a structural adhesive may have caused the poor weathering results for two reasons. First, the adhesives caused the Confirm<sup>®</sup> material to bond sufficiently to the release liner so that some of the Confirm<sup>®</sup> was separated in removing the release liner, thereby allowing weathering effects to accelerate degradation. Second, some of the adhesives, especially the acrylic type, attacked the Confirm<sup>®</sup> material. This "attack" allowed the entire area of the Confirm<sup>®</sup> material to degrade, not just the material in the window area.

Each of four candidate reactive, rapid-set adhesives (epoxy 1, epoxy 2, polyurethane, and acrylic) were used to bond the prototype tamper tapes made in the laboratory to six surfaces, i.e., roughened steel, roughened aluminum, cedar wood, polyester fiberglass board, Lexan polycarbonate, and Mil. Spec. polyurethane-painted steel. Approximately 0.7 g of each of the candidate adhesives were applied manually to the tamper tapes using a small brush. The tamper tapes were then applied to the various test surfaces and were allowed to cure for several days. They were then tested in the QUV cabinet (ultraviolet light at 60°C; condensing humidity at 40°C), in the thermal cycling cabinet (-18°C to 46°C), in a constant temperature room (23°C, 50% relative humidity) to serve as a control, and in Florida (a photograph of the Florida exposure site is provided in Figure 4.2). After weathering, the tamper tapes were visually examined by two or three persons to provide information regarding their appearance, the security feature with the 3M security illuminator, and the adhesion of the tamper tapes to the surfaces.

#### 4.1.1 Florida Exposure Results

The results of the Daytona Beach, Florida exposure are given in Table 4.1. After 2 months of exposure, neither of the epoxy adhesive-bonded tamper tapes showed a loss of adhesion or changes in the appearance of the security feature. The security features in the window area of the tamper tapes bonded with the polyurethane adhesive or the acrylic adhesive were very faded or completely degraded. There was no loss of adhesion.

#### 4.1.2 QUV Cabinet Exposure Results

The results for rapid-set adhesive tamper tapes bonded to various surfaces and exposed in the QUV cabinet for 56 days are given in Table 4.2. All of the candidate rapid-set adhesives had very good to excellent adhesion on all surfaces, except for the epoxy 1 adhesive on Lexan polycarbonate. The acrylic adhesive attacked the Confirm<sup>®</sup> (series 1700), solvating it so the window area wrinkled or "melted" badly. More importantly, it caused the security features to be faded and barely visible when examined with the 3M illuminator. The window area was black or grayish-black. Since the tamper tape was in bad shape at the beginning of the exposure, it only took 2 to 3 weeks in the QUV cabinet before the security features were compromised.

The Confirm<sup>®</sup> security features of the tamper tapes bonded with the polyurethane adhesive were very faded after 4 to 7 weeks of exposure. The performance of the tamper tapes bonded with epoxy 1 adhesive, relative to the rate of degradation, depended on the surface to which it was applied. On Lexan, the tamper tape started losing adhesion after 1 week, which led to quick degradation of the security features in 2 weeks. On fiberglass board, the security



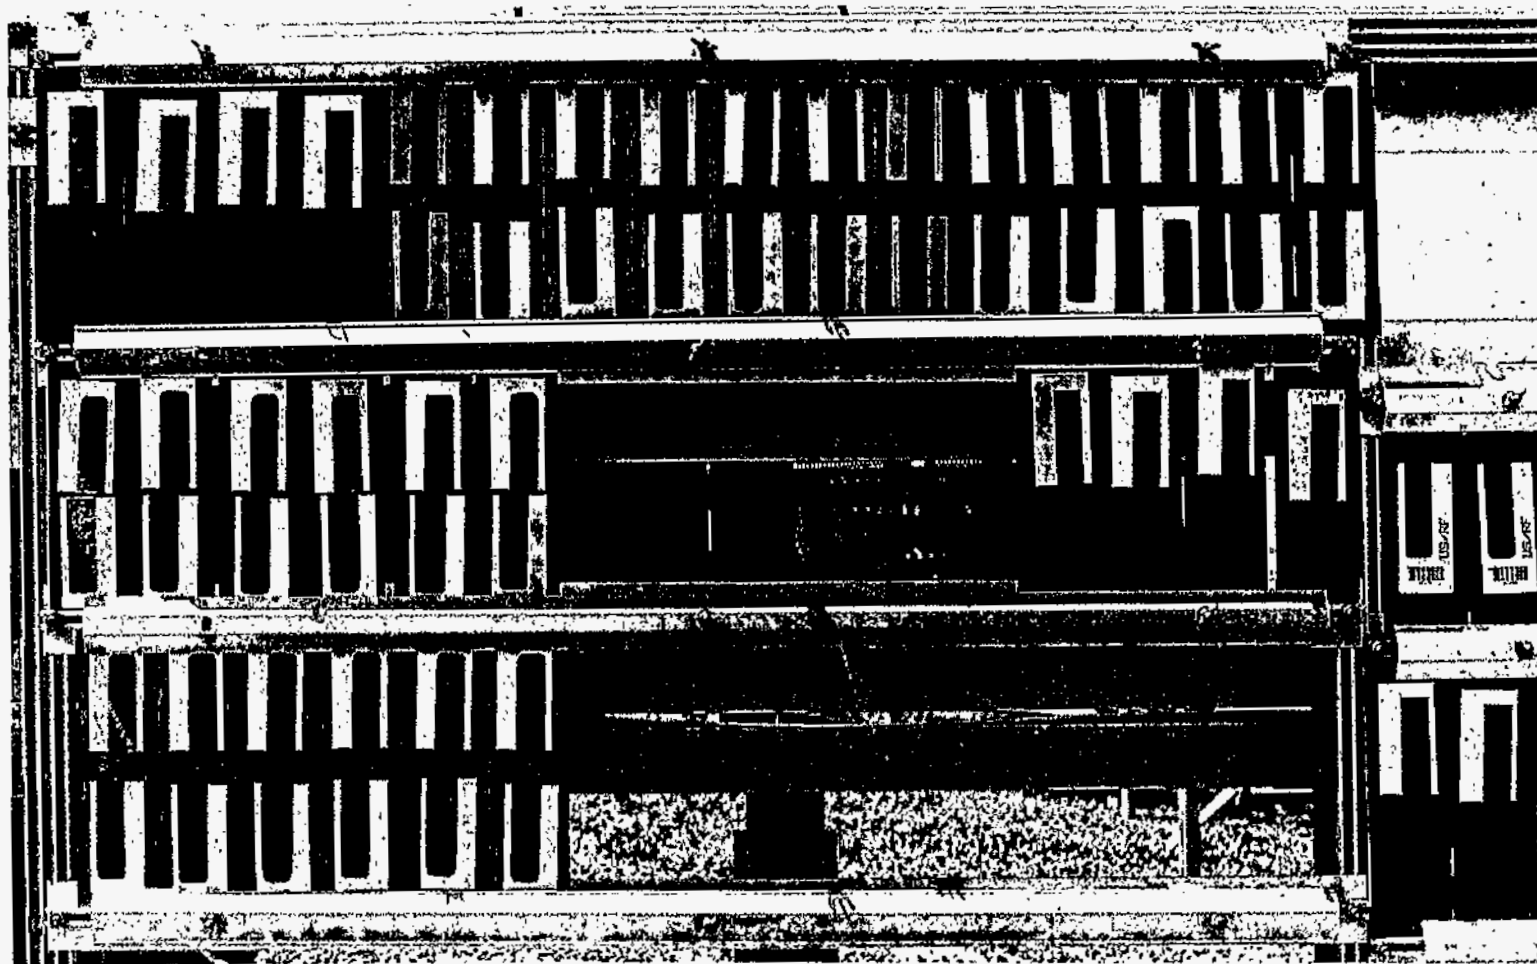


Figure 4.2. Photograph of Daytona Beach, Florida Exposure Site

**Table 4.1.** Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in Daytona Beach, Florida at 90° South

Surface	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
Aluminum	epoxy 1	1	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4-5	5	5	5	5	5
Aluminum	epoxy 1	2	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4	4	2	4	5	5
	acrylic		4	4	2	5	5	5
Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
Steel	epoxy 1	1	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		3-4	3-4	5	5	5	5
Steel	epoxy 1	2	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4	4	3	5	5	5
	acrylic		4-5	4-5	1	4	5	5
Wood	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
Wood	epoxy 1	1	4-5	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		3-4	3-4	5	5	5	5
Wood	epoxy 1	2	4	4	5	5	5	5
	epoxy 2		5	5	4	5	5	5
	polyurethane		4	4	3	4	5	5
	acrylic		3-4	3-4	1	5	5	5

<sup>a</sup> See Table 2.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.1. (Continued)

Surface	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Fiberglass Board	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
Fiberglass Board	epoxy 1	1	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
Fiberglass Board	epoxy 1	2	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4	4	2	5	5	5
	acrylic		5	5	2	5	5	5
Lexan	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
Lexan	epoxy 1	1	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4-5	5	5	5	5	5
Lexan	epoxy 1	2	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4	4	1	5	5	5
	acrylic		4-5	4-5	1	4	5	5
Mil. Spec. PU <sup>b</sup> Painted Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
Mil. Spec. PU-Painted Steel	epoxy 1	1	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		3-4	3-4	5	5	5	5
Mil. Spec. PU-Painted Steel	epoxy 1	2	4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4	4	1	4	5	5
	acrylic		3-4	3-4	2	4	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane

Table 4.2. Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet (UV, 60°C; Condensing Humidity, 40°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1	0	5	5	5	5	5	5
		7	4	4	5	5	5	5
		14	3	3	5	5	5	5
		21	3	3	4	4	5	5
		28	3	3	4	4	5	5
		35	3	3	3	3	5	5
		42	3	3	3	3	5	5
		49	3	3	3	3	5	5
		56	2	2	3	3	5	5
Aluminum	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	4	4	5	5	5	5
		21	4	4	5	5	5	5
		28	4	4	5	4	5	5
		35	4	4	5	4	5	5
		42	4	4	5	4	5	5
		49	4	4	5	4	5	5
		56	4	4	5	3	5	5
Aluminum	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	4	5	4-5	5	5	5
		35	3	4	2	4	5	5
		42	2	4	1-2	4	5	5
		49	b		-		-	
Aluminum	acrylic	0	3	4	3	3	5	5
		7	3	4	3	3	5	5
		14	3	4	1	3	5	5
		21	3	4	1	3	5	5
		28	3	4	1	3	5	5
		35	-		-		-	
Steel	epoxy 1	0	5	5	5	5	5	5
		7	4	4	5	5	5	5
		14	4	4	5	5	5	5
		21	4	4	4	4	5	5
		28	4	4	3	4	5	5
		35	4	4	3	4	5	5
		42	4	4	3	4	5	5
		49	4	3	3	3	5	5
		56	3	3	3	2	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Samples were removed from QUV cabinet because their security features were compromised.

Table 4.2. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	4	5	5
		35	5	5	5	4	5	5
		42	5	5	5	4	5	5
		49	5	5	5	4	5	5
	56	4	3	5	3	5	5	
Steel	polyurethane	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	5	5	5	5	5
		21	3	4	3	4	5	5
		28	3	4	1	3	5	5
		35	3	4	1	3	5	5
		42	3	4	1	3	5	5
		49	3	4	1	3	5	5
	56	2	4	1	3	5	5	
Steel	acrylic	0	3	4	3	3	5	5
		7	2	4	1	2	5	5
		14	2	4	1	2	5	5
		21	2	4	1	2	5	5
		28	2	4	1	2	5	5
		35	b					
Wood	epoxy 1	0	5	5	5	5	5	5
		7	4	4	5	5	5	5
		14	4	4	5	5	5	5
		21	3-4	3-4	5	5	5	5
		28	3	3-4	3	4	5	5
		35	3	3-4	3	4	5	5
		42	3	3-4	3	4	5	5
		49	3	3	3	4	5	5
	56	2	2	2	4	5	5	
Wood	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	4	5	5	5	5
		28	4	4	5	3	5	5
		35	4	4	5	3	5	5
		42	4	4	5	3	5	5
		49	4	4	5	3	5	5
	56	4	4	5	3	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Samples were removed from QUV cabinet because their security features were compromised.

Table 4.2. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Wood	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	4	5	5	5	5	5
		21	3	3	5	5	5	5
		28	3	3	3	3	5	5
		35	3	3	3	3	5	5
		42	3	3	3	3	5	5
		49	3	3	2	3	5	5
		56	2	3	1-2	3	5	5
Wood	acrylic	0	3	4	3	3	5	5
		7	3	4	3	3	5	5
		14	3	4	2	3	5	5
		21	2-3	3	2	3	5	5
		28	2-3	3	1	3	5	5
		35	- <sup>b</sup>	-	-	-	-	-
Fiberglass Board	epoxy 1	0	5	5	5	5	5	5
		7	4	4	5	5	5	5
		14	4	4	5	5	5	5
		21	3-4	3-4	5	5	5	5
		28	3	3	2	2	5	5
		35	3	3	2	2	5	5
		42	3	3	2	2	5	5
		49	3	3	2	2	5	5
		56	2	2	2	2	5	5
Fiberglass Board	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	4-5	5	5	5	5
		28	4	4-5	5	4	5	5
		35	4	4-5	5	4	5	5
		42	4	4-5	5	4	5	5
		49	4	4-5	5	4	5	5
		56	4	4	5	3	5	5
Fiberglass Board	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	3	4	3	5	5	5
		28	3	4	1	3	5	5
		35	-	-	-	-	-	-

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Samples were removed from QUV cabinet because their security features were compromised.

Table 4.2. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Fiberglass Board	acrylic	0	3	4	3	3	5	5
		7	3	4	2	3	5	5
		14	3	4	1	3	5	5
		21	3	4	1	3	5	5
		28	3	4	1	3	5	5
		35	b	-	-	-	-	-
Lexan	epoxy 1	0	5	5	5	5	5	5
		7	2	3	5	5	1	2-3
		14	1	2	1	3	1	1-2
		21	1	1	1	3	1	1
		28	1	1	1	3	1	1
		35	-	-	-	-	-	-
Lexan	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	4	5	5	5	5
		28	4	4	5	3	5	5
		35	4	4	5	3	5	5
		42	4	4	5	3	5	5
		49	4	4	5	3	5	5
		56	4	3	5	3	5	5
Lexan	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	4	3	3	5	5
		28	4	4	1	2	5	5
		35	-	-	-	-	-	-
Lexan	acrylic	0	3	4	3	3	5	5
		7	3	4	2	3	5	5
		14	2-3	4	2	3	5	5
		21	2-3	4	1	3	5	5
		28	2-3	4	1	3	5	5
		35	-	-	-	-	-	-
Mil. Spec. PU <sup>c</sup> Painted Steel	epoxy 1	0	5	5	5	5	5	5
		7	4	4	5	5	5	5
		14	4	4	3	4	5	5
		21	3	3	3	4	5	5
		28	3	3	3	4	5	5
		35	3	3	3	4	5	5
		42	3	3	3	4	5	5
		49	3	3	2	4	5	5
		56	2	3	2	4	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Samples were removed from QUV cabinet because their security features were compromised.

Table 4.2. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Mil. Spec. PU-Painted Steel	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	3	5	5
		35	5	5	5	3	5	5
		42	5	5	5	3	5	5
		49	5	5	5	3	5	5
		56	4	4	5	3	5	5
Mil. Spec. PU-Painted Steel	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	4	5	5	5	5	5
		21	4	5	3	4	5	5
		28	3	4	2	3-4	5	5
		35	2	4	1-2	3-4	5	5
		42	2	4	1-2	3-4	5	5
		49	1	4	1	3-4	5	5
		56	1	4	1	3-4	5	5
Mil. Spec. PU-Painted Steel	acrylic	0	3	4	3	3	5	5
		7	3	4	2	3	5	5
		14	3	4	2	3	5	5
		21	3	4	1	3	5	5
		28	3	4	1	3	5	5
		35	- <sup>b</sup>	-	-	-	-	-

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Samples were removed from QUV cabinet because their security features were compromised.

<sup>c</sup> Polyurethane

features were very faded after 4 weeks, while on the other surfaces, it took 7 to 8 weeks for the security features to become badly faded.

Epoxy 2 adhesive-bonded tamper tapes had the best overall performance on all surfaces for the 8 weeks of exposure in the QUV cabinet (Table 4.2). The appearance of the tamper tapes was good, the security feature on all of the tamper tapes remained very visible with only slight fading, and adhesion was excellent.

#### 4.1.3 Thermal Cycling Exposure Results

The results of thermal cycling exposure of the 2.54-cm-wide Confirm<sup>®</sup> window tamper tapes bonded to surfaces using the four rapid-set adhesives are given in Table 4.3. The 56-day



**Table 4.3.** Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in Thermal Cycling Cabinet (-18°C to 46°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	5	5	5	5	5
		21	4	5	5	5	5	5
		28	4	5	5	5	5	5
		42	4	5	5	5	5	5
		56	4	5	5	5	4	4
Aluminum	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	5	5	5	5	5
		28	4	5	5	5	5	5
		42	4	5	5	5	5	5
		56	4	5	5	5	5	5
Aluminum	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	5	5	5	5	5
		28	4	5	5	5	5	5
		42	4	5	5	5	5	5
		56	4	5	5	5	5	5
Aluminum	acrylic	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	3	4	5	5	5	5
		21	3	4	5	5	5	5
		28	3	4	5	5	5	5
		42	3	4	4	5	5	5
		56	3	4	3	5	5	5
Steel	epoxy 1	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4	5	5	5	5	5
		28	4	5	5	5	5	5
		42	4	5	5	5	5	5
		56	4	5	5	5	5	5
Steel	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	4-5	4-5	5	5	5	5
		28	4-5	4-5	5	5	5	5
		42	4-5	4-5	5	5	5	5
		56	4-5	4-5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.3. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	4	5	5	5	5	5
Steel	acrylic	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	5	4	5	5	5
		21	3-4	4-5	4	5	5	5
		28	3-4	4-5	4	5	5	5
		42	3-4	4-5	4	5	5	5
		56	3-4	4-5	4	5	5	5
Wood	epoxy 1	0	4	4-5	5	5	5	5
		7	4	4-5	5	5	5	5
		14	3	4-5	5	5	5	5
		21	3	4-5	5	5	5	5
		28	3	4-5	5	5	5	5
		42	3	4-5	5	5	5	5
		56	3	4-5	5	5	5	5
Wood	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	5	5	5	5	5	5
Wood	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	4	5	5	5	5	5
Wood	acrylic	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	5	4	5	5	5
		21	4	5	4	5	5	5
		28	4	5	4	5	5	5
		42	4	5	4	5	5	5
		56	3	4	4	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.3. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Fiberglass Board	epoxy 1	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
Fiberglass Board	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
Fiberglass Board	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
Fiberglass Board	acrylic	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	4-5	4	5	5	5
		21	4	4-5	4	5	5	5
		28	4	4-5	4	5	5	5
		42	4	4-5	4	5	5	5
Lexan	epoxy 1	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
Lexan	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
56	5	5	5	5	5	5		

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.3. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Lexan	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	4	5	5	5	5	5
Lexan	acrylic	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	5	4	5	5	5
		21	4	5	4	5	5	5
		28	4	5	4	5	5	5
		42	4	5	3	5	5	5
		56	4	5	3	5	5	5
Mil. Spec. PU <sup>b</sup> Painted Steel	epoxy 1	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	4	5	5	5	5	5
Mil. Spec. PU-Painted Steel	epoxy 2	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	5	5	5	5	5	5
Mil. Spec. PU-Painted Steel	polyurethane	0	5	5	5	5	5	5
		7	5	5	5	5	5	5
		14	5	5	5	5	5	5
		21	5	5	5	5	5	5
		28	5	5	5	5	5	5
		42	5	5	5	5	5	5
		56	4	5	5	5	5	5
Mil. Spec. PU-Painted Steel	acrylic	0	4	5	5	5	5	5
		7	4	5	5	5	5	5
		14	4	4-5	4	5	5	5
		21	4	4-5	4	5	5	5
		28	4	4-5	4	5	5	5
		42	3	4	4	5	5	5
		56	3	4	3	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane

exposure to cycles of -18°C to 46°C showed little or no effects on the security features of the tamper tapes. The acrylic-bonded tamper tapes did show slight to moderate fading of their security feature during the exposure period. The tamper tapes displayed excellent adhesion to the surfaces. The appearance of the tamper tapes using the acrylic and epoxy 1 adhesives changed slightly. Overall, the tamper tapes held up very well to thermal cycling.

#### 4.1.4 Control Exposure Results

The results for the tamper tapes held under the control exposure conditions (23°C, 50% relative humidity) are given in Table 4.4. These rapid-set adhesive-bonded tamper tapes showed no change in appearance, adhesion, or security features during the seven weeks of storage.

## 4.2 WEATHERING OF TAMPER TAPES MADE WITH THREE DIFFERENT CONFIRM® PRODUCTS

In the second study using rapid-set adhesives, tamper tapes with 2.54-cm-wide Confirm® windows were made in the laboratory to determine if another 3M Confirm® material might perform better than the 1700 series previously used in all other weathering studies. Three Confirm® materials, i.e., Confirm® 1500 with primer, Confirm 1500® without primer, and Confirm 1300®, were used. The primary differences between these 3M products were in the bead-bond layers. The 1700 products contain an "alkyd" layer, the 1500 products a polyurethane layer, and the 1300 product a "latex" layer. The tamper tapes were made in the laboratory, as described for the first study with rapid-set adhesives, by bonding the various Confirm® materials to vinyl underlay using a 3M Company PSA. The same four candidate rapid-set adhesives, i.e., epoxy 1, epoxy 2, polyurethane, and acrylic, were used to bond the prototype tamper tapes to four surfaces, i.e., roughened aluminum, roughened steel, wood, and Mil. Spec. polyurethane-painted steel. They were tested at Daytona Beach, Florida, in the QUV cabinet (ultraviolet light, 60°C; condensing humidity, 40°C), and in the thermal cycling cabinet (-18°C to 46°C). After exposure, the tamper tapes were examined as was done in the first study using rapid-set adhesives.

#### 4.2.1 Florida Exposure Results

The results from the exposure of the various Confirm® material tamper tapes in Daytona Beach, Florida are given in Table 4.5. Over 2 months, there was little to no change in the adhesion of the tamper tapes to the various surfaces. However, significant changes occurred in the security feature of the tamper tapes. The security feature on the tamper tapes prepared with Confirm® 1500 (with and without a primer) turned black, an effect not noted previously with other prototype tamper tapes. This change probably was due to corrosion of the reflective layer under the glass

**Table 4.4.** Evaluation of Tamper Tapes Applied with Candidate Rapid-Set Adhesives Held Under Control Conditions (23°C, 50% Relative Humidity)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall	
			Appearance		Security Emblem		Surface Adhesion		
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area		
Aluminum	epoxy 1	7	5	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane		4-5	4-5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	epoxy 1	21	5	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane		4-5	4-5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	epoxy 1	35	5	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane		4-5	4-5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	epoxy 1	49	5	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane		4-5	5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	epoxy 1	63	5	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane		4-5	5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	Steel	epoxy 1	7	4-5	4-5	5	5	5	5
		epoxy 2		5	5	5	5	5	5
		polyurethane		4-5	4-5	5	5	5	5
		acrylic		4	5	5	5	5	5
epoxy 1		21	4-5	4-5	5	5	5	5	
epoxy 2			5	5	5	5	5	5	
polyurethane			4-5	4-5	5	5	5	5	
acrylic			4	5	5	5	5	5	
epoxy 1		35	4-5	4-5	5	5	5	5	
epoxy 2			5	5	5	5	5	5	
polyurethane			4-5	4-5	5	5	5	5	
acrylic			4	5	5	5	5	5	
epoxy 1		49	4-5	4-5	5	5	5	5	
epoxy 2			5	5	5	5	5	5	
polyurethane			4-5	4-5	5	5	5	5	
acrylic			4	4-5	5	5	5	5	
epoxy 1		63	4-5	5	5	5	5	5	
epoxy 2			5	5	5	5	5	5	
polyurethane			4-5	4-5	5	5	5	5	
acrylic			4	4-5	5	5	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.4. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Wood	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		5	5	5	5	5	5
	epoxy 1	21	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		5	5	5	5	5	5
	epoxy 1	35	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		5	5	5	5	5	5
	epoxy 1	49	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		4-5	5	5	5	5	5
epoxy 1	63	5	5	5	5	5	5	
epoxy 2		5	5	5	5	5	5	
polyurethane acrylic		4-5	5	5	5	5	5	
Polyester Fiberglass Board	epoxy 1	7	4-5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		5	5	5	5	5	5
	epoxy 1	21	4-5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		5	5	5	5	5	5
	epoxy 1	35	4-5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		5	5	5	5	5	5
	epoxy 1	49	4-5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		4-5	5	5	5	5	5
epoxy 1	63	5	5	5	5	5	5	
epoxy 2		5	5	5	5	5	5	
polyurethane acrylic		5	5	5	5	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.4. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Lexan	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		3	5	2	5	5	5
	epoxy 1	21	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		3	5	2	5	5	5
	epoxy 1	35	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		3	5	2	5	5	5
	epoxy 1	49	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4	5	5	5	5	5
	acrylic		3	4-5	2	5	5	5
	epoxy 1	63	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		3	4-5	2	5	5	5
Mil. Spec. PU <sup>b</sup> Painted Steel	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4	5	5	5	5	5
	epoxy 1	21	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4	5	5	5	5	5
	epoxy 1	35	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4	5	5	5	5	5
	epoxy 1	49	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4	5	5	5	5	5
	epoxy 1	63	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		4	5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane



Table 4.5. Evaluation of Tamper Tapes Prepared from Different Confirm® Materials, Applied with Candidate Rapid-Set Adhesives, and Exposed in Daytona Beach, Florida

Surface	Confirm® Type	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>						
				Appearance		Security Emblem		Adhesion to Surface		
				Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall	
Aluminum	1500 w/o primer	epoxy 1	0	5	5	5	5	5	5	
		expoxy 2		5	5	5	5	5		
		polyurethane		4-5	5	5	5	5		
		acrylic		2	2	3	3	5		
			epoxy 1	1	4-5	4	b	-	5	5
			expoxy 2		4-5	4-5	-	-	5	5
			polyurethane		4	5	-	-	5	5
			acrylic		2	2	-	-	5	5
			epoxy 1	2	4-5	4-5	3 <sup>c</sup>	3 <sup>c</sup>	5	5
			expoxy 2		4-5	4-5	4 <sup>c</sup>	4 <sup>c</sup>	5	5
			polyurethane		4	5	3 <sup>c</sup>	4 <sup>c</sup>	5	5
			acrylic		2	2	1	2	5	5
Steel	1500 w/o primer	epoxy 1	0	4-5	5	5	5	5	5	
		expoxy 2		4-5	5	5	5	5		
		polyurethane		5	5	5	5	5		
		acrylic		2	2	3	3	5		
			epoxy 1	1	4-5	4	-	-	5	5
			expoxy 2		4-5	4-5	-	-	5	5
			polyurethane		4	5	-	-	5	5
			acrylic		2	2	-	-	5	5
			epoxy 1	2	4-5	4	4	4	5	5
			expoxy 2		4-5	4-5	5	5	5	5
			polyurethane		4	5	5	5	5	
			acrylic		2	2	1	2	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

<sup>c</sup> Emblem was black.

Table 4.5. (Continued)

Surface	Confirm® Type	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					
				Appearance		Security Emblem		Adhesion to Surface	
				Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Polyester Fiberglass Board	1500 w/o primer	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	
		polyurethane		5	5	5	5	5	
		acrylic		2	3	2	3	5	
		epoxy 1	1	4-5	4	- <sup>b</sup>	-	5	5
		epoxy 2		5	4-5	-	-	5	5
		polyurethane		4-5	5	-	-	5	5
		acrylic		2	3	-	-	5	5
		epoxy 1	2	4-5	4	2 <sup>c</sup>	2 <sup>c</sup>	5	5
		epoxy 2		5	4-5	4 <sup>c</sup>	4 <sup>c</sup>	5	5
		polyurethane		4	5	3-4 <sup>c</sup>	3-4 <sup>c</sup>	5	5
		acrylic		2	3	3 <sup>c</sup>	3 <sup>c</sup>	5	5
Mil. Spec. Polyurethane Painted Steel Panel	1500 w/o primer	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	
		polyurethane		4-5	5	5	5	5	
		acrylic		2	3	2	3	5	
		epoxy 1	1	5	4	-	-	5	5
		epoxy 2		5	4-5	-	-	5	5
		polyurethane		4	5	-	-	5	5
		acrylic		2	3	-	-	5	5
		epoxy 1	2	5	4	2 <sup>c</sup>	2 <sup>c</sup>	5	5
		epoxy 2		5	4-5	5	3-4 <sup>c</sup>	5	5
		polyurethane		4	5	4 <sup>c</sup>	3 <sup>c</sup>	5	5
		acrylic		2	3	2 <sup>c</sup>	2 <sup>c</sup>	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

<sup>c</sup> Emblem was black.

Table 4.5. (Continued)

Surface	Confirm <sup>®</sup> Type	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					
				Appearance		Security Emblem		Adhesion to Surface	
				Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Aluminum	1500 w/primer	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		4-5	5	5	5	5	5
		polyurethane		4-5	5	5	5	5	5
		acrylic		4	5	5	5	5	5
		epoxy 1	1	4-5	4	b	-	5	5
		epoxy 2		4-5	5	-	-	5	5
		polyurethane		4	5	-	-	5	5
		acrylic		4	4-5	-	-	5	5
		epoxy 1	2	4-5	4	2 <sup>c</sup>	2 <sup>c</sup>	5	5
		epoxy 2		4-5	5	4 <sup>c</sup>	4 <sup>c</sup>	5	5
		polyurethane		4	5	4-5	4-5	5	5
		acrylic		4	5	1	2	5	5
Steel	1500 w/primer	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	5
		polyurethane		4-5	5	5	5	5	5
		acrylic		4	4	5	5	5	5
		epoxy 1	1	5	4	-	-	5	5
		epoxy 2		5	5	-	-	5	5
		polyurethane		4-5	4-5	-	-	5	5
		acrylic		4-5	4-5	-	-	5	5
		epoxy 1	2	5	4	3	3-4	5	5
		epoxy 2		5	5	3 <sup>c</sup>	3 <sup>c</sup>	5	5
		polyurethane		4-5	4-5	5	5	5	5
		acrylic		4-5	4-5	2	2	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

<sup>c</sup> Emblem was black.

Table 4.5. (Continued)

Surface	Confirm® Type	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					
				Appearance		Security Emblem		Adhesion to Surface	
				Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Polyester Fiberglass Board	1500 w/primer	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	
		polyurethane		5	5	5	5	5	
		acrylic		2	2	2	3	5	5
		epoxy 1	1	5	4	- <sup>b</sup>	-	5	5
		epoxy 2		5	5	-	-	5	5
		polyurethane		4	4-5	-	-	5	5
		acrylic		2	2	-	-	5	5
		epoxy 1	2	5	4	3 <sup>c</sup>	3 <sup>c</sup>	5	5
		epoxy 2		5	5	4 <sup>c</sup>	4 <sup>c</sup>	5	5
		polyurethane		4	4-5	4	3 <sup>c</sup>	5	5
		acrylic		2	2	1 <sup>c</sup>	2 <sup>c</sup>	5	5
Mil Spec. Polyurethane Painted Steel Panel	1500 w/primer	epoxy 1	0	4-5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	
		polyurethane		5	5	5	5	5	
		acrylic		2	2	2	3	5	5
		epoxy 1	1	4-5	3-4	-	-	5	5
		epoxy 2		5	5	-	-	5	5
		polyurethane		4-5	4-5	-	-	5	5
		acrylic		2	2	-	-	5	5
		epoxy 1	2	4-5	3-4	3 <sup>c</sup>	3 <sup>c</sup>	5	5
		epoxy 2		5	5	4 <sup>c</sup>	3 <sup>c</sup>	5	5
		polyurethane		4-5	4-5	5	3	5	5
		acrylic		2	2	1 <sup>c</sup>	2 <sup>c</sup>	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

<sup>c</sup> Emblem was black.

Table 4.5. (Continued)

Surface	Confirm® Type	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					
				Appearance		Security Emblem		Adhesion to Surface	
				Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Aluminum	1300	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		4-5	5	5	5	5	5
		polyurethane		4-5	5	5	5	5	5
		acrylic		4-5	5	5	5	5	5
		epoxy 1	1	4	4	- <sup>b</sup>	-	5	5
		epoxy 2		4-5	5	-	-	5	5
		polyurethane		3-4	5	-	-	5	5
		acrylic		4	5	-	-	5	5
		epoxy 1	2	4	4	5	4	5	5
		epoxy 2		4-5	5	5	5	5	5
		polyurethane		3-4	5	1	2	5	5
		acrylic		4	5	4	4	5	5
Steel	1300	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		4	5	5	5	5	5
		polyurethane		5	5	5	5	5	5
		acrylic		5	5	5	5	5	5
		epoxy 1	1	5	4	-	-	5	5
		epoxy 2		4	5	-	-	5	5
		polyurethane		4	5	-	-	5	5
		acrylic		4-5	5	-	-	5	5
		epoxy 1	2	5	4	4	5	5	5
		epoxy 2		4	5	5	5	5	5
		polyurethane		4	5	1	2	5	5
		acrylic		4-5	5	4	2-3	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

Table 4.5. (Continued)

Surface	Confirm® Type	Adhesive	Months Exposure	Condition of Tamper Tape <sup>a</sup>					
				Appearance		Security Emblem		Adhesion to Surface	
				Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Polyester Fiberglass Board	1300	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		4-5	5	5	5	5	5
		polyurethane		5	5	5	5	5	5
		acrylic		4	5	5	5	5	5
	epoxy 1	1	5	4-5	b	-	5	5	
	epoxy 2		4-5	5	-	5	5		
	polyurethane		4-5	5	-	5	5		
	acrylic		4	5	-	5	5		
	epoxy 1	2	4	4-5	5	5	5	5	
	epoxy 2		4-5	5	5	5	5		
	polyurethane		4-5	5	1	3	5	5	
	acrylic		4	5	4 <sup>c</sup>	4 <sup>c</sup>	5	5	
Mil Spec. Polyurethane Painted Steel Panel	1300	epoxy 1	0	5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	
		polyurethane		5	5	5	5	5	
		acrylic		4-5	5	5	5	5	
	epoxy 1	1	5	4	-	-	5	5	
	epoxy 2		5	5	-	5	5		
	polyurethane		4	5	-	5	5		
	acrylic		4-5	5	-	5	5		
	epoxy 1	2	5	4	3 <sup>c</sup>	3 <sup>c</sup>	5	5	
	epoxy 2		5	5	5	4	5	5	
	polyurethane		4	5	1-2	3	5	5	
	acrylic		4-5	4-5	3	3	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> No data

<sup>c</sup> Emblem was black.

beads of the Confirm<sup>®</sup> material. The change is attributed to the salt spray in the air since the tapes exposed in the QUV cabinet did not show this effect. Security features on only 2 out of 16 of the tamper tapes prepared from the latex Confirm<sup>®</sup> 1300 turned black. With the Confirm<sup>®</sup> 1500 materials, however, there were 10 or 11 out of 16 that showed this effect.

Of the four rapid-set adhesives on all the tamper tapes, epoxy 2 showed the least amount of change in the visibility of the security features. Only the polyurethane adhesive performed better with tamper tapes prepared from the Confirm<sup>®</sup> 1500 with primer. Tamper tapes prepared with the polyurethane adhesive and the latex Confirm<sup>®</sup> (1300) lost the visibility of their security features. Overall, the second best adhesive was epoxy 1. However, with tamper tapes made with the Confirm<sup>®</sup> 1500 products, the epoxy 1 did not do well on the fiberglass or the polyurethane-painted steel surfaces. With the exception of the polyurethane, the adhesives performed better on tamper tapes prepared with the latex Confirm<sup>®</sup> than on those using the Confirm<sup>®</sup> 1500 materials.

#### 4.2.2. QUV Cabinet Exposure Results

The results of the 42-day QUV cabinet exposure of tamper tapes made with Confirm<sup>®</sup> 1500 without primer material are given in Table 4.6. The acrylic adhesive attacked this Confirm<sup>®</sup> material, as it did the 1700 material, causing poor appearance and poor visibility of the security feature. After 5 or 6 weeks, the security features were completely degraded. With the acrylic adhesive tamper tapes, there was also some loss of adhesion after 5 weeks. The visibility of the security features changed slightly on the epoxy 1 adhesive-bonded tamper tapes; moderate to full loss of visibility of the security feature occurred in the same amount of time with the polyurethane adhesive. The security features of the epoxy 2 adhesive-bonded tamper tapes did not show any loss of visibility, and the tapes prepared with this adhesive performed well overall.

Tamper tapes prepared with Confirm<sup>®</sup> 1500 with primer material, bonded to the various surfaces with the rapid-set adhesives, and exposed in the QUV cabinet for 42 days performed very similarly to the Confirm<sup>®</sup> 1500 without primer material (Table 4.7). Because of a shortage of the acrylic adhesive, another commercially-available acrylic adhesive was substituted when adhering the tamper tapes to steel. This acrylic adhesive did not attack or harm the security features, therefore, the tamper tapes aged better. This adhesive had a slower gel time compared to the acrylic adhesive used in all other weathering studies, but its gel time was still comparable to the epoxy 1 adhesive.

In general, the candidate adhesives performed better in the QUV cabinet on tamper tapes prepared with the Confirm<sup>®</sup> 1300 material than they did on tamper tapes prepared with the other Confirm<sup>®</sup> materials (Table 4.8). The acrylic adhesive, which attacked all of the other Confirm<sup>®</sup>

Table 4.6. Evaluation of Confirm® 1500 Without Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet (UV, 60°C; Condensing Humidity, 40°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Aluminum	epoxy 1	0	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		4-5	4-5	3	3	5	5
	epoxy 1	7	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		2	2	2	2	5	5
	epoxy 1	14	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	2	2	5	5
	epoxy 1	21	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	2	2	5	5
	epoxy 1	28	4	4	4	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	4	5	5
	acrylic		1	3	2	2	3	3
	epoxy 1	35	4	3	4	4	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4	4-5	4	4	5	5
	acrylic		1	2	2	2	2	3
epoxy 1	42	3	3	4	4	5	5	
epoxy 2		4	4	5	5	5	5	
polyurethane		3	4-5	4	3	5	5	
acrylic		1	2	1	2	2	2	
Steel	epoxy 1	0	4-5	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		1	1	1	2	5	5
	epoxy 1	7	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		1	1	1	2	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.



Table 4.6. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Steel (Cont.)	epoxy 1	14	3-4	3-4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic		4-5	4-5	5	5	5	5
	epoxy 1	21	3-4	3-4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic		4-5	4-5	5	5	5	5
	epoxy 1	28	3-4	3-4	4	4	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic		4	4-5	1	2	5	5
	epoxy 1	35	3-4	3-4	4	4	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic		4	4-5	1	2	5	5
epoxy 1	42	3	3	4	4	5	5	
epoxy 2		4	4	5	5	5	5	
polyurethane acrylic		3	4-5	1	2	5	5	
Polyester Fiberglass Board	epoxy 1	0	4-5	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic		4-5	4-5	5	5	5	5
	epoxy 1	7	3-4	3-4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane acrylic		4-5	4-5	5	5	5	5
	epoxy 1	14	3	3	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic		4	4	2	5	5	5
	epoxy 1	21	3-4	3-4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic		4	4	2	5	5	5
epoxy 1	28	3	3	4	4	5	5	
epoxy 2		4	4	5	5	5	5	
polyurethane acrylic		3	4	2	3	5	5	
			2	4	2	3	4	4

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.6. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Polyester Fiberglass Board (Cont.)	epoxy 1	35	3	3	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	42	3	3	4	4	5	5
	acrylic		2	4	2	3	3	3
	epoxy 1	42	3	3	4	4	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	42	3	4	2	3	4	4
	acrylic		2	3	2	3	3	3
Mil. Spec. pU <sup>b</sup> Painted Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane	7	5	5	5	5	5	5
	acrylic		3	4-5	5	5	5	5
	epoxy 1	7	4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane	14	5	5	5	5	5	5
	acrylic		2	4	2	3	5	5
	epoxy 1	14	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	21	4-5	4-5	5	5	5	5
	acrylic		2	4	2	3	5	5
	epoxy 1	21	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	28	4-5	4-5	5	5	5	5
	acrylic		2	4	2	3	4	4-5
	epoxy 1	28	4	4	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	35	3	4-5	4	4	5	5
	acrylic		2	4	2	3	4	4-5
	epoxy 1	35	4	3	4	4	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	42	3	4-5	4	4	4	4-5
	acrylic		2	4	2	3	4	4-5
epoxy 1	42	3	3	4	4	5	5	
epoxy 2		4	4	5	4	5	5	
polyurethane	42	3	4-5	3	3	4	4-5	
acrylic		2	3	2	3	4	4	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane

Table 4.7. Evaluation of Confirm® 1500 With Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet (UV, 60°C; Condensing Humidity, 40°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1 epoxy 2 polyurethane acrylic	0	4-5	4-5	5	5	5	5
			5	5	5	5	5	5
			4-5	4-5	5	5	5	5
			3-4	5	5	5	5	5
	epoxy 1 epoxy 2 polyurethane acrylic	7	3-4	3-4	5	5	5	5
			5	5	5	5	5	5
			4	4	5	5	5	5
			3	5	3	4	5	5
	epoxy 1 epoxy 2 polyurethane acrylic	14	3-4	3-4	5	5	5	5
			4-5	4-5	5	5	5	5
			4	4	5	5	5	5
			3	5	3	4	5	5
	epoxy 1 epoxy 2 polyurethane acrylic	21	3-4	3-4	5	5	5	5
			4-5	4-5	5	5	5	5
			4	4	5	5	5	5
			3	5	3	4	5	5
	epoxy 1 epoxy 2 polyurethane acrylic	28	3-4	3-4	4	5	5	5
			4-5	4-5	5	5	5	5
			4	4	4	4	5	5
			3	5	3	4	5	5
	epoxy 1 epoxy 2 polyurethane acrylic	35	3-4	3	4	4	5	5
			4-5	4-5	5	5	5	5
			4	4	4	4	5	5
			3	5	3	4	4	4
epoxy 1 epoxy 2 polyurethane acrylic	42	3	2	4	4	5	5	
		4-5	4-5	5	5	5	5	
		3	3	4	4	5	5	
		2	3	1	3	4	4	
Steel	epoxy 1 epoxy 2 polyurethane acrylic <sup>b</sup>	0	4-5	4-5	5	5	5	5
			5	5	5	5	5	5
			5	5	5	5	5	5
			5	5	5	5	5	5
	epoxy 1 epoxy 2 polyurethane acrylic <sup>b</sup>	7	3-4	3-4	5	5	5	5
			5	5	5	5	5	5
			4-5	4-5	5	5	5	5
			4	5	3	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> A different rapid-set acrylic adhesive was used on this surface compared to the others.

Table 4.7. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel (Cont.)	epoxy 1	14	3-4	3-4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic <sup>b</sup>		4	5	4	5	5	5
	epoxy 1	21	3-4	3-4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic <sup>b</sup>		4	5	4	5	5	5
	epoxy 1	28	3-4	3	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic <sup>b</sup>		4	5	4	5	5	5
epoxy 1	35	3-4	3	4	3	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		4	4	5	5	5	5	
acrylic <sup>b</sup>		4	5	4	5	5	5	
epoxy 1	42	3	2	4	3	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		3	3	3	4	5	5	
acrylic <sup>b</sup>		4	3	4	5	5	5	
Polyester Fiberglass Board	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		2	2	3	3	5	5
	epoxy 1	7	3-4	3-4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	2	3	5	5
	epoxy 1	14	3-4	3-4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		2	2	2	3	5	5
epoxy 1	21	3-4	3-4	5	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		4	4	5	5	5	5	
acrylic		2	2	2	3	5	5	
epoxy 1	28	3-4	3-4	4	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		3	4	5	5	5	5	
acrylic		1	2	2	3	4	4	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> A different rapid-set acrylic adhesive was used on this surface compared to the others.

Table 4.7. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Polyester Fiberglass Board (Cont.)	epoxy 1	35	3-4	3	3	4	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		1	2	2	3	4	4
	epoxy 1	42	3	2	3	4	5	5
	epoxy 2		4-5	4-5	4	5	5	5
	polyurethane		3	3	4	3	5	5
	acrylic		1	2	1	2	3	3
Mil. Spec. PVC Painted Steel	epoxy 1	0	4-5	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		2	2	1	3	5	5
	epoxy 1	7	3-4	3-4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	1	3	5	5
	epoxy 1	14	3-4	3-4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		2	2	1	3	5	5
	epoxy 1	21	3-4	3-4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		2	2	1	3	5	5
	epoxy 1	28	3-4	3-4	3	4	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	3	3	5	5
	acrylic		2	2	1	2	4	4
	epoxy 1	35	3-4	3	3	4	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	3	3	5	5
	acrylic		2	2	1	2	4	4
epoxy 1	42	3	2	3	3	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		3	4	3	3	5	5	
acrylic		1	2	1	2	3	3	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>c</sup> Polyurethane

Table 4.8. Evaluation of Confirm® 1300 Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in QUV Cabinet (UV, 60°C; Condensing Humidity, 40°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	7	4-5	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	14	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	21	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	28	4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	35	4	3	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	4	4
	acrylic		4-5	4-5	4	5	5	5
epoxy 1	42	3	3	4	4	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		3	4-5	5	5	5	5	
acrylic		4-5	4-5	4	4	5	5	
Steel	epoxy 1	0	4-5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	7	3-4	4	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.8. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel (Cont.)	epoxy 1	14	3-4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	21	3-4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	28	3-4	4	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	35	3-4	3	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	4	5	4	4
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	42	3	3	4	3	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		3	4-5	4	4	5	5
	acrylic		4-5	4-5	3	4	5	5
Polyester Fiberglass Board	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	7	4	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		4-5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	14	4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4	4-5	5	5	5	5
	epoxy 1	21	4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4	4-5	5	5	5	5
epoxy 1	28	4	4	4	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		4	4-5	4	5	5	5	
acrylic		4	4-5	4	5	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.8. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall
Polyester Fiberglass Board (Cont.)	epoxy 1	35	4	3	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	4	5	5	5
	acrylic		4	4-5	4	5	5	5
	epoxy 1	42	3	3	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		3	4-5	4	5	5	5
	acrylic		4	4	2	3	5	5
Mil. Spec. PU <sup>b</sup> Painted Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	7	4-5	4-5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	14	4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	21	4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	28	4	4	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		4-5	4-5	4	5	5	5
	epoxy 1	35	4	3	5	4	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	4	5	4	4
	acrylic		4-5	4-5	4	4	5	5
epoxy 1	42	3	3	5	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		3	4	5	5	5	5	
acrylic		4-5	4-5	3	4	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane



materials, did not attack the latex Confirm<sup>®</sup> 1300. An examination of the tamper tapes' security features showed that the most loss in visibility occurred with the acrylic adhesive when tamper tapes were bonded to fiberglass board. Otherwise, there was only a slight or no change in visibility of the security features on tamper tapes bonded with the rapid-set adhesives. Adhesion, in general, was very good. The epoxy 2 adhesive essentially had no change in the 42 days of exposure.

#### 4.2.3 Thermal Cycling Exposure Results

Tables 3.9, 3.10, and 3.11 give the results of the 42-day thermal cycling exposures for the tamper tapes made with Confirm<sup>®</sup> 1500 without primer, Confirm<sup>®</sup> 1500 with primer, and Confirm<sup>®</sup> 1300 materials, respectively. Changes in temperature from -18°C to 46°C did not appear to affect the security feature or the adhesion of the tamper tapes nearly as much as did the conditions in the QUV cabinet. Overall, the tamper tapes held up very well throughout the thermal cycling exposure. The acrylic-adhesive bonded tamper tapes showed the same appearance and were attacked similarly as they were in the other exposures with this rapid-set adhesive, i.e., some of the security features on the tapes were essentially not visible or were very faded at the start of the exposure. Thermal cycling did not significantly worsen the condition of these tamper tapes. With the epoxy 1 and 2 adhesive-bonded tamper tapes, slight changes in the visibility of the security features were noted. With the epoxy 1 adhesive, these effects were apparent only on the tamper tapes prepared with the Confirm<sup>®</sup> 1300 and adhered to aluminum and steel surfaces. For the epoxy 2 adhesive, the effects were only on the tamper tapes prepared with the Confirm<sup>®</sup> 1500 with primer material bonded to the fiberglass board. Otherwise, all of the other tamper tapes performed very well.

#### 4.3 SUMMARY

Of the four Confirm<sup>®</sup> materials, i.e., 1700, 1500 without primer, 1500 with primer, and 1300, the Confirm<sup>®</sup> 1300 was the least affected by the candidate rapid-set adhesives, especially the acrylic adhesive. The tamper tapes prepared with the Confirm<sup>®</sup> 1300 also showed less deterioration in appearance and security feature visibility in comparison to tamper tapes prepared with the other Confirm<sup>®</sup> materials. Adhesion, in general, was quite good with all of the tamper tapes with one exception, that of the epoxy 1 on Lexan with the tamper tapes prepared from the Confirm 1700 material.

The epoxy 2 rapid-set adhesive weathered better than the other adhesives on tamper tapes prepared with any of the Confirm<sup>®</sup> materials.

**Table 4.9.** Evaluation of Confirm® 1500 Without Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in the Thermal Cycling Cabinet (-18°C to 46°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	3	3	5	5
	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	2	3	5	5
	epoxy 1	14	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		2	2	2	3	5	5
	epoxy 1	21	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		2	2	2	3	5	5
	epoxy 1	28	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		1	2	2	3	2	3
	epoxy 1	35	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		1	2	2	2	2	3
epoxy 1	42	4-5	4-5	5	5	5	5	
epoxy 2		3-4	4	5	5	5	5	
polyurethane		4	4	5	5	5	5	
acrylic		1	2	2	2	2	3	
Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	3	3	5	5
	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	2	3	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.9. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Steel (Cont.)	epoxy 1	14	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		2	2	2	3	5	5
	epoxy 1	21	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		2	2	2	3	5	5
	epoxy 1	28	4-5	4-5	5	5	5	5
	epoxy 2		3-4	4	5	5	5	5
	polyurethane		4	4	5	5	5	5
	acrylic		2	2	2	3	2	3
epoxy 1	35	4-5	4-5	5	5	5	5	
epoxy 2		3-4	4	5	5	5	5	
polyurethane		4	4	5	5	4	4	
acrylic		2	2	2	3	2	3	
epoxy 1	42	4-5	4-5	5	5	5	5	
epoxy 2		3-4	4	5	5	5	5	
polyurethane		4	4	5	5	4	4	
acrylic		2	2	2	3	2	3	
Polyester Fiberglass Board	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		2	4	3	5	5	5
	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		2	4	3	5	5	5
	epoxy 1	14	4-5	4-5	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	4	3	5	5	5
epoxy 1	21	4-5	4-5	5	5	5	5	
epoxy 2		4	4	5	5	5	5	
polyurethane		4-5	4-5	5	5	5	5	
acrylic		2	4	3	5	5	5	
epoxy 1	28	4-5	4-5	5	5	5	5	
epoxy 2		4	4	5	5	5	5	
polyurethane		4-5	4-5	5	5	5	5	
acrylic		2	4	3	5	4	4	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.9. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Polyester Fiberglass Board (Cont.)	epoxy 1	35	4-5	4-5	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane acrylic	42	4-5	4-5	5	5	5	5
			2	4	3	4	4	4
	epoxy 1	42	4-5	4-5	5	5	5	5
			epoxy 2	4	4	5	5	5
	polyurethane acrylic	42	4-5	4-5	5	5	5	5
			2	4	3	4	4	4
Mil. Spec. PUB Painted Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane acrylic	7	5	5	5	5	5	5
			2	3	2	3	5	5
	epoxy 1	7	5	5	5	5	5	5
			epoxy 2	4-5	4-5	5	5	5
	polyurethane acrylic	14	5	5	5	5	5	5
			2	3	2	3	5	5
	epoxy 1	14	4-5	4-5	5	5	5	5
			epoxy 2	4	4	5	5	5
	polyurethane acrylic	21	4-5	4-5	5	5	5	5
			2	3	2	3	5	5
	epoxy 1	21	4-5	4-5	5	5	5	5
			epoxy 2	4	4	5	5	5
	polyurethane acrylic	28	4-5	4-5	5	5	5	5
			2	3	2	3	3	4
epoxy 1	35	4-5	4-5	5	5	5	5	
		epoxy 2	4	4	5	5	5	5
polyurethane acrylic	35	4	4-5	5	5	5	5	
		2	3	2	3	3	3	
epoxy 1	42	4-5	4-5	5	5	5	5	
		epoxy 2	4	4	5	5	5	5
polyurethane acrylic	42	4	4-5	5	5	5	5	
		2	3	2	3	2	3	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane

**Table 4.10.** Evaluation of Confirm® 1500 With Primer Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in the Thermal Cycling Cabinet (-18°C to 46°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>						
			Appearance		Security Emblem		Surface Adhesion		
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall	
Aluminum	epoxy 1	0	5	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane	7	4-5	5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	epoxy 1	14	4	5	5	5	5	5	
	epoxy 2		5	5	5	5	5	5	
	polyurethane	21	4-5	5	5	5	5	5	
	acrylic		4	5	5	5	5	5	
	epoxy 1	28	4	4-5	5	5	5	5	
	epoxy 2		4-5	4-5	5	5	5	5	
	polyurethane	35	4	4	5	5	5	5	
	acrylic		4	5	4	5	5	5	
	epoxy 1	42	4	4-5	5	5	5	5	
	epoxy 2		4-5	4-5	5	5	5	5	
	polyurethane	Steel	4	4	5	5	5	5	
	acrylic		3	4	3	4	5	5	
	Steel	epoxy 1	0	4-5	5	5	5	5	5
		epoxy 2		5	5	5	5	5	5
		polyurethane	7	4-5	5	5	5	5	5
		acrylic		4	5	5	5	5	5
		epoxy 1	7	4	5	5	5	5	5
		epoxy 2		5	5	5	5	5	5
		polyurethane	7	4-5	5	5	5	5	5
		acrylic		4	5	4	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.10. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>						
			Appearance		Security Emblem		Surface Adhesion		
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	Overall	
Steel (Cont.)	epoxy 1	14	3-4	4-5	5	5	5	5	
	epoxy 2		4-5	4-5	5	5	5	5	
	polyurethane	21	4	4-5	5	5	5	5	
	acrylic		4	5	4	5	5	5	
	epoxy 1	28	3-4	4-5	5	5	5	5	
	epoxy 2		4-5	4-5	5	5	5	5	
	polyurethane	35	4	4-5	5	5	5	5	
	acrylic		4	5	4	5	5	5	
	epoxy 1	42	3-4	4-5	5	5	5	5	
	epoxy 2		4-5	4-5	5	5	5	5	
	polyurethane	0	4	4-5	5	5	5	5	
	acrylic		4	5	3	5	5	5	
	Polyester Fiberglass Board	epoxy 1	7	3-4	4-5	5	5	5	5
		epoxy 2		4-5	4-5	5	5	5	5
		polyurethane	14	4	4-5	5	5	5	5
		acrylic		2	2	2	5	5	5
		epoxy 1	21	4	4-5	5	5	5	5
		epoxy 2		4-5	4-5	5	5	5	5
		polyurethane	28	4-5	4-5	5	5	5	5
		acrylic		2	2	2	5	5	5
		epoxy 1	0	4	4-5	5	5	5	5
		epoxy 2		4-5	4-5	5	5	5	5
		polyurethane	7	4-5	4-5	5	5	5	5
		acrylic		2	2	2	4	3	3

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.10. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Polyester Fiberglass Board (Cont.)	epoxy 1	35	4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane	42	4	4-5	5	5	5	5
	acrylic		2	2	2	4	3	3
	epoxy 1		4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane	0	4	4-5	5	5	5	5
	acrylic		2	2	2	4	5	5
Mil. Spec. PU <sup>b</sup> Painted Steel	epoxy 1	7	4-5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane	14	5	5	5	5	5	5
	acrylic		2	2	2	4	5	5
	epoxy 1		4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane	21	4-5	4-5	5	5	5	5
	acrylic		2	2	2	4	5	5
	epoxy 1	28	4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		2	2	2	4	4	4
	epoxy 1	35	4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		2	2	2	4	4	4
	epoxy 1	42	4	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		2	2	2	3	4	4

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane

**Table 4.11.** Evaluation of Confirm® 1300 Tamper Tapes Applied with Candidate Rapid-Set Adhesives and Aged in the Thermal Cycling Cabinet (-18°C to 46°C)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance		Security Emblem		Surface Adhesion	
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area	
Aluminum	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	14	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	21	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	28	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
	epoxy 1	35	4-5	4-5	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4-5	5	5	5	5
epoxy 1	42	4-5	4-5	4	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		4-5	4-5	5	5	5	5	
acrylic		4-5	4-5	5	5	5	5	
Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	7	5	5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.



Table 4.11. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall	
			Appearance		Security Emblem		Surface Adhesion		
			Window Area	Vinyl Area	Window Area	Vinyl Area	Window Area		
Steel (Cont.)	epoxy 1	14	4-5	4-5	5	5	5	5	
	epoxy 2		4	4	5	5	5	5	
	polyurethane	21	4-5	4-5	5	5	5	5	
	acrylic		4-5	4	5	5	5	5	
	epoxy 1	28	4-5	4-5	5	5	5	5	
	epoxy 2		4	4	5	5	5	5	
	polyurethane	35	4-5	4-5	5	5	5	5	
	acrylic		4-5	4	5	5	5	5	
	epoxy 1	42	4-5	4-5	4	5	5	5	
	epoxy 2		4	4	5	5	5	5	
	polyurethane	0	4	4-5	5	5	5	5	
	acrylic		4-5	4	5	5	5	5	
	Polyester Fiberglass Board	epoxy 1	7	5	5	5	5	5	5
		epoxy 2		4-5	4-5	5	5	5	5
		polyurethane	14	5	5	5	5	5	5
		acrylic		4-5	5	5	5	5	5
epoxy 1		21	4-5	4-5	5	5	5	5	
epoxy 2			4	4	5	5	5	5	
polyurethane		28	4-5	4-5	5	5	5	5	
acrylic			4-5	4	5	5	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

Table 4.11. (Continued)

Surface	Adhesive	Days of Exposure	Condition of Tamper Tape <sup>a</sup>					Overall
			Appearance	Security Emblem	Surface Adhesion	Window Area	Vinyl Area	
Polyester Fiberglass Board (Cont.)	epoxy 1	35	4-5	4-5	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane	42	4	4-5	5	5	5	5
	acrylic		4-5	4	5	5	5	5
	epoxy 1	42	4-5	4-5	5	5	5	5
	epoxy 2		4	4	5	5	5	5
	polyurethane		4	4-5	5	5	5	5
	acrylic		4-5	4	5	5	5	5
Mil. Spec. PU <sup>b</sup> Painted Steel	epoxy 1	0	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane	7	5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	14	5	5	5	5	5	5
	epoxy 2		5	5	5	5	5	5
	polyurethane		5	5	5	5	5	5
	acrylic		5	5	5	5	5	5
	epoxy 1	21	4-5	4-5	5	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4	5	5	5	5
	epoxy 1	28	4-5	4-5	4	5	5	5
	epoxy 2		4-5	4-5	5	5	5	5
	polyurethane		4-5	4-5	5	5	5	5
	acrylic		4-5	4	5	5	5	5
epoxy 1	35	4-5	4-5	5	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		4	4-5	5	5	5	5	
acrylic		4-5	4-5	5	5	5	5	
epoxy 1	42	4-5	4-5	5	5	5	5	
epoxy 2		4-5	4-5	5	5	5	5	
polyurethane		4	4-5	5	5	5	5	
acrylic		4-5	4	5	5	5	5	

<sup>a</sup> See Table 3.8 for a description of the numerical ranking code for assessing tamper tapes.

<sup>b</sup> Polyurethane

DISTRIBUTION

No. of  
Copies

OFFSITE

- 2 DOE/Office of Scientific and  
Technical Information
- 2 Michael O'Connell  
Office of Research & Development/NN-20  
U.S. Department of Energy  
1000 Independence Ave.  
Washington, DC 20585
- LTC William McKune  
Defense Nuclear Agency/OPAC  
6801 Telegraph Road  
Alexandria, VA 22310-3398
- 5 Gordon Pickett  
Battelle Columbus  
505 King Avenue  
Columbus, OH 43201-2693

ONSITE

- 21 Pacific Northwest Laboratory
- J. R. Abraham, P8-08  
J. L. Fuller, K6-48  
H. A. Udem, K6-48 (4)  
B. W. Wright, P7-07 (8)  
C. W. Wright, P7-07  
Publishing Coordination  
Technical Report Files (5)