

 Open access • Journal Article • DOI:10.1260/0144-5987.31.4.645

## **Adsorption/desorption characteristics for methane, nitrogen and carbon dioxide of coal samples from Southeast Qinshui Basin, China** — [Source link](#)

Fengde Zhou, Fengde Zhou, Furqan Hussain, Zhenghuai Guo ...+2 more authors

**Institutions:** University of New South Wales, China University of Geosciences (Wuhan)

**Published on:** 01 Aug 2013 - Energy Exploration & Exploitation (Sage Publications)

**Topics:** Langmuir adsorption model, Langmuir, Desorption, Adsorption and Activated carbon

Related papers:

- [Methane and CO2 sorption and desorption measurements on dry Argonne premium coals: pure components and mixtures](#)
- [Laboratory and Simulation Investigation of Enhanced Coalbed Methane Recovery by Gas Injection](#)
- [Adsorption of CO2, CH4, and N2 on Ordered mesoporous carbon: Approach for greenhouse gases capture and biogas upgrading](#)
- [High Pressure Adsorption Data of Methane, Nitrogen, Carbon Dioxide and their Binary and Ternary Mixtures on Activated Carbon](#)
- [Competitive sorption and diffusion of methane and carbon dioxide mixture in Carboniferous-Permian anthracite of south Qinshui Basin, China](#)

Share this paper:    

View more about this paper here: <https://typeset.io/papers/adsorption-desorption-characteristics-for-methane-nitrogen-2tzkmdrts3>

# Adsorption/desorption characteristics for methane, nitrogen and carbon dioxide of coal samples from Southeast Qinshui Basin, China

Fengde Zhou<sup>1,2\*</sup>, Furqan Hussain<sup>1</sup>, Zhenghuai Guo<sup>1</sup>, Sefer Yanici<sup>1</sup>  
and Yildiray Cinar<sup>1</sup>

<sup>1</sup>*School of Petroleum Engineering, University of New South Wales, Sydney,  
NSW 2052, Australia*

<sup>2</sup>*Key Laboratory of Tectonics and Petroleum Resources (China University of Geosciences),  
Ministry of Education, Wuhan 430074, China*

\*Author for Corresponding. Email: f.zhou@unsw.edu.au; fdzhou@cug.edu.cn

(Received 11 August 2012; accepted 16 February 2013)

## Abstract

This paper presents an experimental and modelling study of the adsorption/desorption of pure gases CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub> and their binary and ternary mixtures on coal samples obtained from southeast Qinshui Basin, China. Results show that the adsorbed amounts of N<sub>2</sub>, CH<sub>4</sub> and CO<sub>2</sub> have approximate ratios of 1.0:1.3:2.4, respectively. No significant hysteresis from adsorption to desorption is observed for pure N<sub>2</sub> and CH<sub>4</sub> whereas significant hysteresis is measured for CO<sub>2</sub> in CO<sub>2</sub>-CH<sub>4</sub> and CO<sub>2</sub>-CH<sub>4</sub>-N<sub>2</sub> mixtures and CH<sub>4</sub> in the N<sub>2</sub>-CH<sub>4</sub> mixture. The experimental observations are modelled using three different models, namely the extended Langmuir (EL), the Langmuir-based ideal adsorbed solution (L-IAS) and the Dubinin-Radushkevich-based ideal adsorbed solution (D-R-IAS). The models predict well the experimental observations for desorption tests. But the measurements for the low adsorbate capacity in binary and ternary mixtures are overestimated by the prediction models. It is found that the EL model predicts the CO<sub>2</sub>-CH<sub>4</sub> desorption test better while the D-R-IAS model is the best model for the CO<sub>2</sub>-CH<sub>4</sub>-N<sub>2</sub> adsorption.

**Keywords:** Adsorption, Desorption, Gas mixture, Coalbed methane, Qinshui Basin

## 1. INTRODUCTION

The process of enhanced coalbed methane recovery (ECBM) strongly depends on the type of injection gas composition, e.g. pure/a mixture of CO<sub>2</sub> and N<sub>2</sub> or flue gas (Stevens *et al.*, 1998; Mazumder and Wolf, 2008; Connell *et al.*, 2011). When CO<sub>2</sub> is injected, it is adsorbed by coal more than CH<sub>4</sub> through which CH<sub>4</sub> is displaced from coal. The ECBM mechanism with N<sub>2</sub> as injectant relies on lowering the partial

pressure of  $\text{CH}_4$  in the cleat system and thereby making  $\text{CH}_4$  to be desorbed from coal (Puri and Yee, 1990). Both gases offer technical and economical advantages and disadvantages. For example,  $\text{CO}_2$  injection can help delay the breakthrough time and reduce greenhouse gas emissions to the atmosphere for which project may benefit from additional revenue from carbon credits. But, at the same time, it can also cause coal to swell which, in turn, decreases coal permeability (Shi and Durucan, 2005; Mazumder *et al.*, 2006). As a consequence, the required economic injection rate may not be obtained. On the contrary,  $\text{N}_2$  injection increases coal permeability (Mitra *et al.*, 2008) which enhances the  $\text{CH}_4$  production rate at early stage. At the later stage, however,  $\text{N}_2$  breakthroughs at producers earlier compared to  $\text{CO}_2$  which results in a lower ultimate recovery. Moreover, there is no credit for storing  $\text{N}_2$  which may bring additional costs to the project in comparison to  $\text{CO}_2$  injection (Zhou *et al.*, 2011). Hence, all these features of ECBM need to be understood properly before any project. During these processes, adsorption/desorption characteristics play an important role in determining which gas or gas mixture should be used. Hence, an accurate understanding of the adsorption/desorption competition between pure and mixture gases in a specific coal is essential for an accurate design of ECBM.

Adsorption/desorption characteristics of pure or a mixture gas are generally measured using laboratory tests (Stevenson *et al.*, 1991; Hall *et al.*, 1994; Yu *et al.*, 2008; Gruszkiewicz *et al.*, 2009; Pini *et al.*, 2009, 2010). The size of coal sample used in experiments is reported to range from decades of microns to several centimetres (Yu *et al.*, 2008; Kelemen and Kwiatek, 2009; Papanicolaou *et al.*, 2009; Gruszkiewicz *et al.*, 2009; Wang *et al.*, 2010). Besides, it is known that using crushed coal in experiments can reduce the experimental time remarkably (Gruszkiewicz *et al.*, 2009). Other important parameters that play important role in the adsorption/desorption of gases on/from coal are coal rank (Schepers *et al.*, 2010; Ding *et al.*, 2011), moisture (Joubert *et al.*, 1973; Goodman *et al.*, 2007) and shrinkage/swelling (Hema *et al.*, 2009; Majewska *et al.*, 2010; Wang *et al.*, 2010; Battistutta *et al.*, 2010).

For pure gas adsorption in coal, it is known that coal absorbs more  $\text{CO}_2$  than  $\text{CH}_4$  and  $\text{CH}_4$  more than  $\text{N}_2$  (Pini *et al.*, 2009). Because ECBM includes adsorption/desorption of multiple gases it is also needed to understand the adsorption/desorption characteristics of gas mixtures. However, gas mixture experiments are rather time consuming as they require the measurement of gas compositions. An alternative proposed solution is the use of predictive models for adsorption/desorption of binary/ternary gases. Three prediction models, namely the extended Langmuir (EL), the ideal adsorbed solution (IAS), and the real adsorbed solution (RAS) models, have been widely used to estimate binary/ternary gas adsorption characteristics of coal from its pure isotherm data (Myers and Prausnitz, 1965; Talu and Zwiebel, 1984; O'Brien and Myers, 1985; Gamba *et al.*, 1989; Hall *et al.*, 1994; Dreisbach *et al.*, 1999; Yu *et al.*, 2008). Stevenson *et al.* (1991) noted that the RAS model is not always better than the IAS model, in particular when the mixed gas has higher  $\text{CO}_2$  or  $\text{N}_2$  concentrations.

The motivation for this study has come from the necessity of the knowledge of adsorption/desorption characteristics in a techno-economic modelling of the ECBM potential of a coalbed methane (CBM) field in South Qinshui Basin (Zhou *et al.*,

2012). No reported data of adsorption/desorption for the study area was available for the project and hence series of laboratory tests were carried out for pure and binary/ternary gas mixtures. The experimental results are presented in this paper. Then the predictions made by three different models proposed in the literature are compared.

## 2. EXPERIMENTAL PROCEDURE

### 2.1. Sample preparation

The coal sample used in this study was collected from a nearby coal mine – Duanshi Coal Mine – which is producing coal from the same seam (seam No.3) as the Shizhuang coalbed methane district, south Qinshui Basin in China. The average composition of the produced gas was 99.35% CH<sub>4</sub>, 0.14% N<sub>2</sub> and 0.5% CO<sub>2</sub>, measured on no-air base using 12 gas samples from the study area. The H<sub>2</sub>S content was less than 1mg/m<sup>3</sup>. The coal sample was first crashed to a particle size ranging from 0.25 to 0.5 mm (60 mesh to 35 mesh). Then the sample was dried at 60 °C for two hours. All calibration and experimental tests were carried out at a constant temperature of 25 °C. The pure gases used in the experiments were obtained from Coregas™ Australia.

### 2.2. Experimental apparatus and calibration

Figure 1 shows the apparatus used for volumetric adsorption measurements. The apparatus consisted of stainless steel cells of three different volumes (two as reference cells “RC” and one as sample cell “SC”), four gas cylinders, a buffer bottle and three pressure transducers with different maximum pressures, 34 MPa (5,000 psi), 6.9 MPa (1,000 psi) and 3.4 MPa (500 psi). A syringe and a vial were used to collect gas at the atmospheric pressure and input to a gas chromatograph (GC).

The volumetric method was used (Stevenson *et al.*, 1991; Yu *et al.*, 2008). The system was first vacuumed down to a pressure of 0.7 kPa (0.1 psi). Then the system was filled with pure gas in the RC and connected to the SC while keeping the pressure

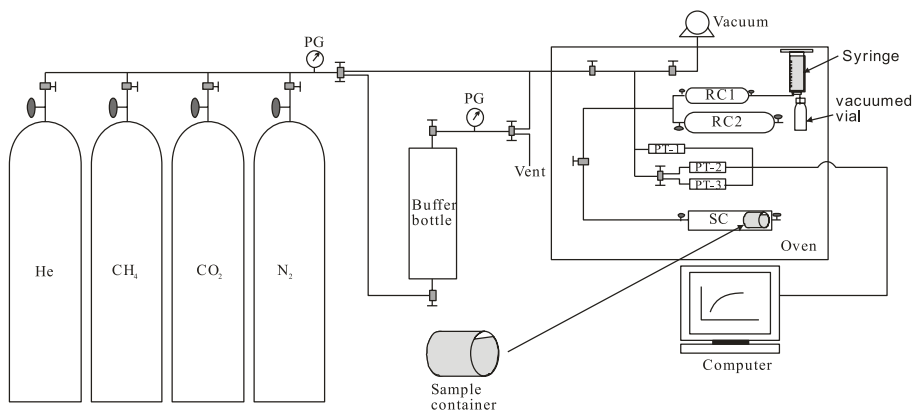


Figure 1. Schematic diagram of test apparatus, RC=Reference cell, SC=Sample cell, PT=Pressure Transducer, PG=Pressure gauge.

constant at 0.7 kPa (0.1 psi) for 30 min. The two equilibrium pressures for each adsorption point were recorded automatically by a personal computer. The RC was then disconnected from the SC and was introduced with more gas to repeat the test at a higher equilibrium pressure. The process was then reversed to determine the desorption points. The same experimental procedure was applied for gas mixtures with the only difference being testing the gas composition in the RC at equilibrium before and after connecting to the SC.

The volumes of the RC and SC were calibrated using helium and a cubic stainless steel of known volume. Two equilibriums with and without the cubic stainless steel were conducted to identify the volumes of the RC and SC using the following two equations based on the Boyle's Law:

$$P_1 \cdot V_{RC} + P_2 \cdot V_{SC} = P_t \cdot (V_{RC} + V_{SC}) \quad (1)$$

$$P_1' \cdot V_{RC} + P_2' \cdot (V_{SC} - V_{steel}) = P_t' \cdot (V_{RC} + V_{SC} - V_{steel}) \quad (2)$$

where  $P_1$  and  $P_1'$  are the pressures in the RC before connecting to the SC,  $P_2$  and  $P_2'$  are the pressures in the SC before being connected with the RC,  $P_t$  and  $P_t'$  are the equilibrium pressures after the connection of the RC and SC. The repeats of three times showed an acceptable reproducibility of the measurements with a deviation of less than 2%.

With a similar process, the sample grain volume was determined using

$$P_1'' \cdot V_{RC} + P_2'' \cdot (V_{SC} - V_{sample}) = P_t'' \cdot (V_{RC} + V_{SC} - V_{sample}) \quad (3)$$

where  $P_1''$  is the pressure in the RC before connecting to the SC and  $P_2''$  is the pressure in the SC before being connected with the RC.

The calibrated volume of the SC was 181.97 cm<sup>3</sup>, RC-1 was 75.81 cm<sup>3</sup>, RC-2 was 144.02 cm<sup>3</sup>, PT-1 was 1.27 cm<sup>3</sup>, PT-2 was 6.40 cm<sup>3</sup> and PT-3 was 8.85 cm<sup>3</sup>. The weight and volume of the sample were 66.74 g and 46.66 cm<sup>3</sup>, respectively. The calculated sample density was 1.43 g/cm<sup>3</sup>.

### 3. BASIC CALCULATION PROCEDURES

#### 3.1. Pure gas adsorption test and calculations

The adsorption volume of pure gas at any discrete step can be calculated using the following equations (Hall *et al.*, 1994) -

$$\Delta n_{ads} = \left[ \left( \frac{P_1}{Z_{P1}} - \frac{P_t}{Z_{Pt}} \right) V_{RC} + \frac{P_2}{Z_{P2}} (V_{SC} - V_{sample}) - \frac{P_t}{Z_{Pt}} (V_{SC} - V_{sample}) \right] \frac{1}{W_{coal} RT} \quad (4)$$

$$n_{ads-i} = \Delta n_{ads_1} + \Delta n_{ads_2} + \Delta n_{ads_3} + \dots + \Delta n_{ads_i} \tag{5}$$

where  $P_1$  is the pressure in the RC before connected to the SC,  $P_2$  is the pressure in the SC before connected to the RC,  $P_t$  is the equilibrium pressure after the SC is connected with the RC,  $Z_t$  is the total compressibility at the corresponding pressure and temperature,  $T_{atm} = 273.15$  °K,  $P_{atm} = 101.325$  kPa,  $W_{coal}$  is the dry sample weight and  $R$  is the universal gas constant. The equations for  $Z$  are given in the appendix.

Eq. 5 gives Gibbs adsorption/desorption data where the adsorbate volume is neglected (Clarkson and Bustin, 2000). The absolute adsorption/desorption data are calculated using the following equation (Hall *et al.*, 1994)-

$$n_{abs} = n_{Gib} \cdot \rho_{g-ads} / (\rho_{g-ads} - \rho_{g-gas}) \tag{6}$$

where  $n$  is the adsorption/desorption volume,  $\rho$  is the density and subscripts *abs*, *Gib*, *g-ads* and *g-gas* represent *absolute*, *Gibbs*, *adsorbate gas* and *gaseous gas*, respectively. In this study, the adsorbate density was determined by the Ono-Kondo model. The adsorbate densities of CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub> are 0.345 g/cm<sup>3</sup>, 0.701 g/cm<sup>3</sup> and 0.996 g/cm<sup>3</sup>, respectively (Sudibandriyo *et al.*, 2003).

**3.2. Mixed gas adsorption test and calculations**

The adsorption tests for the gas mixtures require the gas mixture composition. We used Agilent 7890 Gas Chromatograph (GC) with column HP-Plot Q to determine gas compositions. Table 1 shows the parameters for GC. The calibrations with pure gases showed that the retention times of N<sub>2</sub>, CH<sub>4</sub> and CO<sub>2</sub> were about 1.72, 1.87, and 2.50 min, respectively.

The partial pressure, compressibility factor and volume occupied by the adsorbate are determined from -

$$P_i = P \cdot y_i \tag{7}$$

$$Z_p = \sum_{i=1}^n Z_{i-p} y_{i-p} \tag{8}$$

$$V_a = \sum_{i=1}^n V_{ai} \cdot y_i \tag{9}$$

**Table 1. Gas chromatograph setting parameters with column HP-Plot Q.**

Carrier gas	Oven	Injection	Detector
Helium, 34.5 kPa (5 psi), flow rate at 8.3mL/min	35°C, isothermal	100µL syringe, split ratio 1:1	TCD, 200°C

where  $P$  is the total pressure of gas mixture,  $y_i$  is the mole fraction of composition  $i$  in the gas phase which is determined by GC.

Experimental data of pressure, calibrated volumes of the RC, SC and coal sample, sample weight and density are used to calculate the adsorptions of pure and mixed gases using the Boyle's law and real gas law with the Soave-Redlich-Kwong equation of state (SRK-EOS) (see the appendix for details).

### 3.3. Prediction models

#### 3.3.1. Pure-component adsorption isotherm

In order to simulate pure or mixed gas adsorption in coal seam, the experimental discrete data must be matched with an isotherm model. There are three linearized isotherm models, namely the Langmuir, the Freundlich and the Dubinin-Radushkevich (D-R) isotherms (Richter *et al.*, 1989; Yu *et al.*, 2008; Wood, 2002). The Freundlich isotherm is inadequate in predicting capacities for unmeasured vapours (Wood, 2002). Therefore, only the Langmuir and D-R isotherms were used in this study. The equations are given by -

$$\text{Langmuir isotherm: } q = \frac{V_{L,i} b p}{1 + b p} \quad (10)$$

$$\text{D-R isotherm: } q = V_D \exp \left\{ -D \left[ \ln \left( \frac{P_s}{p} \right) \right]^p \right\} \quad (11)$$

where  $V_{L,i}$  is the Langmuir volume for component  $i$ ,  $b$  is the Langmuir constant,  $P$  is the pressure for the gaseous phase,  $V_D$  is the maximum amount adsorbed,  $D$  is the D-R constant,  $P_s$  is the saturation pressure and  $p$  is the pressure.

#### 3.3.2. Extended Langmuir model

The Extended Langmuir (EL) model is a simple approach used widely to predict the mixed gas adsorption (Hall *et al.*, 1994). The equations are given by -

$$q_i = V_{L,i} \frac{b_i p_i}{1 + \sum b_j p_j} \quad (12)$$

$$p_i = P_t y_i \quad (13)$$

where  $V_{L,i}$  is the Langmuir volume for component  $i$ ,  $y_i$  is the gas fraction of component  $i$  in the gaseous phase,  $b_i$  is the Langmuir constant for component  $i$  and  $P_t$  is the total pressure for the gas phase.

### 3.3.3. Ideal adsorbed solution models

The ideal adsorbed solution (IAS) theory is based on the thermodynamic equilibrium. The theory predicts multi-component adsorption from pure gas isotherms (Richter *et al.*, 1989). The key of an IAS model is the calculation of reduced spreading pressure. Myers and Prausnitz (1965) assumed that the reduced spreading pressures ( $\pi_i^*$ ) of the components in a gas mixture are equal to the reduced spreading pressure ( $\pi^*$ ) of the mixture. The following equations are used to calculate reduced spreading pressures -

$$\pi_i^* = \frac{\pi_i A}{RT} = \int_0^{p_{i,0}(\pi)} \frac{q_i}{p_i} dp_i \quad (14)$$

$$\pi_1^* = \pi_2^* = \dots = \pi_n^* = \pi^* \quad (15)$$

where  $A$  is the specific surface area,  $R$  is the universal gas constant,  $T$  is the temperature,  $p_{i,0}$  is the pressure of single component  $i$ ,  $q_i$  is the adsorption isotherm of component  $i$  and  $p_i$  is the partial pressure of component  $i$ .

The relationship between gas mole fractions in the gas phase ( $y_i$ ) and in the adsorbed phase ( $x_i$ ) is described by the Raoult's law for the vapor-liquid equilibrium -

$$py_i = p_{i,0}(\pi)x_i \quad (16)$$

where  $p$  is the total pressure in the gas phase. Both the total mole fractions of the components in the gas ( $y_i$ ) and adsorbed phases ( $x_i$ ) are equal to 1 -

$$\sum_{i=1}^n x_i = 1 \quad (17)$$

$$\sum_{i=1}^n y_i = 1 \quad (18)$$

The total adsorbed gas,  $q_t$ , can then be calculated by -

$$\frac{1}{q_t} = \sum_{i=1}^n \frac{x_i}{q_{i,0}} \quad (19)$$

$$q_i = q_t x_i \quad (20)$$

where  $q_{i,0}$  is calculated by the pure gas isotherm equation at  $P_{i,0}$ .  $P_{i,0}$  is obtained by



solving simultaneously Eqs. 15 and 16 and one of the following models for the reduced spreading pressure (Richter *et al.*, 1989):

$$\text{Langmuir isotherm: } \pi_i^* = V_{L,i} \ln(1 + bp_{i,0}(\pi)) \quad (21)$$

$$\text{D-R isotherm: } \pi_i^* \approx \frac{V_{D,i} \pi^{1/2}}{2D_i^{1/2}} \operatorname{erfc} \left[ D_i^{1/2} \ln \left( \frac{P_{s,i}}{P_{i,0}} \right) \right] \quad (22)$$

where  $V_{L,i}$  is the Langmuir volume of component  $i$ ,  $V_{D,i}$  is the maximum adsorption for component  $i$ ,  $D_i$  is the D-R constant for component  $i$ ,  $P_{s,i}$  is the saturation pressure for component  $i$  and  $\operatorname{erfc}$  is the error function which is given by -

$$\operatorname{erfc}(x) = \frac{2}{\sqrt{\pi}} \left( x - \frac{x^3}{3} + \frac{x^5}{10} - \frac{x^7}{42} + \frac{x^9}{216} - \dots \right) \quad (23)$$

## 4. RESULTS AND DISCUSSION

### 4.1. Pure gas adsorption tests

The procedure includes first injecting CH<sub>4</sub> into the RC, then connecting the RC and SC and finally recording the pressure variation. If the variation of pressure is less than 0.7 kPa (0.1 psi) within 30 min, the pressure is considered to be the equivalent pressure. Then the procedure is repeated by introducing more gas into the SC. After the equivalent pressure is obtained, the compressibility factor is then calculated using the SRK EOS. Finally the adsorption amount is calculated using the equations given in the methodology section.

Figure 2 shows the experimental results for adsorption and desorption of pure gases on coal samples. The adsorption capacity sequence is CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub> from high to low. The relative adsorbed amount of N<sub>2</sub>, CH<sub>4</sub> and CO<sub>2</sub> has an approximate ratio of 1.0:1.3:2.4. There are no significant hysteresis effects in pure N<sub>2</sub> and CH<sub>4</sub> adsorption and desorption cycles, but there is a clear hysteresis effect in the CO<sub>2</sub> adsorption/desorption cycle. Tang *et al.* (2005) and Jessen *et al.* (2008) reported a coal which absorbs almost three times as much CO<sub>2</sub> as CH<sub>4</sub> and exhibits significant hysteresis among pure components adsorption and desorption isotherms. It is observed that the adsorption amount of CO<sub>2</sub> at the first desorption point is higher than that at the last adsorption point. Dutta *et al.* (2011) also reported similar observations when they studied a set of Indian coals. This is because the density of CO<sub>2</sub> decreases as pressure decreases which causes more gaseous CO<sub>2</sub> in the system to be adsorbed.

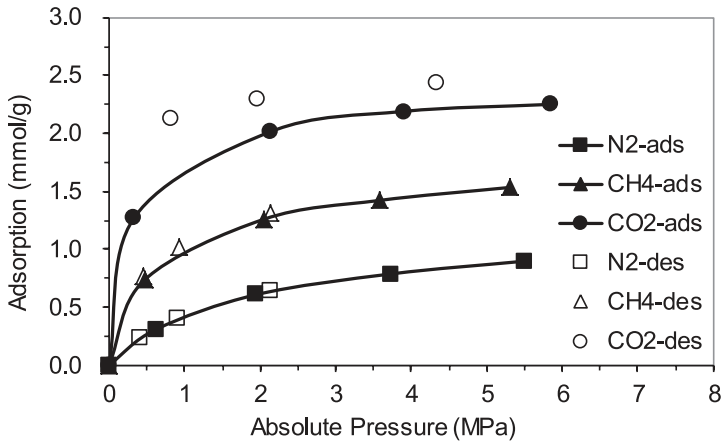


Figure 2. Experimental results of adsorption (ads) and desorption (des) of pure gases of CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub>.

**4.2. Adsorption/desorption equilibrium time**

Figure 3 shows the equilibrium times for the adsorption/desorption tests. The pressure difference shown on the x-axis represents the pressure in the RC before connecting the RC and SC minus the equilibrium pressure after connecting the RC and SC. Results show that the equilibrium time increases with the increasing pressure difference for pressures lower than 2 MPa (300 psi) and decreases for pressures higher than 2 MPa (300 psi).

**4.3. Binary and ternary gas adsorption tests**

The experimental results for the adsorption of binary and ternary gas mixtures are shown in Figure 4. The measured molar fraction of N<sub>2</sub> was affected by air when measured using GC. A standard deviation of 0.01 was therefore used in error

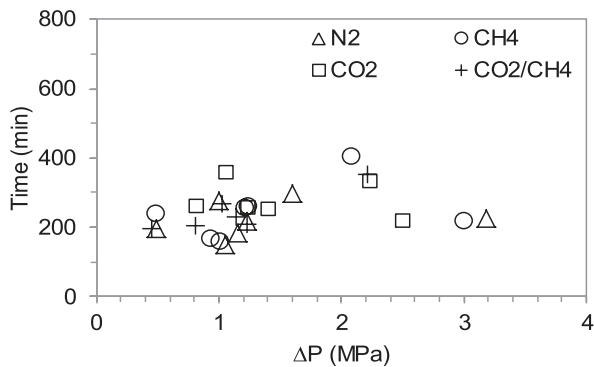


Figure 3. Adsorption/desorption equilibrium times against the difference between the feed gas pressure and equilibrium pressure.

calculation for mixtures  $\text{CH}_4\text{-N}_2$  and  $\text{CO}_2\text{-CH}_4\text{-N}_2$ . We used Oracle Crystal Ball™ to calculate the error ranges and assign  $P_{90}$  as the minimum and  $P_{10}$  as the maximum values.

Figure 4a shows the total gas adsorption for the gas mixture of  $\text{CH}_4\text{-N}_2$ . It demonstrates that the sample has a stronger adsorption capacity for  $\text{CH}_4$  than  $\text{N}_2$ . The total adsorption has hysteresis effects during the cycle from adsorption to desorption. The hysteresis is different from pure  $\text{N}_2$  or  $\text{CH}_4$  adsorption and desorption because this is caused by the displacement of  $\text{CH}_4$  for  $\text{N}_2$  when desorption occurs.

The adsorption/desorption with mixed  $\text{CO}_2\text{-CH}_4$  as the adsorbed gas shows similar characteristics to the mixed  $\text{CH}_4\text{-N}_2$ . But the hysteresis of  $\text{CO}_2$  over  $\text{CH}_4$  is stronger than that of  $\text{CH}_4$  over  $\text{N}_2$  (Fig. 4b).  $\text{CO}_2$  desorbs more  $\text{CH}_4$  when pressure decreases.

The adsorption/desorption of mixed  $\text{CO}_2\text{-CH}_4\text{-N}_2$  shows that the coal sample has lower adsorption capacity for  $\text{N}_2$  than  $\text{CH}_4$  than  $\text{CO}_2$  (Fig. 4c).  $\text{CO}_2$  and  $\text{CH}_4$  displace  $\text{N}_2$  during the desorption process.

#### 4.4. Modelling experimental results using three isotherm models

Because all the models are based on the pure gas adsorption isotherm, we first attempt to fit the experimental pure gas adsorption with the Langmuir and D-R IAS models. Figure 5a shows the comparison of experimental adsorption results and the best-fit

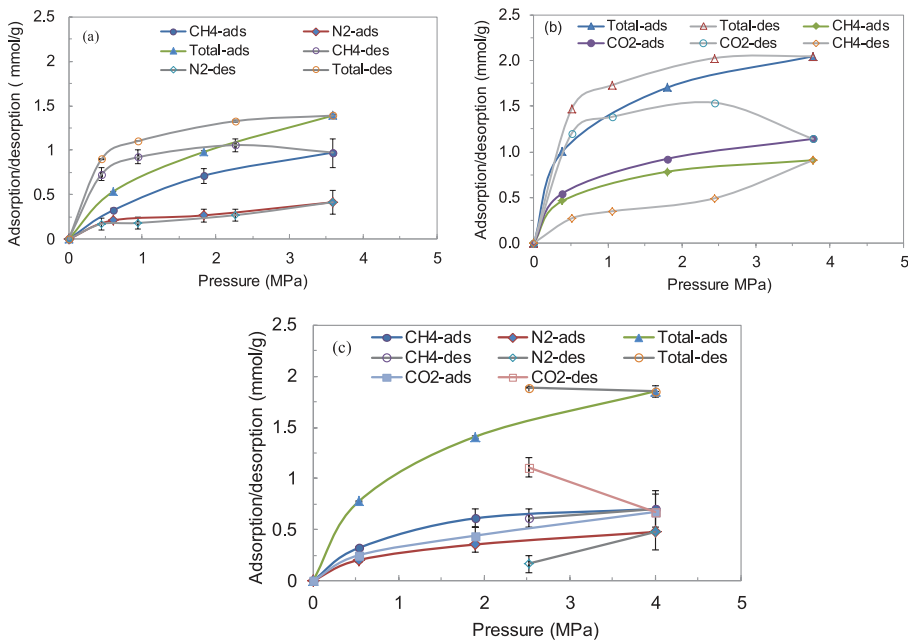


Figure 4. Comparison of adsorption/desorption results of binary and ternary gas mixtures with pure gas adsorption isotherms. (a)  $\text{N}_2\text{-CH}_4$  mixture, (b)  $\text{CO}_2\text{-CH}_4$  mixture, (c)  $\text{CO}_2\text{-CH}_4\text{-N}_2$  mixture.

Langmuir and D-R curves for CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>. Figure 5b shows the comparison of experimental desorption results and the best-fit Langmuir and D-R curves for CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>. The Langmuir and D-R curves are fitted by experimental data using the least-squares regression method. The fitting parameters for adsorption and desorption are given in Tables 2 and 3, respectively. The data shows that the D-R model has a lower absolute error for fitting the experimental data for CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub> adsorption than the Langmuir model.

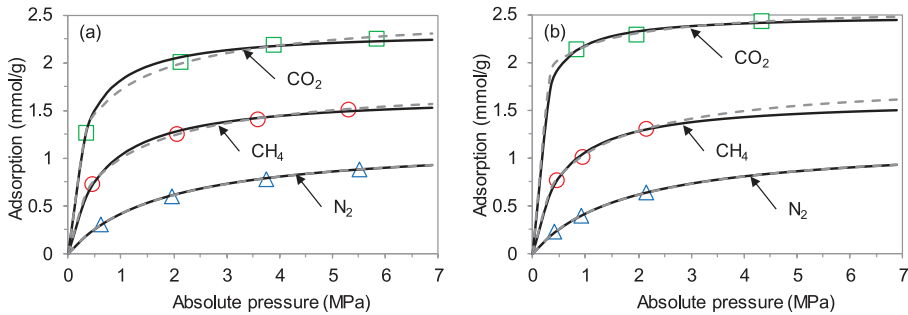


Figure 5. Best-fit curves for CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub> adsorption (a) and desorption (b) with the Langmuir and D-R models (points = experimental data, black solid line = the Langmuir model and dashed line = the D-R model).

**Table 2. Fitting parameters of the adsorption for CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub> for the coal sample using the Langmuir and IAS (D-R) models.**

Fit with the	Gas	Langmuir mole amount, N <sub>L</sub> (mmol/g)	Langmuir pressure, P <sub>L</sub> (kPa)	MSE* (mmol/g) <sup>2</sup>	
Langmuir model	CH <sub>4</sub>	1.67	615.1	3.49×10 <sup>-4</sup>	
	CO <sub>2</sub>	2.33	283.9	7.78×10 <sup>-4</sup>	
	N <sub>2</sub>	1.17	1,793.2	3.49×10 <sup>-5</sup>	
Fit with the	Gas	V <sub>D</sub> (mmol/g)	D <sub>i</sub>	P <sub>s</sub> (kPa)	Absolute Error (mmol/g)
D-R model	CH <sub>4</sub>	1.65	0.06245	17,052	2.51×10 <sup>-5</sup>
	CO <sub>2</sub>	2.41	0.03715	20,670	3.17×10 <sup>-4</sup>
	N <sub>2</sub>	1.02	0.10980	17,052	1.83×10 <sup>-5</sup>

\*Mean squared error

**Table 3. Fitting parameters of the desorption of CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub> for the coal sample using the Langmuir and IAS (D-R) models.**

Fit with the Langmuir model	Gas	Langmuir mole amount, N <sub>L</sub> (mmol/g)		Langmuir pressure, P <sub>L</sub> (kPa)	MSE <sup>a</sup> (mmol/g) <sup>2</sup>
		CH <sub>4</sub>	1.61		520.1
	CO <sub>2</sub>	2.50		146.5	4.20×10 <sup>-4</sup>
	N <sub>2</sub>	1.15		1,694	1.01×10 <sup>-5</sup>
Fit with the D-R model	Gas	V <sub>D</sub> (mmol/g)	D <sub>i</sub>	P <sub>s</sub> (kPa)	Absolute Error (mmol/g)
				CH <sub>4</sub>	1.69
	CO <sub>2</sub>	2.53	0.01676	20,670	8.23×10 <sup>-5</sup>
	N <sub>2</sub>	1.03	0.10923	17,052	8.44×10 <sup>-6</sup>

<sup>a</sup>Mean squared error

4.4.1. Comparison of adsorptions

The experimental and predicted gas adsorptions and the selectivity of binary and ternary mixed gas adsorption and desorption are shown in Figures 6-10.

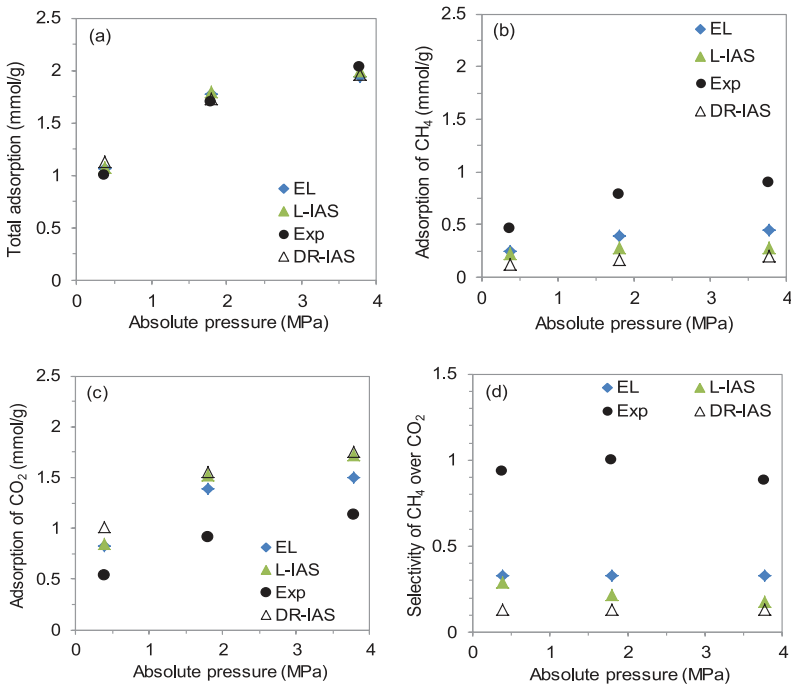


Figure 6. Adsorption and selectivity of mixed CH<sub>4</sub>-CO<sub>2</sub>. (a) total adsorption, (b) adsorption of CH<sub>4</sub>, (c) adsorption of CO<sub>2</sub> and (d) selectivity of CH<sub>4</sub> over CO<sub>2</sub>.

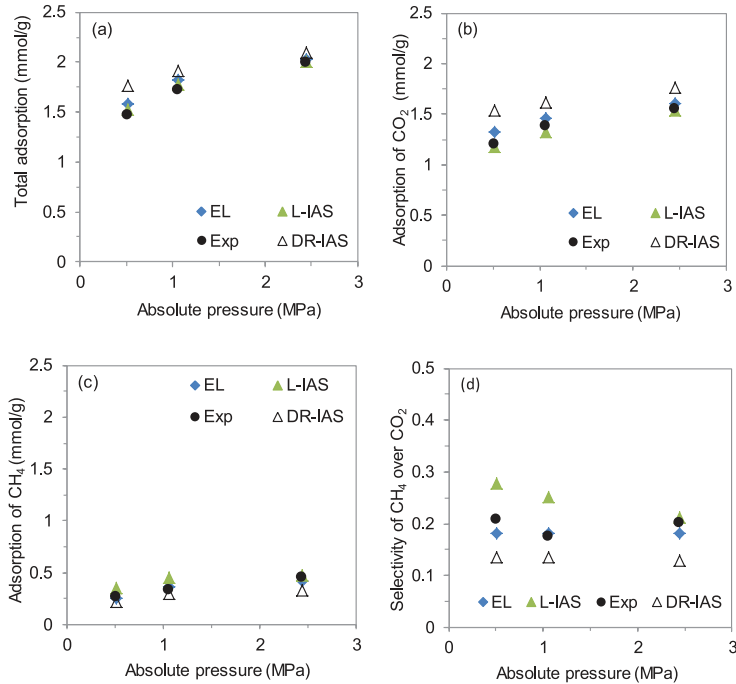


Figure 7. Desorption and selectivity of mixed CH<sub>4</sub>-CO<sub>2</sub>. (a) total adsorption, (b) adsorption of CO<sub>2</sub>, (c) adsorption of CH<sub>4</sub>, and (d) selectivity of CH<sub>4</sub> over CO<sub>2</sub>.

For the binary gas adsorption, the results show that the total gas adsorptions predicted by the EL, L-IAS and D-R-IAS models are similar to the experimental results (Fig. 6a, Fig. 8a). The predicted CO<sub>2</sub> adsorption in the CO<sub>2</sub>-CH<sub>4</sub> mixture (Fig. 6c) and CH<sub>4</sub> adsorption in the CH<sub>4</sub>-N<sub>2</sub> mixture (Fig. 8b) are lower than the experimental measurements. This suggests that the counter components in the mixtures act reversely.

For the binary gas desorption, the results show that the total gas desorptions predicted by the EL, L-IAS and D-R-IAS models are similar to the experimental results for the CH<sub>4</sub>-CO<sub>2</sub> mixture (Fig. 7a) but are lower than the experimental measurements for the CH<sub>4</sub>-N<sub>2</sub> mixture (Fig. 9a). For the CH<sub>4</sub>-CO<sub>2</sub> experiment, the predicted CH<sub>4</sub> adsorption by the L-IAS and EL models are similar to the experimental measurements (Fig. 7b) and predicted CO<sub>2</sub> adsorptions by the three models agree well with the experiments (Fig. 7c). For the CH<sub>4</sub>-N<sub>2</sub> experiment, the predicted CH<sub>4</sub> adsorption by the three models are slightly lower than the experimental results (Fig. 9b) and predicted N<sub>2</sub> adsorptions by the three models are slightly higher than the experimental results (Fig. 9c).

For the ternary CH<sub>4</sub>-CO<sub>2</sub>-N<sub>2</sub> gas adsorption, the calculated total gas adsorptions using the EL and L-IAS models agree well with the experimental measurements (Fig. 10a). The calculated adsorptions of CO<sub>2</sub>, N<sub>2</sub> and CH<sub>4</sub> using the D-R-IAS model are the closest to the experimental results (Figs. 10b through 10d).

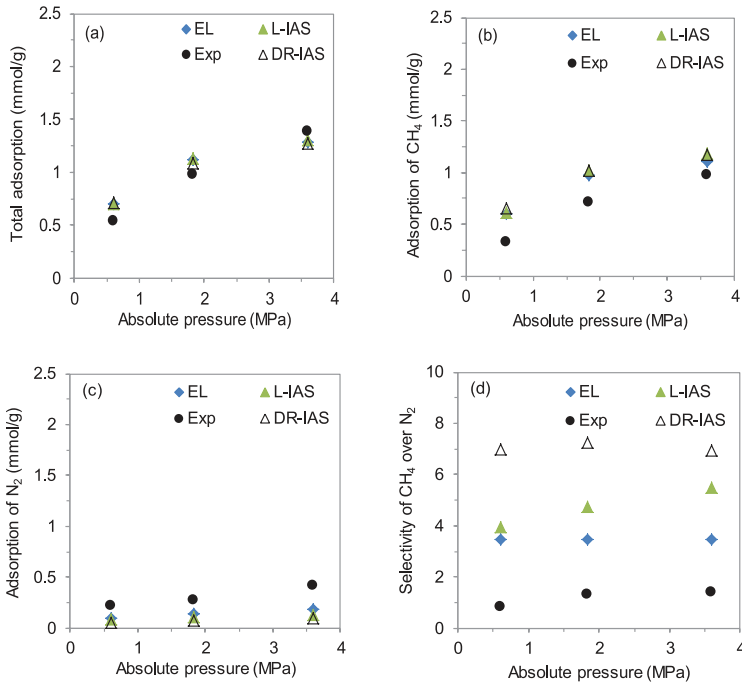


Figure 8. Adsorption and selectivity of mixed CH<sub>4</sub>-N<sub>2</sub>. (a) total adsorption, (b) adsorption of CH<sub>4</sub>, (c) adsorption of N<sub>2</sub> and (d) selectivity of CH<sub>4</sub> over N<sub>2</sub>.

#### 4.4.2. Comparison of selectivity ratio

The selectivity ratio (or separation factor) of component  $i$  over component  $j$  is defined by John *et al.* (1985) as –

$$S_{ij} = \frac{x_i / y_i}{x_j / y_j} \quad (24)$$

where  $y$  is the molar fraction of component  $j$  in the gas phase and  $x$  is the molar fraction of component  $i$  in the adsorbed phase.

For the binary CH<sub>4</sub>-CO<sub>2</sub> adsorption, the experimental selectivity of CH<sub>4</sub> over CO<sub>2</sub> is about one. The predicted selectivity of CH<sub>4</sub> over CO<sub>2</sub> using the three models is lower than the experiment as shown in Figure 6d. This causes the predicted CH<sub>4</sub> adsorptions to be slightly lower than the experiments (Fig. 6b). For the binary CH<sub>4</sub>-CO<sub>2</sub> desorption, the experimental selectivity of CH<sub>4</sub> over CO<sub>2</sub> is about 0.2 which is solely caused by the hysteresis of CO<sub>2</sub> desorption. The predicted selectivity from the EL model is quite similar to the experiment (Fig. 7d).

For the binary CH<sub>4</sub>-N<sub>2</sub> adsorption, the predicted selectivity of CH<sub>4</sub> over N<sub>2</sub> is higher than the experiment which ranges from 0.8 to 1.3 (Fig. 8d). The overestimated

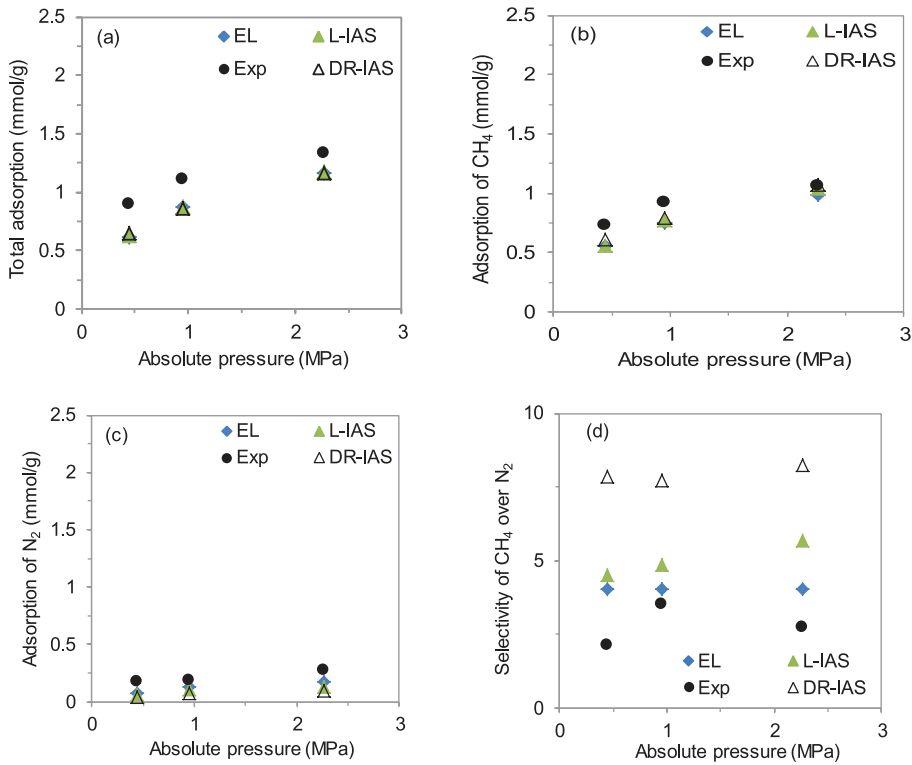


Figure 9. Desorption and selectivity of mixed CH<sub>4</sub>-N<sub>2</sub>. (a) total adsorption, (b) adsorption of CH<sub>4</sub>, (c) adsorption of N<sub>2</sub> and (d) selectivity of CH<sub>4</sub> over N<sub>2</sub>.

selectivity for CH<sub>4</sub> over N<sub>2</sub> makes the predicted CH<sub>4</sub> adsorption higher than the experiment (Fig. 8b). For the CH<sub>4</sub>-N<sub>2</sub> desorption, the experimental selectivity of CH<sub>4</sub> over N<sub>2</sub> ranges from 2 to 4 which suggests that the adsorption ability of CH<sub>4</sub> is two to four times higher than that of N<sub>2</sub>. The predicted selectivity by the EL model is similar but slightly higher than that obtained from the experiment (Fig. 9d).

For the ternary CH<sub>4</sub>-CO<sub>2</sub>-N<sub>2</sub> adsorption, the predicted selectivity of CH<sub>4</sub> over CO<sub>2</sub> by the L-IAS and EL models agrees well with the experimental data (Fig. 10e); the predicted selectivity of N<sub>2</sub> over CH<sub>4</sub> is similar to the prediction by the D-R-IAS model for a pressure of 2 MPa (Fig. 10f). The predicted selectivity of N<sub>2</sub> over CH<sub>4</sub> by the three models is all lower than the experimental data (Fig. 10g). Note that the mismatches between the predictions and the measurements might likely be caused by the contamination of N<sub>2</sub> in air when sampling and testing with GC.

### 5. CONCLUSIONS

We have presented the results of adsorption/desorption tests on coal samples taken from the Qinshui Basin, China. We used the volumetric adsorption measurement method for pure, binary and ternary gas adsorption and desorption. We interpreted



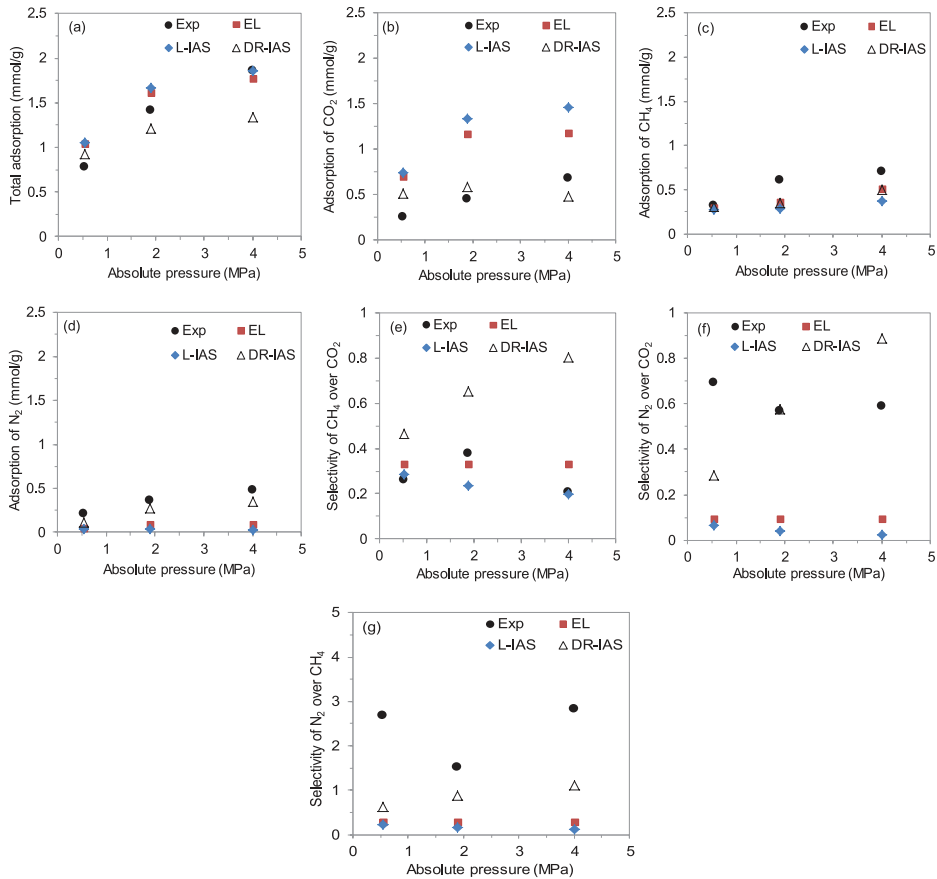


Figure 10. Adsorption and selectivity of mixed CO<sub>2</sub>-CH<sub>4</sub>-N<sub>2</sub>. (a) total adsorption, (b) adsorption of CO<sub>2</sub>, (c) adsorption of CH<sub>4</sub>, (d) adsorption of N<sub>2</sub>, (e) selectivity of CH<sub>4</sub> over CO<sub>2</sub>, (f) selectivity of N<sub>2</sub> over CO<sub>2</sub> and (g) selectivity of N<sub>2</sub> over CH<sub>4</sub>.

experimental observations using three isotherm models commonly reported in the literature. The following conclusions are drawn –

1. The pure gas adsorption is well predicted by the Langmuir and D-R models.
2. The adsorptions of N<sub>2</sub>, CH<sub>4</sub> and CO<sub>2</sub> are found to have an approximate ratio of 1.0:1.3:2.4 for the study area in the basin. No significant hysteresis is observed for pure N<sub>2</sub> and CH<sub>4</sub> but CO<sub>2</sub> adsorption/desorption isotherms show a hysteresis. The binary and ternary adsorption tests show no large difference in sorption capacity but large difference during desorption.
3. The D-R model has a lower absolute error for fitting the experimental adsorption data for pure CH<sub>4</sub>, CO<sub>2</sub> and N<sub>2</sub> compared to the Langmuir model.
4. The binary and ternary experiments show that there are significant hysteresis effects for mixture gases from adsorption to desorption.

5. The total adsorptions for binary and ternary gas mixtures predicted by the three models agree well with experimental observations. The predicted amount for low capacity adsorbate, however, is higher than the experimental data for the adsorption tests. The predicted amount of individual components has a fair match with the experimental data for the desorption tests.
6. The EL model appears to be the best in predicting the CO<sub>2</sub>-CH<sub>4</sub> desorption while the D-R-IAS model predicts better the CO<sub>2</sub>-CH<sub>4</sub>-N<sub>2</sub> adsorption.

#### abbreviation

CH <sub>4</sub>	=	Methane
N <sub>2</sub>	=	Nitrogen
CO <sub>2</sub>	=	Carbon dioxide
IAS	=	Ideal adsorbed solution
EL	=	Extended Langmuir
D-R	=	Dublinlin- Radushkevich
CBM	=	Coalbed methane
ECBM	=	Enhanced coalbed methane
GC	=	Gas chromatograph
RAS	=	Real adsorbed solution
RC	=	Reference cell
SC	=	Sample cell
SRK-EOS	=	Soave-Redlich-Kwong Equation of state
MSE	=	Mean squared error

#### ACKNOWLEDGEMENTS

The authors thank the financial support from Australia–China Joint Coordination Group on Clean Coal Technology Research & Development Grants, Department of Resources, Energy and Tourism, Australia. The Project was partially supported by the Fundamental Research Funds for the Central Universities, China University of Geosciences (Wuhan) (CUGL100249).

#### APPENDIX: SOAVE-REDLICH-KWONG EQUATIONS OF STATE

Soave (1972) brought forward a new equation of state based on Redlich and Kwong's work (1949). The equations are -

$$P = \frac{RT}{V-b} - \frac{a(T)}{V(V+b)} \quad (25)$$

$$a(T) = 0.42748 \frac{RT_c^2}{P_c} [1 + m(1 - T_r^{0.5})]^2 \quad (26)$$

$$b = 0.086640 \frac{RT_c}{P_c} \quad (27)$$

$$m = 0.48508 + 1.55171\omega - 0.15613\omega^2 \quad (28)$$

$$T_r = \frac{T}{T_c} \quad (29)$$

$$P_r = \frac{P}{P_c} \quad (30)$$

The SRK cubic equations for  $z$  are -

$$z^3 - z^2 + (A - B - B^2)z - AB = 0 \quad (31)$$

$$A = \frac{a(T) \cdot P}{(R \cdot T)^2} \quad (32)$$

$$B = \frac{b \cdot P}{R \cdot T} \quad (33)$$

In Eqs. 25 through 33,  $R$  is the universal gas constant of  $8.314 \text{ J} \cdot \text{mol}^{-1} \cdot \text{K}^{-1}$ ,  $T_r$  and  $P_r$  are the reduced temperature and pressure in °K and Pa, respectively,  $T_c$  is the critical temperature in K,  $P_c$  is the critical pressure in Pa and  $\omega$  is the accentric factor. Eq. 31 was solved by using the Microsoft Excel solver to obtain the root with Visual Basic Applications codes.

## REFERENCES

- Battistutta E., Hemert V.P., Lutynski M., Bruining H. and Wolf K., 2010. Swelling and sorption experiments on Methane, Nitrogen and Carbon Dioxide on dry Selar Cornish coal. *International Journal of Coal Geology* **84**(1), 39-48.
- Clarkson C.R. and Bustin R.M., 2000. Binary gas adsorption/desorption isotherms: effect of moisture and coal composition upon carbon dioxide selectivity over methane. *International Journal of Coal Geology* **42**(4), 241-271.
- Connell L.D., Sander R., Pan Z., Camilleri M. and Heryanto D., 2011. History matching of enhanced coal bed methane laboratory core flood tests. *International Journal of Coal Geology* **87**(2), 128-138.
- Ding S.L., Zhu J.G., Baiping Zhen, Zhanyong Liu and Qinfu Liu, 2011. Characteristics of high rank coalbed methane reservoir from the Xiangning Mining Area, Eastern Ordos Basin, China. *Energy Exploration and Exploitation* **29**(1), 33-48.
- Dreisbach F., Staudt R. and Keller J.U., 1999. High pressure adsorption data of Methane, Nitrogen, Carbon Dioxide and their binary and ternary mixtures on activated carbon. *Adsorption* **5**(3), 215-227.

- Dutta P., Bhowmik S. and Das S., 2011. Methane and carbon dioxide sorption on a set of coals from India. *International Journal of Coal Geology* **85(3-4)**, 289-299.
- Gamba G., Rota R., Storti G., Carra S. and Morbidelli M., 1989. Adsorption solution theory models for multicomponent adsorption equilibria. *AIChE Journal* **35(6)**, 959-966.
- Goodman A.L., Busch A., Bustin R.M., Chikatamarla L., Day S., Duffy G.J., Fitzgerald J.E., Gasem K.A.M., Gensterblum Y., Hartman C., Jing C., Krooss B.M., Mohammed S., Pratt T., Robinson Jr R.L., Romanov V., Sakurovs R., Schroeder K. and White C.M., 2007. Inter-laboratory comparison II: CO<sub>2</sub> isotherms measured on moisture- equilibrated Argonne premium coals at 55 °C and up to 15 MPa. *International Journal of Coal Geology* **72(3-4)**, 153-164.
- Gruskiewicz S.M., Naney T.M., Blencoe G.J., Cole R.D., Pashin C.J. and Carroll E.R., 2009. Adsorption kinetics of CO<sub>2</sub>, CH<sub>4</sub>, and their equimolar mixture on coal from the Black Warrior Basin, West-Central Alabama. *International Journal of Coal Geology* **77(1-2)**, 23-33.
- Hall F.E., Zhou C., Gasem K.M. and Robinson R.L., 1994. Adsorption of pure Methane, Nitrogen, and Carbon Dioxide and their binary mixtures on wet Fruitland coal. Society of Petroleum Engineers Paper 29194 presented at Society of Petroleum Engineers Eastern Regional Meeting. November 8-10 1994. Charleston, West Virginia, pp.329-343.
- Hema S.J., Raj G.K. and Duane S.H., 2009. Shrinkage and swelling of coal induced by desorption and sorption of fluids: theoretical model and interpretation of a field project. *International Journal of Coal Geology* **77(1-2)**, 188-202.
- Jessen K., Tang G-Q. and Kovscek A., 2008. Laboratory and simulation investigation of enhanced coalbed methane recovery by gas injection. *Transport in Porous Media* **73(2)**, 141-159.
- John T.S., Benjamin M.C.T. and Ralph T.Y., 1985. Adsorption of gases on coals and heat-treated coals at elevated temperature and pressure: 2. Adsorption from hydrogen-methane mixtures. *Fuel* **64(5)**, 621-626.
- Joubert J.L., Grein C.T. and Bienstock D., 1973. Sorption of methane in moist coals. *Fuel* **52(3)**, 181-185.
- Kelemen R.S. and Kwiatek M.L., 2009. Physical properties of selected block Argonne premium bituminous coal related to CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub> adsorption. *International Journal of Coal Geology* **77(1-2)**, 2-9.
- Majewska Z., Majewski S. and Zietek J., 2010. Swelling of coal induced by cyclic sorption/desorption of gas: experimental observations indicating changes in coal structure due to sorption of CO<sub>2</sub> and CH<sub>4</sub>. *International Journal of Coal Geology* **83(4)**, 475-483.
- Mazumder S., Karnik A. and Wolf K.H., 2006. Swelling of coal in response to CO<sub>2</sub> sequestration for ECBM and its effect on fracture permeability. *SPE Journal* **11(3)**, 390-398.
- Mazumder S. and Wolf K.H., 2008. CO<sub>2</sub> and flue gas core flood experiments for enhanced coalbed Methane. Society of Petroleum Engineers Paper 114790

- presented at Society of Petroleum Engineers Asia Pacific Oil and Gas Conference and Exhibition, Perth, Australia, pp. 43.
- Mitra A., Harpalani S. and Kumar A., 2008. CO<sub>2</sub>/N<sub>2</sub> injection in deep coals and its impact on coal permeability. The 42<sup>nd</sup> U.S. Rock Mechanics Symposium (USRMS), American Rock Mechanics Association. San Francisco, CA.
- Myers A.L. and Prausnitz J.M., 1965. Thermodynamics of mixed-gas adsorption. *AIChE journal* **11(1)**, 121-127.
- O'Brien A.J. and Myers L.A., 1985. Rapid calculations of multicomponent adsorption equilibria from pure isotherm data. *Industrial & Engineering Chemistry Process Design and Development* **24(4)**, 1188-1191.
- Papanicolaou C., Pasadakis N., Dimou D., Kalaitzidis S., Papazisimou S. and Foscolos E.A., 2009. Adsorption of NO, SO<sub>2</sub> and light hydrocarbons on activated Greek brown coals. *International Journal of Coal Geology* **77(3-4)**, 401-408.
- Pini R., Ottiger S., Burlini L., Storti G. and Mazzotti M., 2010. Sorption of Carbon Dioxide, Methane and Nitrogen in dry coals at high pressure and moderate temperature. *International Journal of Greenhouse Gas Control* **4(1)**, 90-101.
- Pini R., Ottiger S., Storti G. and Mazzotti M., 2009. Pure and competitive adsorption of CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub> on coal for ECBM. *Energy Procedia* **1(1)**, 1705-1710.
- Puri R. and Yee D., 1990. Enhanced coalbed Methane recovery. Society of Petroleum Engineers Paper 20732 presented at 65<sup>th</sup> Society of Petroleum Engineers Annual Technical Conference and Exhibition. September 23-26, 1990. New Orleans, Louisiana, pp. 10.
- Redlich O. and Kwong J.N.S., 1949. On the thermodynamics of solutions. V: An equation of state. Fugacities of gaseous solutions. *Chemical Reviews* **44(1)**, 233-244.
- Richter E., Schutz W. and Myers L.A., 1989. Effect of adsorption equation on prediction of multicomponent adsorption equilibria by the ideal adsorbed solution theory. *Chemical Engineering Science* **44(8)**, 1609-1616.
- Schepers C.K., Oudinot Y.A. and Ripepi N., 2010. Enhanced gas recovery and CO<sub>2</sub> storage in Coalbed-Methane reservoirs: optimized injected-gas composition for mature basins of various coal rank. Society of Petroleum Engineers Paper 139723 presented at Society of Petroleum Engineers International Conference on CO<sub>2</sub> Capture. November 10-12, 2010. Stora, New Orleans, Louisiana, USA, pp. 21.
- Shi J-Q. and Durucan S., 2005. A Model for changes in coalbed permeability during primary and enhanced Methane recovery. *Society of Petroleum Engineers Reservoir Evaluation & Engineering* **8(4)**, 291-299.
- Soave G., 1972. Equilibrium constants from a modified Redlich-Kwong equation of state. *Chemical Engineering Science* **27(6)**, 1197-1203.
- Stevens S.H. and Spector Denis, 1998. Advanced Resources International, Inc.; Riemer, Pierce, IEA Greenhouse Gas R&D Programme. 1998. Enhanced coalbed Methane recovery using CO<sub>2</sub> injection: worldwide resource and CO<sub>2</sub> sequestration potential. Society of Petroleum Engineers Paper 48881 presented

- at Society of Petroleum Engineers International Oil and Gas Conference and Exhibition in China. November 2-6, 1998. Society of Petroleum Engineers Beijing, China, pp. 13.
- Stevenson M.D., Pinczewski W.V., Somers M.L. and Bagio S.E., 1991. Adsorption/desorption of multicomponent gas mixtures at in-seam conditions. Society of Petroleum Engineers Paper 23026 presented at Society of Petroleum Engineers Asia-Pacific Conference Perth. Western Australia, pp. 741-756.
- Sudibandriyo M., Pan Z., Fitzgerald J.E., Robinson R.L. and Gasem K.A.M., 2003. Adsorption of Methane, Nitrogen, Carbon Dioxide, and their binary mixtures on dry activated Carbon at 318.2 K and pressures up to 13.6 MPa. *Langmuir* **19**(13), 5323-5331.
- Talu O. and Zwiebel I., 1984. Multicomponent adsorption equilibria of nonideal mixtures. *AIChE journal* **32**(8), 1263-1276.
- Tang Q.G., Jessen K. and Kovscek R.A., 2005. Laboratory and simulation investigation of enhanced coalbed methane recovery by gas injection. *Springer Link* **73**(2), 141-159.
- Wang G.X., Wei X.R., Wang K., Massarotto P. and Rudolph V., 2010. Sorption-induced swelling/shrinkage and permeability of coal under stressed adsorption/desorption conditions. *International Journal of Coal Geology* **83**(1), 46-54.
- Wood G.O., 2002. Review and comparisons of D/R models of equilibrium adsorption of binary mixtures of organic vapors on activated carbons. *Carbon* **40**(3), 231-239.
- Yu H., Zhou L., Guo W., Cheng J. and Hu Q., 2008. Predictions of the adsorption equilibrium of methane/carbon dioxide binary gas on coals using Langmuir and ideal adsorbed solution theory under feed gas conditions. *International Journal of Coal Geology* **73**(2), 115-129.
- Zhou F., Allinson G., Wang J., Sun Q., Xiong D. and Cinar Y., 2012. Stochastic modelling of coalbed methane resources: A case study in Southeast Qinshui Basin, China. *International Journal of Coal Geology* **99**, 16-26.
- Zhou F., Yao G., Tang Z. and Orodu O.D., 2011. Influence and sensitivity study of matrix shrinkage and swelling on enhanced coalbed methane production and CO<sub>2</sub> sequestration with mixed gas injection. *Energy Exploration & Exploitation* **29**(6), 759-776.