

AN AUTOMATED COST ESTIMATING SYSTEM FOR VARIANT DESIGN BASED ON THE METHOD OF SUCCESSIVE CALCULUS

F Elgh and S Sunnersjö

Abstract

For many products the adaption to customer specifications is essential and requires flexible product design and manufacture while maintaining competitive pricing. A large category of design work in industry has the character of redesign of an existing product concept in terms of dimensional changes, topology variations and configuration of components. In order to evaluate design proposals, costs, which are controlled by the product design, selected materials and manufacturing processes, need to be estimated. Cost estimates are normally based on the manufacturing process plans, which can only be formed when production preparation is finalised. The widespread industrial use of solid modelling opens up new possibilities to automate this process. The purpose of this work is to demonstrate and test a method to extract product information from a CAD model to allow process planning and cost calculation to be carried out automatically for a given class of products. With such a system cost estimates can be made available to the designer the instant a design proposal has been presented. This allows for design iterations to be carried out in order to govern the design work towards solutions with an optimal balance between product and production properties.

Keywords: Design evaluation, CAPP, cost estimation, successive calculus.

1 Introduction

Cost is one of the most fundamental criteria for the evaluation of design proposals [1]. Still, cost is often calculated late in the product development process, when not only the concept is chosen, but also most details are fixed. This means that the cost information feed back to the designer often arrives too late to be taken into account and guide the design towards solutions, which are cost-effective and easily produced.

Different methods exist for cost estimation [2] and much work is currently being done to estimate cost early in the product development cycle. Reference [3] have developed a generic framework for cost estimation and cost control which supports the storage of costs data in a generic way. A multidisciplinary design tool with integration of geometric modelling and activity-based costing for addressing costs in the early stages of technology development is presented by [4]. To handle the uncertainty in cost estimation [5] has applied the method of fuzzy logic.

For many industrial products the cost of material is dominating and easy to estimate, while the production cost presents more difficulties. Estimation of production cost is normally based on the process planning created by production engineers. By using computer-aided process planning (CAPP) the effort is reduced in converting CAD models into process plans, but the lack of interface standards aggravates the system integration. An information model to define the interfaces is presented by [6].

The method used here for process planning and cost estimation is based on extracting information from a parametric solid geometry model. Information about the topology, features and parameters is imported into a CAPP system consisting of generic process plans for different groups of products. The information from the CAD model provides input to a rule-based system and adapts the generic process plans. The values of parameters, which are identified as cost drivers, are imported into the process plans and the material and manufacturing costs are estimated using *the method of successive calculus* [7] to accommodate uncertainties at the early design stages. Design variants can be evaluated at the early stage of the design process and the designer can obtain a balance between product and production properties and the product cost. The method is demonstrated and tested with an example of submarine bulkhead stiffeners. For a brief description of the method of successive calculus see section 4.

2 Knowledge, information flow and information transfer

Redesign of an existing product is the most common design problem in industry [8]. Tasks, which are repetitive, time-consuming, involves information handling and do not involve creative problem solving, could be automated by writing application programs in a CAD systems internal programming language [9] or by using commercial KBE systems [10]. To reduce the cost and the risk of critical vendor dependence, we are attempting a different approach where all vital knowledge is stored in commonly used software programs with a high degree of accessibility and knowledge transportability.

The automated system for cost estimation is part of an overall system for order-based generation of variant product designs. In the proposed system (figure 1) design documentation, process plans and cost estimation for different variant design are created and the design could be evaluated to optimise product properties, production properties and the product cost. The system for cost estimation presented in this paper can operate either as part of the overall system or as a stand-alone application program.

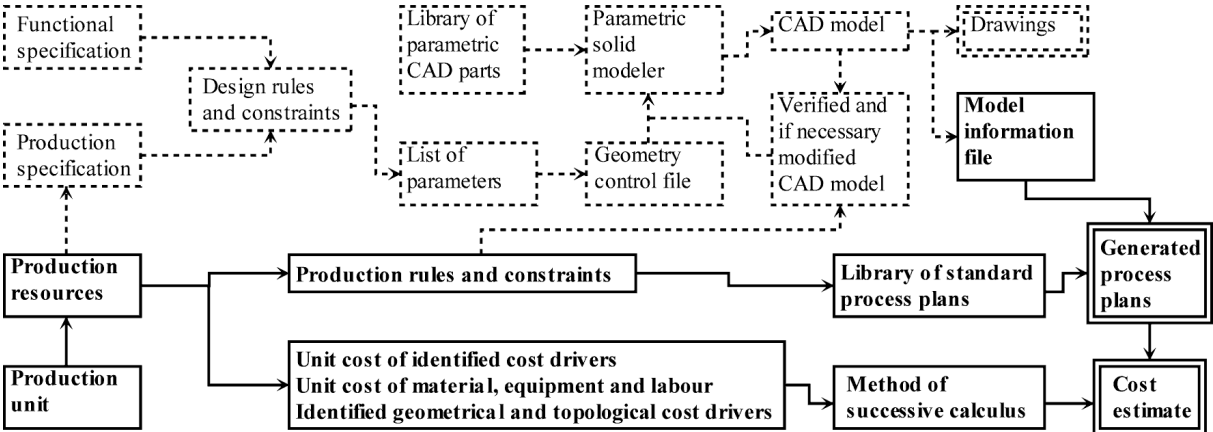


Figure 1. – Information flows and transformations in the proposed overall system. The dashed lines represent information flows and transformations of sub-systems that are not discussed in this paper. The solid lines represent the sub-system for automated cost estimation.

2.1 Generative Process Planning And Cost Estimation, GEPPACE

Implementation of the method should be done concurrently with the development of product platforms for variant design. The core of the GEPPACE method is the nomenclature for encoding of objects, which is created and implemented in a parallel process for parametric

CAD models, generic standard process plans and worksheets for cost estimation. In operation, CAD model information is extracted and transferred to the generic standard process plans and worksheets for cost estimation with a program for information transfer (figure 2).

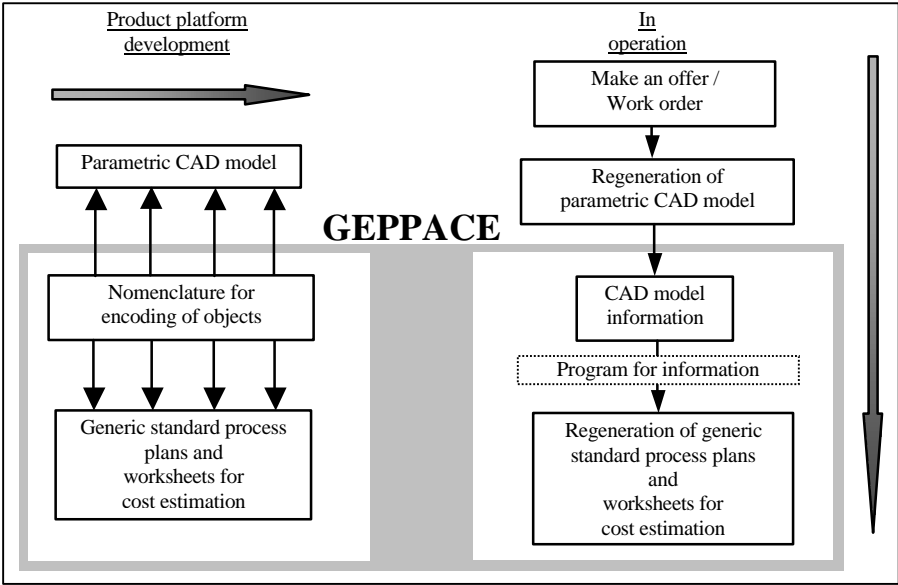


Figure 2. – GEPPACE, implementation and in operation.

2.2 Information extraction and nomenclature for CAD model objects

There are two approaches to identify features in a CAD model for process planning, which will determine the sequence of operation: *feature recognition* and *design by feature* [11]. Feature recognition searches an existing solid model’s data structure for combination of geometric elements and tries to identify predefined manufacturing features, which correspond to operations. In design by feature the process of converting features to operations is implemented in the construction of the solid model by using standard shape features, which correspond to manufacturing operations. The present work is based on the method of *designing by feature*.

Many CAD systems support extraction of CAD model information in text format and allow renaming of assemblies, parts, features and parameters. Some programs have commands for saving model information in a text file. Otherwise there is often an application program interface (API), which can be used for adapting the program to save model information in a text file or a database.

An alternative method for information extraction, which is proposed and used in this system, is the renaming of assemblies, parts, features and parameters by text strings with predefined positions for classification of objects using a predefined nomenclature. The nomenclature structure and encoding of objects depend on the company needs and the product. Often there are restrictions, e.g. a maximum number of characters in variable names and the use of special characters, due to the different application programs, which are used to build the system.

For information extraction and information transfer an application program, developed in a common programming language, is used. The application program searches the text files or the database for CAD model information, and matches the information with the information in the generic standard process plans and worksheets for cost estimation. The application program does not have to be developed for every new product and should preferably not

contain any rules about the regeneration of process plans or worksheets for cost estimation, as that would make the system less transparent and less accessible to the user.

The model information text files may contain help features, which are of no interest to process planning. In combination with a future wish of allowing manual changes of the CAD model, which should be captured in the process planning and cost estimation, the system has to be selective and open. For a search tool, which scans a text file, this is made possible by using prefixes. In the case of application the prefix II_ is used to identify parameters and the prefix III_ is used to identify features.

3 Process planning

The basis for the cost estimation is the automated generation of process plans. In this work a distinction is drawn between *process planning* and *operational planning*. Process planning is the initial step, which involves selection of operations and their sequence, selection of production resources and a rough prediction of the manufacturing time. The result is sometimes called routing sheets. Operational planning is a detailed description of each operation. This often includes operation sequences in a machine, tooling, fixtures, sketches of set up, machine settings and generation of NC-programs.

Computer-aided process planning systems (CAPP) are used for automating the task of process planning and much research has been done on mapping CAD model data to a process planning system [12]. There are two general approaches: *variant CAPP* and *generative CAPP* [13]. Variant CAPP is based on group technology and standard process plans and often includes manual editing. Generative CAPP utilises decision logic, formulas, manufacturing rules and geometry-based data. In a fully generative CAPP system, there is no need for human assistance or standard plans.

The CAPP system in this work consists of a database with generic standard process plans for a group of parts or assemblies with the same sequence of operations. Individually the numbers of operation can differ. This reduces the number of standard process plans. Figure 3 shows an example of a process plan. Respective text strings with the prefix III_ given in the column "Operation/Parameter", activate the required operations. There could also be operations, which are dependent on other operations and have no corresponding feature in the CAD model, e.g. grinding of sharp edges after a cutting operation or different control operations. Procedural rules stated as "If-Then" handle these operations and are accomplished with logic operators. Manufacturing features are preferred, but not necessary, depending on the rules in the generic standard process plans. When manufacturing features are used, the operations are implicitly stated in the process plans. Parameters, which have an effect on the selection of production resources or are needed for the cost estimation, are also given. Their values are then imported when the process plans are generated.

Name		Standard process plan number 01					
Bill of materials							
Component/Material	Quantity	Dimension					
Opnr	Active	Pgrp	Setup time	Process time	Ref.	Operation/Parameter	Value Calc. Result Rule
10	No	2810				III_Cut1_Rol1 II_Cut1_UNI1_depth II_Cut1_UNI1_length II_Cut1_UNI1_thickness	if Cut1 or Rol1
Cutting steel plate, plasma							
20	No	2815				III_Edg1 II_Edg1_Uni1_angle II_Edg1_Uni1_depth	if Edp1
Edge preparation							
30	No	2817				III_Rol1 II_Rol1_Kne1_depth	if Rol1
Bending flange, hydraul							

Figure 3. – Example of a process plan.

Every plan is a separate worksheet and a set of standard process plans is stored in the same workbook. For evaluation of different production units a set of standard process plans for each production unit can be made.

The CAPP system is based on standard process plans in accordance with variant CAPP but also utilises properties of generative CAPP, such as decision logic and geometry-based data. Based on these facts our system is classified as a *generative CAPP system*.

When a process plan is to be generated automatically for a part or an assembly, the system first identifies which standard process plan is to be used. The plan is retrieved from the set of generic standard process plans and modified in correspondence with the CAD model. Parametric values are extracted from the CAD model and the finalised process plan is saved in a new set of generated process plans. In the present system status, one process plan is created for every part or assembly. A numeric code in the beginning of part or assembly names determine which standard process plan to be used for a part or assembly (figure 4). Alternately the coupling could be done by a computerised dialogue system by which the user interacts and specifies the standard process plan to be used.

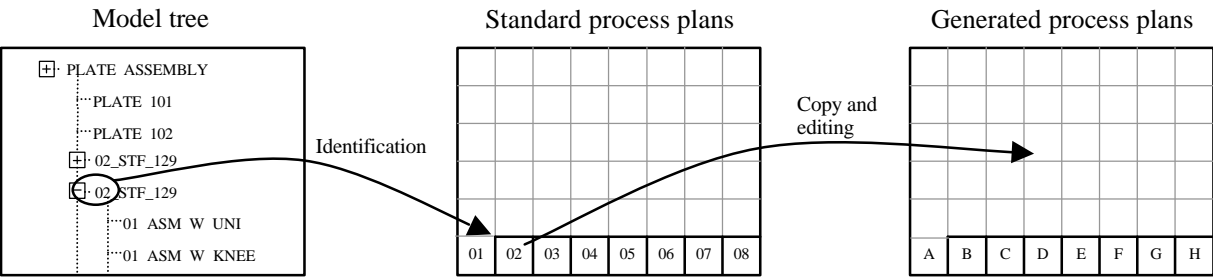


Figure 4. – Identification and generation of process plans.

The system is prepared for manual changes of the CAD geometry through the use of prefixes and a descriptive nomenclature. Manual changes could be activated and handled by a dialogue system. The descriptive nomenclature supplies the engineer with information necessary for adaption of process plans corresponding to the manual changes.

4 Cost estimation

All methods for calculation of production costs prior to manufacture are more or less a simplification with underlying uncertainties. Cost calculations based on operational planning and all relevant production data requires extensive work. With the method of successive calculus [7], costs can be estimated with less effort and the uncertainty is calculated for evaluation. The method supports a systematic breakdown of cost items if a more precise estimate is to be made at a later stage and accommodates uncertainties at the early design stages. The method of successive calculus is based on two statistical assumptions: 1) Cost predictions always involve uncertainties of a statistical nature, and 2) When a number of uncertain values are added up, the uncertainty will even out.

Implementation of the method of successive calculus is done by dividing the cost object in a reasonable number of independent items. For each item a triple estimate of a minimum (min.), a maximum (max.) and a most likely value is done and the mean value (M) and variance (S) is calculated with the following equations [7]:

An application program with a graphical user interface (figure 8) was developed for information transfer. With the application program the user can open the model tree and check features, parameters and their values, which provide system transparency. Process plans and a summary of the cost estimation are presented in two horizontally separated windows. The search routine for scanning the CAD geometry file is configured for the specific product class and for the CAD system used. Reconfiguration for other products and/or CAD systems can be done using the same principles and with a moderate work effort.

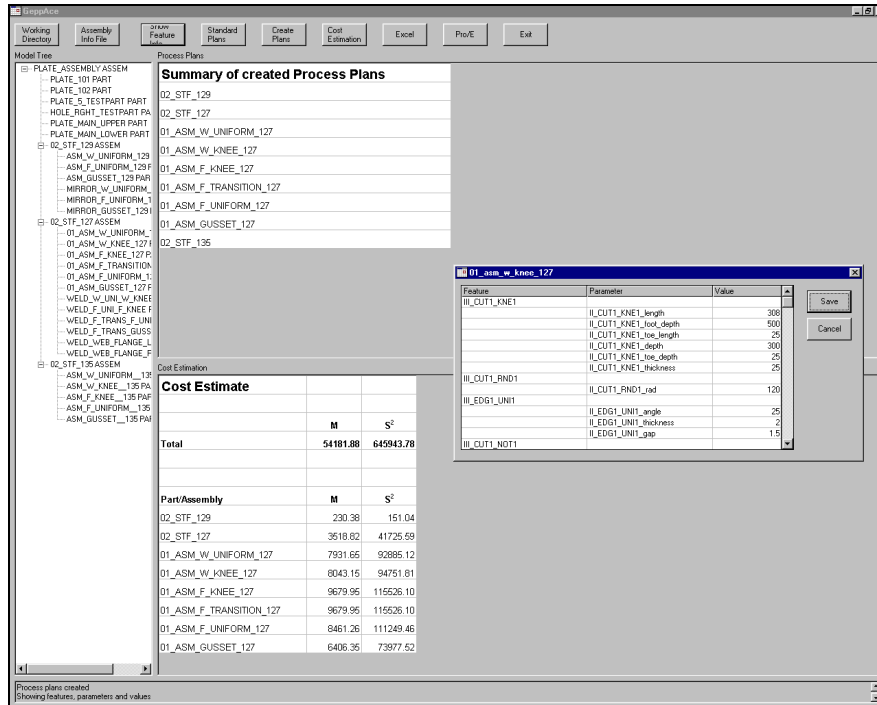


Figure 8. – Graphical user interface of the application program.

The cost estimates of the two variants are presented in figure 9. The program execution proceeds in the following steps:

- Model information files are exported from the CAD system.
- The files are searched and information is transferred to the identified standard process plans.
- The process plans are regenerated based on the imported information and the rules within the plans.
- Values of cost drivers are extracted from the CAD model and transferred to the system for cost estimation.
- The cost is calculated, with the method of successive calculus, for each part and assembly and summarized for the whole product.

Cost Estimate		
	M	S ²
Total	34769,88	946114,71
Part/Assembly	M	S ²
02_STF_129	1407,86	39735,41
01_ASM_W_UNIFORM_129	8552,94	458951,52
01_ASM_F_UNIFORM_129	4260,49	110044,07
01_ASM_GUSSET_129_1	481,86	1093,55
01_ASM_GUSSET_129_2	481,86	1093,55
02_STF_127	1639,35	51335,29
01_ASM_W_UNIFORM_127	3857,94	89897,26
01_ASM_GUSSET_135	481,86	1093,55

Cost Estimate		
	M	S ²
Total	81201,97	1354396,61
Part/Assembly	M	S ²
02_STF_127_1	1639,35	51335,29
01_ASM_W_UNIFORM_127_1	3857,94	89897,26
01_ASM_W_KNEE_127_1	965,19	4586,60
01_ASM_F_KNEE_127_1	558,56	684,23
01_ASM_F_TRANSITION_127_1	829,08	2007,15
01_ASM_F_UNIFORM_127_1	1878,10	19850,19
01_ASM_GUSSET_127_1	481,86	1093,55
01_ASM_GUSSET_127_8	481,86	1093,55

Figure 9. – Cost estimates for the two variants in figure 6.

6 Results

Our work has resulted in a method and an application program, where knowledge about the design and manufacturing processes of a product is stored and reused in the redesign of the product with the possibility to make automated cost estimations. The method is demonstrated with a system consisting of a database with generic process plans, in which the method of successive calculus is used for cost estimation, and an application program for information transfer. The method supports the designer with information about the manufacturing process at an early stage of the design process, which is a step towards solutions with an optimal balance between product and production properties in a cost-effective way.

7 Conclusions

Using CAD model objects encoded by a nomenclature, a CAPP system consisting of standard process plans can be developed for variant design. All manufacturing operations are proposed to be divided into an equivalent subset of cost items, for which geometrical and topological manufacturing cost drivers are identified and addressed in the CAD models. With the method of successive calculus in terms of estimating costs and production data by a triple estimate of a minimum, a maximum and a most likely value, a system for automated cost estimation for variant design can be developed. A first proposal of process plans as well as cost estimates can be produced automatically by the designer the instant a design proposal is available. This allows for design iterations that will guide the designer towards cost effective solutions, which are in accordance with manufacturing restrictions. A cost estimate based on the method of successive calculus facilitates the work also when exact data are not available. The uncertainty of the prediction is taken into account and through the calculation of variance, items are pointed out for successive break down to gain a refined cost estimate.

8 Acknowledgements

This work was conducted within the Vinnova program for “Information Technology in the Manufacturing Industry” and financial support is gratefully acknowledged. The authors would also like to express their gratitude to Kockums AB for information on application cases and helpful discussions.

References

- [1] French M., "Conceptual Design for Engineers", Springer-Verlag, London, 1999.
- [2] Pahl G. and Beitz W., "Engineering design - A systematic approach", Springer-Verlag, Berlin, 1996.
- [3] Weustink I.F., ten Brinke E., Streppel A.H. and Kals H.J.J., "A generic framework for cost estimation and cost control in product design", Materials Processing Technology, Vol. 130, 2000, pp. 141-148.
- [4] Blair M., Hartong A., "Multidisciplinary Design Tools for Affordability", AIAA-2000-1378, Proceedings of 41st Structures, Structural Dynamics and Materials Conference, 3 April 2000, Atlanta, Georgia.
- [5] Shebab E.M. and Abdalla H.S., "Manufacturing cost modelling for concurrent product development", Robotics and Computer Integrated Manufacturing, Vol. 17, 2001, pp. 341-353.
- [6] Feng S.C. and Song E.y., "Information Modeling of Conceptual Process Planning Integrated with Conceptual Design", Proceedings of DETC2000: ASME Design Engineering Technical Conferences and Computer and Information in Engineering Conference, September 10-13 2000, Baltimore, Maryland. DETC2000/CFM-14009.
- [7] Lichtenberg S., "Proactive management of uncertainty using the successive principle", Polyteknisk Press, Copenhagen, 2000.
- [8] Ullman D.G., "The mechanical design process", McGraw-Hill Inc., New York, 1997.
- [9] Wong L.M., Wang G.G., Friesen C., Foo K.H. and Pang L., "Development of an automatic design and optimization system for industrial silencers", Proceedings of DETC'02: ASME Design Engineering Technical Conferences and Computer and Information in Engineering Conference, September 29-October 2, 2002, Montreal, Canada. DETC2002/DAC-34118.
- [10] Fan I-S., Li G., Lagos-Hernandez M., Bermell-García P. and Twelves M., "A rule level management for knowledge based engineering applications", Proceedings of DETC'02: ASME Design Engineering Technical Conferences and Computer and Information in Engineering Conference, September 29 - October 2, 2002, Montreal, Canada. DETC2002/CIE-34501.
- [11] McMahon C. and Brown J., "CADCAM", Addison-Wesley, Harlow, 1998.
- [12] Ahmad N., Haque A.F.M.A., Hasin A.A., "Current trend in computer aided process planning", Proceedings of the 7th Annual Paper Meet and 2nd International Conference, Bangladesh, 2001, pp. 81-92.
- [13] Groover M.P., "Automation, production systems, and computer-integrated manufacturing", Prentice Hall, Upper Saddle River, N.J., 2001.
- [14] Cederfeldt M., Sunnersjö S., "Solid Modelling with Dimensional and Topological Variability", Proceedings of ICED 03: International Conference on Engineering Design, August 19-21, Stockholm, Sweden.

Corresponding author:

Fredrik Elgh

Jönköping University, School of Engineering, Department of Mechanical Engineering

P.O.Box 1026 SE-551 11 Jönköping Sweden

Phone: +46 36 15 62 13 Fax: +46 36 12 53 31

E-mail: fredrik.elgh@ing.hj.se