
# **Journal of Energetic Materials**



# Azidated Ether-Butadiene-Ether Block Copolymers as Binders for Solid Propellants

Journal:	Journal of Energetic Materials
Manuscript ID:	UEGM-2015-1340.R3
Manuscript Type:	Original Article
Date Submitted by the Author:	n/a
Complete List of Authors:	Cappello, Miriam; University of Pisa, Civil and Industrial Engineering Lamia, Pietro; University of Pisa, Civil and Industrial Engineering Mura, Claudio; University of Pisa, Civil and Industrial Engineering Polacco, Giovanni; University of Pisa, Civil and Industrial Engineering Filippi, Sara; University of Pisa, Civil and Industrial Engineering
Keywords:	Azides, HTPB, block copolymers, energetic binders

SCHOLARONE™ Manuscripts Azidated Ether-Butadiene-Ether Block Copolymers as Binders for Solid Propellants

Short title: Azidated Ether-Butadiene Energetic Copolymers

Miriam Cappello, Pietro Lamia, Claudio Mura, Giovanni Polacco\*, Sara Filippi

Department of Civil and Industrial Engineering

University of Pisa

Largo Lucio Lazzarino, 1 – 56122 Pisa, ITALY

\* Corresponding author

e-mail: giovanni.polacco@unipi.it

phone: +39 050 2217820

fax: +39 050 2217866

# Abstract

Polymeric binders for solid propellants are usually based on hydroxyl-terminated polybutadiene (HTPB), which does not contribute to the overall energy output. Azidic polyethers represent an interesting alternative, but may have poorer mechanical properties. Polybutadiene-polyether copolymers may join the advantages of both. Four different ether-butadiene-ether tri-block copolymers were prepared and azidated starting from halogenated and/or tosylated monomers and using HTPB as initiator. The presence of the butadiene block complicates the azidation step and reduces the storage stability of the azidic polymer. Nevertheless, the procedure allows modifying the binder properties by varying the type and the lengths of the energetic blocks.

#### 1. Introduction

In the most common propellant formulations, the solid ingredients are mixed with a polymer, which is subsequently cast cured to give an elastomeric network. The polymer binder acts by wetting the solid thus providing a void-free matrix that allows the formulation to be cast into large and irregular cases [1]. The polymer provides mechanical integrity to the final product and, together with a plasticiser, ensures safety during handling, since it absorbs and dissipates energy from hazardous stimuli that may happen during storage and transportation [2]. The most commonly used binder is hydroxy-terminated polybutadiene (HTPB) cross-linked with isocyanates to give a polyurethanic network. Alternatively, carboxy-terminated polybutadiene and hydroxyl-terminated polyethers have been also suggested [2]. HTPB is used worldwide and its success from the mechanical and safety point of view is well known and recognized. However, from the propellant point of view, due to its inert character, there are many cases when it is just a dead weight, which does not contribute to the overall energy output and limits the performance of the composition unless there is a high solids loading. On the other hand, high solids loadings induce processing and vulnerability problems. Therefore, the main goal of binder research is to find a formulation that reduces vulnerability, shock and impact insensitivity without lowering performance. A possible approach is to substitute HTPB with alternative materials, such as the so-called energetic-polymers, that act as binder and at the same time contribute to the output energy. The simplest way to achieve this result is the inclusion of functional groups (such as nitro (NO<sub>2</sub>), nitrate (NO<sub>3</sub>) or azide (N<sub>3</sub>)), which may increase the internal enthalpy of formation of the formulation and/or improve the overall oxygen balance. Of course, this has to be done by preserving all the main requirements of a binder, which should [3]:

(a) be a liquid with a good processability at the mixing temperatures (30-60 °C);

- (b) be curable, with minimum evolution of heat at 40-80 °C and give an elastomeric network with good mechanical properties;
- (c) have a glass transition temperature possibly below -40 °C;
- (d) be compatible with all the other ingredients of the formulation.

During the last decades, several energetic binders have been synthesized and here we will mention only the most promising ones, but the interested reader may find detailed information and a much longer list in the reviews by Agrawal [4], Provatas [2], Badgujar et al. [5], Sikder and Sikder [6] and Gaur et al. [7].

The first idea that comes to mind is the introduction of a limited quantity of energetic groups directly into HTPB. The early studies to produce nitrated HTPB (NHTPB) suggested a nitromercuration-demercuration route, [8], while later on Colclough et al. [1] started from epoxidation of HTPB and then reacted  $N_2O_5$  with epoxide groups to form dinitrate esters. Of course, the level of nitration affects also thermal stability and mechanical properties and the authors suggested that a nitration corresponding to 10% of double bonds gives a good compromise between energy output, mechanical properties and miscibility with energetic plasticizers.

Alternatively, the energetic binders may have a chemical structure completely different from HTPB and the most studied one are those containing nitro or azidic groups. In the first case, popular polymers derives from cationic polymerization of 3,3-(nitratomethyl) methyl oxetane 3-nitratomethyl-3-methyl oxetane (NIMMO) and glycidyl nitrate (GLYN). Again, the OH-terminated chains are able to crosslink into polyurethane rubbers. By comparing these nitrated polymers, Agrawal [4] suggested that NHTPB has the lower production cost, while the other two have better performances. In the case of azidic functionalities, there is a slightly longer list of candidates, but the most studied one is glycidyl azide polymer (GAP). GAP has been employed also as a plasticizer [4] and several publications may be found concerning its

synthesis as well as its thermal behavior and explosive properties [9-25]. The GAP synthesis was first described in a patent filed in 1972 by Vandenburg [26] who did azidation of polyepichlorohydrin (PECH) by using sodium azide in dimethylformamide. Twenty years later, Frankel et al. described a semi-industrial production in USA, sponsored by the Air Force Astronautic Laboratory [27]. The PECH was obtained by polymerization of epichlorohydrin (ECH) by using glycerol as the initiator to give a triol polymer easily crosslinkable with isocyanates. In the following decades, the synthetic route has not changed significantly and sodium azide remains the preferred reagent. The azidation can be performed in different organic solvents and in water [27, 28]. In the first case, the reaction is much faster and in dimethyl sulphoxide (DMSO) it is reported to occur at 90-95°C within 12-18 h. In water, the use of a phase transfer catalyst is necessary and the reaction may take several days before completion at comparable temperatures. Nevertheless, the two processes give GAP of comparable quality. PECH may be in linear, star or branched form depending on the catalyst, initiator and operating conditions. Consequently, the number of hydroxyl functionalities per chain can be modulated in a wide range of values. Moreover, PECH is now commercially available as well as GAP. Starting from GAP, several alternative organic azides have been developed in the last years and the use of the azido group is gaining more and more attention since it has also other advantages like i.e. reducing the flame and smoke in exhaust gases, thus making the propellant formulations more eco-friendly [5]. Some examples of suggested polymeric azides are poly(3,3 bis(azidomethyl)oxetane-co-ε-caprolactone) [29], 3,3 bis(azidomethyl)oxetane-tetrahydrofuran [30, 31] and polyglycidylazide-b-poly(azidoethyl methacrylate) [32]. Among the proposed ones, the polyoxetanes, first synthesized by Manser [33-35], gained an important role in the field of energetic binders. Manser started from monomers such as 3-nitratomethyl-3-methyl oxetane (NIMMO), 3,3-bis-(azidomethyl)oxetane (BAMO) and its analog monofunctional 3-azidomethyl-3-methyl

oxetane (AMMO). Later on, he also described the synthesis of many different oxetanes with cubyl and carboranyl groups, but the difficult syntheses involved have so far precluded their evaluation in large-scale formulations [1]. In the case of BAMO and AMMO, a chlorinated or tosylated monomeric precursor was azidated and then subjected to cationic ring-opening polymerization (CROP) by using a diol and a Lewis acid as catalyst. The classical Active Chain End (ACE) mechanism proceeds by donation of a proton from initiator to the oxetane, which then propagates with more oxetane monomers until the chain is terminated either with water or alcohol to give the hydroxy-terminated polymer. The number of hydroxyl functionalities per chain should theoretically coincide with those of the alcohol used as initiator.

The molecular weight can be adjusted by changing monomer feed rates and the ratio of diol to Lewis acid, but of course a post-polymerization chain elongation by using di-isocyanates is always possible. Unfortunately, the ACE mechanism has some disadvantages e.g. a lack of molecular weight control and product reproducibility, poor initiator incorporation and formation of cyclic oligomers [36]. For these reasons, an Activated Monomer Mechanism (AMM), which involves the concept of living polymerization, where the OH-terminated polymer reacts with an "active" monomer, may be preferable since it avoids the formation of unstable and highly active cationic propagating species and favors the molecular weight control and reproducibility of the results. Side reactions, including cyclization, are strongly reduced in AMM and well-defined linear products can be obtained [7]. However, it must be emphasized that it is not easy to drive the reaction toward the desired mechanism and often both mechanisms may be present at the same time [37, 38].

It is important to introduce another aspect, related to safety during the synthetic process. In contrast to the above-mentioned polymers, the low molecular weight azide monomers are highly dangerous and may explode without apparent reasons during handling. In addition, the

polymerization of energetic monomers requires careful control of reaction conditions since initiators may not be compatible with the energetic groups. Consequently, this polymerization is seen as an advanced technology and high-risk approach. Alternative to azidationpolymerization is the polymerization-azidation route, where the azidation step follows that of polymerization of the chlorinated-tosylated monomers. This is a low-tech., low-risk approach, but gives less opportunity to tailor the final properties of the polymer and suffers from the usual complications of modifying a macromolecule [36]. Taking into account the risks associated to the scale up for an industrial production, researchers are nowadays aiming toward the polymerization followed by azidation. With regard to the three candidate repeating units, BAMO is the one with the higher N content (50%w) followed by GA (42 w %) and AMMO (33%w). However, BAMO is a symmetric monomer and gives a crystalline homopolymer that cannot be used as energetic binder, but is suitable to provide the hard block of an energetic thermoplastic elastomer [7, 39]. In contrast, GA and AMMO are nonsymmetric and provide amorphous character to the polymer. Therefore, the best solution to combine the amorphous character and the high energetic content seems to be the random copolymerization of BAMO with either GA or AMMO introduced in the minimum quantity necessary to break up the crystallization ability of the polymer. Barbieri et al described the synthesis of polyAMMO (PAMMO) and polyBAMO (PBAMO) homopolymers starting from the chlorinated and brominated precursors and followed by azidation with sodium azide in DMF [40]. In the same paper, poly(GA-r-BAMO) copolymers were also synthesized by using different molar ratios between the two repeating units. Later on, the GA/BAMO = 75/25molar ratio was considered as the optimal one and the effects of different operating conditions on copolymer characteristics were investigated [37]. Even though the operating conditions were set to favor a living character of the polymerization, the final product resulted in combined AMM and ACE mechanism. In particular, the latter is responsible for the formation of cyclic oligomers, which of course do not contribute to the formation of the binder network, but may be tolerated in the formulation since they behave as plasticizers perfectly miscible and compatible with the binder. The polymers were also subjected to preliminary characterizations in lab-scale propellant formulations [41, 42]. The same research group studied also the use of the tosylated precursor of AMMO to prepare PAMMO [43] and p(AMMO-*r*-BAMO) copolymers [38].

Pisharat et al. choose to produce a thermoplastic elastomer and prepared a poly(BAMO-*b*-GA-*b*-BAMO) block copolymer by using hydroxyl terminated PECH as initiator for the polymerization of the chlorinated precursor of BAMO. The azidation was then performed by using NaN<sub>3</sub> in DMF [39].

Another possible strategy is the joining of HTPB and energetic binders, in order to keep the advantages of both components. However, as it is easily predictable, due to their different composition and polarity, HTPB and the azidic polyethers are not compatible and the mixture is destined to phase separation [44]. Nonetheless, Manu et al. prepared blends of HTPB and GAP and determined their glass transition after cross-linking with isocyanates [44]. The glass transition temperatures were evaluated through differential scanning calorimetry (DSC) and, even though the reported spectra are not easy to interpret, the authors claim that the blends show a "dominant single glass transition" that indicates a micro-heterogeneous morphology of the interpenetrating network. This result is somehow in agreement with those reported by Mathew et al. who did a mechanical and thermal characterization of cross-linked GAP/HTPB networks [45]. The glass transition temperatures were evaluated by dynamic mechanical analysis and it was found that blends prepared with GAP content up to 30% showed a single transition in the loss tangent trace. Very recently, Ding et al. used a triazole curing system as alternative to the traditional isocyanates, starting from GAP and a propargyl-terminated polybutadiene, under the catalysis of cuprous chloride at ambient temperature [46].

Nonetheless, it is not advisable to use HTPB and GAP or another azidic polymer in a simple blend that may separate before the curing process, thus giving the risk of inhomogeneity in the final product. A possible solution could be the use of a compatibilizer, which may be, e.g. a diblock copolymer made with the two components, but the best way to limit the problem of phase separation is the covalent bonding of the two polymers to form block copolymers. In block copolymers, usually the incompatibility between the blocks leads to a biphasic structure where the dispersed phase is organized in nanoscale blocks that may arrange in several configurations that have been widely studied both from the experimental and theoretical point of view [47]. Zhou et al. made a simulation study of the morphologies of GA-b-PB and GA-b-PB-b-GA di- and tri-block copolymers and concluded that there is a narrow range of compositions where a "bicontinuous" phase may form and improve the overall mechanical properties [48, 49]. Since after copolymerization, the polybutadiene block does not contain the OH terminal groups, in the above sentence and in what follows it is indicated as PB, while HTPB refers to the unreacted OH terminated homopolymer.

The GAP/HTPB block copolymers have been synthesized and characterized by a few research groups. Eroğlu et al. first described the grafting of GAP onto HTPB, via free radical mechanism, by using a GAP "macroinitiator" obtained by reacting the azidic polymer with 4,4' azo bis(4-cyanopentanoyl chloride) [50]. Later on, Murali and Raju used the same procedure and made a detailed characterization of the graft copolymer, which exhibited two distinct glass transition temperatures at -74 and -36 °C, corresponding to the PB and GA blocks respectively [51].

Alternatively, the hydroxyl functionalities of HTPB may start the polymerization of a suitable monomer, thus directly giving a tri-block copolymer with PB as the central block. This was done for ECH almost contemporarily by Vasudevan and Sundararajan [52] and by Subramanian [53]. The main difference in the two procedures is the azidation step, done by

using NaN<sub>3</sub>, in DMSO or in a mixture of dimethylacetamide and toluene. Similarly, Reddy et al. used HTPB as the central block and polymerized BAMO on it [54]. It is worth nothing that in this case the azidation followed by polymerization was chosen.

In this work, the same idea of using HTPB as the polyalcohol that starts the ionic polymerization was followed to prepare block copolymers to be subsequently azidated. As already pointed out, the azidation of ether precursors can be performed by using many different operating conditions and solvents. However, in this case we found that the unsaturated polybutadiene middle block may lead to an undesired cross-linking that impedes the subsequent use as binder. Therefore, it has been necessary to test different precursors, solvents and reaction temperatures to obtain appropriate operating conditions to solve this problem. A mixture of dimethylacetamide (DMAc) and toluene, as suggested by Subramanian [53], showed to be suitable to limit the cross-linking problems during azidation. Four block copolymers were then prepared by using the same procedure: 1) GAP-PB-GAP copolymer starting from a tosylated glycidol, 2) GA/BAMO-PB-GA/BAMO copolymer from ECH and 3,3-bis-(Brome methyl)oxetane (BBrMO, the brominated precursor of BAMO), 3) GA/BAMO-PB-GA/BAMO copolymer from tosylated glycidol (GT) and BBrMO and 4) AMMO-PB-AMMO copolymer starting from 3-tosyloxymethyl-3-methyl oxetane (TMMO). Therefore, polymers 2 and 3 are equal, with the difference just in the precursors. The first polymer (GAP-PB-GAP) was already synthesized by Vasudevan and Sundararajan [52] and by Subramanian [53], but starting from different precursors, while, to our knowledge, the other two polymers have not been described yet in the scientific literature. The synthetic pathways are described in Figure 1 (preparation of the monomers starting from the commercial products) and Figure 2 (synthesis of the polymeric precursors). In all cases, a polymeric non-energetic precursor was prepared and subsequently azidated.

All the monomers and polymers were characterized by Fourier Transfer Infra Red (FTIR) analysis and Nuclear Magnetic Resonance (NMR). The thermal behavior of the polymers was evaluated by Differential Scanning Calorimetry (DSC) and Thermogravimetric Analysis (TGA).

## 2. Materials and methods

#### 2.1. Materials

All the chemicals, unless differently stated, were purchased at Sigma Aldrich. N,N dimethylacetamide (99%), toluene (99,8%), dimethyl sulfoxide (DMSO) (99.7%), dimethylformamide (DMF) (99.8%), methanol (99.9%), ethanol (99.9%), sodium azide (>99.5%), boron trifluoride tetrahydrofuranate (BTF THF), triethylamine (TEA) ( $\geq$ 99%), 3-hydroxy-methyl-3-methyloxetane (HMMO) (98%), glycidol (G) (96%), toluene-4-sulfonyl chloride (TsCl) ( $\geq$ 99%), sodium chloride (>99%), sodium hydroxide (>98%), sodium carbonate anhydrous, sodium bicarbonate (>99.7%), magnesium sulfate (>99.5%), phosphorus pentoxide, hydrochloric acid, potassium hydroxide were used as received. Diethyl-ether, 3-bromo-2,2-bis(bromomethyl)propanol (BrBBrMP) from Chemos GmbH, was used as received. Dichloromethane (DCM) was dried with  $P_2O_5$  and distilled at 40°C and 1 atm, ECH and butanediol were distilled under reduced pressure. HTPB was Poly bd® R-45HTLO by Cray Valley, with the following main properties: viscosity = 8000 mPa.s at 23 °C, hydroxyl value = 0.84 meq/g, hydroxyl functionality = 2.4-2.6 OH groups/chain, glass transition temperature = -75 °C. 2,2'-Methylenebis(6-tert-butyl-4-methylphenol) used as antioxidant was VulKanox BKF by Lanxess.

## 2.2. Synthesis of monomers

# 2.2.1. Glycidyl tosylate GT

The synthesis was performed according to a procedure described by Nakabayashi et al [55]. A 250 mL flask, was fed with 50 mL of anhydrous toluene and 4.2 mL of TEA. In a beaker, a solution of 5.42 g TsCl in 12 mL of toluene was also prepared. The flask and the beaker were then conditioned at -15°C for 1.5 h. Then, the flask was fed with 2 mL of distilled G and dropwise with the TsCl solution. At the end of the feeding, the system was maintained at -15 °C for 24 h, filtered and distilled. The remaining liquid was dropped in cold petroleum-ether thus forming a white suspension that crystallizes at -15 °C. The GT was obtained with a 98.6% yield, as white anhydrous crystals.

## 2.2.2. 3,3-bis(bromomethyl)oxetane (BBrMO)

A 1L three-necked round bottom flask, fitted with a reflux condenser, a nitrogen inlet and a mechanical stirrer set at 180 rpm was fed with 50 g di BrBBrMP and 100 mL of ethanol. The flask was then immersed in a water bath set at 6±1 °C and 100 mL of a 1.77 M solution of NaOH in ethanol were added drop by drop in about 0.5 h. Once all the NaOH solution was fed to the reactor, the bath temperature raised to 70 °C and the solution was kept under stirring for further 1 h. Then, the solution was cooled to room temperature, filtered under reduced pressure (6500 Pa) and mixed with 50 mL of DCM. The organic phase was washed several times with distilled water and BBrMO was finally obtained after distillation at 30,000 Pa and 61 °C, with a 93.0 % yield.

#### 2.2.3. 3-tosyloxymethyl-3-methyl oxetane (TMMO)

The synthesis was performed in the solid state, according to a procedure described by Kazemi et al [56]. A mortar was fed with 31.8 g of anhydrous Na<sub>2</sub>CO<sub>3</sub>, 10.2 g of HMMO

(Na<sub>2</sub>CO<sub>3</sub>/HMMO=3/1 molar ratio) and manually milled with a pestle for about 7 min. Then 28.7 g of TsCl (TsCl/HMMO=1.5/1 molar ratio) where added and milled for another 23 min. Finally, 28.05 g of KOH were added (KOH/HMMO=5/1 molar ratio) and milled for about 50 min to remove the unreacted TsCl. The whole reaction was conducted in a glove box under nitrogen atmosphere. The obtained solid was added to 200 mL of diethyl-ether and filtered several times. The obtained clear liquid phase was finally subjected to distillation at 48°C and 8500 Pa thus inducing the crystallization of TMMO that was obtained with a 40 % yield.

The structure and purity of all monomers was verified by Fourier transform infrared spectroscopy (FTIR) and by nuclear magnetic resonance (<sup>1</sup>H-NMR).

# 2.3. Polymerizations

As stated above, the block copolymers formed through the growing of the energetic segments on each end of preformed HTPB, act as initiator. The catalyst and operating conditions were set in order to favor the cationic ring opening polymerization by AMM. In all the polymerizations, the quantities of BTF THF and HTPB were such that the molar ratio between BTF THF and the OH functionalities of the polymer was equal to 2/1, while the molar ratio between monomers and OH functionalities was equal to 50/1. Table 1 reports the quantities used for a typical polymerization of each block copolymers, being in the last column indicated the theoretical N<sub>3</sub> content after azidation, calculated from the hypothesis of 100 % yield in both the polymerization and azidation reactions. The polymerization procedure was as follows: A 1L three-necked round bottom flask, fitted with a reflux condenser, a nitrogen inlet and a mechanical stirrer set at 120 rpm was fed with 80 ml of DCM, 0.72 mL of BTF THF, about 4 g of HTPB and maintained 2 h under stirring at room temperature. Then, the reactor was covered with aluminum foil, immersed in a water bath at 20±0.5 °C and the

monomers, previously dissolved in 30 mL of DCM, were added drop-wise to the reactor through a dropping funnel. From the end of the monomer feeding, the reaction mixture was kept in the same conditions for 20 h (120 h when using tosylated monomers) and then hydrolyzed with 400 mL of an aqueous solution of NaCl (10% w). The mixture was maintained under vigorous stirring for further 2 h and then the organic and aqueous phases were separated. The aqueous phase was washed with DCM, subsequently recovered and added to the organic phase. The organic phase was washed once with a water/methanol = 50/50 v/v solution to remove unreacted monomers and catalyst, then several times with the aqueous solution of NaCl, dried with MgSO<sub>4</sub>, filtered and distilled at 45 °C, under vacuum (6500 Pa) in order to remove all the DCM. All the polymers were obtained with a 95-97 % yield.

# 2.4 Azidation of the polymeric precursors

The azidation was conducted with the well-known second-order reaction with SN2 type mechanism, by using sodium azide and a polar solvent. This technique of azidation is almost "universal" and in the last decades many researchers, which tested several solvents and operating conditions as well as many different leaving groups, described it. In our research group, it was previously used to substitute chlorine, bromine and tosyl groups, in either DMF or DMSO, with temperatures ranging from 90 up to 150 °C [37, 38, 40, 43]. Pisharat and Ang azidated PECH in DMF, at 120 °C for 12h [39], while Manser suggested DMSO at 80 °C also for the azidation of the oxetanic monomers [33]. Many other examples of azidic compounds can be found in the literature, with DMF and DMSO the most used solvents. However, we found that neither DMF nor DMSO were suitable for the azidation step, because before obtaining the complete azidation of the polymers, an incipient cross-linking reaction was observed, thus leading to partially soluble materials. This happened in several attempts made

at testing temperatures ranging from 100 to 130 °C. The addition of small quantities of Vulkanox BKF as antioxidant only reduced the phenomenon. Since this procedure is well established and was already tested several times in our laboratory for GAP, BAMO and PAMMO polymers and copolymers, which never caused such inconvenience, the cross-linking must be correlated with the presence of the unsaturations in the polybutadiene middle block. However, Vasudevan and Sundararajan, which used DMSO at 105 °C for 10 h, did not describe the cross-linking problem in their work [52]. In our case, the use of a toluene/DMAc mixture, as suggested by Subramanian [53], in combination with small quantities of Vulkanox BKF, gave good results and was adopted for all azidations.

A typical azidation procedure was as follows: About 2 g of polymeric precursor were dissolved in 100 ml of DMAc/toluene (50/50 v/v) solution and fed in a 250 mL three-necked round bottom flask, fitted with a reflux condenser, a nitrogen inlet and a magnetic stirrer. After adding a small quantity of Vulkanox BKF (about 1% by weight with respect to the polymer), the flask was immersed in an oil bath set at 90±1 °C and conditioned for 30 minutes. Then, NaN<sub>3</sub> was added in 10% molar excess with respect to the stoichiometric quantity and the temperature of the bath raised to 95 °C while maintaining the system under constant stirring. Periodically, samples were taken from the reactor and subjected to FTIR analysis to evaluate the degree of azidation. Once the IR spectra reached a stationary "state", the reaction medium was filtered under vacuum in order to remove the formed sodium salt's and the unreacted sodium azide. The reaction time strongly varied depending on the monomeric precursors (Table 2).

The solution was then washed several times with an aqueous solution of NaCl (10% w) in order to complete the salts removal. The aqueous phases resulting from the washings were mixed together and washed with DCM to remove possible traces of polymer, while the organic phase was dried with MgSO<sub>4</sub>, filtered again and distilled at 45 °C, under vacuum

(1000 Pa) in order to remove all the organic solvents. A small quantity (about 1.5 % by weight) of Vulkanox BKF was finally added to the polymer before storage. All the azidated copolymers were obtained with a yield higher than 95%.

The structure and purity of all synthesized polymers (before and after azidation) was checked by FTIR and NMR, while their thermal properties were determined by DSC and TGA.

## 2.5. Characterization of the monomers and polymers

Fourier transform infrared spectroscopy was performed on a Bruker Tensor 27 and nuclear magnetic resonance (<sup>1</sup>H-NMR, <sup>13</sup>C-NMR) on a VXR300 and INOVA600 instruments. Chemical analysis and FTIR Chemical Imaging were carried out by Spectrum Spotlight FTIR Imaging System from Perkin Elmer. Chemical imaging analysis, in transmittance mode, allowed combining optical microscopy and infrared analysis of micro and macro areas of thin films prepared by solvent evaporation on a microscope slide. The morphological analysis was performed also by a LEICA DM LB fluorescence microscope. The molecular weight distributions of the polymers were measured from solution in CHCl<sub>3</sub> (4 mg/mL) by using a Gel Permeation Chromatography (GPC) apparatus Jasco PU-1580, equipped with PL Mesopore column, calibrated with low polydispersity polystyrene standards. Thermogravimetric analysis (TGA) was done by using a TA O500 apparatus, under nitrogen atmosphere, with a heating rate of 10°C/min until 600 °C and using samples of about 5 mg. Thermal properties were studied by differential scanning calorimetry (DSC) performed with a Pyris 1 scanning calorimeter from Perkin Elmer, by using aluminum pans. The sample mass was in the range of 3-5 mg and spectra were collected from 50 °C at a heating rate of 10°C/min, until 350 °C.

## 3. Results and discussion

IR and NMR spectra were recorded for all monomers, precursors and polymers synthesized in

this work. In order to limit the number of figures, we report only two H-NMR spectra,

## 3.1. Chemical characterization (IR – NMR)

showing the comparison between GT/BBrMO-PB-GT/BBrMO and GA/BAMO-PB-GA/BAMO in the range corresponding to the tosyl group signals (Figure 3).

With regard to the IR spectra, they are reported in Figures 4 and 5, showing the main peaks involved in the azidation process. In all cases, but one, azidation appeared to be quantitative. The only polymer without complete substitution of the leaving groups is AMMO-PB-AMMO, where the peaks relative to the tosyl group are clearly visible even after 140 h of azidation reaction. A quantitative evaluation of the residual tosyl groups indicates a degree of azidation close to 50 %. The peaks highlighted in the figures are: 554 cm<sup>-1</sup> = N<sub>3</sub> bending, 670 cm<sup>-1</sup> = C-Br stretching, 744 cm<sup>-1</sup> = C-Cl stretching, 1190 cm<sup>-1</sup> = SO<sub>2</sub> symmetric stretching, 1280 cm<sup>-1</sup> = N<sub>3</sub> symmetric stretching, 1363 cm<sup>-1</sup> = SO<sub>2</sub> asymmetric stretching, 1600 cm<sup>-1</sup> = aromatic C=C vibration, 2100 cm<sup>-1</sup> = N<sub>3</sub> asymmetric stretching.

From the reaction times reported in Table 2, it can be concluded that the azidation of the tosyl group is the bottleneck of the reported synthetic strategies. This is somehow unexpected, because the tosyl is a good leaving group. However, it should be considered that the group is attached to a polymeric chain, so there are several aromatic rings close one to each other and this may determine a high steric hindrance as well as a low mobility of the chains even when in solution. In the case of the GT/BBrMO copolymer, probably the alternation of GT and BBrMO groups allows sufficient mobility of the chain, so that a complete azidation was obtained in a short time. Therefore, even if potentially better than halogen atoms, the tosyl group may determine a slowing down of the azidation kinetics and also limits the maximum degree of azidation obtainable within the reaction times adopted in this work.

An interesting point concerning FTIR is that a comparison of the GA-PB-GA spectrum (labeled as N. 6 in Figure 5) with the corresponding one reported in the paper by Subramanian [53] clearly shows that in the latter the N<sub>3</sub> peak is significantly smaller. This means that the synthetic procedure adopted in this work enables formation of copolymers with a significantly higher azide content.

With regard to the characterization of the copolymers, during the revision process it was asked if the alcohol moieties in the HTPB chain were really used as the primary initiator site rather than adventitious moisture. In the latter case, we would have obtained the polyether instead of a block copolymer. Therefore, depending on the primary initiator, the final product may contain block copolymer, polyether and HTPB. Block copolymer alone is the desired product, with all HTPB used as initiator and no moisture involved. A mechanical mixture of block copolymer and polyether will form if both HTPB and moisture act as initiator. A mechanical mixture of block copolymer and HTPB is obtained if HTPB is only partially used as initiator. A mechanical mixture of HTPB and polyether is the worst case, with no HTPB used as initiator. And so on, with other combinations possible. To clarify this point, we can start from the above-described incompatibility between the ether and butadiene blocks [44], which leads to a macroscopic phase separation when blended. For this reason, the morphologies of the polymeric precursors were compared with those of the mechanical blends prepared from the polymers constituting the single blocks. For this purpose, the ether blocks were appositely synthesized, by using the same synthetic strategy described for the block copolymers, simply substituting HTPB with butanediol. Particular care was taken in order to assure the use of identical operating conditions during polymerizations (reagent purity, volumes, solvent quantities and so on). The mechanical blends (MB) were prepared by solvent evaporation from a DCM solution where HTPB and polyether were added in quantities corresponding to the composition calculated from the yields of the copolymer

synthesis. Moreover, MB and copolymers were subjected to fluorescence microscopy and Spectrum Spotlight FTIR Imaging. As an example of the obtained results (qualitatively similar for all the synthesis and corresponding MB), Figure 6 shows the images and spectra recorded for PGT and HTPB. The MB is on the left hand side of the Figure and the product of the synthesis (named product in what follows) is on the right hand side. The fluorescence microscopies of MB (Figure 6a) and the product (Figure 6b) are completely different. The latter is quite homogeneous and shows some area with slightly different fluorescence intensity, but no visible phase separation. In contrast, the MB is markedly biphasic, with dark roundish drops dispersed in a bright matrix. A comparison of these images with those (not reported) of the homopolymers suggests that the dark phase corresponds to HTPB. However, the dark phase and brightness inhomogeneity may also derive from voids and/or variations of the sample thickness. Therefore, the samples were analyzed by Spectrum Spotlight FTIR Imaging, which uses optical microscopy (Figures 6c and 6d) and allows building a chemical maps (Figures 6e and 6f). The maps represent the normalized peak area between 2980 and 2700 cm<sup>-1</sup> (stretching of aliphatic C-H bonds). This peak is present in both polyether and HTPB, but its intensity is significantly higher in the latter. Therefore, the grey level in the map reflects the composition of the sample: a high HTPB content corresponds to white color in the map. Figure 6e shows areas with markedly different grey level and confirms that the round domains of MB are mainly composed of HTPB. In contrast, Figure 6f does not show any significant variations in grey level. Moreover, the arrows indicate the spectra recorded in correspondence of the "+" symbols reported in Figures 6e and 6f. The two spectra on the left hand side differ one from each other and result similar to those of the polyether and HTPB homopolymers (not reported). In contrast, the right hand side spectra are very similar, even if recorded in areas corresponding to the maximum possible difference in grey scale. Based on the IR spectra and maps, we can conclude that the shadows and apparent inhomogeneity

observable in Figures 6b, 6d and 6f do not correspond to significant variation in chemical composition. Therefore, we can exclude that the reaction product is a mechanical mixture of HTPB and polyether.

Moreover, a phase separation is observable also while adding very small quantities of HTPB to the product. This excludes also that the product could be a mechanical mixture of block copolymer and HTPB. The last proof that all HTPB was used to build the polyether blocks comes from an extraction with n-hexane. The mechanical blend was immersed in n-hexane, and stirred vigorously at room temperature for a few minutes, after which a consistent part of the blend showed to be immiscible with the solvent. Then, the hexane-phase was recovered and the solvent evaporated. The resulting polymeric phase was HTPB alone. The same procedure was followed for the copolymer and, in that case, no HTPB was recovered after hexane evaporation.

The presented results demonstrate that HTPB worked as initiator for the polyether, but leave the doubt that the ether could polymerize starting from the above-mentioned water moieties. This possibility is validated from the fact that the addition of small quantities of polyether to the synthesis product did not give phase separation (contrary to what happened while adding HTPB). Unfortunately, this hypothesis could not be verified with solvent extraction, because we did not find a solvent selective toward the ether phase. Several polar solvents were tried, but all of them partially dissolved the HTPB, probably due to its OH functionalities. A more enhanced extraction procedure was necessary and the GPC column showed to be useful. As an example, Figure 7 shows the GPC analysis of HTPB and GT-PB-GT copolymer. The weight molecular weight distribution of the copolymer resulted bimodal, and the curve was subjected to deconvolution (dashed lines). The obtained results are summarized in Table 3 and show that the right hand peak of the copolymer has a molecular weight slightly higher than HTPB. In contrast, the left hand peak has a very low molecular weight, thus

remembering the values usually associated with the formation of cyclic oligomers composed of 3-5 repeating units [40]. Therefore, the correct interpretation of the GPC is that the highmolecular weight peak is the block copolymer, while the low-molecular weight peak is due to the presence of polyether not linked to HTPB and grown from OH functionalities of different origin. The synthesis product is a mechanical mixture of block copolymer and polyether, thus both HTPB and some adventitious moisture worked as initiator. The polyether content was calculated from the area of the peaks and the results are reported in the last column of Table 3. In all cases, the oligomer content is around 20 % by weight of the total amount. We can thus affirm that all the HTPB chains acted as initiator for the polymerization, but some of the OH moieties present in the reaction medium did the same and led to the formation of polyether chains not covalently linked to the polybutadiene. The product thus contains polyether oligomers that are difficult to separate from the copolymer. Nevertheless, if these oligomers are linear, they should be OH functionalized and participate to the curing with isocyanates while forming the polymeric network that constitutes the final binder. Otherwise, in case they are cyclic oligomer, they will act as plasticizers in the binder formulation.

## 3.2 Thermal characterization (DSC – TGA)

In the scientific literature there is a long list of papers that analyze the thermal decomposition of polymers (especially GAP) containing the azidic functionalities, alone or after curing and addition of plasticizers [17, 20, 21, 23, 25, 31, 57]. Usually, the easiest way to determine the thermal stability of this kind of polymers is by TGA and DSC analysis. However, due to the violent kinetics of decomposition, it may not be easy to obtain reliable and reproducible results. Selim et al., in the case of GAP, used 2-3-mg samples, and kept the ramp rates in the

range of 0.2-5°C/min since a greater amount of polymer or higher heating rate lead to explosion during the decomposition experiment [14]. In all cases, while subjected to a temperature sweep procedure, the azidic polymers degrade in a two-stage process. The first one, occurring at about 240-270 °C, is exothermic and corresponds to the abstraction of N<sub>3</sub> groups from the polymeric chain. The second one, partially overlapped with the first one, but shifted to higher temperatures, generally occurs without significant heat release and corresponds to the progressive decomposition of the remaining polymeric chain. In one of the first and most cited work, Kubota and Sonobe suggested that the first process corresponds to the release of a nitrogen molecule from the  $N_3$  group, with the formation of a nitrile C $\equiv$ N bond [58]. The following studies confirmed that the decomposition starts with the initial rupture of N-N<sub>2</sub> bond, with elimination of molecular nitrogen. Then, rearrangement to a polymeric imine and/or acrylonitrile following elimination of hydrogen molecule has been proposed. In the final products of decomposition, gaseous (N<sub>2</sub>, CO, HCN, NH<sub>3</sub>, CH<sub>2</sub>O, CH<sub>4</sub>, C<sub>2</sub>H<sub>2</sub>, C<sub>2</sub>H<sub>4</sub>, CH<sub>3</sub>CHO, CH<sub>2</sub>CHCHNH, CH<sub>3</sub>CHNH, H<sub>2</sub>O etc.) and larger molecules as benzene, pyrrole and furan have been identified [18, 23, 24]. However, in all cases, the weight loss experimentally measured during the first stage is higher than the theoretical one based on sole N<sub>2</sub> release. This is due to the above-mentioned partial overlapping with the incipient second stage of decomposition, but also to the occurrence of other, parallel reactions during the first stage. Various mechanisms and possible involved reactions have been proposed by analyzing the residual solid and the evolved gases during decomposition. As an example, Eroĝlu and Güven used FTIR and observed that the decrease of N<sub>3</sub> content was accompanied by the appearance of signals related to N-H bending, -C=N-C-H, - C=N-C-C, and N-H stretching. At the same time, the signal of the C-O-C ether bridge remained unchanged thus suggesting that the main chain was not yet involved in the decomposition process. Based on these observations, a mechanism based on the formation of intra and inter-molecular crosslinking was suggested for the first stage of degradation [13]. Reshmi et al. used DSC and TGA coupled with pyrolysis gas chromatography—mass spectrometric technique and showed that during its first stage of decomposition, 1,6-bis (azidoacetoyloxy) hexane preferentially forms the corresponding diimine by elimination of N<sub>2</sub> [59]. Then, at higher temperatures, there is formation of diimines by elimination of CO<sub>2</sub>, diols through elimination of CO and HCN and diene due to CO<sub>2</sub> and CH<sub>2</sub>NH elimination. The photodegradation under ultraviolet (UV) irradiation was also investigated by Sahu et al. [15] and by Wang et al. [19]. The latter combined a tunable synchrotron vacuum ultraviolet photoionization and molecular-beam sampling mass spectrometry and observed that the UV radiation lowered the onset of the thermal decomposition of GAP and caused the appearance of a larger number of free radical species, compared to thermal decomposition alone.

The DSC and TGA analysis are reported in Figures 8-10 and summarized in Tables 4 and 5. In both Tables,  $T_i$  and  $T_f$  indicate the initial and final temperatures of the degradation step. The produced heat and weight loss are reported after normalization with respect to both the total weight and the theoretical  $N_3$  content of the polymer. In Table 5,  $\Delta w$  is the weight loss with respect to the total initial mass and  $\Delta w$   $N_3$  (%) is the weight loss compared to the theoretical one expected if all azidic groups release one  $N_2$  molecule. Finally,  $W_r$  is the residual weight at the end of the test (600 °C). The DSC traces are reported only for the azidic polymers. It is useful to underline that such high temperatures have only scientific interest, not practical, because the behavior of the polymers in propellant will not be the same as in the individual state due to the oxidizer presence around.

As already stated, the N<sub>3</sub> group decomposition is responsible for the exothermic peak observed in DSC and the first weight loss in the TGA thermograms. However, this decomposition may follow different pathways and be partially superposed to other degradation phenomena, which depend not only on the operating conditions, but also on the

polymer structure. Therefore, the weight loss and energy release during this stage are unequivocally determined in the literature. As an example, in the case of GAP, the following values (here expressed as J/g of N<sub>3</sub>) were reported: 4,352 [13], 4,835 [14] and 6,166 [21], representing the heat of formation of the azido group around 8500 J/g of N<sub>3</sub> [27]. In our case, the decomposition is probably "complicated" by the presence of the butadiene block that may interact with the formed species. The enthalpies reported in Table 4 are substantially in agreement with those reported in the literature. The value obtained for the AMMO-PB-AMMO copolymer confirms the estimation of about 50% substituted tosyl groups. Moreover, in the spectrum of this polymer there is the superposition with a second peak (centered at about 275 °C) that corresponds to the exothermic degradation of the tosyl group and well visible in the spectra of the tosylated precursor (not reported here).

With regard to TGA (Figures 9 and 10), a first general observation is that all the azidated copolymers, but AMMO-PB-AMMO, have a significant residual weight at 600 °C (see last column of Table 5). In contrast, the precursors show a much lower final weight and HTPB alone has almost no residual weight at the same final temperature. This difference between azidated polymers and precursors suggests that during thermal decomposition some chemical interactions may occur between the azidic functionalities and the butadiene backbone. Probably, this is strictly connected with the above-mentioned tendency of the copolymers to cross-link during azidation and subsequent storage. It may be supposed that the first decomposition products interact with the butadiene main chain and form a highly cross-linked network that slows down the degradation process at higher temperatures. Of course, the explanation of different behavior of the AMMO-PB-AMMO copolymer can be based on its low degree of azidation. This difference among azidated copolymer and non-energetic precursors is coherent with the shape of the TGA curves. The precursors show a two-step degradation, well separated by a horizontal plateau. A comparison with the HTPB curve

suggests that the first step is relative to the ether block, while the second one is the butadiene block. The azidic copolymers show again a two-step degradation, but differently shaped. The first step, already attributed to the N<sub>3</sub> functionality, is sharp, while the second one corresponds to a gradual weight loss that extends in a wide temperature range and ends at about 500 °C. Again, AMMO-PB-AMMO copolymer is the only one with an intermediate behavior (curve 8 in Figure 10 shows three distinct steps).

The weight losses during the first decomposition step are higher than expected if each  $N_3$  functionality releases one nitrogen molecule (Table 5). This confirms that the main chain is already subjected to other degradation phenomena (mainly ascribable to the ether block) that superpose to the degradation of the azidic functionalities.

A last point to be underlined is that polymers 2 and 3 in Figure 9 have very slight differences in the TGA and DSC curves, which is a further confirmation of their substantial equivalence. The AMMO-PB-AMMO copolymer is the one that shows the lower enthalpy release during decomposition of the azidic functionalities. This is in accordance with the already observed incomplete substitution of the tosyl functionalities with the azidic ones. From DSC and FTIR we already calculated that this corresponds to about one-half of the theoretical azidic functionalities. However, this value must be analyzed by taking into account also the TGA curves. The TMMO-PB-TMMO precursor shows two very distinct and sharp peaks corresponding to the degradations of the ether and butadiene blocks. However, the weight loss (16.6 %) associated to the latter is higher than the theoretical value (8.0%) corresponding to a 100% conversion during polymerization, thus suggesting that the TMMO blocks may be shorter than expected. Therefore, with respect to the expected structure, the AMMO-PB-AMMO copolymer may have both shorter ether blocks and incomplete degree of tosyl functionalities. After N<sub>3</sub> decomposition, the weight loss of the azidic copolymer shows two partially superposed consecutive steps related to ether and HTPB blocks degradation.

#### 4. Conclusions

The synthesis of ether-butadiene-ether energetic block copolymers was done by a classical cationic homo and co-polymerization of oxetanes and oxiranes, using HTPB as diol-initiator and followed by the azidation process. Four copolymers were synthesized, with the external linear blocks constituted by azido homo and copolymers. Probably due to the presence of water moieties, a small amount of polyether oligomers not linked with HTPB were also obtained as undesired side products. With respect to the corresponding polymers prepared by using a low molecular weight, saturated diol, such as i.e. 1-4 butanediol, the use of HTPB complicates the synthetic procedure, since the azide could have a side reaction with the double bonds to cause some species, which could lead to cross-linking. This may lead to the formation of a cross-linked block copolymer, which, of course, is not suitable as polymeric binder for solid propellants. The cross-linking phenomenon may happen either during the polymerization, azidation or purification steps, or also during prolonged storage at room temperature. This restricts the range of operating conditions available for the synthetic process, limiting the suitable solvents, as well as the temperatures and duration of the reactions and purification procedures. Moreover, the addition of an anti-ageing compound to the final product and the storage in an inert and dark atmosphere is necessary. The tosyl group may slow down the kinetics of the azidation step and may also lead to incomplete substitution. In conclusion, the synthesis of these azidic copolymers with an internal unsaturated block is not simple and presents several drawbacks not easy to manage. Nevertheless, the appropriate choice of the operating conditions allows these drawbacks to be partially overcome and results in a versatile tool for the synthesis of polymeric binders, whose properties can be modulated by changing the type and length of the ether blocks.

# 5. References

- [1] Colclough, M. E., H. Desai, R. W. Millar, N. C. Paul, M. J. Stewart, and P. Golding. 1993. Energetic polymers as binders in composite propellants and explosives. Polymers for Advanced Technologies, 5:554-560.
- [2] Provatas, A. 2000. Energetic polymers and plasticisers for explosive formulations A review of recent advances, DSTO-TR-0966.
- [3] Sikder, A. K., and S. Reddy. 2013. Review on energetic thermoplastic elastomers (ETPEs) for military science. Propellants Explosives and Pyrotechnics, 38:14-28.
- [4] Agrawal, J. P. 1998. Recent trends in high-energy materials. Progress in energy and combustion science, 24:1-30.
- [5] Badgujar, D. M., M. B. Talawar, S. N. Asthana, and P. P. Mahulikar. 2008. Advances in science and technology of modern energetic materials: An overview. Journal of Hazardous Materials, 151:289-305.
- [6] Sikder, A. K., and N. Sikder. 2004. A review of advanced high performance, insensitive and thermally stable energetic materials emerging for military and space applications. Journal of Hazardous Materials, A112:1-15.
- [7] Gaur, B., B. Lochab, V. Choudhary, and I. K. Varma. 2003. Azido polymers-energetic binders for solid rocket propellants. Journal of Macromolecular Science, Part C-Polymer Reviews, C43(4):505-545.
- [8] Chien, J. C. W., T. Kohara, C. P. Lillya, T. Sarubbi, B-H. Su, and R. S. Miller. 1980.
  Phase transfer-catalyzed nitromercuration of diene polymers. J. Polym. Sci. Part A
  Polym. Chem., 18(8):2723-2729.

- [9] Korobeinichev, O.P., L.V.Kuibida, E. N. Volkov, and A. G. Shmakov. 2002. Mass spectrometric study of combustion and thermal decomposition of GAP. Combustion and Flame, 129(1-2):136-150.
- [10] Sahu, S.K., S. P. Panda, D. S. Sadafule, C. G. Kumbhar, S. G. Kulkarni, and J. V. Thakur. 1998. Thermal and photodegradation of glycidyl azide polymers. Polymer Degradation and Stability, 62:495-500.
- [11] You, J. S., and S. T. Noh. 2013. Rheological and thermal properties of glycidyl azide polyol-based energetic thermoplastic polyurethane elastomers. Polym. Int., 62:158-164.
- [12] Manu, S. K., V. Sekkar, K. J. Scariah, T. L. Varghese, and S. J. Mathew. 2008.
  Kinetics of glycidyl azide polymer-based urethane network formation. Appl. Polym.
  Sci110:908-914.
- [13] Eroĝlu, M. S., and O. Güven. 1996. Thermal decomposition of poly(glycidyl azide) as studied by high-temperature FTIR and thermogravimetry. Journal of Applied Polymer Science, 61:201-206.
- [14] Selim, K., S. ÖZkar, and L. Yilmaz. 2000. Thermal characterization of glycidyl azide polymer (GAP) and GAP-based binders for composite propellants. Journal of Applied Polymer Science, 77:538-546.
- [15] Sahu, S. K., S. P. Panda, D. S. Sadafule, C. G. Kumbhar, S. G. Kulkarni, and J. V. Thakur. 1998. Thermal and photodegradation of glycidyl azide polymers. Polymer Degradation and Stability, 62:495-500.
- [16] Menke, K., J. Bohnlein-Mauβ, and H. Schubert. 1996. Characteristic properties of AN/ GAP-Propellants. Propellants, Explosives, Pyrotechnics, 21:139-145.
- [17] Sun, Y., and S. Li. 2008. The effect of nitrate esters on the thermal decomposition mechanism of GAP. Journal of Hazardous Materials, 154:112-117.

- [18] Fazlioğlu, H., and J. Hacaloğlu. 2002. Thermal decomposition of glycidyl azide polymer by direct insertion probe mass spectrometry. Journal of Analytical and Applied Pyrolysis, 63:327-338.
- [19] Wang, T., S. Li, B. Yang, C. Huang, and Y. J. Li. 2007. Thermal decomposition of glycidyl azide polymer studied by synchrotron photoionization mass spectrometry. Phys. Chem. B, 111:2449-2455.
- [20] Arisawa, H., and T. B. Brill. 1998. Thermal decomposition of energetic materials 71: Structure- decomposition and kinetic relationships in flash pyrolysis of gliycidyl azide polymer (GAP). Combustion and Flame, 112:533-544.
- [21] Feng, H. T., K. J. Mintz, R. A. Augsten, and D. E. G. Jones. 1998. Thermal analysis of branched GAP. Thermochimica Acta, 311:105-111.
- [22] Tamura G., M. Tanabe, and T. Kuwahara. 2012. Decomposition of GAP single droplets used as liquid monopropellants. Propellants Explosives and Pyrotechnics, 37:302-307.
- [23] Tang, C. J., Y. Lee, and T. A. Litzinger. 1999. Simultaneous temperature and species measurements of the glycidyl azide polymer (GAP) propellant during laser-induced decomposition. Combustion and Flame, 117:244-256.
- [24] Korobeinichev, O. P., L. V. Kuibida, E. N. Volkov, and A. G. Shmakov. 2002. Mass spectrometric study of combustion and thermal decomposition of GAP. Combustion and Flame, 129:136-150.
- [25] Laviolette, M., and M. Auger. 1999. Monitoring the aging dynamics of glycidyl azide polyurethane by NMR relaxation times. Macromolecules, 32:1602-1610.
- [26] Vandenburg, E. J. (Hercules Inc.). 1972. U.S. Patent 3,645,917.
- [27] Frankel, M. B., L. R. Grant, and J. E. Flanagan. 1992. Historical development of glycidyl azide polymer Journal of Propulsion and Power, 8(3):560-563.

- [28] Frankel, M. B., E. F. Witucki, and D.O. Woolery. 1983. U.S. Patent 4,379,894.
- [29] Jutier, J-J., A. De Gunzborg, and R. E. Prud'Homme. 1999. Synthesis and characterization of poly(3,3 bis(azidomethyl)oxetane-co-ε-caprolactone)s. Journal of Polymer Science: Part A: Polymer Chemistry, 37:1027-1039.
- [30] Zhai, J., R. Yang, and J. Li. 2008. Catalytic thermal decomposition and combustion of composite BAMO–THF propellants. Combustion and Flame, 154:473-477.
- [31] Luo, Y., P. Chen, F-Q. Zhao, R-Z. Hu, S-W. Li, and Y. Gao. 2004. Kinetics and mechanism of the thermal decomposition reaction of 3,3-bis(azidomethyl)oxetane/tetrahydrofuran copolymer. Chinese Journal of Chemistry, 22:1219-1224.
- [32] Zhang Y., J. Zhao, P. Yang, S. He, and H. Huang. 2012. Synthesis and characterization of Energetic GAP-b-PAEMA block copolymer. Polym. Eng. Sci., 52:768–773.
- [33] Manser, G. E., R. W. Fletcher, and G. C. Shaw. 1983. High Energy Binders.Contract No. N00014-82-C-0800, Morton Thiokol, Inc. Project JM101.
- [34] Hardenstine, K. E., G. V. S. Henderson Jr, L. H. Sperling, C. J. Murphy, and G. E. Manser. 1985. Crystallization behavior of poly(3,3-bisethoxymethyl oxetane) and poly(3,3-bisazidomethyl oxetane) Journal of Polymer Science: Polymer Physics Edition, 23(8):1597-1609.
- [35] Jones, R. B., C. J. Murphy, L. H. Sperling, M. Farber, S. P. Harris, and G. E. Manser. 1985. Thermal decomposition behavior of poly[3,3-bis(ethoxymethyl) oxetane] and related polyethers. Journal of Applied Polymer Science, 30(1):95-109.
- [36] Bouchékif, H., M. I. Philbin, M. E. Colclough, and A. J. Amass. 2008. Cationic ringopening polymerization of oxetane via a non-steady-state controlled polymerization

- process: a comparison of initiators yielding living and nonliving polymers.

  Macromolecules, 41:1989-1995.
- [37] Kawamoto, A. M., U. Barbieri, T. Keicher, H. Krause, J. A. S. Holanda, M. Kaiser, and G. Polacco. 2008. Synthesis and characterization of glycidyl azide-r-(3,3-bis(azidomethyl)oxetane) copolymers. Propellant Explosives and Pyrotechnics, 33:365-372.
- [38] Barbieri, U., T. Keicher, and G. Polacco. 2009. Homo and copolymers of 3-tosyloxymethyl-3-methyl oxetane (TMMO) as precursors of energetic azide polymers. e-Polymers, 9(1):565-575.
- [39] Pisharath, S., and H. G. Ang. 2007. Synthesis and thermal decomposition of GAP/Poly(BAMO) copolymer. Polymer Degradation and Stability, 92:1365-1377.
- [40] Barbieri, U., G. Polacco, and R. Massimi. 2006. Synthesis of energetic polyethers from halogenated precursors. Macromolecular Symposia, 234(1):51-58.
- [41] Barbieri, U., T. Keicher, R. Massimi, and G. Polacco. 2009. Preliminary

  Characterization of Propellants Based on GA/BAMO and pAMMO binders. Propellant

  Explosives and Pyrotechnics, 34(5):427-435.
- [42] Kawamoto, A. M., M. F. Diniz, V. L. Lourenço, M. F. K. Takahashi, T. Keicher, H. Krause, K. Menke, and P. B. J. Kempa. 2010. Synthesis and characterization of GAP/BAMO copolymers applied at high energetic composite propellants. Aerosp. Technol. Manag., 2(3):307-322.
- [43] Barbieri, U., G. Polacco, E. Paesano, and R. Massimi. 2006. Low risk synthesis of energetic poly(3-azidomethyl-3-methyloxetane) from tosylated precursors. Propellant Explosives and Pyrotechnics, 31(5):369-375.

- [44] Manu, S. K., T. L. Varghese, S. Mathe, and K. N. Ninan. 2009. Compatibility of glycidyl azide polymer with hydroxyl terminated polybutadiene and plasticizers.

  Journal of Propulsion and Power, 25(2):533-536.
- [45] Mathew, S., S. K. Manu, and T. L. Varghese. 2008. Thermomechanical and morphological characteristics of cross-linked GAP and GAP–HTPB networks with different diisocyanates. Propellants, Explosives, Pyrotechnics, 33(2):146-152.
- [46] Ding, Y., C. Hu, X. Guo, Y. Che, and J. Huang. 2014. Structure and mechanical properties of novel composites based on glycidyl azide polymer and propargylterminated polybutadiene as potential binder of solid propellant. Journal of Applied Polymer Science, 131(7): 40007.
- [47] Hamley, I.W. 2004. Developments in block copolymer science and technology.

  Oxford UK, Oxford Univ Press, John Wiley and Sons.
- [48] Zhou, Y., X-P. Long, and Q-X. J. Zeng. 2013. Simulation study of the morphologies of energetic block copolymers based on glycidyl azide polymer. Appl. Polym. Sci., 129:480-486.
- [49] Zhou, Y., X-P. Long, and Q-X. J. Zeng. 2012. Simulation studies of the interfaces of incompatible glycidyl azide polymer/hydroxyl-terminated polybutadiene blends by dissipative particle dynamics. I. The effect of block copolymers and plasticizers. Appl. Polym. Sci., 125:1530-1537.
- [50] Eroglu, M. S., B. Hazer, and o. Giiven. 1996. Synthesis and characterization of hydroxyl terminated poly(butadiene)-g-poly(glycidyl azide) copolymer as a new energetic propellant binder. Polymer Bulletin, 36:695-701.
- [51] Mohan, Y. M., and K. M. Raju. 2005. Synthesis and characterization of HTPB-GAP cross-linked co-polymers. Designed Monomers and Polymers, 8(2):159-175.

- [52] Vasudevan, V., and G. Sundararajan 1999. Synthesis of GAP-PB-GAP triblock copolymer and application as modifier in AP/HTPB composite propellant. Propellants, Explosives, Pyrotechnics, 24:295-300.
- [53] Subramanian K. 1999. Hydroxyl-terminated poly (azidomethyl ethylene oxide-b-butadiene-b-azidomethyl ethylene oxide) synthesis, characterization and its potential as a propellant binder. European Polymer Journal, 35:1403-1411.
- [54] Reddy, T. S., J. K. Nair, R. S. Satpute, R. M. Wagh, A. K. Sikder, and S. Venugopalan. 2007. Bis(azidomethyl) oxetane/hydroxyl-terminated polybutadiene/bis(azidomethyl) oxetane triblock copolymer: synthesis and characterization. Journal of Applied Polymer Science, 106:1885-1888.
- [55] Nakabayashi, N., E. Masuhara, Y. Iwakura. 1966. Some reactions of the glycidyl esters of sulfonics acids. Bulletin of the Chemical Society of Japan, 39:413-417.
- [56] Kazemi, F., A. R. Massah, M. Javaherian. 2007. Chemoselective and scalable preparation of alkyl tosylates under solvent-free conditions. Tetrahedron, 63:5083-5087.
- [57] Selim, K., S.Özkar, and L. Yilmaz. 2000. Thermal characterization of glycidyl azide polymer (GAP) and GAP-based binders for composite propellants. Journal of Applied Polymer Science, 77:538-546.
- [58] Kubota, N., and T. Sonobe. 1988. Combustion mechanism of azide polymer.

  Propellants, Explosives, Pyrotechnics, 13:172-177.
- [59] Reshmia, S., K. P. Vijayalakshmi, Deepthi Thomas, B. K. George, and C. P. Reghunadhan Nair. 2013. Thermal decomposition of a diazido ester: Pyrolysis GC–MS and DFT study. Journal of Analytical and Applied Pyrolysis, 104:603-608.

# Figure captions

- Figure 1 Synthesis of the monomers. G = Glycidol; GT = glycidol tosylate; HMMO = 3-hydroxy-methyl-3-methyloxetane; TMMO = 3-tosyloxymethyl-3-methyl oxetane; BrBBrMP = 3-bromo-2,2-bis(bromomethyl)propanol; BBrMO = 3,3-bis(bromomethyl)oxetane.
- Figure 2 Synthesis and azidation of the block copolymers.
- Figure 3 H-NMR spectra of: (1) GT/BBrMO-PB-GT/BBrMO and (2) GA/BAMO-PB-GA/BAMO from (1).
- Figure 4 FT-IR spectra of: 1) GT/BBrMO-PB-GT/BBrMO; 2) GA/BAMO-PB-GA/BAMO from 1; 3) GA/BAMO-PB-GA/BAMO from 4; 4) ECH/BBrMO-PB-ECH/BBrMO.
- Figure 5 FT-IR spectra of: 5) GT-PB-GT; 6) GA/PB/GA; 7) TMMO-PB-TMMO; 8) AMMO-PB-AMMO.
- Figure 6 GT-HTPB. Fluorescence microscopy of MB (a) and synthesis product (b); optical microscopy of MB (c) and synthesis product (d); chemical map of MB (e) and synthesis product (f). FTIR spectra corresponding to the positions indicated by the + symbols in (e) and (f).
- Figure 7 GPC analysis of HTPB and GT-PB-GT copolymer. The dashed lines represent the deconvolution peaks of the GT-PB-GT distribution.
- Figure 8 DSC traces of the first decomposition step for the azidated copolymers.
- Figure 9 TGA analysis of HTPB, GA/BAMO-PB-GA/BAMO copolymers and their respective precursors.
- Figure 10 TGA analysis of HTPB, GA-PB-GA, AMMO-PB-AMMO copolymers and their respective precursors.

Table 1 - Composition of the reaction mixtures for the polymerizations.

polymer	HTPB (g) (mole)	BBrMO (g) (mole)	ECH (g) (mole)	GT (g) (mole)	TMMO (g) (mole)	BTF THF (g) (mole)	DCM (mL)	N <sub>3</sub> (w%)
GT-PB-GT	1.5 5.3·10 <sup>-4</sup>	-	-	13.65 0.06	-	0.336 0.0024	110	35
GT/BBrMO-PB-GT/BBrMO	1.48 5.3·10 <sup>-4</sup>	3.6 0.015	ı	10 0.044	ı	0.336 0.0024	110	38
ECH/BBrMO-PB-ECH/BBrMO	3.99	10.0	11.4	-	-	0.91 0.0065	110	38
TMMO-PB-TMMO	$0.99$ $3.5 \cdot 10^{-4}$	-	-	-	10.1 0.039	0.21 0.0015	110	28

Table 2 – Reaction time for the azidation of the copolymers.

monomeric precursor	GT	GT/BBrMO	ECH/BBrMO	TMMO
Azidation time (h)	140	22	16	140



Table 3. GPC results. Mn= number average molecular weight; Mw= weight average molecular weight.

polymer	Mn	Mw	Mn 1 <sup>st</sup> peak	Mw 1 <sup>st</sup> peak	Mn 2 <sup>nd</sup> peak	Mw 2 <sup>nd</sup> peak	Polyether content
			(g/mole)	(g/mole)	(g/mole)	(g/mole)	(% wt)
	(g/mole)	(g/mole)					
НТРВ	4700	11400	-	-	-	-	-
GT-PB-GT	1400	6230	1180	1340	6770	14850	21
ECH/BBrMO-PB-ECH/BBrMO	610	13420	550	810	6650	15200	22
GT/BBrMO-PB-GT/BBrMO	860	4990	750	1340	6930	14330	20
TMMO-PB-TMMO	1850	9430	900	1020	7060	16200	15

Table 4 – DSC data corresponding to the first decomposition step.

GA-PB-GA	(°C)	$T_{\rm f}$ (°C)	$\Delta H$ (J/g)	ΔH (J/g N <sub>3</sub> )
0.110 0.1	205	270	1,380	3,940
GA/BAMO-PB-GA/BAMO	203	210	1,500	5,770
from	175	240	1,740	4,575
ECH/BBrMO-PB-ECH/BBrMO	1,5	210	1,710	1,5 / 5
GA/BAMO-PB-GA/BAMO				
from	210	270	1,875	4,940
GT/BBrMO-PB-GT/BBrMO	210	2,0	1,075	1,5 10
AMMO-PB-AMMO	175	255	630	2,250

Table 5 – TGA data for energetic polymers and corresponding precursors.

	N <sub>3</sub> (	N <sub>3</sub> degradation				
Polymer	$T_i$ - $T_f$	Δw	Δw N <sub>3</sub>	$\mathbf{W}_{\mathrm{r}}$		
•	(°C)	(%)	(%)			
НТРВ		` ′		0.5		
GT-PB-GT				4.7		
GA-PB-GA	210-280	47	201	15		
ECH/BBrMO-PB-ECH/BBrMO	-	-		2.2		
GA/BAMO-PB-GA/BAMO						
from	175-275	41.2	164	24.1		
ECH/BBrMO-PB-ECH/BBrMO						
GT/BBrMO-PB-GT/BBrMO				6.1		
GA/BAMO-PB-GA/BAMO						
from	200-275	43.8	175	25.6		
GT/BBrMO-PB-GT/BBrMO						
TMMO-PB-TMMO				6.3		
AMMO-PB-AMMO	159-250	12.5	70	4.2		

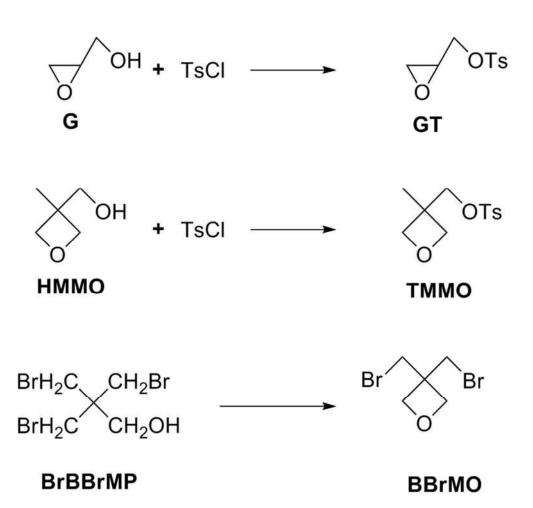


Figure 1 - Synthesis of the monomers. G = Glycidol; GT = glycidol tosylate; HMMO = 3-hydroxy-methyl-3-methyloxetane; TMMO = 3-tosyloxymethyl-3-methyl oxetane; BrBBrMP = 3-bromo-2,2-bis(bromomethyl)propanol; BBrMO = 3,3-bis(bromomethyl)oxetane.

81x76mm (300 x 300 DPI)

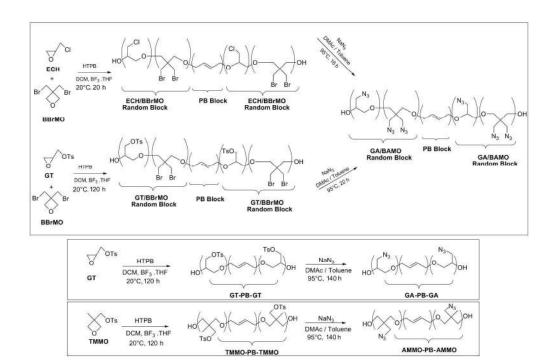


Figure 2 - Synthesis and azidation of the block copolymers. 272x183mm~(300~x~300~DPI)

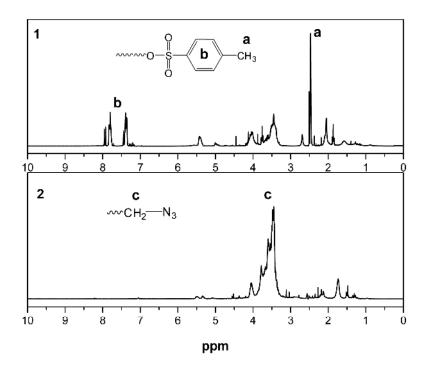


Figure 3 - H-NMR spectra of: (1) GT/BBrMO-PB-GT/BBrMO and (2) GA/BAMO-PB-GA/BAMO from (1). 227x174mm (300 x 300 DPI)

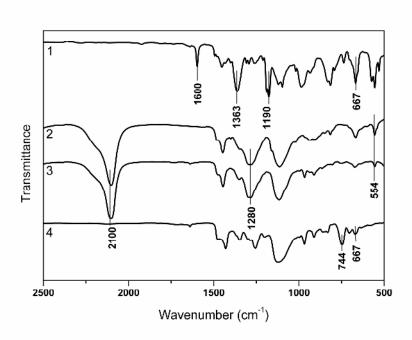


Figure 4 - FT-IR spectra of: 1) GT/BBrMO-PB-GT/BBrMO; 2) GA/BAMO-PB-GA/BAMO from 1; 3) GA/BAMO-PB-GA/BAMO from 4; 4) ECH/BBrMO-PB-ECH/BBrMO.

207x144mm (300 x 300 DPI)

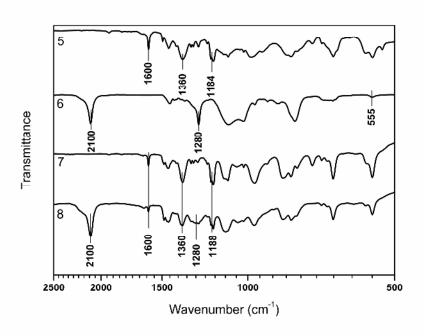


Figure 5 - FT-IR spectra of: 5) GT-PB-GT; 6) GA/PB/GA; 7) TMMO-PB-TMMO; 8) AMMO-PB-AMMO. 207x144mm (300 x 300 DPI)

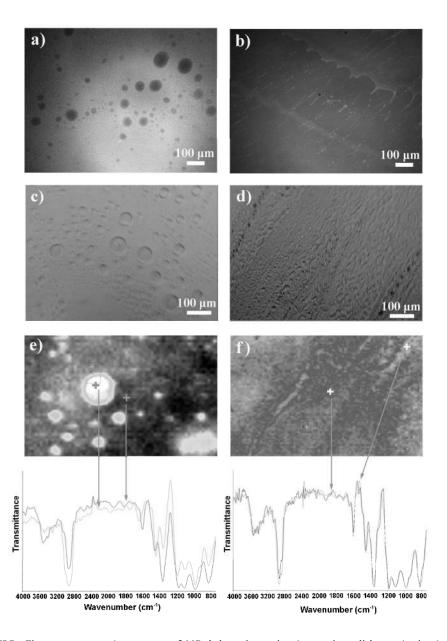


Figure 6 GT-HTPB. Fluorescence microscopy of MB (a) and synthesis product (b); optical microscopy of MB (c) and synthesis product (d); chemical map of MB (e) and synthesis product (f). FTIR spectra corresponding to the positions indicated by the + symbols in (e) and (f).

175x249mm (300 x 300 DPI)

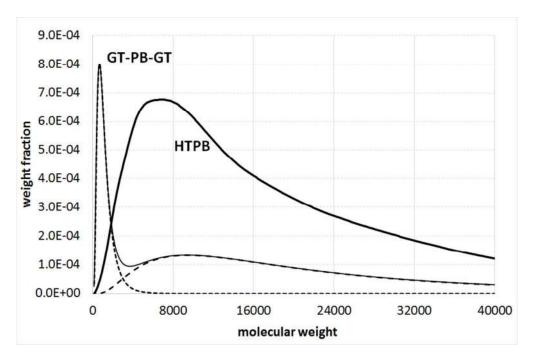


Figure 7 GPC analysis of HTPB and GT-PB-GT copolymer. The dashed lines represent the deconvolution peaks of the GT-PB-GT distribution.

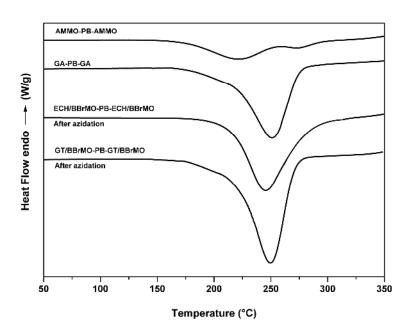


Figure 8 DSC traces of the first decomposition step for the azidated copolymers. 210x148mm (300 x 300 DPI)

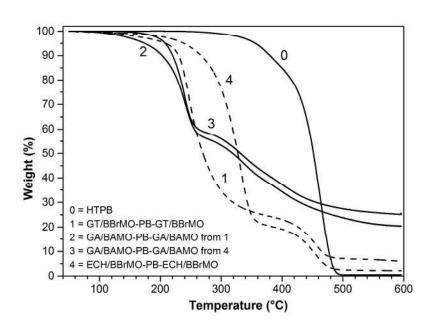


Figure 9 TGA analysis of HTPB, GA/BAMO-PB-GA/BAMO copolymers and their respective precursors. 286x199mm~(300~x~300~DPI)

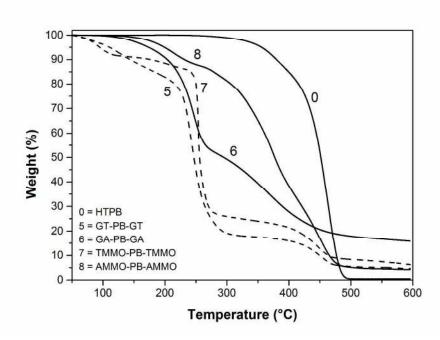


Figure 10 TGA analysis of HTPB, GA-PB-GA, AMMO-PB-AMMO copolymers and their respective precursors. 286x199mm (300 x 300 DPI)