

Title:	Background to the Model Code 2010 Shear Provisions - Part II Punching Shear
Authors:	Muttoni A., Fernández Ruiz M., Bentz E. C., Foster S. J., Sigrist V.
Published in:	Structural Concrete, Ernst & Sohn
DOI	10.1002 / suc o .2 012 00064
Pages:	37 p.
City, country:	Berlin, Germany
Year of publication:	2013
Type of publication:	Peer reviewed journal article

Please quote as:	Muttoni A., Fernández Ruiz M., Bentz E. C., Foster S. J., Sigrist V., <i>Background to the Model Code 2010 Shear Provisions - Part II Punching Shear</i> , Structural Concrete, Ernst & Sohn, Berlin, Germany, 2013, 37 p..
------------------	---

## Background to the Model Code 2010 Shear Provisions –

### Part II Punching Shear

Aurelio Muttoni (École Polytechnique Fédérale de Lausanne, Switzerland)

Miguel Fernández Ruiz (École Polytechnique Fédérale de Lausanne, Switzerland)

Evan Bentz (University of Toronto, Canada)

Stephen Foster (University of New South Wales, Australia)

Viktor Sigrist (Hamburg University of Technology, Germany)

#### Abstract

This paper outlines the theoretical background of the punching shear provisions implemented in the fib Model Code 2010 and presents a practical example of its application. It is the aim to explain the mechanical model that forms the basis of the punching design equations, to justify the relevance of the provisions and to show their suitability for the design and assessment of structures.

---

This article has been accepted for publication and undergone full peer review but has not been through the copyediting, typesetting, pagination and proofreading process, which may lead to differences between this version and the Version of Record. Please cite this article as doi: 10.1002/suco.201200064.

Submitted: 20-Dec-2012  
Revised: 29-Apr-2013  
Accepted: 24-May-2013

**Key-words:**

Model Code 2010, punching shear, flat slabs, critical shear crack theory, Level-of-Approximation

**1. Introduction**

The Model Code 2010 [1,2] constitutes a significant step forward with respect to basing design on more physical and more comprehensive models. With regards to the punching shear provisions, an in-depth review of the previous versions of the code (Model Codes 78 [3] and 90 [4]) was performed. At the time they were published, MC 78 and MC 90 constituted the state-of-the-art and, as such, these codes later inspired a generation of standards such as Eurocode 2 [5]. When MC 78 and MC 90 were published, the first mechanical models for punching shear that were based on physical behaviour were already available [6,7]. However, these models led to rather cumbersome design expressions and were difficult to use in practice. Thus, an empirical approach was preferred by national and international standards. The corresponding design formulas (derived on the basis of dimension analysis and statistical regression) accounted for the influence of a number of properties and phenomena on the shear resistance, such as concrete compressive strength, size effect, reinforcement ratio or the influence of unbalanced moments transferred by the slab.

Since the publication of MC 90, a significant amount of research has been undertaken on the punching shear strength of slab connections and extensive reviews on the topic can be found in [8,9,10]. Many contributions provided physical models and theoretical advances [11,12,13,14] that lead to simple design expressions with comparable, or improved, accuracy than previous empirical approaches. These expressions are rationally derived on the basis of the physical models supporting the grounding theories and include some material constants fitted on the basis of test results. These advances in mechanical modelling were acknowledged when preparing MC 2010. The new and physically grounded design equations have the advantage that the underlying principles can still be understood by practitioners, thus enabling phenomenological approaches to punching shear. These models can be considered as an evolution of the previous empirical design approaches, providing physical approaches that explain the role of the various parameters. This is justified since the role and the influence of the previously empirically-fitted governing parameters had been derived and incorporated on the design expressions on the basis of mechanical analogies.

With respect to the punching shear provisions, the Critical Shear Crack Theory (CSCT), based on a physical model, was selected as the reference model. Grounding design rules based on physical models has a number of advantages:

- rules based on a physical model can be explained, understood and justified on physical principles and have the potential for further development;

- they provide a consistent platform for design in various situations (eg. with and without shear reinforcement, fibres, etc...); and
- design equations can be adapted to different cases (even if they are still not considered in current design equations) by suitably evaluating the mechanical parameters.

With respect to the CSCT, it provides simple design equations that are widely checked against experimental results and enables the use of a Level-of-Approximation (LoA) approach for design and analysis, consistent with the general principles of MC 2010 [15]. It is also worthy of note that an earlier form of the CSCT model was already adopted in Swiss concrete structures standards [16] with positive experiences.

Details on the LoA approach and on how punching shear provisions take advantage of it can be found elsewhere [15]. The idea of the approach is that the number and accuracy of the mechanical parameters used in the physical model (and thus the accuracy of the estimate of the strength) can be refined (if necessary) in a number of steps. For a preliminary estimate of the strength of a member, the mechanical parameters of the design expressions are determined in a safe and simple manner. This allows for checking the dimensions and main properties of a structure with minimum effort and sufficient accuracy and conservatism. In addition, in many cases, such safe and simplified checks are sufficient to ensure that punching is not governing and hence, no further effort is required (this is the case when column size and slab thickness are

governed by other design criteria). When a more accurate estimate of the strength is required for critical or non-conventional elements, the calculation of the mechanical parameters of the design expressions can be refined, which requires some additional work (successive LoA). The LoA approach allows for a consistent use of the same theory and design equations during the different phases of a project (preliminary design, tender or executive design, assessment of critical details) with improving the accuracy of the strength estimates as, and when, required.

## **2. Code provisions**

The MC 2010 establishes a consistent basis for design of beams and one-way and two-way slabs and is based on physical models. The influence of strain and size effects on the strength of beams in shear have long been established [17,18,19]. The same influences have been observed for punching in two-way slabs and the physical mechanisms are similar [12,13,20]. With respect to the punching shear provisions of MC2010, references [20] and [21] are of particular interest, as these illustrate the basis for the design formulations.

### *2.1 Failure criterion*

According to the CSCT the shear strength depends on the crack widths (and thus on the strains) developing in the shear-critical region [20], see Figure 1a. For slabs failing in punching shear, a strong gradient of bending moments and shear forces occur in the vicinity of supported areas (or

of concentrated loads) [22]. A suitable parameter for describing the strains in the shear-critical region (near the concentrated forces) was identified in [6] as the rotation of the slab ( $\psi$ ), which can be considered as an integral of the curvatures for such region, see Figure 1a. According to the CSCT, the crack widths in the shear-critical region can be correlated to the product of rotation and flexural effective depth of the slab ( $w \propto \psi \cdot d$  [24]). In MC2010, this dependency is incorporated in the calculation of the punching shear strength ( $V_{Rd,c}$ ) as:

$$V_{Rd,c} = k_{\psi} \frac{\sqrt{f_{ck}}}{\gamma_c} b_0 \cdot d_v \quad (1)$$

Where  $b_0$  refers to the length of the control perimeter (set at  $d_v/2$  of the edge of the supported area),  $d_v$  to the shear-resisting effective depth of the member (accounting for penetration of the supported area in the slab),  $f_{ck}$  to the characteristic compressive strength of concrete measured in cylinder (in [MPa]),  $\gamma_c$  is the partial safety factor for concrete and  $k_{\psi}$  is the factor accounting for the opening and roughness of the cracks:

$$k_{\psi} = \frac{1}{1.5 + 0.9k_{dg}\psi \cdot d} \leq 0.6 \quad (2)$$

With factor  $k_{dg}$  defined as for shear ( $k_{dg} = 32/(16+d_g) \geq 0.75$ , where  $d_g$  refers to the maximum size of the aggregate in [mm]) and  $d$  is the effective depth to be introduced in [mm]. It can be noted that Eq. (2) is based on the criterion given in [20] where the constant terms have been adapted to the definition of term  $k_{dg}$ .

Note that this approach can be adapted to different situations. For instance, the contributions to the punching shear strength ( $V_{Rd}$ ) of any shear reinforcement can be accounted for by adding the shear reinforcement contribution ( $V_{Rd,s}$ ) to the concrete contribution ( $V_{Rd,c}$ ) [21] (see Figure 2e).

That is:

$$V_{Rd} = V_{Rd,c} + V_{Rd,s} \quad (3)$$

Extensive theoretical justification and experimental validation of Eq. (2) and details of the equations defining the activation of the shear reinforcement as a function of the slab rotations are presented elsewhere [23,25] accounting for the contributions of aggregate interlock and tensile strength of concrete. The same approach has also been adopted in MC 2010 to account for the contribution of steel fibres to punching shear strength [26]. Also, application to prestressed slabs [27,28], post-installed shear reinforcement [29] or non-axis-symmetric slabs [30,31] can be found elsewhere.

## 2.2 Load-rotation behaviour of the slab

Contrary to shear in beams and one-way slabs in the companion paper [32], where the relationship between strains (crack openings) and acting bending moments can be assumed as proportional after flexural cracking, the load-rotation behaviour of a slab is significantly nonlinear [6,12,13,20].



A general approach for obtaining such a relationship was already investigated by Muttoni [20] on the basis of an axis-symmetric slab accounting for equilibrium and compatibility conditions (considering concrete tensile strength, tension-stiffening of the reinforcement and the elastic-plastic behavior of the reinforcement and concrete). The resulting expression was derived on the basis of a quadri-linear moment-curvature diagram (see Figs. 1b-h) and results in:

$$V = \frac{2\pi}{r_q - r_c} \cdot \left( \begin{aligned} & -m_r \cdot r_0 + m_R \cdot \langle r_y - r_0 \rangle + EI_1 \cdot \psi \cdot \langle \ln(r_1) - \ln(r_y) \rangle + \\ & EI_1 \cdot \chi_{TS} \cdot \langle r_1 - r_y \rangle + m_{cr} \cdot \langle r_{cr} - r_1 \rangle + EI_0 \cdot \psi \cdot \langle \ln(r_s) - \ln(r_{cr}) \rangle \end{aligned} \right) \quad (4)$$

where  $\langle x \rangle$  is equal to  $x$  if  $x > 0$  and 0 otherwise, and the various parameters are defined in Figures 1a,b,g. This law is aimed at performing refined analyses of the behavior of slabs and is particularly suitable for assessing the strength of existing structures (typically corresponding to a LoA IV). For design of new structures, it can however be simplified on the basis of some conservative assumptions leading to larger rotations for a given load level (thus associated to larger crack widths and lower punching shear strength). For instance, by neglecting the tensile strength of concrete and its tension-stiffening behavior (i.e. considering a bilinear moment-curvature diagram, Fig. 1g) one can obtain the following load-rotation expression [20] (Fig. 1h):

$$V = \frac{2\pi}{r_q - r_c} \cdot EI_1 \cdot \psi \cdot \left( 1 + \ln \frac{r_s}{r_0} \right) \text{ for } r_y \leq r_0 \text{ (elastic regime)} \quad (5)$$

$$V = \frac{2\pi}{r_q - r_c} \cdot EI_1 \cdot \psi \cdot \left( 1 + \ln \frac{r_s}{r_y} \right) \text{ for } r_0 \leq r_y \leq r_s \text{ (elastic-plastic regime)} \quad (6)$$

It can be noted that these expressions are similar to those already proposed by Kinnunen and Nylander for characterizing the behaviour of slabs [6] and in a general manner they can be written as:

$$V = \frac{2\pi}{r_q - r_c} \cdot EI_1 \cdot \psi \cdot f_1 \left( \frac{V_E}{V_{flex}} \right) \quad (7)$$

where  $f_1(V/V_{flex})$  is a function depending on the ratio between the applied load and the bending strength of the slab ( $V_{flex} = 2\pi \cdot m_R \cdot r_s / (r_q - r_c)$ ). Then, the load-rotation diagram can be further

simplified by introducing the suitable values of the bending strength ( $V_{flex}$ ,  $m_R$ ) and the cracked flexural stiffness ( $EI_1$ ):

$$m_R = \rho \cdot d^2 \cdot f_y \cdot g_1(x_{pl}/d) \quad (8)$$

$$EI_1 = \rho \cdot \beta \cdot E_s \cdot d^3 \cdot g_2(x_{el}/d) \quad (9)$$

where  $\rho$  refers to the flexural reinforcement ratio,  $d$  to its effective depth,  $f_y$  to the yield strength of the reinforcement,  $\beta$  is a factor accounting for non axis-symmetric reinforcement layout (that can be set approximately to 0.6 according to [20]),  $E_s$  is the modulus of elasticity of the reinforcement;  $g_1(x_{pl}/d)$  is a function depending on the parameter between brackets (depth of plastic compression zone, a solution assuming a rigid-plastic behaviour for the materials can be found in [20]) and  $g_2(x_{el}/d)$  is a function depending on the parameter between brackets (depth of

elastic compression zone, a solution assuming an elastic behaviour for concrete with no tensile strength and an elastic behaviour for the reinforcement can be found in [20]). Thus:

$$V = \frac{2\pi}{r_q - r_c} \cdot EI_1 \cdot \psi \cdot f_1\left(\frac{V}{V_{flex}}\right) = \frac{V_{flex}}{r_s \cdot m_R} \cdot EI_1 \cdot \psi \cdot f_1\left(\frac{V}{V_{flex}}\right) \quad (10)$$

That can alternatively be written as:

$$\psi = \frac{r_s \cdot m_R}{EI_1} f_2\left(\frac{V}{V_{flex}}\right) = \frac{r_s \cdot \rho \cdot d^2 \cdot f_y \cdot g_1(x_{pl}/d)}{\rho \cdot \beta \cdot E_s \cdot d^3 \cdot g_2(x_{el}/d)} f_2\left(\frac{V}{V_{flex}}\right) = \frac{r_s}{d} \frac{f_y}{E_s} f_3\left(\frac{V}{V_{flex}}\right) \quad (11)$$

The function  $f_3(V/V_{flex})$  contains thus the information on the development of the rotations for the level of applied load. According to MC 2010, such function can be estimated on the basis of the acting bending moments and flexural strength as:

$$f_3\left(\frac{V_E}{V_{flex}}\right) = k_m \cdot \left(\frac{m_s}{m_R}\right)^{1.5} \quad \text{so that} \quad \psi = k_m \frac{r_s}{d} \frac{f_y}{E_s} \left(\frac{m_s}{m_R}\right)^{1.5} \quad (12)$$

where  $m_s$  refers to the moment used for calculation of the reinforcement in the support strip [15] and  $m_R$  to the corresponding bending strength. The shape of the curve given by Eq. 12 reproduces with sufficient accuracy that obtained from other models (refer to Fig. 1h), such as those found from a quad-linear or bi-linear approximation of the  $m$ - $\chi$  curve (refer to Fig. 1g).

A factor of proportionality ( $k_m$ ) is also given to account if simpler (Level-of-Approximation II,  $k_m = 1.5$ ) or more refined (Level-of-Approximation III,  $k_m = 1.2$ ) estimates of the acting moment in the design strip ( $m_s$ ) are considered. For design purposes, the previous formulas can be directly used by introducing the pertinent safety format and its corresponding values (design

moment strip  $m_{sd}$ , design bending strength  $m_{Rd}$  and design yield strength of the reinforcement ( $f_{yd}$ ).

For preliminary design purposes, a safer estimate of the rotation of the slab can be used by setting  $m_s = m_R$  (full reinforcement yielding at the support strip). This is typically adopted at a

LoA I, in order to check if the general dimensions of a slab are suitable.

### *2.3 Design and calculation of failure loads*

Performing a design using this strain-based method is rather simple. It suffices to calculate the rotation of the slab ( $\psi$ ) that corresponds to the acting shear force ( $V_E$ ) and, with that, to determine the strength according to the failure criterion ( $V_R$ ). In the case  $V_E \leq V_R$ , the strength is sufficient (Fig. 2b). Otherwise, the punching shear strength is insufficient (Fig. 2c) and the design of the slab has to be modified (e.g. by placing of shear reinforcement or shearheads, enlargement of the supported area, increasing of the slab thickness or of the flexural reinforcement).

If it is necessary to calculate the actual punching strength (which might be necessary for the assessment of an existing structure), the intersection point of the failure criterion, which provides the available punching shear strength for a given rotation, and the load-rotation curve

of the slab, which represents shear force for a given rotation, has to be determined (refer to Figure 2d).

The accuracy of the MC 2010 approach is compared in Figure 3a-b to test results on slabs without transverse reinforcement for Levels-of-Approximation II (given by Eq. 12) and using a LoA IV approximation (Eq. 4) based on a quad-linear moment-curvature diagram. Details on the tests compared to MC 2010 in Figure 3a-b have been presented in reference [20]. The results compare well for both cases, with a logical improvement in accuracy for LoA IV calculations, compared to those of LoA II. It has to be noted though that LoA II already provides very good estimates for the measured strengths and, in these cases of punching in symmetric slabs without moment transfer, performing a LoA III or LoA IV calculation has only a limited influence on the results. On the other hand, the LoA III and LoA IV models provides significant improvement in accuracy when designing slabs of irregular geometry [23].

Comparison to shear-reinforced slabs is also shown in Figure 3c for the tests presented in references [21,25]. The results are presented for LoA II, showing how various failure modes (punching within the shear-reinforced area, by crushing of concrete struts and outside the shear-reinforced area) can be governing [21]. The results are again in nice agreement to the measured failure loads.

### 3. Design example

In this section, the MC 2010 provisions are used for the punching shear design of a flat slab.

The structure under consideration is a five-storey residential building with the geometry and main dimensions given in Figure 4. In the following, the design of the flat slab against punching of the inner column (C5) is discussed.

For the concrete, the strength class C30/37 ( $f_{ck} = 30$  MPa,  $\gamma_c = 1.5$ ) is assumed and for the reinforcing steel a grade B500S ( $f_{yk} = 500$  MPa,  $E_s = 200$  GPa,  $\gamma_s = 1.15$ , ductility class B) is assumed. The factored design load accounting for self-weight, dead load and live load is

$$q_d = 15.6 \text{ kN/m}^2.$$

#### 3.1 First LoA: Check of the main dimensions of the structure

For preliminary design it is usually sufficient to check whether the thickness of the slab and the size of the slab connections (columns, walls) are adequate to ensure a sufficient punching shear strength. For the selected design example, and without performing a rigorous analysis, the design reaction can be estimated on the basis of contributive areas, refer to Figure 5. For the inner column, this results in  $R_{Ed} = 692$  kN. If the loads applied on the inside the control perimeter are neglected, which is a safe and reasonable assumption with respect to the degree of accuracy, the shear force results in  $V_{Ed} = R_{Ed} = 692$  kN.

The punching shear strength for members without shear reinforcement is calculated as [2]:

$$V_{Rd} = V_{Rd,c} = k_{\psi} \cdot \frac{\sqrt{f_{ck}}}{\gamma_c} \cdot b_0 \cdot d_v \quad (13)$$

The control perimeter  $b_0$  can be estimated assuming a basic perimeter at a distance of  $d_v/2$  from the supported area and a safe value of the eccentricity coefficient  $k_e$  of 0.90 (accounting for concentrations of loads within the shear field [15]). Thus, the control perimeter results in:

$$b_0 = k_e (4 \cdot b_c + \pi \cdot d_v) = 0.90 \cdot (4 \cdot 260 + \pi \cdot 200) = 1501 \text{ mm} \quad (14)$$

Assuming an average effective depth of  $d = 200$  mm and  $d_v$  (defined as the distance from the centroid of the reinforcement layers to the supported area) equal to  $d$ , as the construction joint between the slab and the column is assumed to be at the base of the slab; that is, there is no column penetration.

For estimating the punching shear strength, the rotation of the slab is the governing parameter.

A first and safe estimate of this value can be obtained assuming that failure of the slab occurs at full yielding of the flexural reinforcement in the support strip, which is a conservative assumption with respect to the crack widths [15]. This allows calculation of the the governing rotation as a function of the slenderness of the slab (expressed in terms of the ratio  $r_s/d$ , where  $r_s$  denotes the radius of contraflexure of radial bending moments) and of the yield strain of the flexural reinforcement [15]. The distance  $r_s$  can be approximated for flat slabs with regular bays

as [2]:  $r_{sx} = 0.22\ell_x = 1.32$  and  $r_{sy} = 0.22\ell_y = 1.23$  m (where  $\ell$  refers to the bay span). In this case,

the rotation around the  $x$ -direction is governs (larger value of  $r_s$ ) and can be calculated as [2]:

$$\psi_x = 1.5 \cdot \frac{r_{s,x}}{d} \frac{f_{yd}}{E_s} = 1.5 \cdot \frac{1.32}{0.200} \frac{435}{200000} = 0.0215 \quad (15)$$

Thus, the value of  $k_\psi$  (accounting for the opening of the shear-critical crack and for its roughness [15]) is:

$$k_\psi = \frac{1}{1.5 + 0.9 \cdot \psi \cdot d \cdot k_{dg}} = \frac{1}{1.5 + 0.9 \cdot 0.0215 \cdot 200 \cdot 0.75} = 0.227 (< 0.6) \quad (16)$$

Assuming that the aggregate size is larger than 27 mm, a value  $k_{dg} = 0.75$  is obtained ( $k_{dg} = 32/(16+d_g) \geq 0.75$ ). The punching shear strength can thus be calculated according to MC 2010 [2] as:

$$V_{Rd,c} = k_\psi \cdot \frac{\sqrt{f_{ck}}}{\gamma_c} \cdot b_0 \cdot d_v = 0.227 \frac{\sqrt{30}}{1.5} 1501 \cdot 200 \cdot 10^{-3} = 249 \text{ kN} \leq V_{Ed} \quad (17)$$

In this case, the punching shear resistance is lower than the design shear force. In order to check whether the placement of shear reinforcement will suffice to strengthen the slab or other alternatives have to be provided (shearheads, changes of thickness or of supported area dimensions), the maximum punching shear strength of a shear-reinforced slab has to be determined. In the MC 2010 [2] this can be done with help of the coefficient  $k_{sys}$ . This coefficient is equal to the ratio between design shear force and the shear strength due to the concrete contribution. A similar approach has also been adopted by other authors [33] on the



basis of the Eurocode 2 empirical formulas [5]. The coefficient  $k_{sys}$  varies between 2.0, for lower performing systems, and 2.8, for higher performing systems. In the present case there is a demand of:

$$k_{sys} = \frac{V_{Ed}}{V_{Rd,c}} = \frac{692}{249} = 2.78 \quad (18)$$

This value implies that it is possible to choose shear reinforcement that will provide sufficient strength and no increases of the column size or of the thickness of the slab are necessary.

### 3.2 Second LoA: Design for punching shear

For preliminary design purposes and in order to check the dimensions of a structure, it is assumed that the flexural reinforcement yields at failure of the slab. However, in a tender or executive design this (safe) assumption can be improved, if necessary. To do so, the amount of flexural reinforcement over the column needs to be known.

The design of the flexural reinforcement can be carried out for example with help of the “advanced strip method” [34], the “direct design method”, the “equivalent frame method” [35] or by using the finite element method (FEM). For the following, the latter option was used resulting in the reinforcement layout shown in Figure 6. The resistance in bending is calculated according to the rigid-plastic theory as:

$$m_{Rd} = \rho d^2 f_{yd} (1 - 0.5 \rho f_{yd} / f_{cd}) \quad (19)$$

which, for the investigated region, leads to a value of  $m_{Rd} = 115$  kNm/m (calculated with  $d = 204$  mm). Based on the FEM analysis a more refined value of the design reaction of  $R_d = 664$  kN is obtained, which is in close agreement with the previous estimate and the corresponding bending moments acting on top of the column are found as  $M_{Ed,x} = 8$  kNm and  $M_{Ed,y} = 1$  kNm. The total bending moment  $M_{Ed} \approx 8$  kNm.

According to MC 2010 [2], the design shear force can be reduced by subtracting the loads applied within the control perimeter from the column reaction (Figure 7):

$$A_c = b_c^2 + 2b_c \cdot d_v + \frac{\pi}{4} d_v^2 = 0.206 \text{ m}^2, \quad \text{thus} \quad V_{Ed} = R_d - q_d A_c = 661 \text{ kN} \quad (20)$$

In this case the design shear force is only slightly reduced; however, in other cases (such as foundations or post-tensioned slabs) this reduction might be significant. The calculation of the eccentricity coefficient  $k_e$  can also be performed in a more accurate manner. Instead of the safe estimate adopted in LoA I ( $k_e = 0.90$ ) the the general expression provided by MC 2010 for this parameter [2] can be used:

$$k_e = \frac{1}{1 + e_u / b_u} \quad (21)$$

The load eccentricity  $e_u$  is calculated to  $e_u = |M_{Ed} / V_{Ed}| = 8 \cdot 10^3 / 661 = 12$  mm, accounting for the coincident position of the centroids of the column and of the control perimeter. The diameter of

a circle with the same surface as the region  $A_c$  inside the basic control perimeter is  $b_u = (4A_c/\pi)^{0.5} = 513$  mm. This yields  $k_e = 0.977$  and  $b_0 = 1642$  mm.

The determination of the design rotations, accounting for the flexural reinforcement, starts with the definition of the width of the bending moment support strip. This parameter can be calculated as [15]  $b_s = 1.5(r_{sx} \cdot r_{sy})^{0.5} = 1.91$  m. The bending moments acting in the support strip result in:

$$m_{sd,x} = \frac{V_{Ed}}{8} + \left| \frac{M_{Ed,x} - V_{Ed} \cdot \Delta e_x}{2b_s} \right| = \frac{661}{8} + \left| \frac{8}{2 \cdot 1.91} \right| = 84.7 \text{ kNm/m} \quad (22)$$

Finally, at LoA II, the estimate of the design rotations can be improved with respect to LoA I [2]:

$$\psi_x = 1.5 \frac{r_{s,x}}{d} \frac{f_{yd}}{E_s} \left( \frac{m_{sd}}{m_{Rd,x}} \right)^{1.5} = 1.5 \frac{1.32}{0.204} \frac{435}{200000} \left( \frac{84.7}{115} \right)^{1.5} = 0.0133 \quad (23)$$

where the rotation around the  $x$ -axis is governing (rotation in the  $y$ -axis is smaller with  $m_{sd,y} = 82.9$  kNm/m and  $\psi_y = 0.0121$ ). Thus:

$$k_\psi = \frac{1}{1.5 + 0.9 \cdot \psi \cdot d \cdot k_{dg}} = \frac{1}{1.5 + 0.9 \cdot 0.0133 \cdot 204 \cdot 0.75} = 0.30 (\leq 0.6) \quad (24)$$

$$V_{Rd,c} = k_\psi \cdot \frac{\sqrt{f_{ck}}}{\gamma_c} \cdot b_0 \cdot d_v = 0.300 \frac{\sqrt{30}}{1.5} 1642 \cdot 204 \cdot 10^{-3} = 367 \text{ kN} \leq V_{Ed} \quad (25)$$

The punching shear strength of the slab without shear reinforcement is insufficient and reinforcement is required. The shear carried by the concrete, however, is assessed to be higher from that of the LoA I model and, thus, the total steel reinforcement required is reduced.

This result confirms that of the LoA I analysis. Taking advantage of the improved values  $k_{\psi}$  and  $\psi$ , a detailed design of the required shear reinforcement can be performed. To do so, the three potential failure modes of shear-reinforced slabs (i.e., crushing of concrete struts, punching within the shear-reinforced zone and punching outside the shear-reinforced zone [21]) have to be checked.

*a) Maximum punching shear strength (crushing of concrete struts)*

The required value of  $k_{sys}$  results from the previous value of  $V_{Rd,c}$ :

$$k_{sys} = \frac{V_{Ed}}{V_{Rd,c}} = \frac{661}{367} = 1.80 \quad (26)$$

This implies that the slab can be shear-reinforced using any available shear reinforcement system. In this example vertical stirrups or links suitably detailed according to MC 2010 [2] are used.

*b) Design of punching shear reinforcement*

At failure,  $V_{Ed}$  is equal to  $V_{Rd}$  and the punching shear strength is calculated as  $V_{Rd} = V_{Rd,c} + V_{Rd,s}$ ,

where the contribution of the shear reinforcement  $V_{Rd,s} = V_{Ed} - V_{Rd,c}$  has to satisfy  $V_{Rd,s} \geq 0.5V_{Ed}$

(minimum shear reinforcement); in the present case this condition is governing:  $V_{Rd,s} \geq 331$  kN.

The required shear reinforcement can thus be determined as [2]:

$$V_{Rd,s} = A_{sw} \cdot k_e \cdot \sigma_{swd} \quad (27)$$

where  $A_{sw}$  denotes the cross-sectional area of the shear reinforcement located between  $0.35 \cdot d_v$

and  $d_v$  from the edge of the supported area (Figure 8) and  $\sigma_{swd}$  is the average stress activated in

the shear reinforcement due to the opening of the critical shear crack. This latter parameter can

be calculated as:

$$\begin{aligned} \sigma_{swd} (\leq f_{ywd}) &= \frac{E_s \cdot \psi}{6} \left( 1 + \frac{f_{bd}}{f_{ywd}} \frac{d}{\phi_w} \right) = \frac{200000 \cdot 0.0133}{6} \left( 1 + \frac{3}{435} \frac{204}{8} \right) \\ &= 521 \text{ MPa} \rightarrow \sigma_{swd} = f_{ywd} \end{aligned} \quad (28)$$

The values  $f_{bd}$ ,  $f_{ywd}$  and  $\phi_w$  refer to the bond strength, yield strength and diameter of the shear

reinforcement, respectively. Thus

$$A_{sw} = \frac{V_{Rd,s}}{k_e \cdot \sigma_{swd}} = \frac{331}{0.977 \cdot 435} = 779 \text{ mm}^2 \quad (29)$$

Choosing, for instance, 8 mm-diameter links at a spacing of 100 mm in both  $x$ - and  $y$ -directions

( $\rho_w = 0.5\%$ ) results in  $A_{sw} = \rho_w \cdot A_{cw} = 1263 \text{ mm}^2$ , where  $A_{cw}$  is the concrete area within  $d_v$  and

$0.35 \cdot d_v$  from the supported area ( $0.253 \text{ m}^2$ ), refer to Figure 8.

For shear studs or other types of shear reinforcement arranged either radially or in a cruciform shape (see Figure 9),  $A_{sw}$  may be determined from:

$$A_{sw} = n_r \cdot A_\phi \cdot d/s \quad (30)$$

where  $n_r$  is the number of lines of stud, or shear, reinforcement radiating from the column,  $s$  is the nominal stud spacing,  $s = \max(s_1; s_0 + 0.5 \cdot s_1)$ , where  $s_0$  is the distance of the first shear reinforcement unit to the supported area and  $s_1$  is the spacing of the studs in the radial direction, and  $A_\phi$  is the cross-sectional area of one stud.

### c) Extent of the shear-reinforced area

The extent of the area where shear reinforcement has to be provided can be determined by calculating the punching shear strength outside the shear-reinforced area (accounting for the concrete contribution  $V_{Rd,c}$  only). The shear-resisting effective depth ( $d_{v,out}$ ) has to be reduced in this case because of the concrete cover of the shear reinforcement in the compression side (soffit) of the slab ( $d_{v,out} = d - c = 174$  mm). The required perimeter to ensure sufficient punching shear strength results in

$$b_0 = \frac{V_{Ed}}{k_\psi \cdot \frac{\sqrt{f_{ck}}}{\gamma_c} \cdot d_v} = \frac{661 \cdot 10^3}{0.300 \cdot \frac{\sqrt{30}}{1.5} \cdot 174} = 3468 \text{ mm} \quad (31)$$

which is smaller than that available:  $b_{0,out} = 0.99 \cdot (4 \cdot 800 + \pi \cdot 174) = 3708$  mm, see Figure 8, where the factor 0.99 is the coefficient  $k_e$  for the outer perimeter. It can be noted that the reduction of the shear forces acting inside the control perimeter have been neglected as a safe assumption.

#### 4. Conclusions

Punching shear design procedures - especially those of the previous Model Codes (MC 1978 and MC 1990) - have been thoroughly reviewed during the preparation of the Model Code 2010. The new Model Code provisions provide a consistent, physical, approach to shear design, including that of punching, with design equations on the mechanical model provided by the Critical Shear Crack Theory. It is to be recognised that the CSCT approach for two-way shear and the SMCFT approach for one-way shear, presented in the Part I paper, are coherent and, for the first time, a consistent physical modelling philosophy is established that links these two situations.

The main advantages of having a physically based model are:

1. A set of clear and understandable design equations are established that directly incorporate size and strain effects and enables a consistent treatment of members with transverse reinforcement and/or fibres.

2. The accuracy of the strength estimate can be progressively improved, if necessary, by following a Level-of-Approximation approach. Simple, safe and low effort expressions are provided for preliminary design. If more accurate estimates of the shear strength are required (for instance for tender or executive designs or for the assessment of existing structures), the accuracy of the design expressions can easily be improved by performing some additional work better reproducing the actual load-rotation behaviour of the member.
3. As the design expressions are based on physical models both for determining the strength and load-rotation behaviour, they are open for incorporation future developments and construction technologies (new punching shear reinforcing systems, new grades or types of steel and/or concrete) as the mechanical parameters and the underlying model(s) for determining them can be adjusted, or extended, simply.

Finally, an example is presented that demonstrates how the LoA methodology may be utilised effectively depending on the accuracy needed and/or the level of design required, preliminary or detailed, and on the determination of shear reinforcement, using different arrangements, to achieve a required performance.



## Acknowledgements

The authors are appreciative of the help and comments of Dr. Stefan Lips (École Polytechnique Fédérale de Lausanne, Switzerland), Dr. Juan Sagaseta Albajar (Univ. of Surrey, United Kingdom), Dr. Luca Tassinari (former PhD student at École Polytechnique Fédérale de Lausanne) and Carsten Siburg (Rheinisch-Westfälische Technische Universität, Germany) in preparing and checking the design example of this article.

## Appendix 1: Notation

The following symbols are used within this paper:

$A_c$  = cross-sectional area of concrete

$A_{cw}$  = cross-sectional area of concrete where shear reinforcement is activated

$A_{c\phi}$  = cross-sectional area of one shear reinforcement

$A_{sw}$  = cross-sectional area of a shear reinforcement

$E_s$  = modulus of elasticity of the reinforcement

$EI_0$  = uncracked flexural stiffness

$EI_1$  = cracked flexural stiffness

$M_{Ed}$  = transfer moment (design value; subscripts  $x, y$  referring to the considered directions)

$R_{Ed}$  = reaction of supported area (design value)

$V$  = shear force

$V_E$  = acting shear force

$V_{Ed}$  = design value of acting shear force

$V_{flex}$  = level of shear force leading to failure in bending

$V_R$  = punching shear strength

$V_{Rd}$  = design punching shear strength

$V_{Rd,c}$  = design concrete contribution to punching shear strength

$V_{Rd,s}$  = design shear reinforcement contribution to punching shear strength

$b_0$  = shear-resisting control perimeter

$b_c$  = size of square column

$b_s$  = strip width

$b_u$  = Diameter of a circle with the same surface as the region inside the basic control perimeter

$d_v$  = shear-resisting effective depth

$d$  = effective depth

$d_g$  = maximum diameter of the aggregate

$e_u$	=	load eccentricity with respect to the centroid of the basic control perimeter
$f_i, g_i$	=	functions
$f_{bd}$	=	design bond strength
$f_{ck}$	=	characteristic compressive strength of concrete (measured on cylinder)
$f_{cd}$	=	design value of the compressive strength of concrete (measured on cylinder)
$f_y$	=	yield strength of flexural reinforcement
$f_{yd}$	=	design yield strength of flexural reinforcement
$f_{yk}$	=	characteristic value of the yield strength of the flexural reinforcement
$f_{ywd}$	=	design yield strength of the shear reinforcement
$k_{dg}$	=	coefficient for aggregate size ( $= 32 / (16 \text{ mm} + d_g)$ )
$k_e$	=	coefficient of eccentricity
$k_m$	=	factor of proportionality
$k_{sys}$	=	efficiency factor of a punching shear reinforcing system
$k_{\psi}$	=	factor accounting for crack widths and roughness of cracks on shear strength
$\ell$	=	span length (subscripts $x, y$ referring to the considered directions)
$m_{cr}$	=	cracking moment
$m_r$	=	radial moment
$m_s$	=	average moment per unit length (design of flex. reinforcement) in the strip
$m_{sd}$	=	average design moment per unit length (design of flex. reinforcement) in the strip (subscripts $x, y$ referring to the considered directions)
$m_R$	=	average flexural strength per unit length in the support strip
$m_{Rd}$	=	average design flexural strength per unit length in the support strip (subscripts $x, y$ referring to the considered directions)
$n_r$	=	number of lines of studs
$q_d$	=	applied load (design value)
$r_0$	=	radius of the critical shear crack
$r_1$	=	radius of the zone where cracking is stabilized
$r_q$	=	distance between the column the line of contraflexure of bending moments

$r_s$	=	distance between the column and the line of contraflexure of moments (subscripts $x, y$ referring to the considered directions)
$r_c$	=	column radius
$r_y$	=	radius of yielded zone
$s$	=	reference stud spacing
$s_0$	=	distance of the first shear reinforcement unit to the supported area
$s_1$	=	spacing of the studs in the radial direction
$w$	=	critical shear crack opening
$x_{el}$	=	depth of uncracked concrete
$x_{pl}$	=	depth of plastic zone of concrete
$\beta$	=	efficiency factor of the bending reinforcement for stiffness calculation
$\chi$	=	curvature
$\chi_{TS}$	=	reduction of curvature due to tension-stiffening
$\gamma_c$	=	partial safety factor of concrete
$\gamma_s$	=	partial safety factor of steel
$\phi_w$	=	diameter of shear reinforcement
$\rho$	=	flexural reinforcement ratio
$\rho_w$	=	transverse reinforcement ratio
$\sigma_{swd}$	=	design stress in shear reinforcement
$\psi$	=	rotation of the slab outside the supported area region (subscripts $x, y$ referring to the considered directions)

## References

- [ 1] Fédération Internationale du Béton (fib), *Model Code 2010 - Final draft*, Vol. 1, fédération internationale du béton, Bulletin 65, Lausanne, Switzerland, 2012, Vol. 2, 350 p.
- [ 2] Fédération Internationale du Béton (fib), *Model Code 2010 - Final draft*, Vol. 2, fédération internationale du béton, Bulletin 66, Lausanne, Switzerland, 2012, Vol. 2, 370 p.
- [ 3] CEB-FIP, *Model Code for Concrete Structures*, Comité Euro-International du Béton (CEB), 3rd ed., Lausanne, 1978, 348 p.
- [ 4] CEB-FIP MC 90, *Design of concrete structures. CEB-FIP Model Code 1990*, Thomas Telford, London, 1993, 460 p.
- [ 5] Eurocode 2, *Design of concrete structures - Part 1-1: General rules and rules for buildings*, CEN, EN 1992-1-1, Brussels, Belgium, 2004, 225 p.
- [ 6] Kinnunen S., Nylander H., 1960, *Punching of Concrete Slabs Without Shear Reinforcement*, Transactions of the Royal Institute of Technology, N° 158, 112 p.
- [ 7] Braestrup M. W., Nielsen M. P., Jensen B. C., Bach F. *Axisymmetric Punching of Plain and Reinforced Concrete*, Afdelingen for Baerende Konstruktioner - Danmarks Tekniske Højskole, Nr. 75, Lyngby, Denmark, 1976, 33 p.
- [ 8] Silfwerbrand J. and Hassanzadeh G. (Ed.), *International Workshop on Punching Shear Capacity of RC Slabs*, Royal Institute of Technology, 2000, 527 p.
- [ 9] Fédération Internationale du Béton (fib), 2001, *Punching of structural concrete slabs*, fib, bulletin No 12, Lausanne, Switzerland, 314 p.
- [ 10] Pollak, M.-A. and ACI committee 445, 2005, *Punching Shear in Reinforced Concrete Slabs*, American Concrete Institute, SP-232, 298 p.
- [ 11] Muttoni A., Schwartz, J., *Behaviour of Beams and Punching in Slabs without Shear Reinforcement*, IABSE Colloquium, Vol. 62, Zurich, Switzerland, 1991, pp. 703-708

- [12] Hallgren, M., *Punching Shear Capacity of Reinforced High Strength Concrete Slabs*, doctoral thesis, Royal Institute of Technology, Stockholm, Sweden, 1996, 206 pp.
- [13] Broms, C. E., *Concrete Flat Slabs and Footings: Design Method for Punching and Detailing for Ductility*, Royal Institute of Technology, Stockholm, Sweden, 2006, 114 pp.
- [14] Hong-Gun Park, Kyoung-Kyu Choi, Lan Chung, *Strain-based strength model for direct punching shear of interior slab-column connections*, Engineering Structures, Volume 33, Issue 3, March 2011, Pages 1062-1073
- [15] Muttoni, A., Fernández Ruiz, M., *The levels-of-approximation approach in MC 2010: applications to punching shear provisions*, Structural Concrete, Ernst & Sohn, Germany, Vol. 13, No. 1, 2012, pp. 32-41
- [16] SIA, *Code 262 for Concrete Structures*, Swiss Society of Engineers and Architects, Zürich, 2003, 94 p.
- [17] Kani, G.N.J., *How Safe are Our Large Reinforced Concrete Beams?*, ACI Journal Proceedings, Vol. 64, No. 3, 1967, pp. 128-141
- [18] Collins, M.P., Kuchma, D., *How Safe Are Our Large, Lightly Reinforced Concrete Beams, Slabs, and Footings?*, ACI Structural Journal, Vol. 96, No. 4, 1999, pp. 482-490
- [19] Muttoni A., Fernández Ruiz M., *Shear strength of members without transverse reinforcement as function of critical shear crack width*, ACI Structural Journal, V. 105, No 2, 2008, pp. 163-172
- [20] Muttoni A., *Punching shear strength of reinforced concrete slabs without transverse reinforcement*, ACI Structural Journal, V. 105, No 4, 2008, pp. 440-450
- [21] Fernández Ruiz, M., Muttoni, A., *Applications of the critical shear crack theory to punching of R/C slabs with transverse reinforcement*, ACI Structural Journal, Vol. 106, No. 4, 2009, pp. 485-494

- [22] Muttoni, A., Fernández Ruiz, M., *Shear in slabs and beams: should they be treated in the same way?*, *fédération internationale du béton*, Bulletin # 57, 2010, pp. 105-12
- [23] Muttoni, A., Fernández Ruiz, M., *MC2010: The Critical Shear Crack Theory as a mechanical model for punching shear design and its application to code provisions*, *fédération internationale du béton*, Bulletin # 57, 2010, pp. 31-60
- [24] Guandalini S., Burdet O., Muttoni A., *Punching tests of slabs with low reinforcement ratios*, *ACI Structural Journal*, V. 106, N°1, USA, 2009, pp. 87-95
- [25] Lips S., Fernández Ruiz M., Muttoni A., *Experimental Investigation on Punching Strength and Deformation Capacity of Shear-Reinforced Slabs*, *ACI Structural Journal*, Vol. 109, USA, 2012, pp. 889-900.
- [26] Maya, L. F., Fernández Ruiz, M., Muttoni, A., Foster, S., *Punching shear strength of steel fibre reinforced concrete slabs*, *Engineering Structures*, Elsevier, Vol. 40, 2012, pp. 83-94
- [27] Clément, T., Pinho Ramos, A., Fernández Ruiz, M., and Muttoni, A., *Design for punching of prestressed concrete slabs*, *Structural concrete*, Accepted manuscript online: 26.11.2012 | DOI: 10.1002/suco.201200028
- [28] Faria, D. M. V., Lúcio, V.J.G., Pinho Ramos, A., *Strengthening of flat slabs with post-tensioning using anchorages by bonding*, *Engineering Structures*, Vol. 33, No. 6, 2011, pp. 2025–2043
- [29] Fernández Ruiz M., Muttoni A., Kunz J., *Strengthening of flat slabs against punching shear using post-installed shear reinforcement*, *ACI Structural Journal*, V. 107 N° 4, USA, 2010, pp. 434-442.
- [30] Farzam, M., Fouad, N.A., Grünberg, J., Fard, M.Y., *Punching of RC slabs under eccentric loads*, *Structural Concrete*, Vol. 11, No. 4, 2010 , pages 211-220
- [31] Sagaseta, J., Muttoni, A., Fernández Ruiz, M., Tassinari, L., *Non axis-symmetrical punching shear around internal columns of RC slabs without transverse reinforcement*,

Magazine of Concrete Research, Thomas Telford Publishing Ltd., London, Vol. 63, No. 6, 2011, pp. 441-457

[32] Sigrist, V., Bentz, E., Fernández Ruiz, M., Foster, S.J., Muttoni, A., *Background to the Model Code 2010 Shear Provisions - Part I: Beams and Slabs*, *Structural Concrete*, Ernst & Sohn, Germany, companion paper to this manuscript.

[33] Hegger, J., Walraven, J. C., Hausler, F., *Punching of Flat Slabs according to Eurocode 2* (in German: *Zum Durchstanzen von Flachdecken nach Eurocode 2*), *Beton- und Stahlbetonbau*, Vol. 105, No. 4, 2010, pp. 206-215

[34] Hillerborg, A., *The advanced strip method – a simple design tool*, *Magazine of Concrete Research*, Volume 34, Issue 121, pages 175 –181, 1982

[35] ACI, 2008, *Building Code Requirements for Structural Concrete (ACI 318-08) and Commentary (ACI 318R-08)*, American Concrete Institute, Farmington Hills, Mich., USA, 473 p.



## Figures

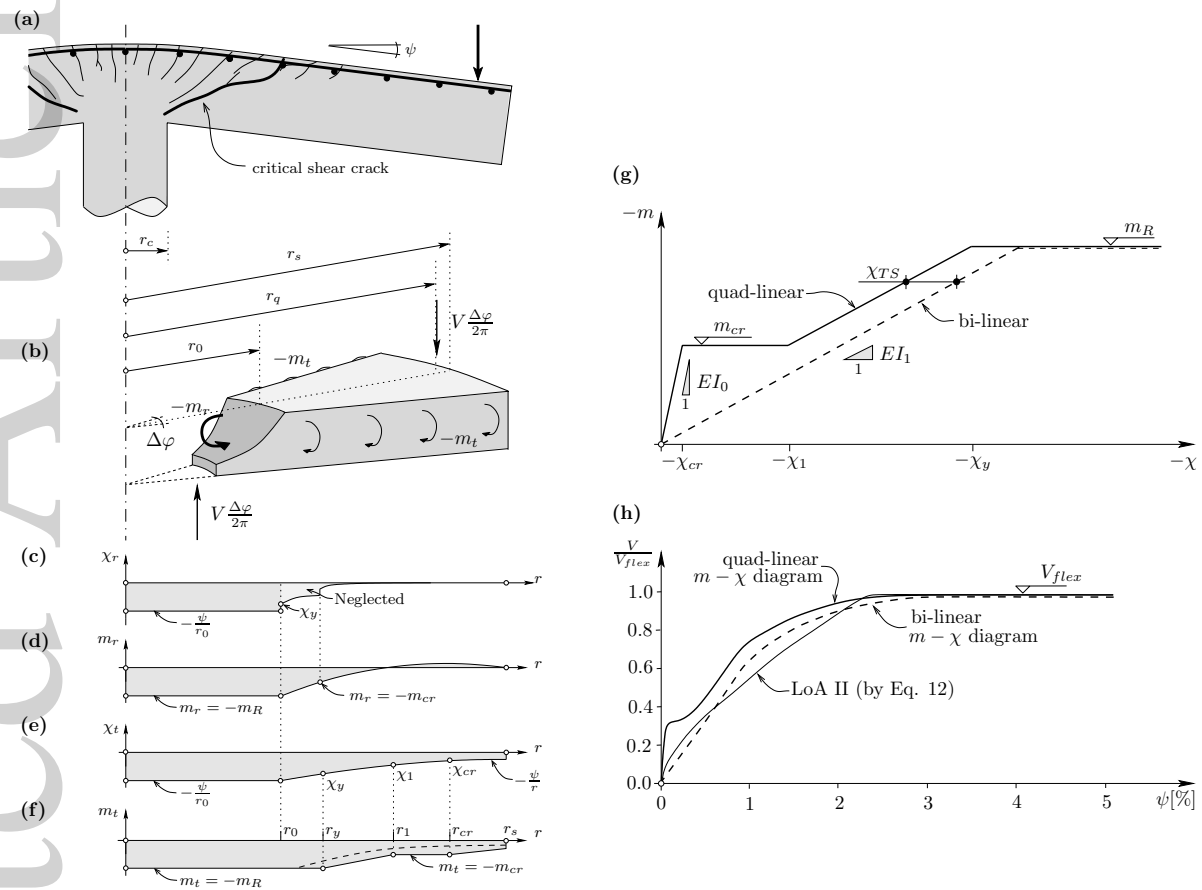


Figure 1: Physical model for obtaining suitable load-rotation relationships in flat slabs: (a) investigated region and critical shear crack; (b) acting moments, forces and dimensions; (c-d) acting radial curvature and moments; (e-f) acting tangential curvature and moments; (g) quadrilinear moment-curvature diagram; and (h) corresponding load-rotation relationships (results calculated for an axis-symmetric slab  $\rho = 0.48\%$ ,  $h = 155$  mm,  $r_c = 150$  mm,  $r_s = r_q = 856$  mm)

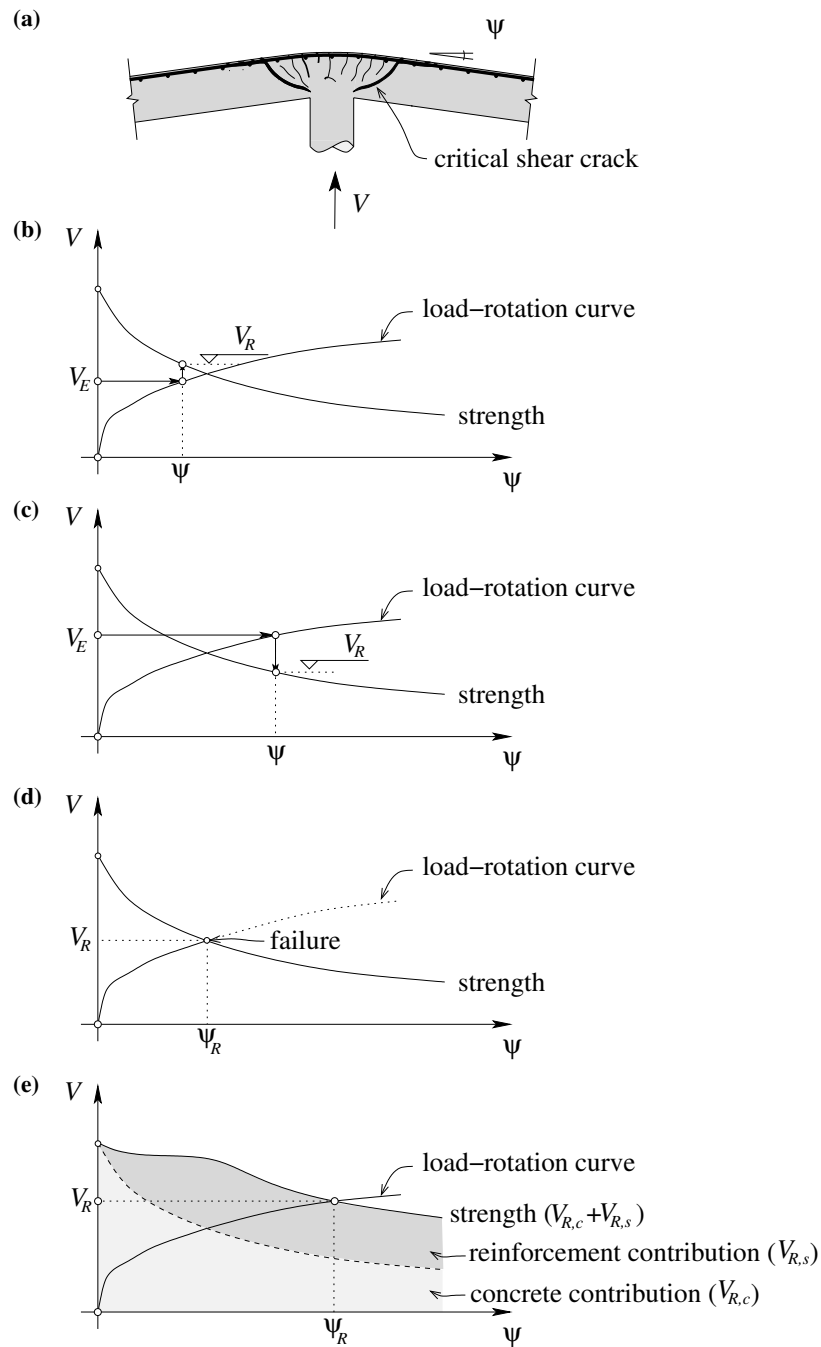


Figure 2: Calculation of punching shear strength according to the CSCT: (a) rotation of the slab near the supported area region; (b,c) calculation of the punching shear strength ( $V_R$ ) for the rotation developed for a given applied load ( $V_E$ ); (d) intersection between failure criterion and load-rotation curve for calculation of punching shear strength ( $V_R$ ); and (e) failure criterion accounting for concrete and shear reinforcement contribution

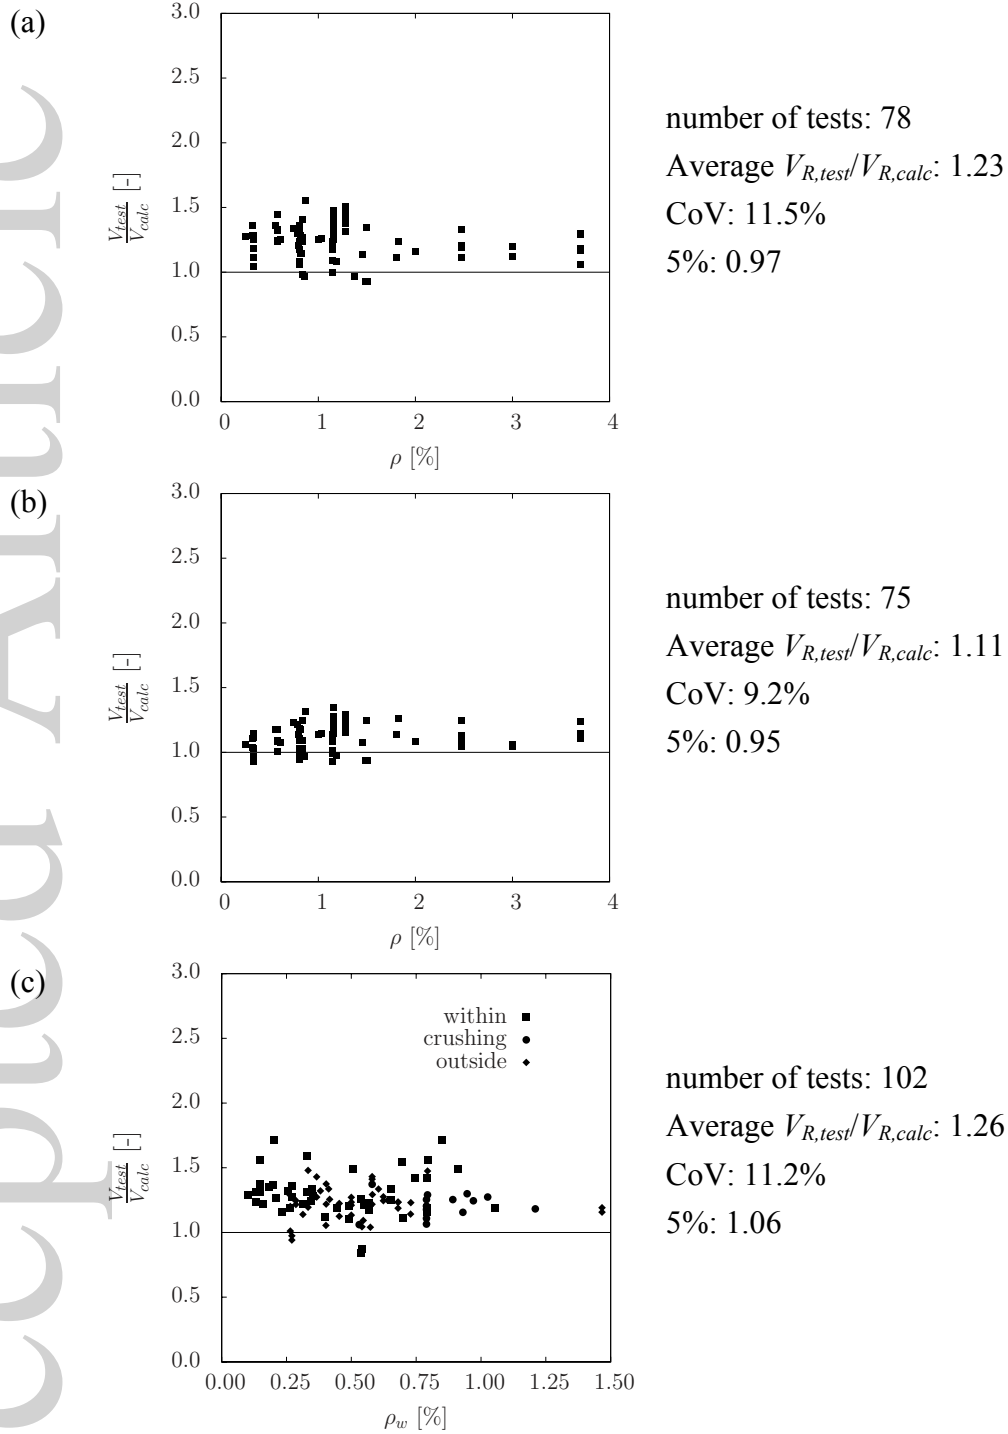


Figure 3: Comparison of Model Code 2010 provisions with test results: (a) and (b) specimens without transverse reinforcement for LoAs II and IV, respectively; and (c) specimens with transverse reinforcement for LoA II.

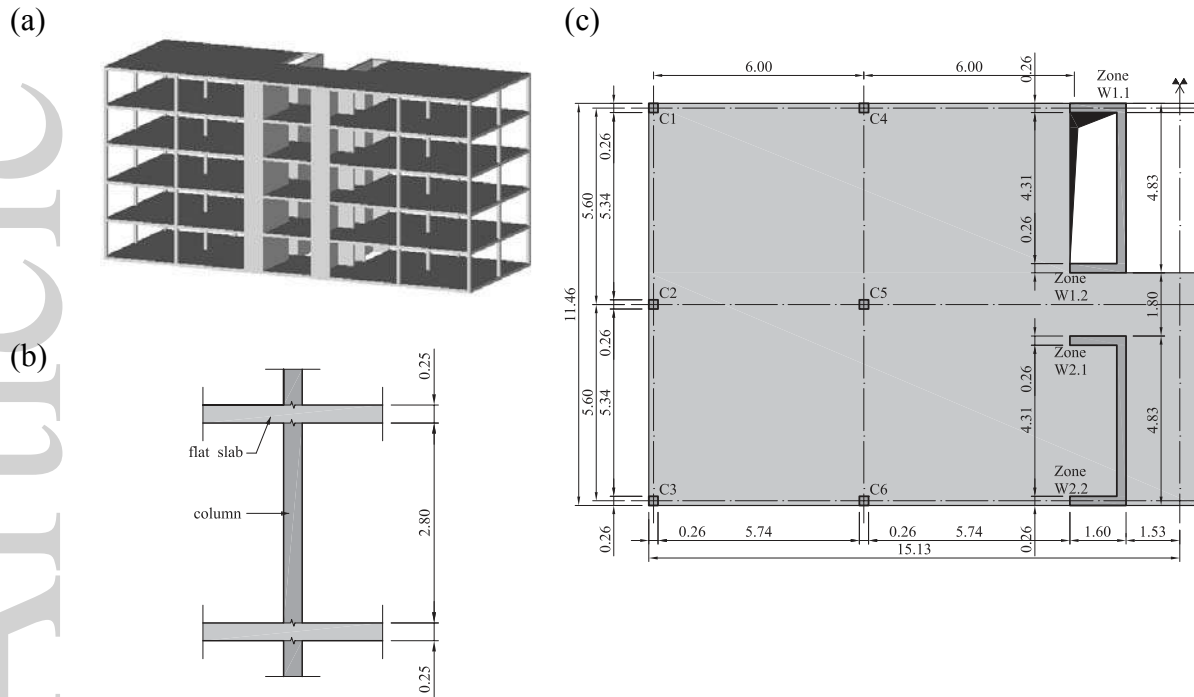


Figure 4: Design example: (a) view of building; (b) cross section of flat slab and supporting columns; and (c) main dimensions (in [m],  $l_x = 6.00$  m,  $l_y = 5.60$  m)

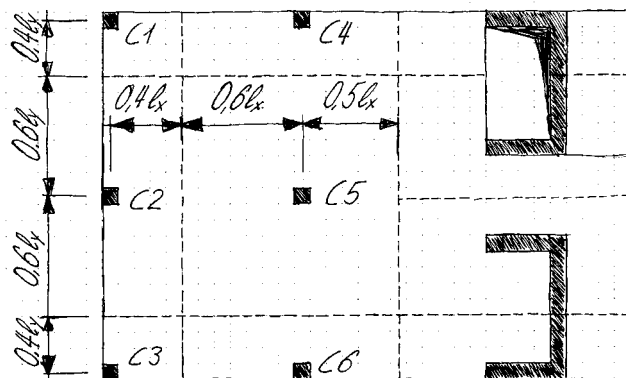


Figure 5: Approximated contributive areas for each column

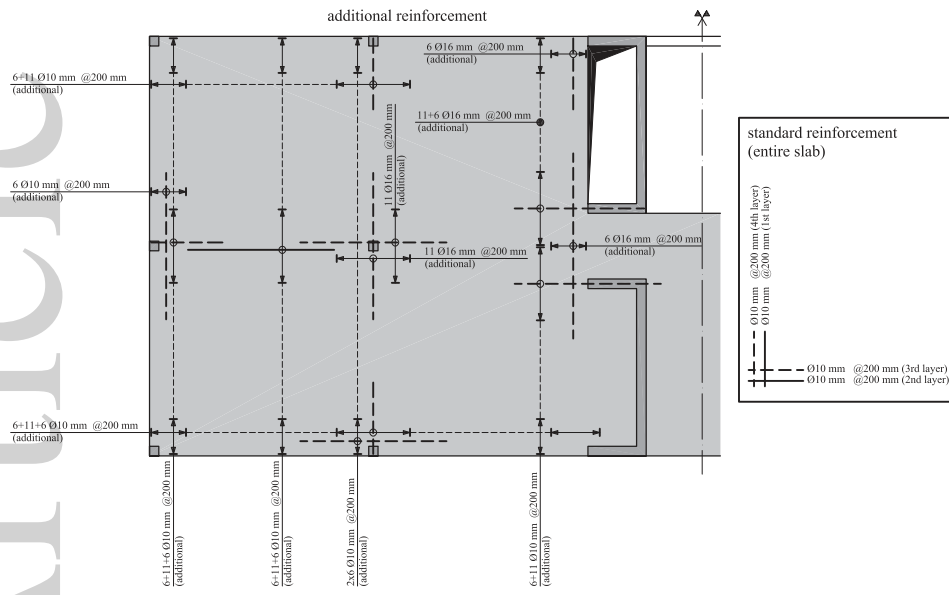


Figure 6: Sketch of flexural reinforcement.

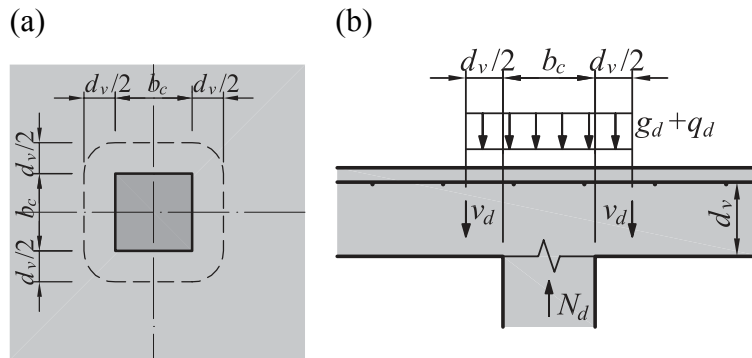


Figure 7: Loads applied within the control perimeter: (a) plan view; and (b) cross-section

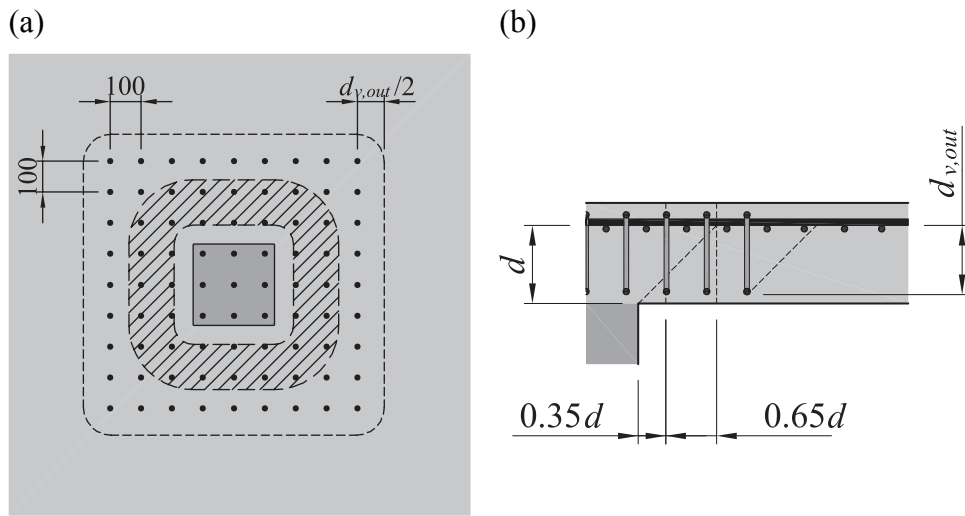


Figure 8: Shear reinforcement arrangement: (a) plan view; and (b) cross-section

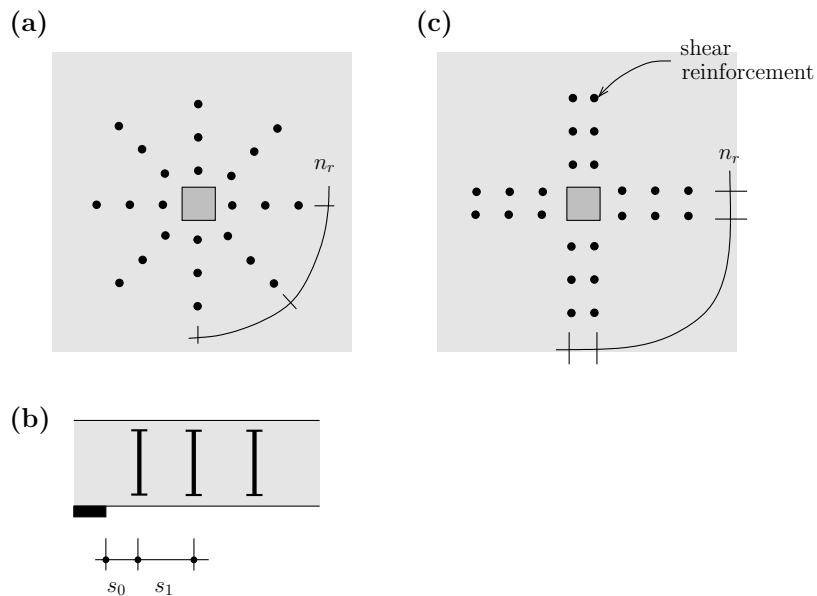


Figure 9: Arrangement of shear reinforcement: (a) radial arrangement ( $n_r = 8$  in this case); (b) detail of distances of first and second shear reinforcement; and (c) cruciform shape ( $n_r = 8$  in this case)