

This work was written as part of one of the author's official duties as an Employee of the United States Government and is therefore a work of the United States Government. In accordance with 17 U.S.C. 105, no copyright protection is available for such works under U.S. Law. Access to this work was provided by the University of Maryland, Baltimore County (UMBC) ScholarWorks@UMBC digital repository on the Maryland Shared Open Access (MD-SOAR) platform.

Please provide feedback

Please support the ScholarWorks@UMBC repository by emailing [scholarworks-group@umbc.edu](mailto:scholarworks-group@umbc.edu) and telling us what having access to this work means to you and why it's important to you. Thank you.

# Broadband omnidirectional reflection from negative index materials

Cite as: Appl. Phys. Lett. **87**, 261921 (2005); <https://doi.org/10.1063/1.2151251>

Submitted: 13 May 2005 . Accepted: 31 October 2005 . Published Online: 30 December 2005

Mark Bloemer, Giuseppe D'Aguanno, Michael Scalora, and Nadia Mattiucci



View Online



Export Citation

## ARTICLES YOU MAY BE INTERESTED IN

[Omnidirectional gap and defect mode of one-dimensional photonic crystals containing negative-index materials](#)

Applied Physics Letters **83**, 5386 (2003); <https://doi.org/10.1063/1.1637452>

[Dyadic Green's functions and guided surface waves for a surface conductivity model of graphene](#)

Journal of Applied Physics **103**, 064302 (2008); <https://doi.org/10.1063/1.2891452>

[Transparent, metallo-dielectric, one-dimensional, photonic band-gap structures](#)

Journal of Applied Physics **83**, 2377 (1998); <https://doi.org/10.1063/1.366996>

Lock-in Amplifiers  
up to 600 MHz



## Broadband omnidirectional reflection from negative index materials

Mark Bloemer,<sup>a)</sup> Giuseppe D'Aguanno, and Michael Scalora  
*Dept. of the Army, Charles M. Bowden Facility, Building 7804 Research, Development, and Engineering  
 Command, Redstone Arsenal, Alabama 35898*

Nadia Mattiucci  
*Universita "RomaTre" Dipartimento di Fisica "E. Amaldi," Via Della Vasca Navale 84, I-00146 Rome,  
 Italy and Time Domain Corp., Cummings Research Park, 7057 Old Madison Pike, Huntsville,  
 Alabama 35806*

(Received 13 May 2005; accepted 31 October 2005; published online 30 December 2005)

We show, by using a dispersion relation with parameters taken from experimental data, that a single layer of a negative index material has omnidirectional reflection properties. In the range between the electric plasma frequency and the magnetic plasma frequency, the refractive index is close to zero and the negative index materials reflect radiation for all angles of incidence and polarization with reflectivities of  $\sim 99\%$ . In addition, with increasing angles of incidence, the reflecting band does not shift in frequency but actually widens. The operational bandwidth can be 100% or greater by increasing the separation between the electric and magnetic plasma frequencies. © 2005 American Institute of Physics. [DOI: 10.1063/1.2151251]

The development of negative index materials (NIMs) has occurred at an astounding pace due to the potential applications [Ref. 1 and references therein]. A recent publication<sup>2</sup> illustrated the striking similarities in the optical properties of NIMs and one-dimensional (1D) photonic band gap (PBG) materials. The similarities are due to the fact that the dispersion relation for the NIM in a spectral range around the electric plasma frequency mimics that of the Bloch's vector for a 1D, infinite periodic structure.<sup>2</sup>

A typical 1D PBG consists of a multilayer stack of alternating high and low index materials. The transmittance spectrum of the 1D PBG has a gap (sometimes called a stop band or reflecting band) whose width and depth depend primarily on the index contrast of the layers and number of periods, respectively. The high reflecting properties of 1D PBGs are a result of the constructive interference of smaller reflections at each interface.

The transmittance spectrum of a single layer of NIM also has a band gap. The width of the gap in a NIM is dependent upon the separation of the electric and magnetic plasma frequencies and its depth depends on the thickness of the layer. The high reflecting properties of NIMs are not due to interference effects and are a result of a refractive index being very close to zero at frequencies between the electric plasma frequency and the magnetic plasma frequency. We are assuming that the unit cell of the NIM is small enough that the optical properties can be described by the macroscopic parameters  $\epsilon$  and  $\mu$ , the electric permittivity and magnetic permeability, respectively.

Other similarities between a single layer of a NIM and a 1D PBG are superluminal group velocities inside the gap where the transmittance is small and low group velocities at the band edges where the transmittance is large.<sup>2</sup>

Not all the properties of NIMs and 1D PBGs are similar; for instance the 1D PBG has a strong field localization at both band edges while the NIM has field localization at one band edge and field delocalization at the other. If nonlinearities

are incorporated, the 1D PBG will support bright solitons while the NIM will support both bright and dark solitons.<sup>3</sup>

Another feature of the NIM that sets it apart from a 1D PBG is the angular dependence of the transmittance spectrum.<sup>2</sup> In a 1D PBG the stop band blueshifts with increasing angle due to the change in the optical path through each layer as the refraction angle changes. The stop band in a NIM does not shift and actually widens with increasing angle. The angular dependence of the stop band in a NIM and its omnidirectional reflecting properties are the topics of this paper.

Omnidirectional reflectors have been made in 1D PBGs by forming an extra wide gap.<sup>4-6</sup> The idea is to make the normal incidence gap extremely wide so that the shift with angle is not large enough to completely move the entire stop band to a new range of frequencies. The gap in a 1D PBG can be widened by having a very large index contrast and/or by adding more periods with different lattice constants. Omnidirectional NIMs do not have these constraints since the gap does not shift and actually widens with increasing angle of incidence.

A convincing experimental demonstration of negative refraction was made by Shelby, Smith, and Schultz.<sup>7</sup> They constructed a two-dimensional (2D) NIM consisting of metal wires for the electric response and split ring resonators (SRRs) for the magnetic response. According to their experimental results, the complex, frequency dependent electric susceptibility  $\epsilon$  and the magnetic permeability  $\mu$  of the NIM can be modeled as follows:<sup>7,8</sup>

$$\epsilon(\omega) = 1 - (\omega_{ep}^2 - \omega_{eo}^2)/(\omega^2 - \omega_{eo}^2 + i\gamma\omega), \quad (1)$$

$$\mu(\omega) = 1 - (\omega_{mp}^2 - \omega_{mo}^2)/(\omega^2 - \omega_{mo}^2 + i\gamma\omega), \quad (2)$$

where  $\omega_{ep}$  is the electric plasma frequency,  $\omega_{eo}$  is the electric resonance frequency,  $\omega_{mp}$  is the magnetic plasma frequency, and  $\omega_{mo}$  is the magnetic resonance frequency and  $\gamma$  the loss term. The parameters are taken according to the experimental results reported in Ref. 7, i.e.,  $\omega_{ep} = 2\pi \times 12.8$  GHz,  $\omega_{eo}$

<sup>a)</sup>Electronic mail: mark.bloemer@us.army.mil

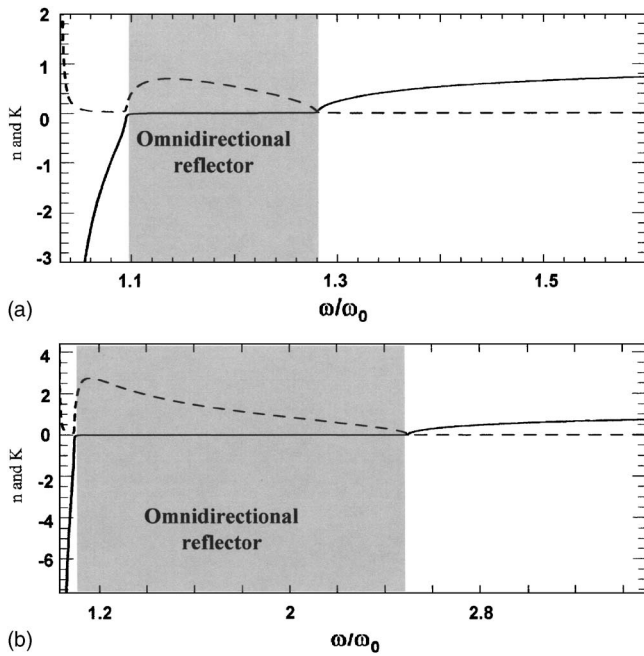


FIG. 1. Optical constants of a broadband omnidirectional reflector. Index of refraction  $n$  (solid line) and extinction coefficient  $K$  (dashed line) vs  $\omega/\omega_0$ , where  $\omega_0 = 2\pi \times 10$  GHz. (a) Optical constants based on the experimental parameters of Ref. 7. In (b) we use the same parameters as in (a) except that  $\omega_{ep} = 2\pi \times 25$  GHz.

$$= 2\pi \times 10.3 \text{ GHz}, \quad \omega_{mp} = 2\pi \times 10.95 \text{ GHz}, \quad \omega_{mo} = 2\pi \times 10.05 \text{ GHz}, \quad \gamma = 2\pi \times 10 \text{ MHz}.$$

We want to clarify that in the following discussion, the material parameters of the NIM from Eqs. (1) and (2) are assumed to be isotropic; that is, we are assuming a fully three-dimensional (3D) NIM structure. The NIM of Ref. 7 is actually a combination of a 1D electric and 2D magnetic metamaterial. The experimental results of negative refraction in Ref. 7 were demonstrated for TE polarization with the incident electric field always parallel to the metal wires. Therefore, we expect the NIM of Ref. 7 to display omnidirectional reflection for only TE polarization. A true omnidirectional reflector requires a 3D structure.

The optical constants for a material can be defined as  $N = \pm(\epsilon\mu)^{1/2} = n + iK$ , where  $N$  is the complex index of refraction,  $n$  is the index of refraction, and  $K$  is the extinction coefficient. The sign in front of the square root must be chosen in a way that ensures the Poynting vector of the light, refracted into a semi-infinite slab of NIM, will always be directed away from the interface and into the refracting material itself.<sup>2,3</sup> Figure 1(a) shows the optical constants for the material parameters described above. Figure 1(b) shows the optical constants for the same material parameters as in Fig. 1(a) with the exception that the electric plasma frequency has been moved to  $\omega_{ep} = 2\pi \times 25$  GHz. Notice that a gap forms between the electric and magnetic plasma frequencies. On the low frequency side of the gap is the region of negative index. Inside the gap, the optical constants of the NIM are similar to a metal at optical frequencies with a small index of refraction and a small but finite extinction coefficient. For comparison, the optical constants of silver at  $\lambda = 620$  nm are  $n = 0.131$  and  $K = 3.88$  (Ref. 9). Metals are good reflectors at optical frequencies because the refractive index is close to zero and  $K$  is reasonably large. NIMs reflect radiation more

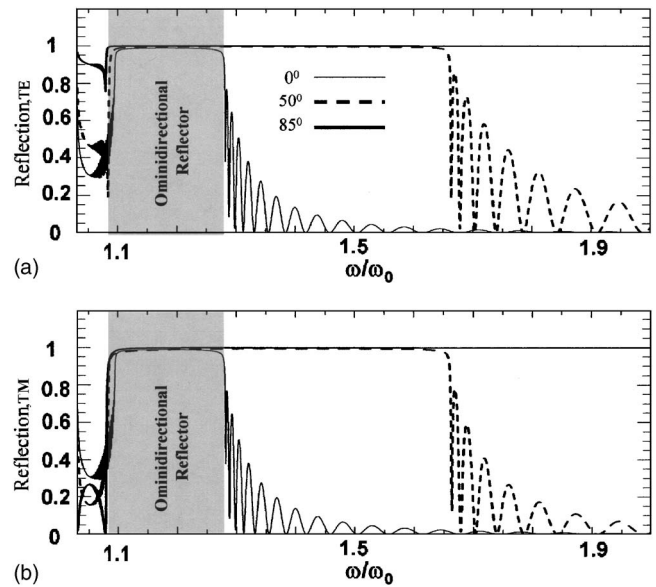


FIG. 2. Angular reflectivity of TE and TM polarized light for the optical constants shown in Fig. 1(a). The shaded area indicates the spectral position of the omnidirectional gap.

efficiently than metals because the refractive index is essentially zero inside the gap.

Comparing Fig. 1(a) with Fig. 1(b) illustrates the dependence of the gap on the choice of  $\omega_{ep}$  and  $\omega_{mp}$ . Increasing the separation of the gap on the choice of  $\omega_{ep}$  and  $\omega_{mp}$  has expanded the width of the gap by a factor of 5. It has been previously shown that the width and center frequency of the gap can be written as  $\Delta\omega \sim |\omega_{ep} - \omega_{mp}|$  and  $\omega_c \sim (\omega_{ep} + \omega_{mp})/2$ , respectively;<sup>2</sup> therefore, the larger the separation between the electric and magnetic plasma frequency the wider the spectral region where the NIM behaves as an omnidirectional reflector.

In Fig. 2 we plot the reflectivity from a single layer of NIM having the optical constants shown in Fig. 1(a). The reflectivity has been calculated by the standard matrix transfer method. The structure is  $L = 5\lambda_0$  in length where  $\lambda_0 = 2\pi c/\omega_0 = 3$  cm. At normal incidence, the highly reflecting band occupies the region between the magnetic plasma frequency and the electric plasma frequency of the NIM. At the steeper angles of incidence, the low frequency side of the reflecting band remains fixed at the magnetic plasma frequency. On the high frequency side of the gap where the NIM has a positive index of refraction, the reflecting band begins to widen as the angle of incidence increases. In this frequency region, the optical constants of the NIM are similar to a low loss dielectric with the exception that the index of refraction is less than unity. The radiation is propagating from a high index region to a low index region and the highly reflecting band terminates when the angle of incidence is less than the angle required for total internal reflection. Also, the reflection is not overly sensitive to losses. If we double the loss term of Eqs. (1) and (2), the reflectivity drops by only 1%.

In Fig. 3 we show that increasing the separation between the magnetic plasma frequency and the electric plasma frequency can expand the omnidirectional reflecting band. The optical constants used to calculate the reflectivity are plotted in Fig. 1(b). By moving the electric plasma frequency from  $\omega_{ep} = 2\pi \times 12.8$  GHz to  $\omega_{ep} = 2\pi \times 25$  GHz, the omnidirec-

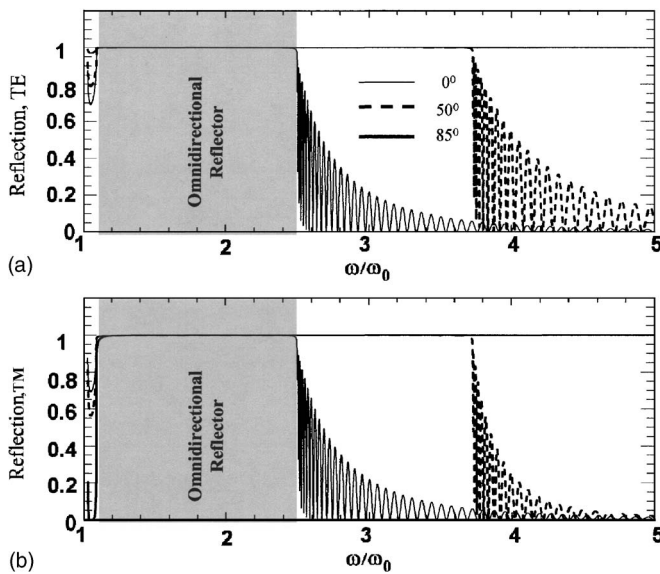


FIG. 3. Angular reflectivity of TE and TM polarized light for the optical constants shown in Fig. 1(b). The shaded area indicates the spectral position of the omnidirectional gap.

tional reflecting band has increased from  $\Delta\omega/\omega_c \sim 15\%$  to  $\Delta\omega/\omega_c \sim 78\%$ . The overall features of Figs. 2 and 3 are similar with the exception that the width of the omnidirectional reflecting band has increased fivefold by shifting the electric plasma frequency.

For the center gap frequency, Fig. 4 shows the complete angular dependence of the reflectivity for TE and TM polarizations. The polarization dependence shown in Fig. 4 is reminiscent of a metal with the TM polarization showing a reduced reflectivity relative to TE polarization. The unusual feature illustrated in Fig. 4 is that the reflectivity for all angles and polarizations never drops below 98.6%. The reflectivity plots of Figs. 3 and 4 show that the larger the separation between the electric and magnetic plasma frequencies not only makes the omnidirectional reflecting band wider but also deeper. The center gap reflectivity for the NIM having  $\Delta\omega/\omega_c \sim 78\%$  is never less than 99%.

In this paper we have demonstrated that a single layer of a NIM has omnidirectional reflecting properties in the region between the electric and magnetic plasma frequencies. In this frequency region, the optical constants of a NIM are similar to real metals at optical frequencies. However, the reflecting properties of “metallic NIMs” are superior to ordinary metals as a result of the real part of the index of refraction being nearly zero.

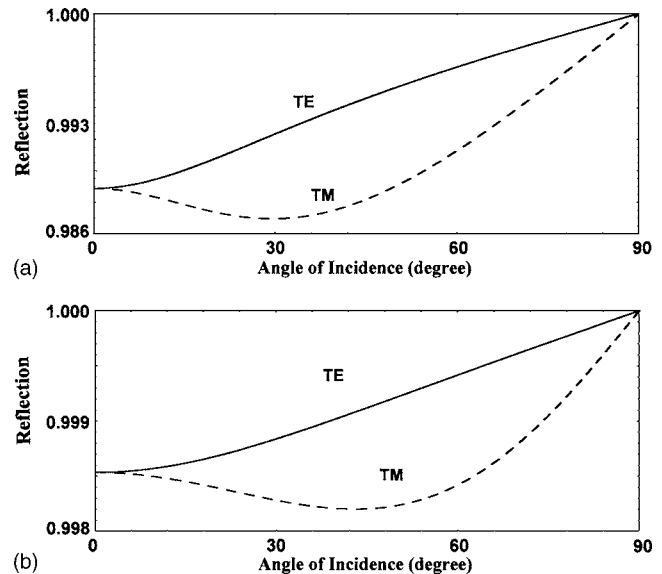


FIG. 4. TE and TM reflectivity vs the angle of incidence at  $\omega_c$ , i.e., at the central frequency of the gap. (a) and (b) are calculated using the optical constants of Figs. 1(a) and 1(b), respectively.

The wide range of applications for NIMs in general and for metallic NIMs in particular, such as hollow core waveguides<sup>10,11</sup> and highly efficient back reflectors for common light fixtures, give additional motivation to develop these unique metamaterials. High reflectivity from metamaterials having a refractive index near zero has been reported for low loss waveguide applications by Schwartz and Piestun.<sup>11</sup> The results show that waveguiding in air using silver/dielectric metamaterials as cladding layers provide lower propagation loss than solid silver reflectors.

<sup>1</sup>D. R. Smith, J. B. Pendry, and M. C. K. Wiltshire, *Science* **305**, 788 (2004).

<sup>2</sup>G. D'Aguanno, N. Mattiucci, M. Scalora, and M. J. Bloemer, *Laser Phys.* **15**, 590 (2005).

<sup>3</sup>G. D'Aguanno, N. Mattiucci, M. Scalora, and M. J. Bloemer, *Phys. Rev. Lett.* **93**, 213902 (2004).

<sup>4</sup>K. V. Popov, J. A. Dobrowolski, A. V. Tikhonravov, and B. T. Sullivan, *Appl. Opt.* **36**, 2139 (1997).

<sup>5</sup>M. Deopura, C. K. Ullal, B. Temelkuran, and Y. Fink, *Opt. Lett.* **26**, 1197 (2001).

<sup>6</sup>E. Xifre-Perez, L. F. Marsal, J. Pallares, and J. Ferre-Borrull, *J. Appl. Phys.* **97**, 064503 (2005).

<sup>7</sup>R. A. Shelby, D. R. Smith, and S. Schultz, *Science* **292**, 77 (2001).

<sup>8</sup>R. W. Ziolkowski and E. Heyman, *Phys. Rev. E* **64**, 056625 (2001).

<sup>9</sup>*Handbook of Optical Constants of Solids*, edited by E. D. Palik (Academic, New York, 1985).

<sup>10</sup>G. D'Aguanno, N. Mattiucci, M. Scalora, and M. J. Bloemer, *Phys. Rev. E* **71**, 046603 (2005).

<sup>11</sup>B. T. Schwartz and R. Piestun, *Appl. Phys. Lett.* **85**, 1 (2004).