

Received December 23, 2020, accepted January 6, 2021, date of publication January 19, 2021, date of current version March 26, 2021.

Digital Object Identifier 10.1109/ACCESS.2021.3052899

# Ceiling Fan Drives—Past, Present and Future

**N. C. LENIN<sup>1</sup>**, (Senior Member, IEEE),  
**SANJEEVIKUMAR PADMANABAN<sup>2</sup>**, (Senior Member, IEEE),  
**MAHAJAN SAGAR BHASKAR<sup>3</sup>**, (Senior Member, IEEE),  
**MASSIMO MITOLO<sup>4</sup>**, (Fellow, IEEE), AND  
**EKLAS HOSSAIN<sup>5</sup>**, (Senior Member, IEEE)

<sup>1</sup>Electric Vehicles—Incubation, Testing and Research Center, Vellore Institute of Technology at Chennai, Chennai 600127, India

<sup>2</sup>CTIF Global Capsule (CGC), Department of Business Development and Technology, Aarhus University, 7400 Herning, Denmark

<sup>3</sup>Renewable Energy Laboratory (REL), Department of Communications and Networks Engineering, College of Engineering, Prince Sultan University (PSU), Riyadh 11586, Saudi Arabia

<sup>4</sup>School of Integrated Design, Engineering and Automation, Irvine Valley College, Irvine, CA 92782, USA

<sup>5</sup>Oregon Renewable Energy Center (OREC), Department of Electrical Engineering and Renewable Energy, Oregon Tech, Klamath Falls, OR 97601, USA

Corresponding authors: Sanjeevikumar Padmanaban (san@et.aau.dk) and N. C. Lenin (lenin.nc@vit.ac.in)

This work was supported by the Stone Link Design Labs, Chennai.

**ABSTRACT** Major electrical gadgets are moving towards energy-efficient designs. Ceiling Fans are one of the prime focuses of such electrical gadgets. This article discusses and reviews about the past, present and future scenarios of the ceiling fans. The review includes different electric motors used in this application with its electromagnetic designs, controller developments, and mechanical designs, including Computational Fluid Dynamics (CFD) and blade structures. Present-day energy-efficient fans with their technical and performance indices are extensively discussed as a case study. In this work novel innovations are concerned for the future development of the ceiling fans. The highlights of the article: 1. The fan is one of the potential energy consumption application globally. 2. Reducing the power consumption of these fans leads to lowering the carbon-di-oxide emissions 3. A comprehensive review has been done on ceiling fans for the first time - terms of their electrical and mechanical structures. 4. Currently, available Energy efficiency fans are discussed in details with its performance. 5. Future scope to reduce power consumption is highlighted in the conclusion section.

**INDEX TERMS** Ceiling fan, CFD, blades, motors.

## I. INTRODUCTION

Energy-efficient devices save energy consumption considerably. Reducing energy consumption led to reduces the adverse effects of global warming. In particular, the fans are one of heavily consumed electrical equipment in a country like India, around 20 to 30% of the total energy produced. Saving energy through energy-efficient products helps the countries to become energy surplus.

In 1882, Schuyler Skaats Wheeler invented the electric fan later; it was patented by Philip H. Diehl in 1889 [1]. After that, there was a massive proliferation in electric fans [2] which is clear from Fig. 1. till date. Fans are one of the most widely used appliances in tropical countries like India as they account for over 6% of primary residential energy use, making them responsible for a couple of terawatt-hour energy consumption per annum [3]. Different fans such as (i) ceiling


(ii) table (iii) wall mounted (iv) pedestal etc., are available in the commercial market. Details of fan operating principle, types, laws, design, selection, requirements, and applications are found in [4].

This article indulges in revisiting the research developments that happened in fans into the ceiling fans. Section II briefs about the electric motors used in the ceiling fans with its advancements. Computational fluid dynamics play a significant role in fan energy-efficient designs, and it is thoroughly discussed in section III. Power converters, digital controllers, are concisely reproduced in section IV. Section V carefully reviewed the blade structures and noise. Existing energy efficient fans in the commercial market are discussed as a case study in section VI. Future developments and conclusions are made in section VII and VIII, respectively.

## II. BASED ON ELECTRIC MOTOR [5]–[31]

Two other new high-efficiency ceiling fans with flat wooden blades are developed based on axial flux permanent magnet

The associate editor coordinating the review of this manuscript and approving it for publication was Yassine Maleh<sup>1</sup>.

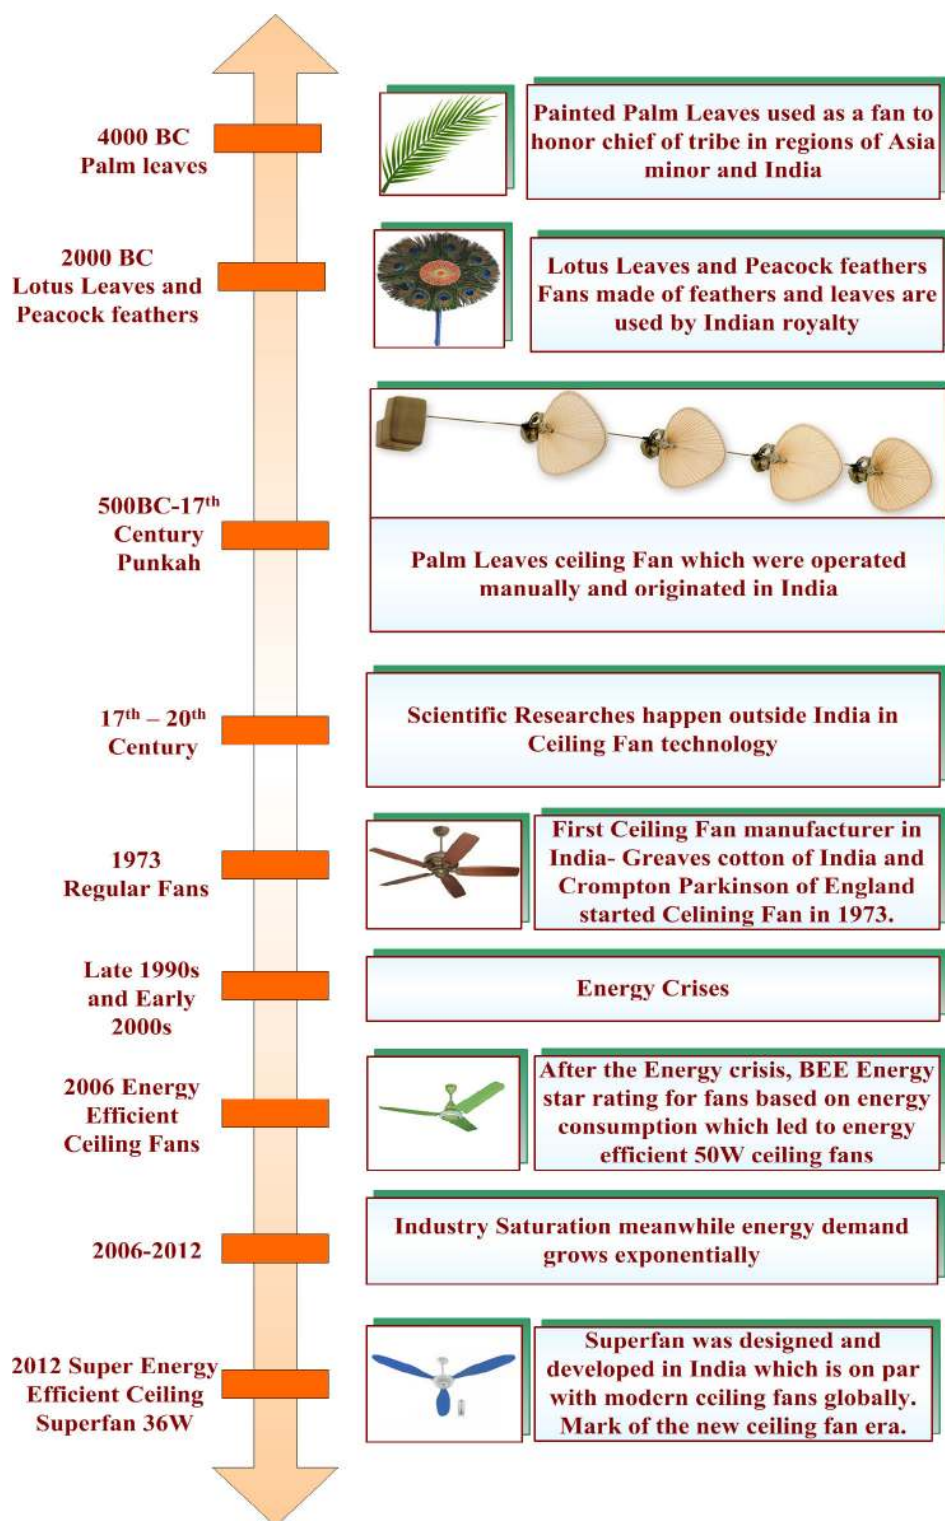





**FIGURE 1.** History of Ceiling Fans [2].

brushless DC motors [5]. Those motors are highly efficient, are maintenance-free, lower noise and are driven by commutation and control electronics from the mains (refer Fig. 2).

A 30W (input power), 48V, 310rpm outer rotating Permanent Magnet Brushless DC (PMBLDC) motor for an energy-efficient ceiling fan [6] had been designed and validated through the computer-aided platform. The variation

**TABLE 1.** Three and Four Blade Fan Performances with 9, 12 & 24 VDC Power Supply.

Fan Type	9V, 3 blade	9V, 4 blade	12V, 3 blade	12V, 4 blade	24V, 3 blade	24V, 4 blade
Average Velocity (m/s)	0.19	0.22	0.32	0.32	0.61	0.56
Maximum Velocity (m/s)	0.90	0.84	1.37	1.14	1.81	1.69
Total CFM	852	1221	1476	1820	3925	3600
Total l/s	402	576	697	859	1853	1699
Total Watts	1.62	1.69	4.09	4.11	12.9	14.6
RPM	75	66	102	83	138	117

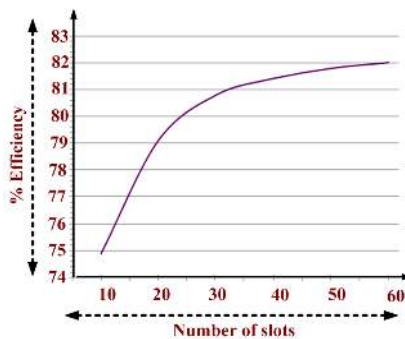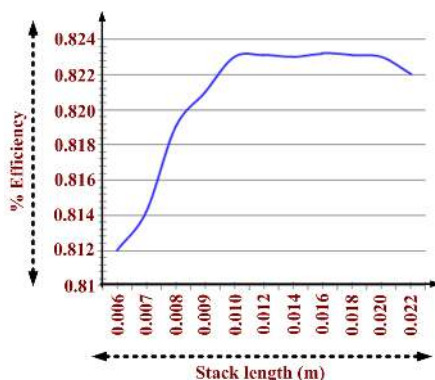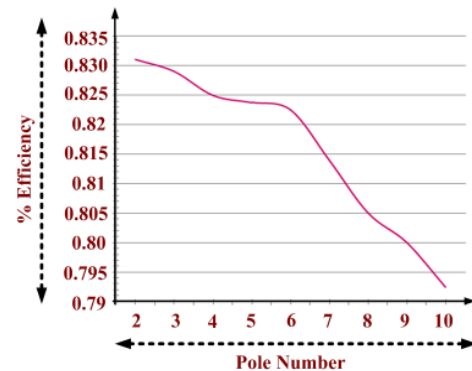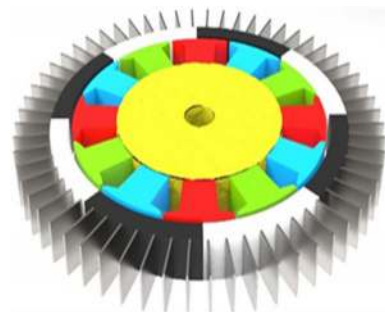**FIGURE 2.** High efficiency ceiling fan [5].**FIGURE 3.** % Efficiency Vs. Variation of Number of Slots.**FIGURE 4.** % Efficiency Vs. Variation of Stack Length.**FIGURE 5.** % Efficiency Vs. Variation of Number of Poles.**FIGURE 6.** Cross Section of PMBLDC.





A study was undertaken to test the extent of air gap variation when components are produced as per design [7]. The findings suggested, shifting the rotor and covering spigot machining operation to newer machines with better process capability to reduce variation. In 2002, Gossamer Wind Solar Powered (GWSP) ceiling fans [8] were developed. Table 1. provides the performance summary of 3 and 4 blade designs, whereas Table 2. shows the performance of the three-blade fan connected to the 25 watt and 10-watt PV panels. With the reduced cost and improved performance [9], a 110 Volt PMBLDC motor (shown in Fig. 6) has been designed and tested for the speed range between 90 – 200 rpm.

The designed motor is having an 8 pole, 12 slots on the stator. The tested PMBLDC motor saves around 50% of energy consumption compared to the conventional single-phase induction motor (SPIM) as clear from Fig. 7.

of efficiency to (i) stack length, (ii) number of stator slots and (iii) number of poles are analyzed through the finite element analysis (FEA) (Figs. 3 - 5).

**TABLE 2.** PV Powered Fan Performance.

Year	2016	2020	2030	2012-2016	2012-2020	2012-2030
Australia	0.06	0.12	0.21	0.12	0.50	2.31
Brazil	1.43	3.35	6.09	3.29	13.83	65.41
Canada	0.05	0.11	0.19	0.11	0.46	2.08
China	9.01	20.68	35.77	21.02	86.50	396.59
EU	0.48	1.08	1.76	1.14	4.59	20.22
India	14.17	33.54	62.38	32.52	137.91	660.60
Indonesia	1.12	2.63	4.81	2.59	10.88	51.51
Japan	0.24	0.54	0.84	0.56	2.27	9.90
Korea	0.11	0.26	0.44	0.26	1.07	4.91
Mexico	0.41	0.93	1.53	0.96	3.90	17.43
Russia	0.15	0.34	0.52	0.37	1.46	6.19
South Africa	0.17	0.40	0.65	0.40	1.67	7.46
US	2.43	5.65	9.86	5.61	23.47	108.57
Total	29.82	69.62	125.05	68.94	288.51	1353.19

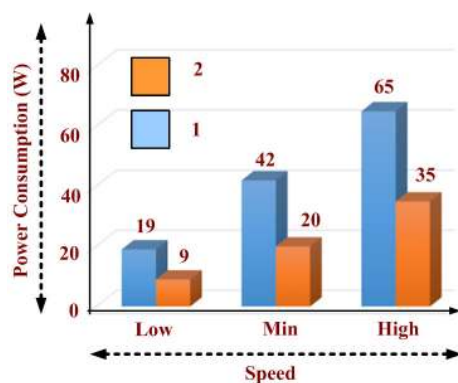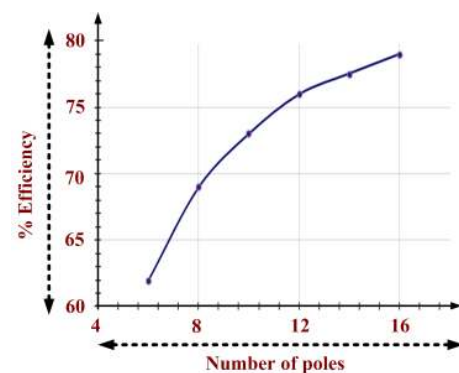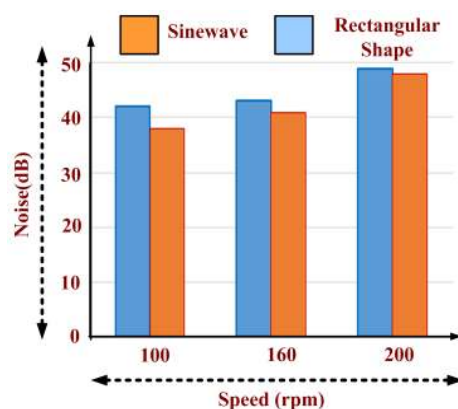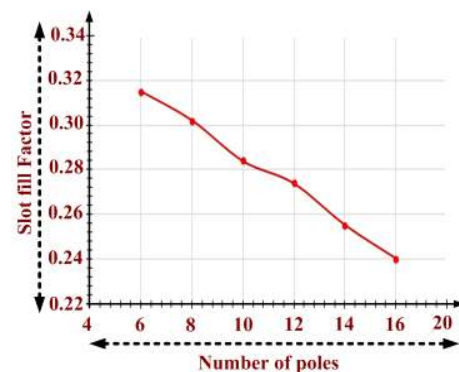**FIGURE 7.** SPIM Vs. BLDC.**FIGURE 9.** % Efficiency Vs. number of poles for single phase PMBLDC motors.**FIGURE 8.** Noise at Different Speeds for PMBLDC motors [11].**FIGURE 10.** Slot fill factor Vs. number of poles.

Further, the cogging torque of PMBLDC and hence the noise (Fig. 8) have been reduced [9]–[11] by using the sine back EMF voltage with the sine waveform currents.

Single-phase PMBLDC motors are cost-effective and easy to manufacture. One such motor drive [12] for 170 V, 20 W, 360 rpm, had been designed and tested. Sensitivity analysis


on the number of Poles, slot fill factor and starting torque (Figs. 9 - 11) are discussed to optimize the designed motor.

If PMBLDC motors are implemented in all ceiling fans sold by 2020, 70 Terawatt hours per year could be saved and 25 million metric tons of carbon dioxide equivalent emissions per year could be avoided, globally [13]. Table 3 shows the results of the energy savings potential analysis in 2016, 2020, and 2030 with the use of high efficient BLDC motors.




**TABLE 3.** Annual and Cumulative energy Savings forecasts [14].


Year	2016	2020	2030	2012-2016	2012-2020	2012-2030
Australia	0.06	0.12	0.21	0.12	0.50	2.31
Brazil	1.43	3.35	6.09	3.29	13.83	65.41
Canada	0.05	0.11	0.19	0.11	0.46	2.08
China	9.01	20.68	35.77	21.02	86.50	396.59
EU	0.48	1.08	1.76	1.14	4.59	20.22
India	14.17	33.54	62.38	32.52	137.91	660.60
Indonesia	1.12	2.63	4.81	2.59	10.88	51.51
Japan	0.24	0.54	0.84	0.56	2.27	9.90
Korea	0.11	0.26	0.44	0.26	1.07	4.91
Mexico	0.41	0.93	1.53	0.96	3.90	17.43
Russia	0.15	0.34	0.52	0.37	1.46	6.19
South Africa	0.17	0.40	0.65	0.40	1.67	7.46
US	2.43	5.65	9.86	5.61	23.47	108.57
Total	29.82	69.62	125.05	68.94	288.51	1353.19

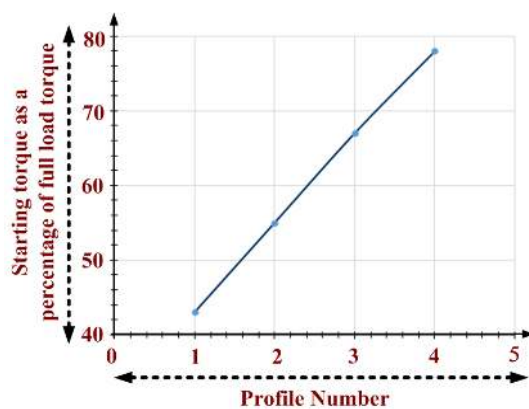

**FIGURE 11.** Starting Torque Vs. air gap profile number.

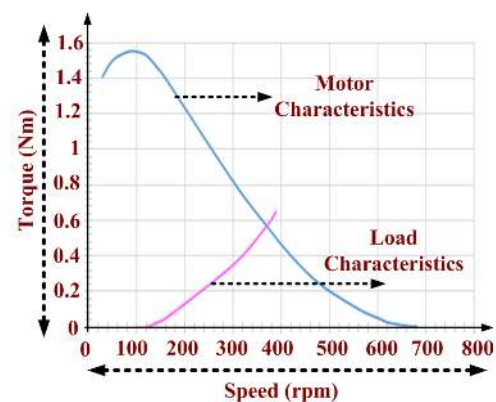

**FIGURE 13.** Torque – Speed characteristic of ceiling fan and load curve.

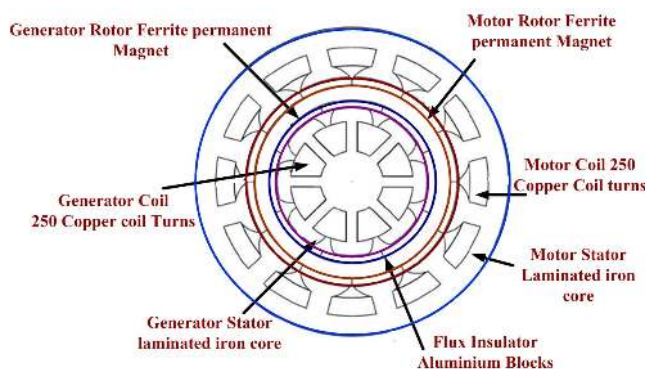


**FIGURE 12.** Machine Cross section [15], [16].

A ceiling fan capable of harnessing wasted kinetic energy from a ceiling fan blade's rotation converted to the energy back to electricity had been examined in [14], [15]. The designed electrical machine has two parts (refer to Fig. 12). One is a motor, and another is a generator. Detailed simulation results and its optimization based on different split and pole pitch ratio [15] show that the designed electrical machine is prominent in high-efficiency ceiling fans.


Three-phase PMBLDC motor for ceiling fan using bonded Neodymium Iron Boron (NdFeB) and ferrite magnets are designed in [16]. The intersection point (Fig. 13) is the motor's operating point in the load curve. To reduce the rotor's back-iron thickness, the magnet's Halbach arrangement was used to magnetize it. The findings inferred that the total weights of active materials in bonded magnet motor and ferrite are 0.884kg (47.2% more) and 1.302kg respectively, but the overall cost in ferrite motor was Rs.338 (22.1% less) compared to Rs.434 in case of bonded magnet motor. The author of [17] designed two different techniques (i) centre of the outer arc of the stator teeth is offset from the center of the cross-section of the fan shaft in the radially outward direction and (ii) rotor Magnet skewing (Fig. 14), to reduce the cogging torque and noise.

With an offset value of 35mm, peak cogging torque is 0.05 N-m which is 8.8% of the rated torque, whereas for a magnet skewing of 3.75 degrees it is 0.005 N-m (Fig. 15) which was only 0.88% of the rated torque. Further, the stator with pole shaping structure reduced the motor's overall noise by 7.1 dB on testing.

A method of generating power by a ceiling fan and its use in a battery for powering low power electrical gadgets are

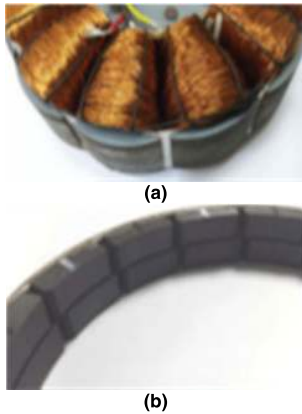


**FIGURE 14.** (a) Stator with centre of teeth arc offset by 35mm (b) PM skewed by 3.75 degrees.

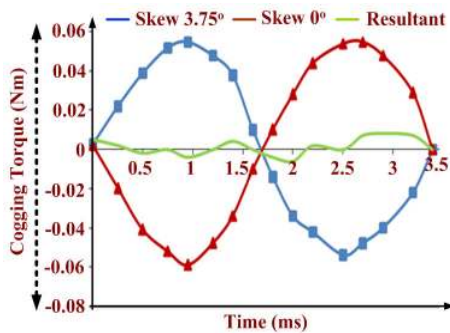

**FIGURE 15.** Cogging torque Vs. time.

discussed in [18]–[23]. The advantages of those designs are (i) reduction of carbon-di-oxide (ii) many electrical and electronic devices can be operated on situations like electricity failure. Ceiling fans use SPIM, Universal motor (rarely) or PMLDC motor.


The performance of these motors is compared [24] based on its accounts. The TRIAC control has got the variation of speed in the induction motor, whereas in BLDC it is by either changing the supply voltage firing angle.

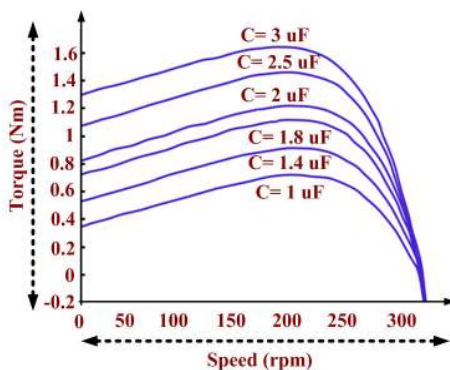

**FIGURE 16.** Torque vs. Capacitor values [26].

Different capacitor values, winding turn ratio and impedance ratio, are analyzed based on two-dimensional

finite element analysis to optimize the permanent split-capacitor single-phase induction motor [25]. Based on the Equivalent circuit developed, the parameters of the designed motor are fine-tuned for the required output. It is clear from the results (Fig. 16) that higher value of capacitor would make the starting torque higher and the operating slip smaller at similarly rated load.

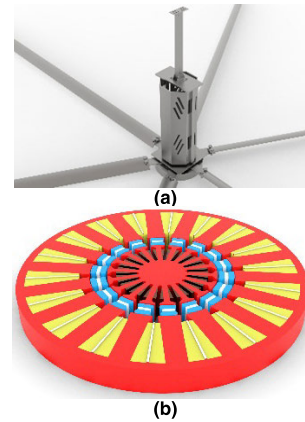

**FIGURE 17.** (a) Monstrous fan (b) DSSR-BLDC.

PMLDC motor with Double Stator Slotted Rotor Brushless DC Motor (DSSR-BLDC) with a speed range of 50-200 rpm for monstrous fan application was developed in [26]–[28] (Fig. 17).

The development of five-phase BLDC has a strong potential to revolutionize motor technology in an energy-efficient fan [29]. Five phase BLDC motors divide the requisite power among multiple phases thus allowing higher power levels, increasing the frequency of torque pulse rate, reducing per phase rotor current without an increase in the per phase voltage, and subsequently increasing performance power concentration on each phase. The power consumed by this BLDC is only 25 Watts.

Electrolytic capacitor-less, induction motor drive system for domestic fan application has been developed in [30]. V/F control was adapted to vary the speed of the fan.

Efficiency improvement in the SPIM has been improved by considering the critical parameters such as B-H characteristics, loss/weight of the magnetic material (steel), number of turns in stator and rotor turns, stack length, and capacitor value and the blade characteristics [31]. The optimal design was got using a dual-layer of design of experiment Fig. 18.

### III. BASED ON CFD [32]–[45]

Computational Fluid Dynamics (CFD) simulation is useful in predicting the airflow around a ceiling fan. One such article [32] provides us with the insight into the airflow of a ceiling fan modeled as boundary conditions of air velocity data measured near the ceiling fan. Matsushita Electric Industrial, FM131H-W fan, was used in this study. Fig. 19 shows the schematic diagram of the airflow model of the chosen ceiling fan.

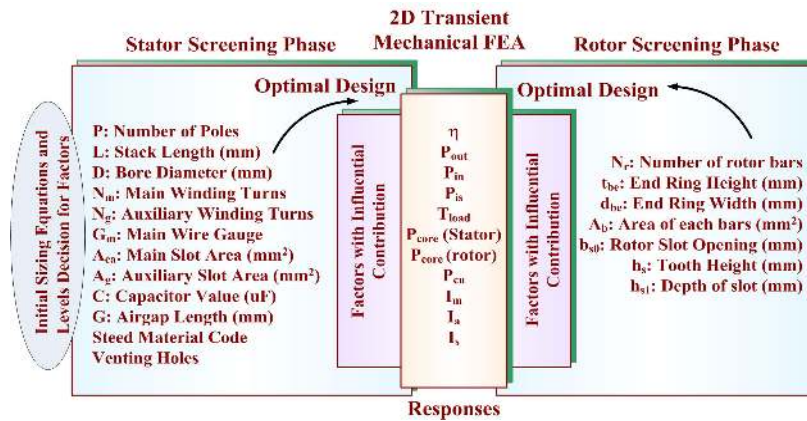


FIGURE 18. Overall Process of Design.

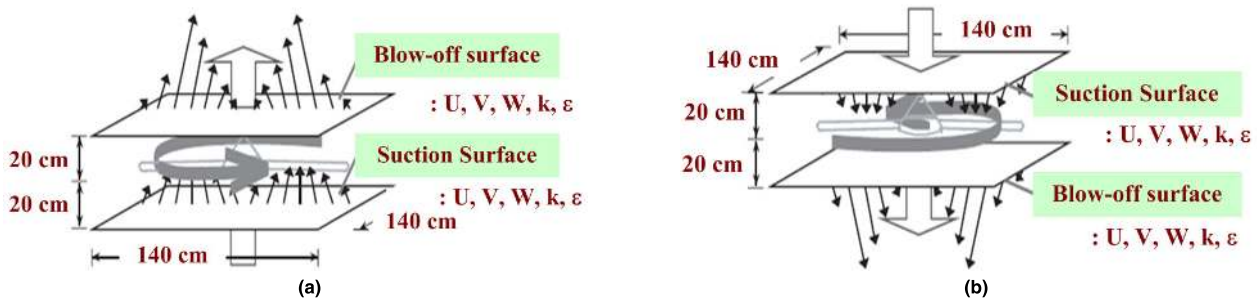


FIGURE 19. Schematic of airflow model [33], (a) Upward airflow direction, (b) downward airflow direction.

The experimental setup was developed to measure each air velocity's average value using three-dimensional ultrasonic anemometer (KAJIO, WA-590) and hot-wire anemometer of constant temperature type (KANOMAX JAPAN, 0251 R-T5) at different frequencies.

Flow-induced by the operation of a ceiling fan in a room has been studied [33]. Significant performance improvements are got by introducing winglets or spikes at blade tips, because of the disruption of tip vortex activity (Fig. 20).

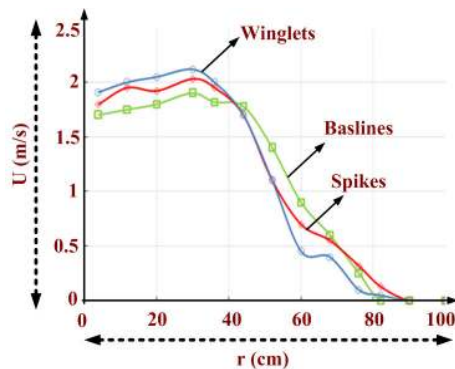


FIGURE 20. Effect of the addition of winglets and spikes.

To find the difference in air velocity variations for the ceiling fan operating at the constant speed mode and the variable speed mode, a measuring point at the half of the blade length

and 100 cm down from the fan blades was chosen to represent the flow characteristics [34]. An analytical and a CFD model was used to predict the flow pattern induced by a ceiling fan into a selected space [35], [36]. The findings inferred that increasing the fan rotational speed results in increasing the local downward velocity distribution inside the area. Hence, operating a ceiling-fan at an improper rotational-speed may cause disturbance for occupants.

Numerical modeling in [37]–[40], used steady-state CFD with a rotating reference frame to simulate fan blades' rotation. The developed numerical model reduced the simulation cost, properly characterized the fan-induced airflow, reproduced the effects of ceiling fans and ultraviolet germicidal irradiation (UR-UVGI) fixtures on the indoor environment, and should aid in the impact's investigation of ceiling fans on UR-UVGI disinfection efficacy.

A transient three-dimensional CFD implicit model of a ceiling fan has been found in [39], [41]–[43]. The model developed can accurately, qualitatively and quantitatively, predict the airflow generated by a typical Indian ceiling fan in a room.

In [44], [45] by changing the ceiling fan parameters, the influence of the airflow is investigated by practical measurement of human body temperature. Based on the simulation studies, it was found that (i) the air velocity is reduced as the air approaches the floor, (ii) the thermal plume that



is generated by the human body is affected by a downward airflow at a velocity of 0.3 m/s, (iii) optimal thermal comfort can be achieved for the human body if the air velocity is 1.34 m/s when the airflow reaches the top of the head.

#### IV. BASED ON POWER CONTROLLERS [46]–[65]

Through compliant wrists, automatic inspecting and monitoring techniques, the assembly line of a ceiling fan was provided with better reliability, safety and adaptability to variation of product sizes [46]. Much similar to the previous literature, a computer monitoring and control system of the robotic & assembly line for ceiling fan motor has been described in [47].

Utilization of a conventional load-commutated inverter for a ceiling fan can be found in [48]. Optimizing the commutation angle [49] for one operating point leads to reduced current, power consumption and temperature, and by increases the efficiency and the lifetime of the PMBLDC motor.

A practical implementation of PMBLDC motor [50], [51] and its complete electronics such as SMPS and controller reveal India's potential for energy savings. The power supply unit in this article was based on the offline flyback converter using the TOP261EN. Further, a comparison between the developed BLDC and conventional 42" ceiling fans (Fig. 21) were discussed. PMBLDC motor with three different speed control method is highlighted in [52], [53].

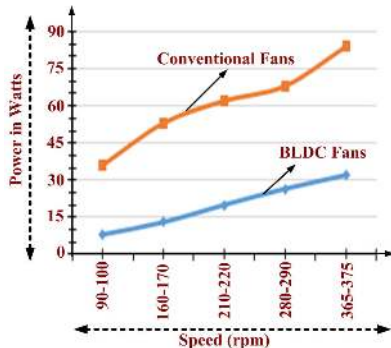


FIGURE 21. Comparison between BLDC fan and Conventional fan.

During, it is manual mode speed can be controlled by a potentiometer. If it is the auto mode, the speed is automatically changed depending on the room temperature using LM35 temperature sensor. If remote control mode is selected, the speed can be adjusted by using a remote controller through an RF module (refer Fig. 22).

Buck-Boost converter (Fig. 23) had been developed because of a smaller number of passive components and fewest losses in the DC-DC converter for a 120V PMBLDC motor. Experimental results show that the developed converter reduces the THD and significantly improves the power factor [54].

Sinusoidal and square wave signals applied to a PMBLDC motor are individually applied to the motor, and characteristics are studied in [55]. Based on the test

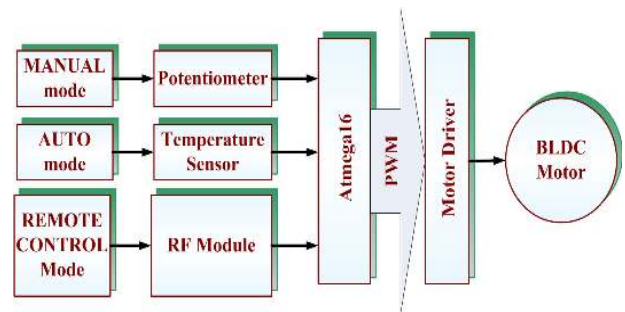


FIGURE 22. Functional Block Diagram.

results, Square wave mode operation provides better torque, improved power factor, quick settling time, lesser current ripples, harmonic content and voltage distortion when compared with the sine wave motor. Microcontroller (PIC16F877A) based speed control technique [56]–[59] has been implemented to control a ceiling fan's speed. Based on the temperature variations, the speed of the fan was alerted.

Implementation of the PMBLDC outer rotor motor control algorithm using FPGA (Field Programmable Gate Array) has been found in [60]. The developed algorithm makes the ceiling fan motor's rotor speed controlled within  $\pm 2$ rpm speed error in the steady-state condition. Automation has become one of the fundamental interests in modern-day technology [61]–[64]. An alternative smart fan (Internet of Things (IoT) based) from a comfort and cost perspectives point has been discussed in [61]. The significant advantage of this method of control is that the user can control the speed of the fan via the smartphone, and hence, the fan motor can be efficiently controlled by using a Wi-Fi connection. Zeta converter fed BLDC motor with fuzzy control and boost converter fed BLDC motor with a PI controller tested for a ceiling fan motor [65]. Based on the experimentation, zeta converter and fuzzy logic were superior based on torque, power factor and speed.

#### V. BASED ON BLADE DESIGN, NOISE, VIBRATION AND TESTING [66]–[68], [68], [70]–[92], [92]

Larger fan blades are recommended to increase airflow. The authors of [66] estimated the combined motor and fan efficiencies at less than 5%. The design objective in [67], [68] was a fan producing air flows of 2 meters per second across the blade radius at a speed of 150 - 200 rpm with lower noise. The performance of the chosen fans (Emerson, Hunter Summer Breeze, and Ceiling Fan-1 (CF-I)) such as input power consumption (Watts), air velocity (cubic feet per minute, CFM) and efficiency index otherwise called as Service value (CFM/Watts) are compared. Further, the authors developed a light-weight and highly durable prototype blade that comprises a foam core material. Matching between the motor and the rotor blades delivers higher efficacy in a ceiling fan [69]. Three ceiling fan models (Bajaj, Orient and Khaitan) are studied to measure the system efficacy as per the Bureau of Indian Standards (BIS). The study further inferred that the



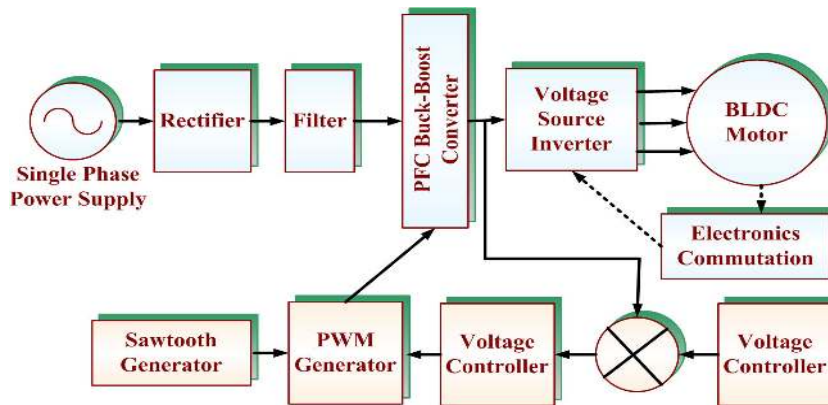


FIGURE 23. Power Electronics for Fan using Buck-Boost converter.

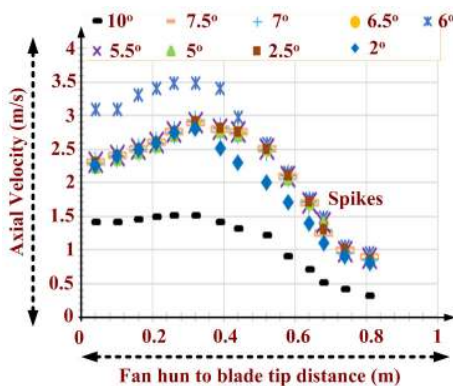


FIGURE 24. Variation of axial velocity Vs. distance.

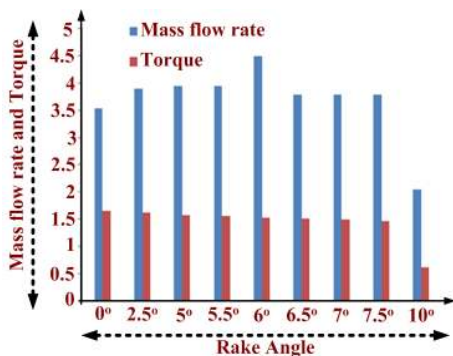


FIGURE 25. Mass Flow rate and Torque Vs. Rake angle.

change in blade angle and the slip have a more significant impact on motor efficiency. A survey of the development of an enhanced ceiling fan, detailing the engineering design process, highlighting health, safety, and environmental can be found in [70]. In [71], performing the Star Co. Fan super deluxe model had been studied. Specific cases of rake angles (00– 100) compared to axial velocity, mass flow rate, air delivery, torque and service value are considered and compared extensively (Figs. 24 - 26). The study concluded that the six-degree rake angle shows enhanced performance.

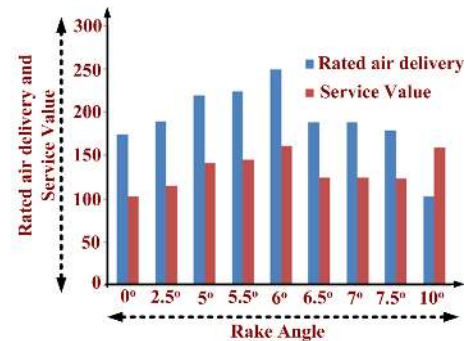


FIGURE 26. Rated Air Delivery and Service Value Vs. Rake angle.

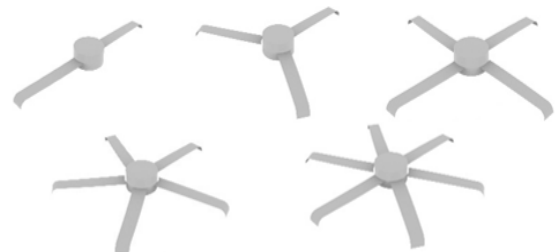


FIGURE 27. Ceiling fans with varying number of blades.

In [72]–[75] response surface method (RSM) had been adopted to predict the noise characteristics of a fan. The results show the ceiling fan noise minimized by operating the fan at the room size 3 level, rod length 3 levels, and the knob position at level 1.

In [76]–[79] the effects of forwarding elliptic sweep angle, tip width, root and tip angle of attack are analyzed. Reference [80] Provides both technical and economic analysis of efficiency improvement options. Despite the massive saving potential, financial incentive programs such as the Super-Efficient Equipment Program (SEEP) for fans in India that promote the adoption of highly efficient fans is the need of the hour. In [81], the effects of the number of blades on the fan performance (Fig. 27) were discussed.

It was clear from Fig. 28 that increasing the number of blades Volumetric flow rate, Mass flow rate, and torque

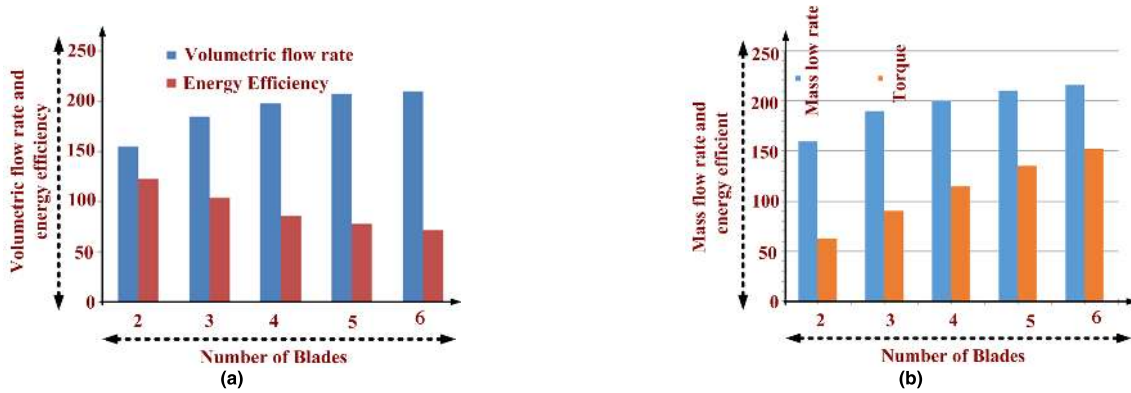


FIGURE 28. Impact of number of blades on (a) volumetric flow rate and energy efficiency, b) Mass flow rate and Torque.

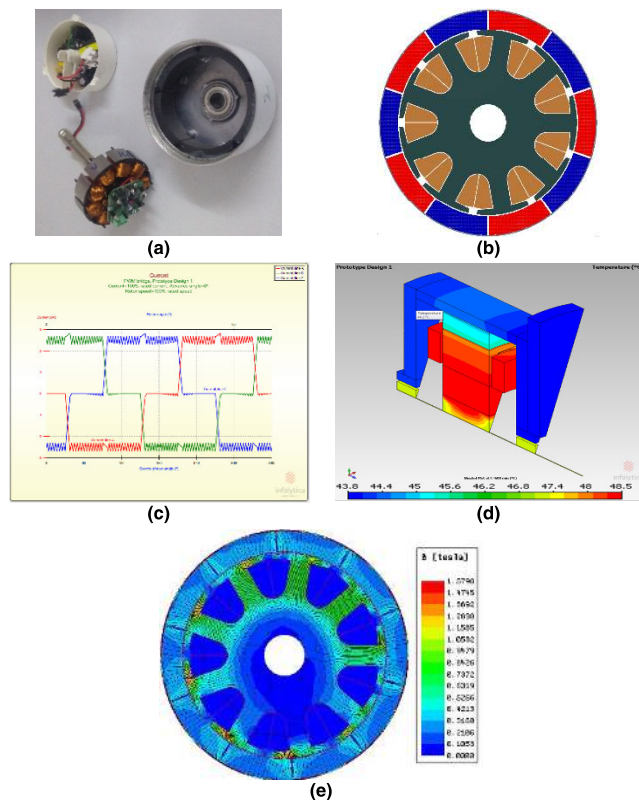


FIGURE 29. Atomberg Gorilla Renessa, a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.

developed by the fan increases, whereas the energy efficiency decreases.

Ceiling fan with cooling blades is developed by [82]. It will be the better replacement of air conditioners and air coolers. Optimize the fan blade angle provides reduced energy consumption [83]. Various blade angles (0, 4, 8 and 12.5 degrees) following room conditions are analyzed and tabulated in Table 4.

By changing both swiveling and tilting of the ceiling fan down-rod, the fan can regulate airflow only in areas where we need airflow [84]. The significant advantage is that the


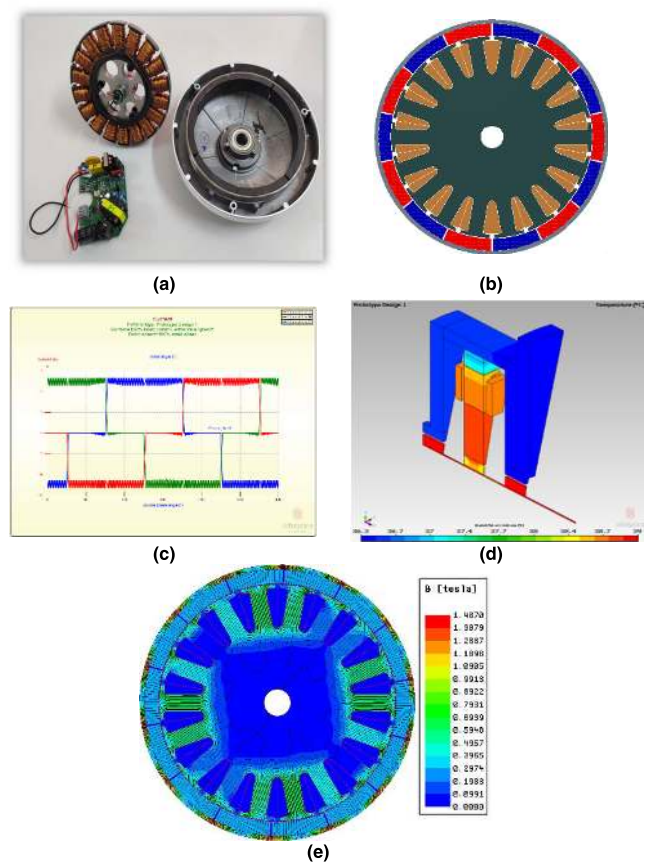


FIGURE 30. Atomberg Gorilla Version - 2, a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.

threaded link mechanism makes it easy to maintain the ceiling fan at a specific angle, with the help of a simple geared DC motor. A sample of 200 consumers of electric fans has been taken to understand the behavior of the fan [85]. Questionnaires are based on the (i) brands, (ii) cost (iii) longevity (iv) service availability, etc. It has been concluded that most of the customers are using a specific brand for a very long period, and the price is the most crucial attribute.

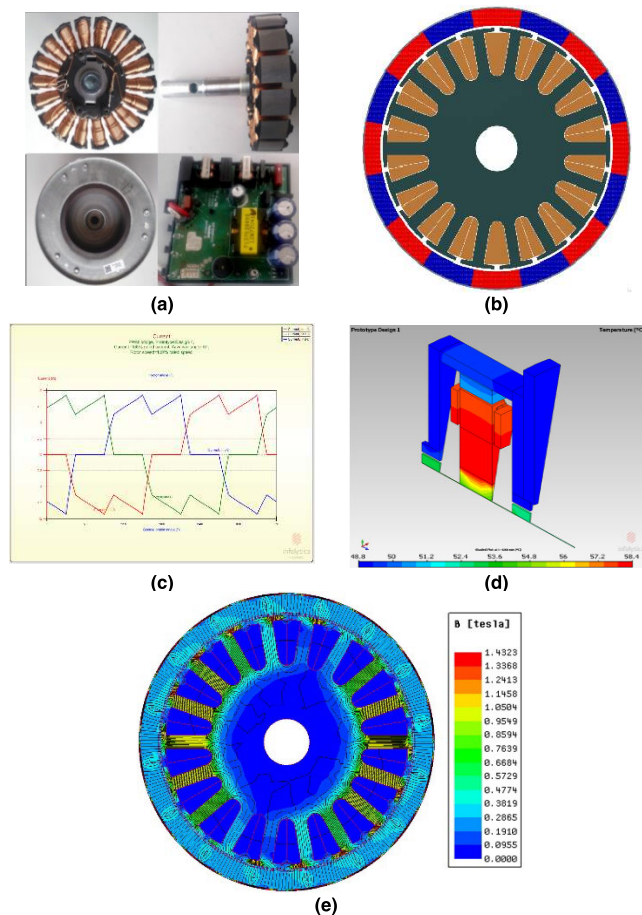


**FIGURE 31.** Usha (Nidec Motors), a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.

**TABLE 4.** Effect of Blade Angle.


No	Blade Angle	Average Velocity
1	0 deg.	0.07416 m/s
2	4 deg.	0.081464 m/s
3	8 deg.	1.040091 m/s
4	12.5 deg.	0.071432 m/s

A multi-axis ceiling fan [86], [87] has been developed which covers larger air delivery area compare to the conventional ceiling fan. It comprises a gear mechanism and AC & DC motor. The significant advantage of the designed fan is that it will rotate about over one axis. With the help of a 54-inch Fan, the influence upon the measured volume of air of (a) Distance of plane of observation below fan blades (b) Position of fan in, and size of, room (c) Height of fan above floor (d) Distance between fan and ceiling (e) Room temperature and (f) Speed of fan were determined [88]. Results got by [88] are discussed critically by [89].

A comparative lab test of 1400 mm (56") ceiling fan of regular models category and its findings are available

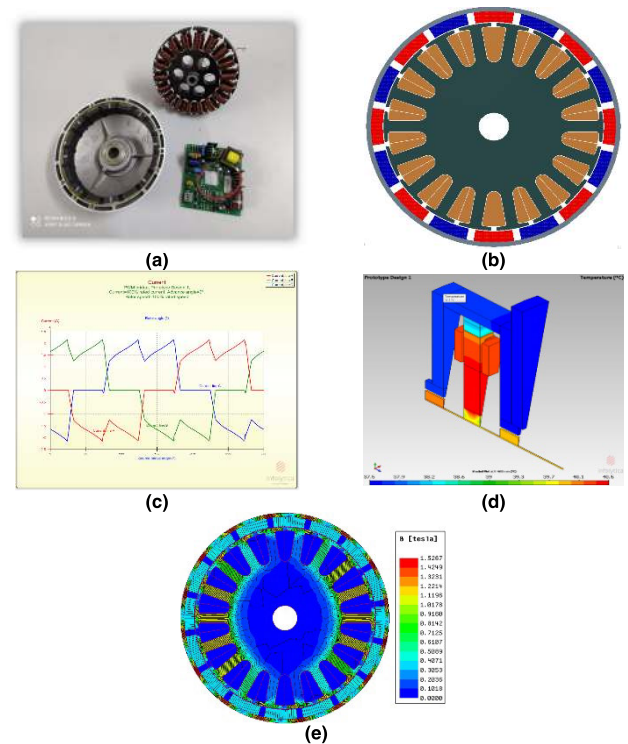

**FIGURE 32.** Versa, a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.

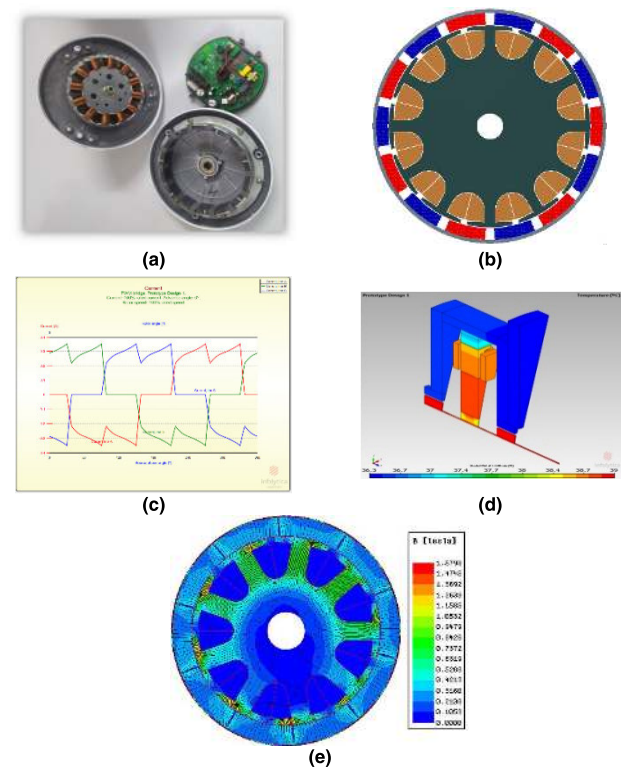



**FIGURE 33.** Surya, a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.

in [90], [91]. They are testing the fans mainly focused on three parameters: safety, performance and energy. Ten brands are chosen for this test. Fan faults can be classified as



**TABLE 5.** Designed Specifications.

Parameters	Units	Designed Values						
		Atomberg Gorilla Renessa	Atomberg Gorilla Version-2	Usha (Nidec)	Versa	Surya	Panasonic	Haiku
DC Voltage	Volts	24	24	24	24	120	120	12
Input Power	Watts	28	28	32	35	32	30	35
Rated Speed	RPM	350	350	375	385	360	380	177
Rotor OD	mm	102.88	155.2	116	152.37	147.9	115.54	175.3
Stator OD	mm	84	132.97	98.7	131.58	127.62	98.05	162.1
Rotor ID	mm	85	133.97	100.7	132.58	128.62	99.05	163.9
Stack length	mm	22.27	13.45	18.5	12.23	17.48	15.47	16.66
Magnet Thickness	mm	8.4	7.91	7	7	7.31	5.91	4.56
Magnet Length	mm	27.13	20.8	34.58	22.01	27.97	25.56	21.34

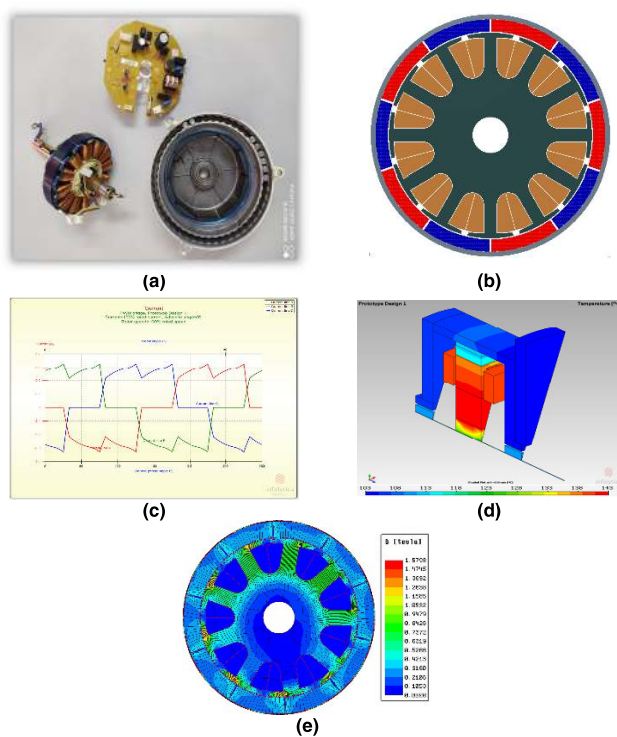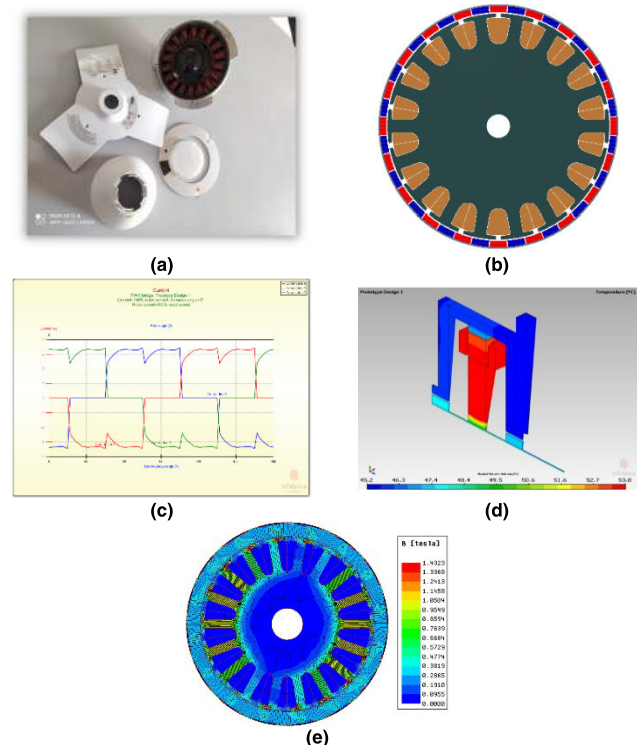**FIGURE 34.** Panasonic, a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.**FIGURE 35.** Haiku, a) Dismantled motor, b) CAD model, c) Phase currents, d) Temperature plot, e) Magnetic Flux density plot.

(i) electrical faults (winding faults) and (ii) mechanical faults (broken rotor bars, eccentricity, bearing faults). An intelligent test bench [92] based on Artificial Neural Network (ANN) with the help of online current, voltage, rpm and temperature had been developed to estimate the temperature rise.

## VI. EXISTING ENERGY EFFICIENT FANS – A CASE STUDY [93]–[98]

Seven types of energy-efficient fans as:

- 1) Atomberg Gorilla Renessa
- 2) Atomberg Gorilla Version-2
- 3) Usha (iv) Versa (v) Surya (vi) Panasonic and
- 4) (vii) Haiku are bought for this case study [93]–[98].

The bought fans are first tested and then dismantled to get the dimensions of the active parts. After acquiring the required dimensions, CAD software's are used to design the same and export it to the FEA platform. Fig. 29 to 35 show the FEA results like phase current, induced emf, temperature, magnetic flux density etc., of each fan one by one. The design specification of each type is given in Table 5, and the performance, weight, and cost comparison based on the numerical study is shown in Table 6.

### A. ATOMBERG GORILLA RENESSA

See Figure 29.



**TABLE 6.** Performance, Weight, and Cost Comparison Based on Numerical Study\*.

Parameters	Units	Atomberg Gorilla Renessa	Atomberg Gorilla Version-2	Nidec (Usha)	Versa	Surya	Panasonic	Haiku
<b>PERFORMANCE</b>								
Current	Amps	2.04	2.04	1.25	1.39	0.236	0.223	2.59
Input Power	Watts	28.1	28	31.3	35.2	32	30	35.6
Output Power	Watts	19.4	21	24.6	29.2	24.4	22.8	15.7
Efficiency	%	69	74.8	78.7	82.9	76.2	76.1	44.2
Rotor OD	mm	102.88	155.2	116	152.37	147.9	115.54	175.3
Rotor ID	mm	85	133.97	100.7	132.58	128.62	99.05	163.9
Air Gap	mm	0.5	0.5	1	0.5	0.5	0.5	0.9
No of turns Per coil		70	32	68	62	365	512	39
<b>WEIGHT</b>								
Stator Core	grams	573	1040	661	822	1140	507	1960
Rotor Core	grams	29.6	133	33.3	127	142	98.3	79.5
Stator Winding	grams	256	179	285	325	204	226	206
Magnet	grams	261	226	215	155	218	144	285
Total	kg	1.12	1.58	1.19	1.43	1.7	0.976	2.53
<b>COST</b>								
Stator	Rs.	143.25	260	165.25	205.5	285	126.75	490
Rotor	Rs.	7.4	33.25	8.325	31.75	35.5	24.575	19.875
Winding	Rs.	200.1	139.9	222.9	254	163.5	181.2	161.2
Magnet	Rs.	391.5	339	322.5	232.5	327	216	2280
Magnet Used	Type	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic	N52
Total	Rs.	742.3	772.2	719.1	723.8	811.1	548.5	2951

\*Unintentional errors may possible

## B. ATOMBERG GORILLA VERSION – 2

See Figure 30 and Table 4.

## C. USHA (NIDEC)

See Figure 31.

## D. VERSA

See Figure 32.

## E. SURYA

See Figure 33.

## F. PANASONIC

See Figure 34.

## G. HAIKU

See Figure 35.

## VII. FUTURE TECHNOLOGIES

This section explores the novel technologies in electric motors, power controllers and mechanical designs which can be adopted for the future.

1. Regarding electric motors, single-phase induction and Permanent Magnet Brushless DC Motors are widely

used in ceiling fan application. PMBLDC motors specifically are preferred for energy-efficient fans. Switched Reluctance Motors (SRM) [99], Synchronous Reluctance Motors (with or without magnets), Flux Switching Motors (FSM) (with or without Permanent Magnets), Axial flux PM motors are the potential candidates for the energy-efficient fans in expectations.

2. Motor material and structure on the magnetic field
3. Single switch converters, improved power factor correction circuits, low on-state loss power devices, sensor-less control are some of the potential innovation in energy-efficient fans.
4. Light weighting materials, improved blade designs, optimized rake angles, high-speed operations (>400 rpm) are the solutions for the future ceiling fans.
5. Motor vibration caused by magneto strictive effect of ferromagnetic materials

## VIII. CONCLUSION

Technological advancements in electric ceiling fan related to its electric motors, power controllers and mechanical designs such as blade designs CFD analysis are reviewed comprehensively. Present energy efficient ceiling fans are explored with their performances. Still, there is a scope to reduce a fan's

power consumption by at least 20% based on the innovations made in motors, controllers, and mechanical designs as highlighted in future technologies.

## ACKNOWLEDGMENT

The authors would like to thank Stone Link Design Labs, Chennai, for procuring the fans; the School of Electrical Engineering, VIT University, Chennai, India; and the Department of Energy Technology, Aalborg University, Esbjerg, Denmark.

## REFERENCES

- [1] *History of the Electric Fan*, Sharon Debartolo Carmack. Accessed: Apr. 26, 2020. [Online]. Available: <https://www.familytreemagazine.com/premium/cooling-trends/>
- [2] *History of Ceiling Fans*. Accessed: Apr. 26, 2020. [Online]. Available: <https://superfan.in/>
- [3] A. Chuneekar and D. Singh, "A guidebook on super-efficient equipment program (SEEP)," Prayas, Energy Group, Pune, India, Tech. Rep. 1, Dec. 2013.
- [4] F. P. Bleier, *Fan Handbook: Selection, Application, and Design*. New York, NY, USA: McGraw-Hill, 1997.
- [5] K. Schmidt and D. J. Patterson, "Performance results for a high efficiency tropical ceiling fan and comparisons with conventional fans: Demand side management via small appliance efficiency," *Renew. Energy*, vol. 22, pp. 169–176, Jan./Mar. 2001.
- [6] K. R. Rajagopal and C. Sathiaiah, "Computer aided design and FE analysis of a PM BLDC hub motor," in *Proc. Int. Conf. Power Electron., Drives Energy Syst.*, New Delhi, India, Dec. 2006, pp. 1–6, doi: [10.1109/PEDES.2006.344367](https://doi.org/10.1109/PEDES.2006.344367).
- [7] T. K. Dutta, "Design evaluation of air gap in a ceiling fan—A simulation case study," *Qual. Eng.*, vol. 18, no. 3, pp. 345–350, 2006, doi: [10.1080/08982110600719449](https://doi.org/10.1080/08982110600719449).
- [8] M. Lubliner, J. Douglass, D. Parker, and D. Chasar, "Performance and applications of Gossamer Wind solar powered ceiling fans," Washington State Univ. Extension Energy Program Florida Sol. Energy Center (FSEC), Tech. Rep. FSEC-PF-411-04, 2002.
- [9] C.-S. Liu, J.-C. Hwang, L.-R. Chen, and C.-C. Fu, "Development of new structure of brushless DC servo motor for ceiling fan," *Proc. 4th IEEE Conf. Ind. Electron. Appl.*, Xi'an, China, May 2009, pp. 2640–2643, doi: [10.1109/ICIEA.2009.5138686](https://doi.org/10.1109/ICIEA.2009.5138686).
- [10] C.-S. Liu and J.-C. Hwang, "Development of brushless DC motor with low cogging torque for ceiling fan," in *Proc. Int. Conf. Power Electron. Drive Syst. (PEDS)*, Taipei, Taiwan, Nov. 2009, pp. 778–782, doi: [10.1109/PEDS.2009.5385923](https://doi.org/10.1109/PEDS.2009.5385923).
- [11] C.-S. Liu, Jonq-Ch, and P.-C. Chen, "Permanent magnet synchronous motor for ceiling fan," in *Proc. IEEE Int. Conf. Sustain. Energy Technol. (ICSET)*, Kandy, Sri Lanka, Dec. 2010, pp. 6–9, doi: [10.1109/ICSET.2010.5684444](https://doi.org/10.1109/ICSET.2010.5684444).
- [12] M. Fazil and K. R. Rajagopal, "Development of external rotor single-phase PM BLDC motor based drive for ceiling fan," in *Proc. Joint Int. Conf. Power Electron., Drives Energy Syst. Power India*, New Delhi, India, Dec. 2010, pp. 20–23, doi: [10.1109/PEDES.2010.5712573](https://doi.org/10.1109/PEDES.2010.5712573).
- [13] N. Shah, N. Sathaye, A. Phadke, and V. Letschert, "Costs and benefits of energy efficiency improvement in ceiling fans," Dept. Article Energy Anal., Environ. Energy Technol. Division, Lawrence Berkeley Nat. Lab., Berkeley, CA, USA, Tech. Rep. 1, 2013.
- [14] N. F. Zulkarnain, T. Ibrahim, and H. Z. Hashim, "Design and modelling of electrical machine for ceiling fan system," *ARNP J. Eng. Appl. Sci.*, vol. 10, no. 21, pp. 10174–10183, Nov. 2015.
- [15] N. F. Zulkarnain, T. Ibrahim, and M. F. Romlie, "Design and optimization of permanent magnet machine for ceiling fan," in *Proc. 6th Int. Conf. Intell. Adv. Syst. (ICIAS)*, Kuala Lumpur, Malaysia, Aug. 2016, pp. 15–17, doi: [10.1109/ICIAS.2016.7824106](https://doi.org/10.1109/ICIAS.2016.7824106).
- [16] A. Saxena, "Performance and cost comparison of PM BLDC motors for ceiling fan," in *Proc. IEEE Int. Conf. Power Electron., Drives Energy Syst. (PEDES)*, Mumbai, India, Dec. 2014, pp. 16–19, doi: [10.1109/PEDES.2014.7042082](https://doi.org/10.1109/PEDES.2014.7042082).
- [17] A. Saxena and B. G. Fernandes, "Noise and cogging torque reduction in brushless DC ceiling fan," in *Proc. 18th Int. Conf. Elect. Mach. Syst. (ICEMS)*, Pattaya City, Thailand, Oct. 2015, pp. 1334–1338, doi: [10.1109/ICEMS.2015.7385246](https://doi.org/10.1109/ICEMS.2015.7385246).
- [18] M. S. Gadkari, K. Kolte, M. Jasani, A. Vichare, and S. Beatrice, "Generation of electricity from fans," *Int. J. Comput. Sci. Inf. Technol.*, vol. 5, no. 3, pp. 3294–3297, 2014.
- [19] V. Pattanashetti, A. L. Noronha, and P. D. Hulaji, "Utilization of mechanical energy from rotation of ceiling fan to generate electricity (mini generator using conventional machine)," *Int. J. Sci., Technol. Manage.*, vol. 4, no. 1, pp. 233–242, Mar. 2015.
- [20] A. N. Deshmukh, "Electricity generative fan," *Int. Res. J. Eng. Technol.*, vol. 3 no. 5, pp. 2958–2961, May 2016.
- [21] N. Kumar, "Generation of electricity with the blades of ceiling fan," *Int. J. Eng. Sci. Comput.*, vol. 7, no. 6, pp. 12651–12654, Jun. 2017.
- [22] N. Datta, A. Mailk, S. Sarkar, and D. Punetha, "Generation of light energy by utilization of electrical energy without consumption of electrical energy through harness of wind energy generated by ceiling fans," in *Proc. 3rd Int. Conf. Adv. Comput., Commun. Autom. (ICACCA) (Fall)*, Dehradun, India, Sep. 2017, pp. 15–16, doi: [10.1109/ICACCA-Fall.2017.8344672](https://doi.org/10.1109/ICACCA-Fall.2017.8344672).
- [23] D. H. Pachchinarav, M. I. Khatib, M. A. Feroz, and F. Hussain, "Design of an inverter using ceiling fan," *Int. J. Emerg. Technol. Eng. Res.*, vol. 6, no. 4, pp. 138–141, Apr. 2018.
- [24] N. R. Bhasme and M. P. Durge, "Comparative study of electrical motors for ceiling fan application," *Int. J. Electr. Eng. Technol.*, vol. 6, no. 5, pp. 8–13, May 2015.
- [25] D. Ishak, T. L. Tiang, and S. K. Choy, "Performance evaluation of permanent split-capacitor single-phase induction motor for ceiling fan application," in *Proc. 18th Int. Conf. Electr. Mach. Syst. (ICEMS)*, Pattaya City, Thailand, Oct. 2015, pp. 1865–1870, doi: [10.1109/ICEMS.2015.7385344](https://doi.org/10.1109/ICEMS.2015.7385344).
- [26] N. Abdullah, R. N. Firdaus, S. Farina, M. Z. Aishah, F. Azhar, and K. A. Karim, "Design of double stator slotted rotor for large ceiling fan application," in *Proc. 5th IET Int. Conf. Clean Energy Technol. (CEAT)*, Kuala Lumpur, Malaysia, 2018, pp. 5–6, doi: [10.1049/cp.2018.1359](https://doi.org/10.1049/cp.2018.1359).
- [27] R. Aynsley, "Fan size and energy efficiency," *Int. J. Ventilation*, vol. 1, no. 1, pp. 33–38, 2002.
- [28] R. N. F. K. R. Othman, N. Abdullah, A. Ahamat, N. A. M. Zuki, F. A. A. Shukor, and K. A. Karim, "Assessing monstrous fan in Malaysia: Present and future," *J. Open Innov., Technol., Market, Complex.*, vol. 5, no. 1, p. 14, 2019, doi: [10.3390/joitmc5010014](https://doi.org/10.3390/joitmc5010014).
- [29] T. Izhar, M. Ali, and A. Idrees, "Energy efficient five phase BLDC ceiling fan," in *Proc. 2nd Int. Conf. Energy Conservation Efficiency (ICECE)*, Lahore, Pakistan, Oct. 2018, pp. 61–65, doi: [10.1109/ECE.2018.8554979](https://doi.org/10.1109/ECE.2018.8554979).
- [30] A. Hota, M. Qasim, J. L. Kirtley, and V. Agarwal, "A novel three-phase induction motor drive for domestic fan application with improved reliability," in *Proc. IEEE Int. Conf. Power Electron., Drives Energy Syst. (PEDES)*, Chennai, India, Dec. 2018, pp. 18–21, doi: [10.1109/PEDES.2018.8707651](https://doi.org/10.1109/PEDES.2018.8707651).
- [31] U. Sharma and B. Singh, "An approach to design of energy efficient single phase induction motor for ceiling fans," in *Proc. IEEE Int. Electr. Mach. Drives Conf. (IEMDC)*, San Diego, CA, USA, May 2019, pp. 12–15, doi: [10.1109/IEMDC.2019.8785233](https://doi.org/10.1109/IEMDC.2019.8785233).
- [32] Y. Momoi, K. Sagara, T. Yamanaka, and H. Kotani, "Modeling of ceiling fan based on velocity measurement for CFD simulation of airflow in large room," *J. Environ. Eng., Trans. AIJ*, vol. 595, no. 1, Jan. 2004, doi: [10.3130/aije.70.41\\_3](https://doi.org/10.3130/aije.70.41_3).
- [33] A. Jain, R. R. Upadhyay, S. Chandra, M. Saini, and S. Kale, "Experimental investigation of the flow field of a ceiling fan," in *Proc. HT-FED ASME Heat Transf./Fluids Eng.*, Charlotte, NC, USA, Jul. 2004, pp. 1–7.
- [34] H.-C. Chiang, C.-S. Pan, H.-S. Wu, and B.-C. Yang, "Measurement of flow characteristics of a ceiling fan with varying rotational speed," in *Proc. Clima Well Being Indoors*, 2007, pp. 1–8.
- [35] S. H. Ho, L. Rosario, and M. M. Rahman, "Thermal comfort enhancement by using a ceiling fan," *Appl. Thermal Eng.*, vol. 29, nos. 8–9, pp. 1648–1656, Jun. 2009.
- [36] R. Bassiouny and N. S. Korah, "Studying the features of air flow induced by a room ceiling-fan," *Energy Buildings*, vol. 43, no. 8, pp. 1913–1918, Aug. 2011.
- [37] T. Feng, J. Wang, B. Liu, N. Li, and X. Wu, "Computational simulation of rotating noise of fan," in *Proc. IEEE 3rd Int. Conf. Commun. Softw. Netw.*, Xi'an, China, May 2011, pp. 27–29, doi: [10.1109/ICCSN.2011.6014371](https://doi.org/10.1109/ICCSN.2011.6014371).
- [38] S. Zhu, J. Srebric, S. N. Rudnick, R. L. Vincent, and E. A. Nardell, "Numerical modeling of indoor environment with a ceiling fan and an upper-room ultraviolet germicidal irradiation system," *Building Environ.*, vol. 72, pp. 116–124, Feb. 2014, doi: [10.1016/j.buildenv.2013.10.019](https://doi.org/10.1016/j.buildenv.2013.10.019).

- [39] S. K. Verma, Y. Anand, and S. Anand, "CFD based modelling of a ceiling fan in a room," *Int. J. Sci. Tech. Advancements*, vol. 4, no. 2, pp. 219–224, Feb. 2018.
- [40] D. Casseer and C. Ranasinghe, "Assessment of spallart almaras turbulence model for numerical evaluation of ceiling fan performance," in *Proc. Moratuwa Eng. Res. Conf. (MERCon)*, Moratuwa, Sri Lanka, Jul. 2019, pp. 577–582, doi: [10.1109/MERCon.2019.8818888](https://doi.org/10.1109/MERCon.2019.8818888).
- [41] F. Babich, M. Cook, D. Loveday, R. Rawal, and Y. Shukla, "Transient three-dimensional CFD modelling of ceiling fans," *Building Environ.*, vol. 123, pp. 37–49, Oct. 2017.
- [42] F. H. Rohles, Jr., S. A. Konz, and B. W. Jones, "Enhancing thermal comfort with ceiling fans," in *Proc. Hum. Factors Soc. Annu. Meeting*, vol. 26, no. 2, Los Angeles, CA, USA: SAGE, Oct. 1982, pp. 118–120.
- [43] Y. Anand, S. K. Verma, and S. Anand, "Transient 3-D modelling of ceiling fan for achieving thermal comfort," in *Proc. Building Perform. Anal. Conf.*, Chicago, IL, USA, Sep. 2018, pp. 197–204.
- [44] S. N. Tapase, G. N. Tale, A. S. Patki, A. D. Tambi, and N. R. Warade, "CFD simulation of modified ceiling fan," *IOSR J. Eng.*, vol. 1, pp. 13–17, Jun. 2019.
- [45] H.-H. Lin, "Improvement of human thermal comfort by optimizing the airflow induced by a ceiling fan," *Sustainability*, vol. 11, no. 12, p. 3370, Jun. 2019.
- [46] X. Cun-Xi, W. Ji-Yuan, Z. Shi-Xiong, and L. Qi-Yi, "Design of robotic automatic assembly line used for ceiling fan motor," in *Proc. IEEE Int. Conf. Robot. Autom. (ICIT)*, San Diego, CA, USA, May 1994, pp. 2279–2284, doi: [10.1109/ROBOT.1994.350946](https://doi.org/10.1109/ROBOT.1994.350946).
- [47] W. Jie, Y. Ping, and Z. Guang-Lin, "Computer monitoring and control system of robotic assembly line for ceiling fan motor," in *Proc. IEEE Int. Conf. Ind. Technol. (ICIT)*, Guangzhou, China, Dec. 1994, pp. 302–306, doi: [10.1109/ICIT.1994.467108](https://doi.org/10.1109/ICIT.1994.467108).
- [48] J. L. V. Mora, A. Lelkes, and J. M. Pacas, "External rotor PM motor fed by a load commutated inverter for fan applications," in *Proc. IEEE 28th Annu. Conf. Ind. Electron. Soc. (IECON)*, Nov. 2002, pp. 5–8, doi: [10.1109/IECON.2002.1187604](https://doi.org/10.1109/IECON.2002.1187604).
- [49] A. Lelkes and M. Bufe, "BLDC motor for fan application with automatically optimized commutation angle," in *Proc. IEEE 35th Annu. Power Electron. Spec. Conf.*, Aachen, Germany, Jun. 2004, pp. 2277–2281.
- [50] M. Rao, "Energy efficient Ceiling fans using BLDC motors-a practical implementation," in *Proc. Int. Conf. Adv. Comput., Electron. Electr. Eng.*, 2012, pp. 59–63.
- [51] M. Rajne, "Designing an energy-efficient BLDC ceiling fan solution," Texas Instrum., Dallas, TX, USA, Apr. 2015.
- [52] P. C. Sahid, P. M. S. Irshad, P. M. Vishnu, and P. A. Thomas, "Energy efficient ceiling fan using BLDC motor," *Int. J. Eng. Res.*, vol. 4, no. 4, pp. 460–464, Apr. 2015.
- [53] D. Anil Marvaniya, "Energy conservation in ceiling fan using BLDC motor," *Int. J. Advances Eng. Res. Develop.*, vol. 4, no. 7, pp. 197–199, Jul. 2017.
- [54] S. Manglik, S. Sundeep, and B. Singh, "Brushless DC motor based ceiling fan using buck-boost converter," in *Proc. IEEE 7th Power India Int. Conf. (PIICON)*, Bikaner, India, Nov. 2016, pp. 25–27, doi: [10.1109/POWERI.2016.8077409](https://doi.org/10.1109/POWERI.2016.8077409).
- [55] P. S. Chaudhari, S. L. Patil, S. K. Pandey, and S. Sinha, "Performance analysis of BLDC motor on sinusoidal and square wave supply," in *Proc. IEEE Int. Conf. Power Electron., Drives Energy Syst. (PEDES)*, Trivandrum, India, Dec. 2016, pp. 14–17, doi: [10.1109/PEDES.2016.7914354](https://doi.org/10.1109/PEDES.2016.7914354).
- [56] R. Mishra and E. A. Elisabeth, "Speed control of ceiling fan using PWM technique," in *Proc. Int. Conf. Comput. Power, Energy Inf. Communication (ICCPEIC)*, Melmaruvathur, India, Mar. 2017, pp. 686–690, doi: [10.1109/ICCPEIC.2017.8290449](https://doi.org/10.1109/ICCPEIC.2017.8290449).
- [57] L. A. Sunday, C.-F. U. Benedette, A. Omokhagbo, I. E. Oluotimi, A. Musa, and A. Umar, "Technical overview of a microcontroller based room temperature fan speed regulator," *Amer. J. Eng. Res. (AJER)*, vol. 7, no. 7, pp. 164–171, 2018.
- [58] M. A. A. Mashud, D. Yasmin, M. A. Razzaque, and M. H. Uddin, "Automatic room temperature controlled fan speed controller using PT-100," *Int. J. Sci. Eng. Res.*, vol. 6, no. 8, pp. 1780–1783, Aug. 2015.
- [59] Z. I. Rizman, K. H. Yeap, N. Ismail, N. Mohamad, and N. H. R. Husin, "Design an automatic temperature control system for smart electric fan using PIC," *Int. J. Sci. Res.*, vol. 2, no. 9, pp. 1–4, 2013.
- [60] Y.-S. Kung, H. Than, Y.-D. Lin, and L.-C. Huang, "FPGA-based speed controller design for a ceiling fan motor," in *Proc. IEEE 3rd Int. Future Energy Electron. Conf. ECCE Asia (IFEEC-ECCE Asia)*, Kaohsiung, Taiwan, Jun. 2017, pp. 3–7, doi: [10.1109/IFEEC.2017.7992413](https://doi.org/10.1109/IFEEC.2017.7992413).
- [61] M. Ektesabi, A. Saman Gorji, A. Moradi, S. Yammen, V. K. Mahesh Reddy, and S. Tang, "IOT-based home appliance system (SMART FAN)," in *Proc. AIAA, WiMNet, DPPR*, 2018, pp. 37–46.
- [62] N. Jayasree, J. M. Jacob, M. I. Easa, and A. Joy, "IOT based energy efficient ceiling fan with BLDC motor for home automation," *Int. Res. J. Eng. Technol. (IRJET)*, vol. 6, no. 5, pp. 7816–7823, May 2019.
- [63] M. Rahman, M. F. Radzi, B. Zakaria, and S. N. Sidek, "Sensory and control system for smart fan," *Int. J. Control, Automat. Syst.*, vol. 4, no. 3, pp. 454–459, Jul. 2015.
- [64] P.-H. Wang and J.-Y. Lin, "Using smart controlled AC and ceiling fan to save energy," *Simul., Predict. Eval.*, vol. 2, pp. 21–28, Mar. 2013.
- [65] D. Karthikeyan, K. Vijayakumar, T. Saptarshi, M. Kheria, and S. Kumari, "Implementation of improved BLDC based ceiling fan control using zeta converter with fuzzy controller," *Int. J. Recent Technol. Eng.*, vol. 8, nos. 1–4, pp. 551–559, Jun. 2019.
- [66] J. Sonne and D. Parker, "Measured ceiling fan performance and usage patterns: Implications for efficiency and comfort improvement," in *Proc. ACEEE Summer Study Energy Efficiency Buildings: Energy Efficiency Competitive Environ.*, Pacific Grove, CA, USA, vol. 1, 1998, pp. 335–341.
- [67] D. S. Parker, M. P. Callahan, J. K. Sonne, G. H. Su, and B. D. Hibbs, "Development of a high efficiency ceiling fan," *Proc. 12th Symp. Improving Building Syst. Hot Humid Climates*, San Antonio, TX, USA, May 2000, pp. 270–277.
- [68] D. S. Parker, M. P. Callahan, J. K. Sonne, and G. H. Su, "Development of a high efficiency ceiling fan," The Gossamer Wind Florida Solar Energy Center (FSEC) and AeroVironment, Cocoa, FL, USA, Tech. Rep. FSEC-CR-1059-99, Jan. 1999. [Online]. Available: <http://www.fsec.ucf.edu/en/publications/html/FSEC-CR-1059-99/>
- [69] A. Chakraborty, P. Saha, A. Acharjee, and K. K. Sasi, "Energy conservation in ceiling fans," in *Proc. 13th Nat. Power Syst. Conf.*, Madras, India, Dec. 2004, pp. 835–838.
- [70] A. Eliasson and M. Westman, "Redesign of ceiling fan adapted to the scandinavian market," M.S. thesis, Dept. Ind. Des., Halmstad Univ., Halmstad, Sweden, 2007.
- [71] M. A. Afaq, A. Maqsood, K. Parvez, and A. Mushtaq, "Study on the design improvement of an indoor ceiling fan," in *Proc. 11th Int. Bhurban Conf. Appl. Sci. Technol. (IBCAST)*, Islamabad, Pakistan, Jan. 2014, pp. 279–283.
- [72] S. R. Shinde, M. R. Phate, and R. V. Bhortake, "Numerical investigation of ceiling fan noise by using response surface method," *Int. J. Innov. Sci., Eng. Technol.*, vol. 1, no. 3, pp. 224–231, May 2014.
- [73] U. Idahosa, V. V. Golubev, and V. O. Balabanov, "An automated optimal design of a fan blade using an integrated CFD/MDO computer environment," *Eng. Appl. Comput. Fluid Mech.*, vol. 2, no. 2, pp. 141–154, Jan. 2008, doi: [10.1080/19942060.2008.11015217](https://doi.org/10.1080/19942060.2008.11015217).
- [74] V. R. Bhortake, S. Gulavani, D. Satpute, A. Landge, and V. Sankpal, "Experimental analysis of power consumption in ceiling fan," *Int. J. Res. Mech. Eng. Technol.*, vol. 4, no. 2, pp. 43–47, May/Oct. 2014.
- [75] S. R. Shinde, R. M. Phate, and V. R. Bhortake, "Numerical investigation of ceiling fan vibration by using response surface method," *Int. J. Sci., Eng. Technol. Res.*, vol. 3, no. 7, pp. 1915–1927, Jul. 2014.
- [76] R. Bhortake and V. Bhortake, "Experimental analysis of energy consumption in ceiling fan," in *Proc. Int. Conf. Ind. Eng. Oper. Manage.*, Detroit, MI, USA, Sep. 2016, pp. 377–385.
- [77] E. Adeeb, A. Maqsood, A. Mushtaq, and Z. Hussain, "Shape optimization of non-linear swept ceiling fan blades through RANS simulations and response surface methods," in *Proc. 12th Int. Bhurban Conf. Appl. Sci. Technol. (IBCAST)*, Jan. 2015, pp. 385–390.
- [78] E. Adeeb, A. Maqsood, A. Mushtaq, and C. H. Sohn, "Parametric study and optimization of ceiling fan blades for improved aerodynamic performance," *J. Appl. Fluid Mech.*, vol. 9, no. 6, pp. 2905–2916, Nov. 2016.
- [79] P. Shinde and S. P. Dr Joshi, "Review on shape optimization of ceiling fan blade geometry for static as well as vibration loading," *J. Emerg. Technol. Innov. Res.*, vol. 6, no. 3, pp. 299–306, Mar. 2019.
- [80] N. Shah, N. Sathaye, A. Phadke, and V. Letschert, "Efficiency improvement opportunities for ceiling fans," *Energy Efficiency*, vol. 8, no. 1, pp. 37–50, Feb. 2015.



- [81] E. Adeeb, A. Maqsood, and A. Mushtaq, "Effect of number of blades on performance of ceiling fans," in *MATEC Web Conferences*, vol. 28, 2015, Art. no. 02002.
- [82] D. S. Parker, "Design and analysis of ceiling fan with cooling blades," Ph.D. dissertation, Florida Solar Energy Center, Cocoa, FL, USA, 2016.
- [83] M. P. Swaroop, R. T. Paul, V. Menon, V. Balachandran, M. Arjun, and R. C. R. Melvin, "Optimization of fan blade angle," *Int. J. Eng. Res. Appl.*, vol. 7, no. 1, pp. 69–71, Jan. 2017.
- [84] C. B. John, M. S. Aravind, P. Arif, E. Arjun, A. Johnson, and A. Radhakrishnan, "Custom angle ceiling fan," *Int. J. Eng. Res. Appl.*, vol. 7, no. 3, pp. 22–25, Mar. 2017.
- [85] I. Singh, "Consumer behaviour towards electric fans," *Int. J. Marketing Financial Manage.*, vol. 5, no. 4, pp. 42–53, Apr. 2017.
- [86] H. Prajapati, N. Prajapati, J. Vyas, U. Joshi, and K. P. M. Parmar, "A technical research—multi axes ceiling fan," *Global Res. Develop. J. Eng.*, vol. 2, no. 6, pp. 300–303, May 2017.
- [87] A. Patel, D. Shah, K. Patel, and J. Shah, "Design and fabrication of omni multi axis ceiling fan," *Int. J. Advance Res. Innov. Ideas Educ.*, vol. 4, no. 2, pp. 185–189, 2018.
- [88] E. Hughes and W. G. White, "Testing of ceiling fans," *J. Electr. Rev.*, vol. 96, no. 86, pp. 367–372, 1924.
- [89] R. O. Kapp, "Discussion on 'testing of ceiling fans,'" Tech. Rep.
- [90] "Ceiling fans: Revolving faster, comparative test, consumer voice," Consumer Voice, India, Tech. Rep. 1, Jan. 2012, pp. 15–19. [Online]. Available: <http://www.youtube.com/VOICEConsumer>, <http://www.facebook.com/ConsumerVoiceIndia>, and <http://www.linkedin.com/pub/consumer-voice/33/a85/849>
- [91] *Consumer Voice*, 2019.
- [92] D. K. Chaturvedi and D. Singh, "Development of intelligent test bench for ceiling fan," in *Proc. 5th Int. Conf. Comput. Intell. Commun. Netw.*, Mathura, India, Agra, India: Dept. of Electrical Engineering, D.E.I., Sep. 2013, pp. 574–579, doi: [10.1109/CICN.2013.125](https://doi.org/10.1109/CICN.2013.125).
- [93] N. Bianchi, *Electrical Machine Analysis Using Finite Elements*. Boca Raton, FL, USA: CRC Press, 2017.
- [94] *Atomberg Technologies Pvt. Ltd.* Accessed: Sep. 11, 2020. [Online]. Available: <https://atomberg.com/>
- [95] *Usha Fans*. Accessed: Sep. 11, 2020. [Online]. Available: <https://www.ushafans.com/>
- [96] *SuperFan*. Accessed: Sep. 11, 2020. [Online]. Available: <https://superfan.in/>
- [97] *Surya Fans*. Accessed: Sep. 11, 2020. [Online]. Available: <http://www.surya.co.in/fans>
- [98] *Panasonic*. Accessed: Sep. 11, 2020. [Online]. Available: <https://in.panasonic.com/panasonic-ceiling-fan>
- [99] *Haiku*. Accessed: Sep. 11, 2020. [Online]. Available: <https://www.bigassfans.com/fans/haiku/>
- [100] N. C. Lenin, "Low cost stator, rotor, and hub structures for energy efficient fans," U.S. Patent 41 007 806, Mar. 8, 2019.



**N. C. LENIN** (Senior Member, IEEE) received the Ph.D. degree from Anna University, Chennai, in 2012. He is involved in various consultancy and funded projects with Lucas TVS Pvt., Ltd.; IFB, Bengaluru, India; NFTDC, Hyderabad, India; CVRDE-DRDO, India; ARCI-Hyderabad; and DST, India; for developing high-performance electric motor drives. He is having 18 years of teaching experience. He is currently working as a Professor and the Deputy Director of the Electric Vehicles—Incubation, Testing and Research Centre, Vellore Institute of Technology at Chennai, Chennai, India. He has published more than 50 international journals and international conferences. He has four patents. His research interests include finite element analysis, advanced electromagnetics, design of low cost, and high-performance electrical machines and its controller for automotive and domestic applications. He serves as an Editor and an Associate Editor for *The Global Electrical Engineers* and *International Journal of Electrical and Computer Engineering*, respectively. He is an Editorial Member of *Majlesi Journal of Energy Management*.



**SANJEEVIKUMAR PADMANABAN** (Senior Member, IEEE) received the Ph.D. degree in electrical engineering from the University of Bologna, Bologna, Italy, in 2012.

He was an Associate Professor at VIT University from 2012 to 2013. In 2013, he joined the National Institute of Technology, India, as a Faculty Member. In 2014, he was invited as a Visiting Researcher at the Department of Electrical Engineering, Qatar University, Doha, Qatar, funded by the Qatar National Research Foundation (Government of Qatar). He continued his research activities with the Dublin Institute of Technology, Dublin, Ireland, in 2014. Further, he served as an Associate Professor with the Department of Electrical and Electronics Engineering, University of Johannesburg, Johannesburg, South Africa, from 2016 to 2018. From March 2018 to February 2021, he has been a Faculty Member with the Department of Energy Technology, Aalborg University, Esbjerg, Denmark. Since March 2021, he has been as Professor with the CTIF Global Capsule (CGC), Department of Business Development and Technology, Aarhus University, Herning, Denmark. He has authored over 300 scientific articles and was the recipient of the Best Paper Cum Most Excellence Research Paper Award from IET-SEISCON'13, IET-CEAT'16, IEEE-EECSI'19, IEEE-CENCON'19, and Five Best Paper Awards from ETAERE'16 sponsored Lecture Notes in Electrical Engineering, Springer book. He is a Fellow of the Institution of Engineers, India, the Institution of Electronics and Telecommunication Engineers, India, and the Institution of Engineering and Technology, U.K. He is an Editor/Associate Editor/Editorial Board for refereed journals, in particular the IEEE SYSTEMS JOURNAL, IEEE TRANSACTIONS ON INDUSTRY APPLICATIONS, IEEE ACCESS, *IET Power Electronics*, *IET Electronics Letters*, and *International Transactions on Electrical Energy Systems* (Wiley); a Subject Editorial Board Member—*Energy Source—Energies Journal*, MDPI; and the Subject Editor for the *IET Renewable Power Generation*, *IET Generation, Transmission and Distribution*, and *FACTS* journal (Canada).



**MAHAJAN SAGAR BHASKAR** (Senior Member, IEEE) received the bachelor's degree in electronics and telecommunication engineering from the University of Mumbai, Mumbai, India, in 2011, the master's degree in power electronics and drives from the Vellore Institute of Technology, VIT University, India, in 2014, and the Ph.D. degree in electrical and electronic engineering from the University of Johannesburg, South Africa, in 2019. He is currently with the Renewable Energy Laboratory, Department of Communications and Networks Engineering, College of Engineering, Prince Sultan University, Riyadh, Saudi Arabia. He has authored more than 100 scientific articles. He has published scientific articles in power electronics, with particular reference to XY converter family, multilevel dc/dc and dc/ac converter, and high-gain converter. He is a Senior Member of IEEE Industrial Electronics, Power Electronics, Industrial Application, and Power and Energy, Robotics and Automation, Vehicular Technology Societies, Young Professionals, various IEEE Councils, and Technical Communities. He is a Reviewer Member of various international journals and conferences, including IEEE and IET. He received the IEEE ACCESS Award "Reviewer of Month" in January 2019 for his valuable and thorough feedback on manuscripts, and for his quick turnaround on reviews. He has received the Best Paper Research Paper Awards from IEEE-CENCON 2019, IEEE-ICPCPT 2014, IET-CEAT 2016, and ETAERE 2016 sponsored Lecture note in Electrical Engineering, Springer book series.





**MASSIMO MITOLO** (Fellow, IEEE) received the Ph.D. degree in electrical engineering from the University of Napoli Federico II, Italy, in 1990. He is currently a Full Professor of electrical engineering with the Irvine Valley College, Irvine, CA, USA, and a Senior Consultant in electric power engineering with Engineering Systems Inc., ESI. He has authored more than 118 journal articles and the books *Electrical Safety of Low-Voltage Systems* (McGraw-Hill, 2009) and the *Laboratory Manual for Introduction to Electronics: A Basic Approach* (Pearson, 2013). His research interests include the analysis and grounding of power systems and electrical safety engineering. He is active within the Industrial and Commercial Power Systems Department of the IEEE Industry Applications Society (IAS) in many committees and working groups. He was a recipient of many recognitions and best paper awards, including the IEEE-I&CPS Ralph H. Lee Department Prize Paper Award, the IEEE-I&CPS 2015 Department Achievement Award, and the IEEE Region 6 Outstanding Engineer Award. He is also the Deputy Editor-in-Chief of the IEEE TRANSACTIONS ON INDUSTRY APPLICATIONS. He also serves as an Associate Editor for the IEEE TRANSACTIONS ON IAS. He is a registered Professional Engineer in the state of California and in Italy.



**EKLAS HOSSAIN** (Senior Member, IEEE) received the B.S. degree in electrical and electronic engineering from the Khulna University of Engineering and Technology, Bangladesh, in 2006, the M.S. degree in mechatronics and robotics from the International Islamic University of Malaysia, Malaysia, in 2010, and the Ph.D. degree from the College of Engineering and Applied Science, University of Wisconsin Milwaukee (UWM). He has been working in distributed power systems and renewable energy integration for last ten years and he has published several research papers and posters in this field. He is now involved with several research projects on renewable energy and grid tied microgrid system at Oregon Tech, as an Assistant Professor with the Department of Electrical Engineering and Renewable Energy since 2015. His research interests include modeling, analysis, design, and control of power electronic devices; energy storage systems; renewable energy sources; integration of distributed generation systems; microgrid and smart grid applications; robotics, and advanced control system. He has been serving as an Associate Editor for IEEE ACCESS. He is also a registered Professional Engineer (PE) in the state of Oregon, USA. He and his dedicated research team, is looking forward to explore methods to make the electric power systems more sustainable, cost-effective and secure through extensive research and analysis on energy storage, microgrid systems, and renewable energy sources.

...