

Compilation of a new bathymetric dataset of South Georgia

P.T. FRETWELL*, A.J. TATE, T.J. DEEN and M. BELCHIER

British Antarctic Survey, NERC, High Cross, Madingley Road, Cambridge CB3 0ET, UK

**ptf@bas.ac.uk*

Abstract: We introduce a new bathymetric compilation of the area around South Georgia in the Southern Ocean. Using a variety of data sources including multi and single-beam swath bathymetry we have constructed a gridded bathymetric dataset of the shelf and near-shelf sea-floor areas. The grid has been constructed using a layered hierarchy dependent upon accuracy of each dataset. The spikes and errors have been checked both manually and with a novel semi-automated process. We discuss the resulting bathymetry and the potential uses of the new dataset.

Received 5 June 2008, accepted 17 October 2008

Key words: grid, oceanography, Scotia Sea, Southern Ocean

Introduction

The island of South Georgia lies to the south of the Polar Front in the South Atlantic Ocean. The island is narrow, *c.* 190 km long but never more than 35 km wide, characterized by steep mountainous terrain rising to 2934 m. Offshore a wide continental shelf extends 30–100 km from the coast. The island constitutes part of the Scotia Ridge, a mainly submarine arc that divides the Scotia Sea Plate from the American Plate. This ridge continues to the north-west of South Georgia to another block of continental shelf around the small islands of Shag and Black rocks some 240 km away. Beyond the continental shelf the continental slope drops to the abyssal plain, which has a maximum depth in this region of 4750 m. The island lies in the eastward flowing Antarctic Circumpolar Current (ACC), with the southern edge of the continental shelf bounding the Southern Antarctic Circumpolar Current Front. The main flow of the ACC is deflected sharply northwards by the continental shelf west of Shag Rocks, although some of the flow is directed through the channel between Shag Rocks and South Georgia.

A requirement for high-resolution bathymetric data in the area has been identified across a range of scientific disciplines. These include the development of high resolution oceanographic models for the South Georgia region, assessing the extent of Quaternary ice (Graham *et al.* 2008), and investigations of the structural geology of the island. Detailed bathymetric information of South Georgia is also required to assist with the identification of seabed habitats that are threatened by fishing, and for marine habitat identification and fisheries management. Previous estimates of seabed depths have been conducted from nautical charts (Everson & Campbell 1991), which for many areas of the South Georgia maritime region are known to be unreliable as they rely on limited soundings data.

Although bathymetric data have been collected in the area for many years, no high-resolution grid of the whole area has previously been compiled.

Previous gridded datasets of the area have been at resolutions too low to be useful in an area as small as South Georgia. The General Bathymetric Chart of the Oceans (IOC *et al.* 2003) has, until now, been the best publicly available dataset of the whole region. GEBCO is a global dataset, so is necessarily generalized; it is sampled at one minute of arc (1.35 km by 2.2 km at this latitude). It shows little of the detail of the new 150 m resolution grid.

The new South Georgia Bathymetric Dataset (SGBD) introduced in this paper is a high-resolution gridded raster sampled at 150 m resolution. Its geographical extent stretches between 34–44°W and 53–56°S. Figure 1 shows areas of interest within the grid. The grid includes the area contained within the Commission for the Conservation of Antarctic Marine Living Resources sub-area 48.3.

Methodology

The data

Several bathymetric data sources were used to compile the new grid. Figure 1 identifies the coverage of relevant data sources and Table I shows the relative amounts of data used. We used a nested hierarchy for the data with more accurate datasets given priority over poorer quality data.

Multibeam

Multibeam swath bathymetry data have been collected by RRS *James Clark Ross* (JCR) since 2000 when a Kongsberg EM120 system was fitted to the vessel. The EM120 is primarily a deep-water echo sounder operating at 12 KHz and returns 191 beams per ping. Multibeam acquisition occurs on both scientific cruises and opportunistically during passage legs. There are 16 JCR cruise legs that have contributed to the South Georgia bathymetric compilation and these have been post-processed in a variety of ways. Earlier data have been

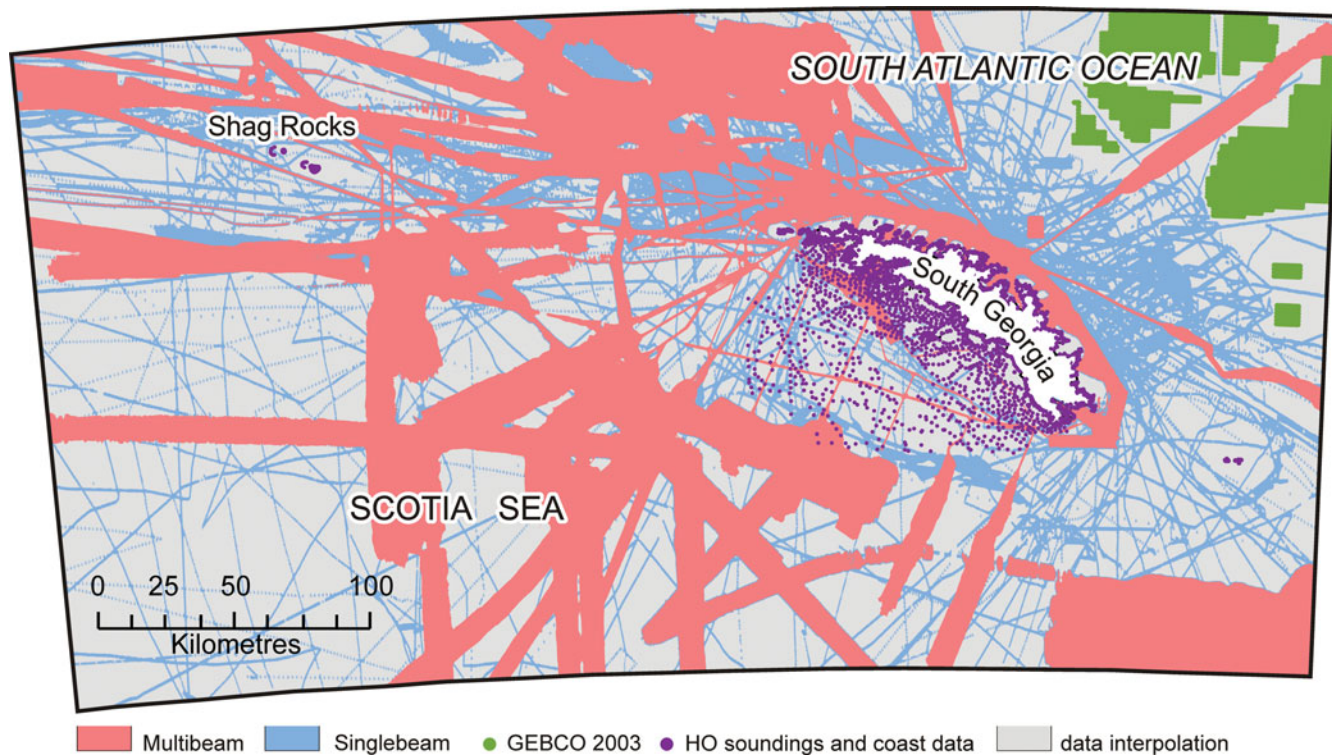


Fig. 1. Datasets used and respective coverage and places named in the text.

processed using Kongsberg's Neptune software while more recent cruises have been processed using MB-System (Caress & Chayes 2006, <http://www.ldeo.columbia.edu/res/pi/MB-System>). Hour files processed by Neptune typically have a min/max filter applied, determined by the local conditions to get rid of outliers. An average surface is then calculated using Neptune's BinStat program and points more than 3 standard deviations away from this surface are removed. The remaining edits are done manually using a graphical interface. Hour files processed by MB-System also have a min/max filter applied but the remainder of the edits are manual. The ratio between manual and automated cleaning is approximately 70/30 for Neptune processing and 90/10 for MB-System processing.

In addition to the JCR data there is a limited amount of multibeam data collected by HMS *Endurance*. A shallow-water (<1000 m) Kongsberg EM710 echo sounder was fitted to the vessel in 2005. Cleaned xyz data from a circumnavigation around the South Georgia shelf has been provided by the UK Hydrographic Office (UKHO) and incorporated into the grid. The UKHO data comply with the International Hydrographic Office S44 standard for hydrographic surveys (Wells & Monahan 2002).

Singlebeam

The bathymetric chart includes singlebeam data collected by the JCR, the HMS *Endurance*, and several fishery vessels including

the Fishery Patrol Vessel *Dorada*. JCR data are acquired by a Kongsberg EA600 echo sounder and have been post-processed using Geosoft Oasis Montaj software. Within Geosoft, the singlebeam data are edited manually. Data from other vessels have been provided as post-processed xyz files.

Hydrographic charts and other datasets

Tertiary data came from soundings and coastlines digitized from Hydrographic Charts (HO charts nos 3596 and 3597) along with a detailed coastline from the BAS (Misc) 12a 1:200 000 map of South Georgia (2004). These were used where no multibeam or single beam swath was available.

Finally, in some areas GEBCO data have been used to supplement the dataset. These data have only been used in the north-east of the region where the single beam coverage is poor and the GEBCO data matches well with the other inputs.

Table I. Comparative coverage of the datasets used

Dataset	area (km ²)	% area
Multibeam	73 630	34.59
Singlebeam	40 863	19.20
GEBCO	6662	3.13
HO soundings	na	na
Coastline	na	na
No data	91 670	43.08

na = not available

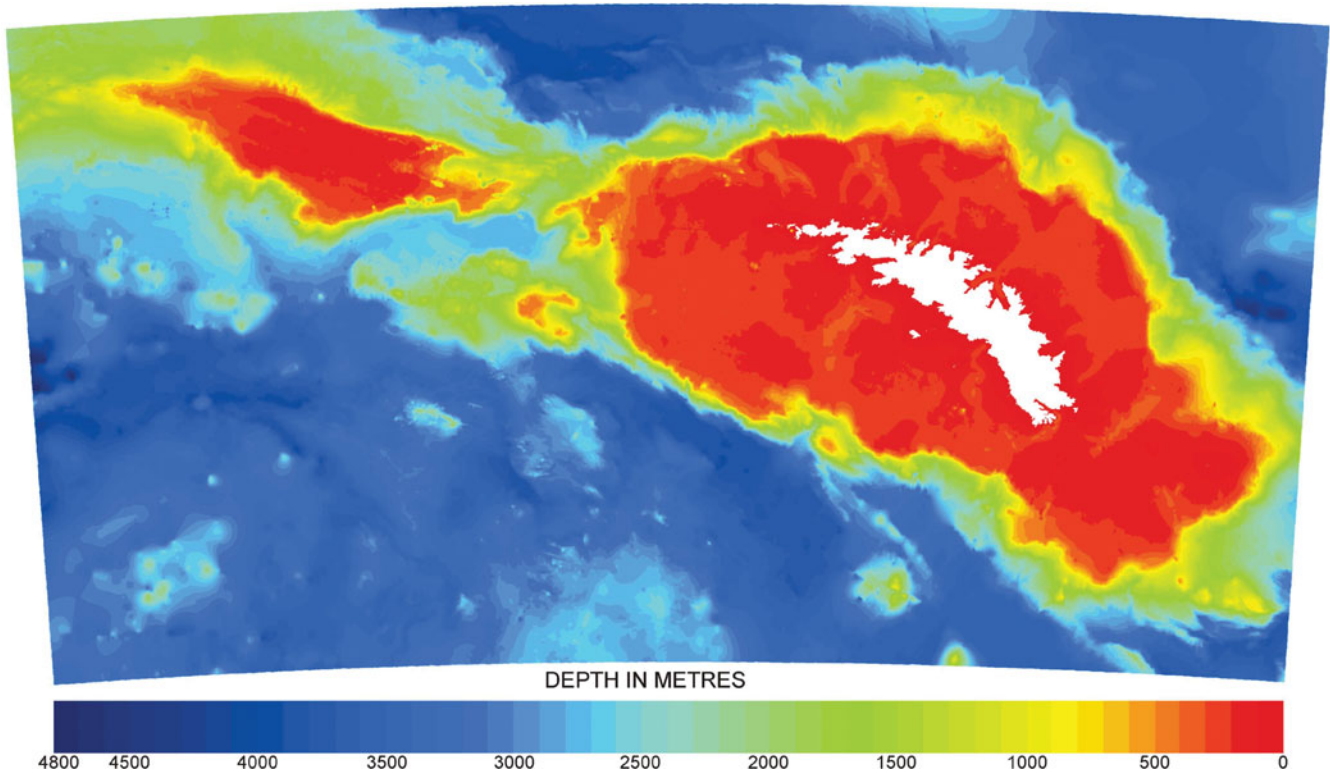


Fig. 2. The South Georgia bathymetric dataset.

Analysis

The various datasets were brought into a GIS and re-projected into Lambert Conformal Conic (LCC) projection to give a more realistic representation of the shape of features. All swath data were then re-sampled to 150 m (approximately 1/8 of a degree) and converted to points to ensure equal weighting of datasets. The TOPOGRID function based on ANUDEM (Hutchinson 1988) in ESRI's ArcGIS was used to convert the final input data to one continuous grid with a cell size of 150 m. The resulting grid contained a number of data spikes, pits and areas of anomalous results. To remove these two processes were employed. The first was an automated analysis based on slope analysis (Burrough 1986): the greatest angle of the continental shelf slope was calculated from reliable multibeam swath on the shelf slope. Any angle of slope greater than this was classed as unreliable and automatically removed from the underlying dataset. This method proved a useful tool in identifying anomalous data and to help in smoothing between datasets. The second method was an iterative process to manually identify and remove disparate measurements, deep holes and edge effects resulting from the outer beams of multibeam swath. This second process is similar to that used in the recently compiled Amundsen Sea grid (Nitsche *et al.* 2007).

The resulting grid (Fig. 2) is available as an ArcGIS shapefile in LCC projection, or as an xyz ASCII file with

lat/long co-ordinates Both grids are available to download from http://www.antarctica.ac.uk/bas_research/data/online_resources/sgbd/

Conclusion

The new SGDB shows a variety of new and interesting features including detail of drowned glacial valleys and trenches on the shelf north of the island. These give evidence of a large palaeo-ice cap (Graham *et al.* 2008). Its volume may have been more than 40–60 000 km³, equivalent to ~12–19 cm of global sea level. Other shelf-edge features such as possible slump scars to the north-west can be observed as well as geological faulting and sea mounts to the south-west of the area. It has also enabled a much more detailed assessment to be made of sea-bed areas (Belchier & Fretwell 2008) in order to refine the management of commercially important demersal fish species at South Georgia.

Acknowledgements

We thank Pete Morris for compiling the collection of single beam data; Phil Leat for overseeing the BAS multibeam acquisition; the officers and crew of the RRS *James Clarke Ross*, HMS *Endurance* and Falkland Islands Fisheries vessels who collected the swath data.

References

- 331 BELCHIER, M. & FRETWELL, P. 2008. *Revised estimates of the area of the*
 332 *South Georgia and Shag Rocks shelf (CCAMLR Subarea 48.3).*
 333 *CCAMLR-WG-SAM-08/10.* Hobart: CCAMLR.
 334
 335 BURROUGH, P.A. 1986. *Principles of Geographical Information Systems*
 336 *for land resources assessment.* New York: Oxford University Press,
 337 50 pp.
 338 EVERSON, I. & CAMPBELL, S. 1991. Area of seabed within selected depth
 339 ranges in CCAMLR subarea 48.3, South Georgia. *SC-CCAMLR-SSP/7,*
 340 *1990, WG-FAS-90-8,* 459–466.
 341 IOC, IHO & BODC. 2003. *Centenary Edition of the GEBCO Digital Atlas.*
 342 Published on CD-ROM on behalf of the Intergovernmental
 343 Oceanographic Commission and the International Hydrographic
 344 Organization as part of the General Bathymetric Chart of the Oceans,
 345 Liverpool: British Oceanographic Data Centre.
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
- GRAHAM, A.G.D., FRETWELL, P.T., LARTER, R.D., HODGSON, D.A., WILSON,
 C.K., TATE, A.J. & MORRIS, P. 2008. New bathymetric compilation
 highlights extensive paleo-ice sheet drainage on continental shelf,
 South Georgia, sub-Antarctica. *Geochemistry, Geophysics, Geosystems,*
 9, 1–21.
 HUTCHINSON, M.F. 1988. Calculation of hydrologically sound digital
 elevation models. *Third International Symposium on Spatial Data*
Handling, Sydney. Columbus, OH: International Geographical Union,
 117–133.
 NITSCHKE, F.O., JACOBS, S.S., LARTER, R.D. & GOHL, K. 2007. Bathymetry
 of the Amundsen Sea continental shelf: implications for geology,
 oceanography, and glaciology. *Geochemistry, Geophysics, Geosystems,*
 8, 10.1029/2007GC001694.
 WELLS, D. & MONAHAN, D. 2002. IHO S44 Standards for Hydrographic
 Surveys and the variety of requirements for bathymetric data. *The*
Hydrographic Journal, 104, 9–16.
- 386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440