

# Constant $Q$ -Wave Propagation and Attenuation

EINAR KJARTANSSON

*Rock Physics Project, Department of Geophysics, Stanford University, Stanford, California 94305*

A linear model for attenuation of waves is presented, with  $Q$ , or the portion of energy lost during each cycle or wavelength, exactly independent of frequency. The wave propagation is completely specified by two parameters, e.g.,  $Q$  and  $c_0$ , a phase velocity at an arbitrary reference frequency  $\omega_0$ . A simple exact derivation leads to an expression for the phase velocity  $c$  as a function of frequency:  $c/c_0 = (\omega/\omega_0)^\gamma$ , where  $\gamma = (1/\pi) \tan^{-1}(1/Q)$ . Scaling relationships for pulse propagation are derived and it is shown that for a material with a given value of  $Q$ , the risetime or the width of the pulse is exactly proportional to travel time. The travel time for a pulse resulting from a delta function source at  $x = 0$  is proportional to  $x^\beta$ , where  $\beta = 1/(1 - \gamma)$ . On the basis of this relation it is suggested that the velocity dispersion associated with anelasticity may be less ambiguously observed in the time domain than in the frequency domain. A steepest descent approximation derived by Strick gives a good time domain representation for the impulse response. The scaling relations are applied to field observations from the Pierre shale formation in Colorado, published by Ricker, who interpreted his data in terms of a Voigt solid with  $Q$  inversely proportional to frequency, and McDonal et al., who interpreted their data in terms of nonlinear friction. The constant  $Q$  theory fits both sets of data.

## INTRODUCTION

A fundamental feature associated with the propagation of stress waves in all real materials is the absorption of energy and the resulting change in the shape of transient waveforms. Although a large number of papers have been written on the absorption of seismic waves in rocks, little, if any, general agreement exists about even the most fundamental properties of the processes involved. Table 1 shows a summary of the basic features of some of the different attenuation theories.

Early laboratory work on the absorption in rocks showed the loss per cycle or wavelength to be essentially independent of frequency. Since at that time no known linear theory could fit this observation, Born [1941] proposed that the loss was due to rate independent friction of the same kind as observed when two surfaces slide against each other. Kolsky [1956] and Lomnitz [1957] gave linear descriptions of the absorption that could account for the observed frequency independence and were also consistent with other independent observations of the transient creep in rocks and the change in shape of pulses propagating through thin rods. Despite this, and the fact that a satisfactory nonlinear friction model for attenuation has never been developed to the point where meaningful predictions could be made about the propagation of waves, nonlinear friction is commonly assumed to be the dominant attenuation mechanism, especially in crustal rocks [McDonal et al., 1958; Knopoff, 1964; White, 1966; Gordon and Davis, 1968; Lockner et al., 1977; Johnston and Toksoz, 1977].

A different type of theory for attenuation has been advocated by Ricker [1953, 1977]. In his model the absorption is described by adding a single term to the wave equation. Because of this simplicity, the theory of the propagation of transient waves has been further developed than for the other theories. For this reason, wavelets based on the Ricker theory have been commonly used in the computation of synthetic seismograms [Boore et al., 1971; Munasinghe and Farnell, 1973], although the frequency dependence of  $Q$  that is implied by the model contradicts practically all experimental observations. In this paper, we will discuss some of the data Ricker interpreted as in support of his theory.

Recently, there has been renewed interest in the effects of anelasticity on the wave propagation in rocks. Liu et al. [1976]

found that the change in the elastic moduli implied by the attenuation over the frequency range covered by the seismic body waves and free oscillations, was about an order of magnitude greater than the uncertainty in the measurements. The models used by Liu et al. [1976], as well as all of the other nearly constant  $Q$  (NCQ) models, have included at least one parameter that is in some way related to the range of frequencies over which the model gives  $Q$  nearly independent of frequency. How this cutoff is chosen appears to be quite arbitrary and the physical implications of the cutoff parameters are different between the models of Lomnitz [1957], Futterman [1962], Strick [1967], and Liu et al. [1976].

In this paper a linear description of attenuation is given that features  $Q$  exactly independent of frequency, without any cutoffs. The constant  $Q$  (CQ) model is mathematically much simpler than any of the NCQ models; it is completely specified by two parameters, i.e., phase velocity at an arbitrary reference frequency, and  $Q$ .

Most of the NCQ papers have described the wave phenomena in the frequency domain and have restricted their analysis to cases where  $Q$  is large ( $Q > 30$ ). In contrast, the simplicity of the CQ description allows the derivation of exact analytical expressions for the various frequency domain properties such as the complex modulus, phase velocity, and the attenuation coefficient, that are valid over any range of frequencies and for any positive value of  $Q$ . In this paper more emphasis will be placed on the time domain description of transient phenomena, and exact expressions for the creep and relaxation functions and scaling relations for the transient wave pulse will be given. In addition, approximate expressions will be given for the impulse response, as a function of time, that results from a delta function excitation.

We will also show that when the frequency range is restricted and the losses are small, the results obtained from the various NCQ theories approach the same limit as those obtained from the CQ theory.

## DEFINITIONS AND BACKGROUND

Seismic attenuation is commonly characterized by the quality parameter  $Q$ . It is most often defined in terms of the maximum energy stored during a cycle, divided by the energy lost during the cycle. When the loss is large this definition

TABLE 1. Comparison of Attenuation Theories

Property	Theory			
	Friction	Voigt-Ricker	NCQ Band-Limited Near-Constant $Q$	CQ Linear Constant $Q$
Linearity	Nonlinear, velocity and $Q$ depend on amplitude	Linear	Linear	Linear
Frequency dependence of $Q$	Independent	$1/Q \propto \omega$	Nearly independent in a frequency band	Independent
Frequency dependence of phase velocity	Independent	Independent at low frequencies	$C/C_0 \approx 1 + (1/\pi Q) \ln(\omega/\omega_0)$	$C/C_0 = (\omega/\omega_0)^\gamma$
Transient creep	None	$\Psi(t) \propto e^{-at}$	$\Psi(t) \approx (1/M_0)[1 + (2/\pi Q) \ln(1 + at)]$	$\Psi(t) \propto t^{2\gamma}$
Pulse broadening References	Distorted or acausal <i>Born</i> [1941] <i>Knopoff</i> [1964] <i>White</i> [1966] <i>Walsh</i> [1966] <i>Lockner et al.</i> [1977] <i>Johnston and Toksöz</i> [1977] <i>Gordon and Davis</i> [1968]	$\tau \propto T^{-1/2}$ <i>Voigt</i> [1892] <i>Ricker</i> [1953, 1977] <i>Collins</i> [1960] <i>Clark and Rupert</i> [1960] <i>Jaramillo and Colvin</i> [1970] <i>Balch and Smolka</i> [1970]	$\tau \propto T$ <i>Kolsky</i> [1956] <i>Lomnitz</i> [1957] <i>Futterman</i> [1962] <i>Azimi et al.</i> [1968] <i>Strick</i> [1967, 1970] <i>Liu et al.</i> [1976] <i>Kanamori and Anderson</i> [1977] <i>Minster</i> [1978a]	$\tau \propto T$ <i>Bland</i> [1960] <i>Strick</i> [1967] This paper

becomes impractical; *O'Connell and Budiansky* [1978] suggested a definition in terms of the mean stored energy  $W$  and the energy loss  $\Delta W$ , during a single cycle of sinusoidal deformation:

$$Q = \frac{4\pi W}{\Delta W} \quad (1)$$

When this definition is used,  $Q$  is related to the phase angle between stress and strain,  $\delta$ , according to

$$\frac{1}{Q} = \tan \delta \quad (2)$$

The fact that amplitude dependence of the propagation velocity and  $Q$  at strains less than  $10^{-8}$  has not been observed, strongly suggests that at these amplitudes the material response is dominated by linear effects, or in other words, the strain that results from a superposition of two stress functions is equal to the sum of the strains that result from the application of each stress function separately. When two effects are linearly related, the relationship may be expressed through a convolution. Thus the relationship between stress and strain in a linear material may be expressed as

$$\sigma(t) = m(t) * \epsilon(t) \quad (3)$$

$$\epsilon(t) = s(t) * \sigma(t) \quad (4)$$

where  $\sigma(t)$  is the stress as a function of time,  $\epsilon(t)$  is the strain, and  $m(t)$  and  $s(t)$  are real functions that vanish for negative time. The convolution operator  $*$  is defined by

$$f(t) * g(t) = \int_{-\infty}^{\infty} f(t-t')g(t') dt' \quad (5)$$

The relationship between stress and strain given in (3) and (4) was first given by *Boltzmann* [1876]. Our notation differs from Boltzmann's original notation only in that the functions  $m(t)$  and  $s(t)$  may include generalized functions such as the Dirac delta function or its derivatives. Combination of (3) and (4) implies that  $m(t)$  and  $s(t)$  must satisfy the condition

$$\delta(t) = m(t) * s(t) \quad (6)$$

where  $\delta(t)$  is the Dirac delta function.

Manipulations involving convolutions are usually facilitated by the use of the Fourier transform. We will use lower case letters to designate functions of time and capital letters for their Fourier transforms according to the definition

$$F(\omega) = \int_{-\infty}^{\infty} f(t)e^{-i\omega t} dt \quad (7)$$

The inverse Fourier transform is then given by

$$f(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega)e^{i\omega t} d\omega \quad (8)$$

*Bracewell* [1965] gives a discussion of the formalism required for the extension to generalized functions.

Using the convolution theorem [*Bracewell*, 1965, p. 108], (3), (4), and (6) may be rewritten:

$$\Sigma(\omega) = M(\omega)E(\omega) \quad (9)$$

$$E(\omega) = S(\omega)\Sigma(\omega) \quad (10)$$

$$1 = M(\omega)S(\omega) \quad (11)$$

where  $\Sigma(\omega)$  is the Fourier transform of the stress,  $E(\omega)$  is the Fourier transform of the strain, and  $M(\omega)$  and  $S(\omega)$  are the Fourier transforms of  $m(t)$  and  $s(t)$ . Thus the stress and the strain are in the frequency domain related through a multiplication by a modulus  $M(\omega)$  or compliance  $S(\omega)$  just as in the purely elastic case, the only difference being that the modulus may be complex and frequency dependent. This relationship is commonly referred to as the correspondence principle. By a substitution of a unit step function into (3) and (4), it is easily shown that  $m(t)$  and  $s(t)$  are the first time derivatives of the relaxation and creep functions, where the relaxation function,  $\Psi(t)$ , is the stress that results from a unit step in strain, and the creep function,  $\Psi(t)$ , is the strain that results from a unit step in stress.

When the stress-strain relations are combined with the equilibrium equation, the resulting one-dimensional wave equation has a solution that may be written in a form analogous to the classical case:

$$U(t, x) = e^{i(\omega t - kx)} \quad (12)$$

where

$$k = \omega \left( \frac{\rho}{M(\omega)} \right)^{1/2} \tag{13}$$

and  $\rho$  is the density of the material.

THE CONSTANT  $Q$  MODEL

The development so far has been completely general; no assumptions other than linearity and causality have been made about the properties of the material. We will now examine a particular form for the stress-strain relationships and show that it leads to a  $Q$  that is independent of frequency. Frequency independent  $Q$  implies that the loss per cycle is independent of the time scale of oscillation; therefore it might seem reasonable to try a material that has a creep function that plots as a straight line on a log-log plot, or

$$\Psi(t) \propto t^b$$

For the sake of convenience in subsequent manipulations, we will use a creep function of the form

$$\begin{aligned} \Psi(t) &= \frac{1}{M_0 \Gamma(1 + 2\gamma)} \left( \frac{t}{t_0} \right)^{2\gamma} & t > 0 \\ \Psi(t) &= 0 & t < 0 \end{aligned} \tag{14}$$

$\Gamma$  is the gamma function which in all cases of interest to us has a value close to unity and  $t_0$  is an arbitrary reference time introduced so that when  $t$  has the dimension of time,  $M_0$  will have the dimension of modulus. Some of the properties of a material that has this creep function are discussed by Bland [1960, p. 54]. Response functions of this form have also been used to model dielectric losses in solids [Jonscher, 1977]. Differentiation of the expression in (14) yields

$$\begin{aligned} s(t) &= \frac{2\gamma}{M_0 \Gamma(1 + 2\gamma)} \left( \frac{t}{t_0} \right)^{2\gamma} \frac{1}{t} & t > 0 \\ s(t) &= 0 & t < 0 \end{aligned} \tag{15}$$

Taking the Fourier transform we get

$$S(\omega) = \frac{1}{M_0} \left( \frac{i\omega}{\omega_0} \right)^{-2\gamma} \tag{16}$$

where

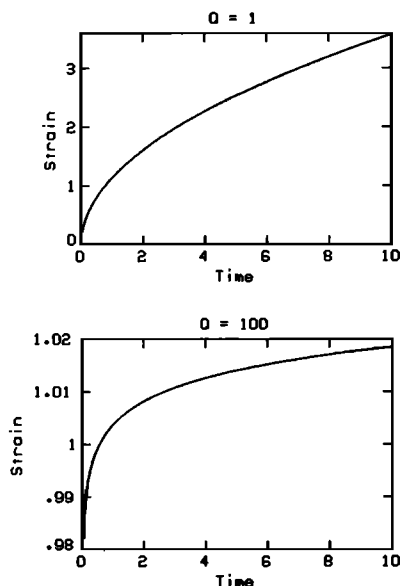


Fig. 1. The constant  $Q$  creep function as given by (14), in units of  $1/M_0$ , plotted versus time in units of  $t_0$ .

$$\omega_0 = \frac{1}{t_0} \tag{17}$$

Using (11) we get

$$M(\omega) = M_0 \left( \frac{i\omega}{\omega_0} \right)^{2\gamma} = M_0 \left| \frac{\omega}{\omega_0} \right|^{2\gamma} e^{i\pi\gamma \text{sgn}(\omega)} \tag{18}$$

where

$$\begin{aligned} \text{sgn}(\omega) &= 1 & \omega > 0 \\ \text{sgn}(\omega) &= -1 & \omega < 0 \end{aligned} \tag{19}$$

Taking the inverse Fourier transform of  $M(\omega)$  and integrating, we get the relaxation function

$$\begin{aligned} \bar{\Psi}(t) &= \frac{M_0}{\Gamma(1 - 2\gamma)} \left( \frac{t}{t_0} \right)^{-2\gamma} & t > 0 \\ \bar{\Psi}(t) &= 0 & t < 0 \end{aligned} \tag{20}$$

Figure 1 shows a plot of the constant  $Q$  creep function (14), and Figure 2, of the relaxation function (20), for several values of  $Q$ . Equation (18) shows that the argument of the modulus and thus the phase angle between the stress and the strain, is independent of frequency; therefore, it follows from the definition of  $Q$  (2) that  $Q$  is independent of frequency:

$$\frac{1}{Q} = \tan(\pi\gamma) \tag{21}$$

or


$$\gamma = \frac{1}{\pi} \tan^{-1} \left( \frac{1}{Q} \right) \approx \frac{1}{\pi Q} \tag{22}$$

Since both the creep and relaxation functions vanish for negative time, no strain can precede applied stress, nor can any stress precede applied strain; the material is causal.

To investigate the propagation of waves in the constant  $Q$  material, the modulus given by (18) may be substituted into the solution to the one dimensional wave equation, given by (12) and (13); the result may be written as

$$U(t, x) = e^{-\alpha x} e^{i\omega(t - x/c)} \tag{23}$$

where

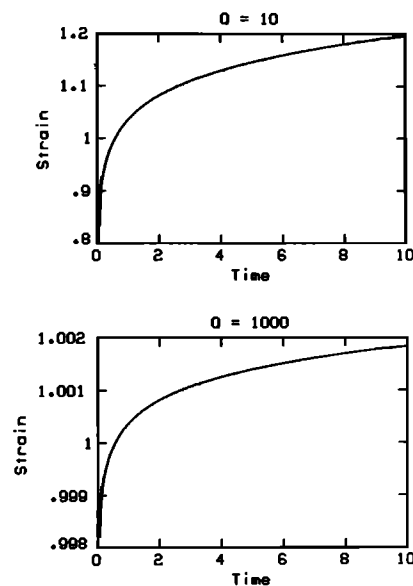

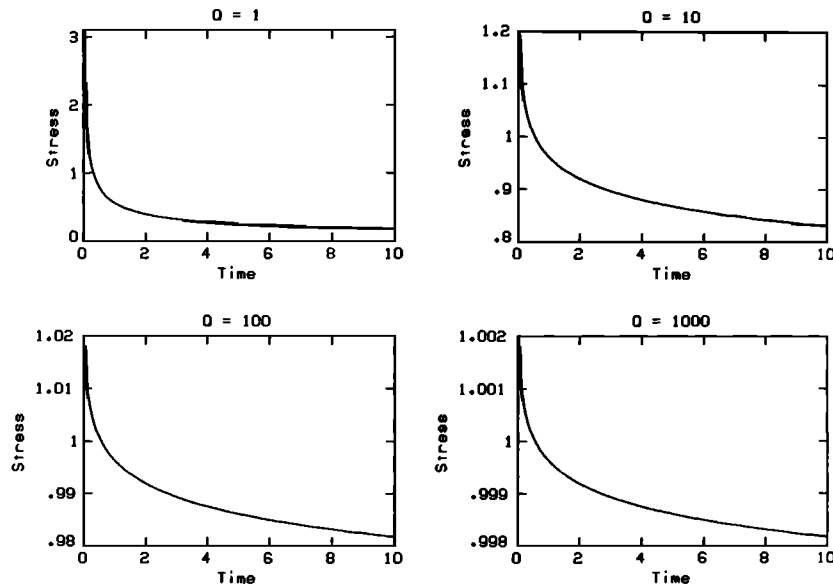


Fig. 2. The constant  $Q$  relaxation function as given by (20), in units of  $M_0$ , plotted versus time in units of  $t_0$ .

$$c = c_0 \left| \frac{\omega}{\omega_0} \right|^\gamma \tag{24}$$

$$\alpha = \tan \left( \frac{\pi\gamma}{2} \right) \text{sgn}(\omega) \frac{\omega}{c} \tag{25}$$

$$c_0 = \left( \frac{M_0}{\rho} \right)^{1/2} / \cos \left( \frac{\pi\gamma}{2} \right) \tag{26}$$

$$B(\omega) = e^{-\alpha x} e^{-i\omega x/c} \tag{29}$$

By substitution of (24) and (25) into (29), we get

$$B(\omega) = \exp \left\{ - \frac{x\omega_0}{c_0} \left| \frac{\omega}{\omega_0} \right|^{1-\gamma} \left[ \tan \left( \frac{\pi\gamma}{2} \right) + i \text{sgn}(\omega) \right] \right\} \tag{30}$$

The impulse response may be obtained by taking the inverse Fourier transform of  $B(\omega)$  given by (30). Although we do not have an analytical expression for  $b(t)$ , we will present a useful approximate relation and some exact scaling relations. We will rewrite (30) as

$$B(\omega) = B_1(\omega_1) \tag{31}$$

where

$$\omega_1 = t_1 \omega \tag{32}$$

$$t_1 = t_0 \left( \frac{x\omega_0}{c_0} \right)^\beta \tag{33}$$

$$\beta = \frac{1}{1-\gamma} \approx 1 + \frac{1}{\pi Q} \tag{34}$$

and

$$B_1(\omega) = \exp \left\{ - |\omega|^{1-\gamma} \left[ \tan \left( \frac{\pi\gamma}{2} \right) + i \text{sgn}(\omega) \right] \right\} \tag{35}$$

It now follows from the similarity theorem [Bracewell, 1965; p. 101] that for any homogeneous material, the impulse response at any distance  $x$  from the source will be given by

$$b(t, x) = \frac{1}{t_1} b_1 \left( \frac{t}{t_1} \right) \tag{36}$$

Equations (36) and (33) imply that in a given material, the travel time  $T$ , the pulse width  $\tau$  and the pulse amplitude  $A$  are related according to

$$T \propto \tau \propto \frac{1}{A} \propto \left( \frac{x}{c_0} \right)^\beta \tag{37}$$

where any consistent operational definitions for the travel time and pulse width may be used. The proportionality between travel time and pulse width may be expressed as

Since  $c$  is slightly dependent on frequency, constant  $Q$  is not exactly equivalent to assuming that  $\alpha$  is proportional to frequency, as is often assumed in the literature. It is clear from (24), that  $c_0$  is simply the phase velocity at the arbitrary reference frequency  $\omega_0$ . In the final section of the paper, we discuss the low and high frequency limits for the phase velocity and the modulus, and the short and long term behavior of the creep function.

An alternative to (23) is to write the solution to the wave equation as

$$U(x, t) = \exp \left[ i\omega \left( t - \frac{x}{c_s(i\omega)^\gamma} \right) \right] \tag{27}$$

where  $c_s$  is a constant related to  $M_0$  by

$$c_s = \left( \frac{M_0}{\rho} \right)^{1/2} \omega_0^{-\gamma} \tag{28}$$

Use of the complex velocity notation, as in (27), often simplifies the algebra, e.g., in the derivation of reflection coefficients or when modeling wave propagation in two or three dimensions.

As most wave phenomena encountered in seismology are transient in nature, a time domain description of wave propagation is often more useful for modeling or comparison with data than a frequency domain description. The waveform that results from a delta function source, the impulse response, is particularly useful since the waveform that results from an arbitrary source is obtained by simply convolving the source with the impulse response. The Fourier transform of the impulse response,  $b(\omega)$  is obtained by omitting the  $i\omega t$  term in (12) or (23):

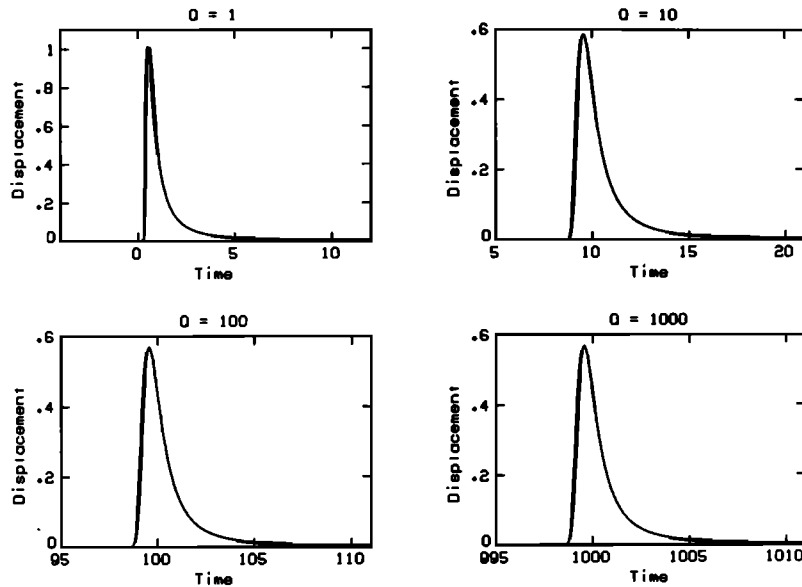


Fig. 3. The waveform  $b(t)$ , resulting from a unit impulse plane wave source at  $x = Qc_0$ , is plotted versus time in units of  $t_0$ . The waveform is computed using a numerical FFT algorithm.

$$\tau = C(Q) \frac{T}{Q} \tag{38}$$

where  $C(Q)$  is a function that depends only on  $Q$ . We will show that  $C(Q)$  is nearly constant for  $Q > 20$ . Figure 3 shows a plot of the function  $b(t)$ , for several values of  $Q$ .

In order to illustrate the scaling relations, seismograms due to impulsive sources at several distances are plotted on a common set of axes in Figure 4. Figure 5 shows the same information but scaled according to distance, by dividing the time by the distance and multiplying the displacement by the distance. Velocity dispersion has the effect of delaying the pulses from the more distant sources more than would be expected for a constant propagation velocity. To further illustrate the dispersion, Figure 6 shows the results of the same kind of a numerical experiment as Figure 5, for a  $Q$  of 1000 and covering a larger range of distances. It may be concluded from Figures 5 and 6 that the dispersion due to the anelasticity is directly observable in the time domain when the travel time, in a homogeneous material, can be measured to within half a pulse width over a ratio of 10 in distance. This applies to high  $Q$  as well as low  $Q$  materials. To measure this effect in the earth would, however, require a careful control over the spatial variation in velocity.

The required control may be obtained when the wave travels the same path more than once. Waves reflected off the core-mantle interface may satisfy this condition for stations near the source. Assuming an average  $Q = 160$  and a travel time of 936 s for one pass of ScS [Jordan and Sipkin, 1977], we obtain by a substitution into (34) a value for  $\beta = 1.0020$ . Equation (37) implies then that doubling the distance will result in a total traveltimes of 1874.6 seconds for ScS<sub>2</sub>, which is 2.6 s longer than would be expected if the dispersion were not present.

APPROXIMATIONS FOR TIME DOMAIN WAVELETS

So far we have made no assumptions about the value of  $Q$  (other than  $Q > 0$ ), or the ranges of frequencies and travel times involved. Although we have been able to derive exact expressions for all frequency domain properties of the wave propagation, we do not have exact analytical expressions for

time domain wavelets or impulse responses. While modern computer techniques (e.g., the fast Fourier transform algorithm) make it relatively easy to transform data to the frequency domain and back, it is still useful to study the time domain wave form, especially since many earthquake data are still recorded in analog form. The need for a convenient time domain representation is demonstrated by the fact that wavelets based on the Voigt-Ricker model are often used by workers who do not accept the frequency dependence of  $Q$  implied by that model [e.g., Boore et al., 1971; Munasinghe and Farnell, 1973].

Strick [1967] applied the causality requirement to the propagation of a wave pulse and found a form for the propagation function that satisfies this requirement. The constant  $Q$  transfer function (23), is a special case of Strick's function. Later Strick [1970] used the method of steepest descent to approximate the time domain impulse response. His expression has, in the notation used in this paper, the form

$$b_s(t, x) = \left\{ 2\pi\gamma t \left[ \frac{(1-\gamma)x}{c_s t} \right]^{-1/\gamma} \right\}^{-1/2} \exp \left\{ -\frac{\gamma}{(1-\gamma)} t \left[ \frac{(1-\gamma)x}{c_s t} \right]^{1/\gamma} \right\}$$

where  $b_s(t, x)$  denotes Strick's approximation to the impulse

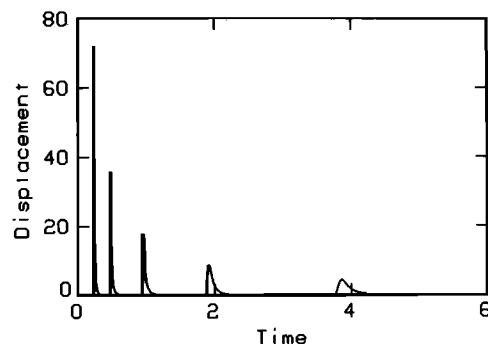


Figure 4. Seismograms resulting from sources at distances of 0.25, 0.5, 1, 2, and 4 times  $c_0$ .  $Q$  is 30.

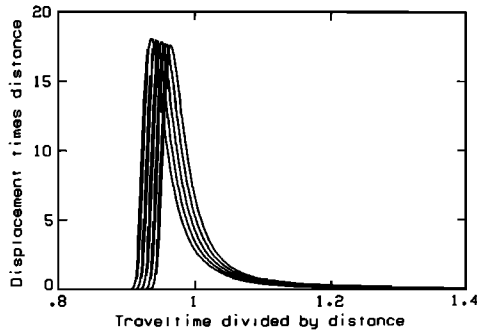


Fig. 5. Same seismograms as in Figure 4, but plotted as displacement times distance versus time divided by distance. The seismograms do not overlap due to velocity dispersion.

response, and  $c_s$  is defined by (28). By rearranging this expression, it may be written as

$$b_s(t, x) = \left(\frac{x}{c_s}\right)^{-\beta} t_s^{-(\gamma+1)/2\gamma} [2\pi\gamma(1-\gamma)^{-1/\gamma}]^{-1/2} \exp[-\gamma(1-\gamma)^{1-\gamma/\gamma} t_s^{1-1/\gamma}] \quad (39)$$

where

$$t_s = t \left(\frac{x}{c_s}\right)^{-\beta}$$

By differentiation we get the approximation for the differentiated impulse response,  $b_{sv}(t, x)$ :

$$b_{sv}(t, x) = \left(\frac{x}{c_s}\right)^{-\beta} b_s(t, x) \left[ (1-\gamma)^{1/\gamma} t_s^{-1/\gamma} - \frac{\gamma+1}{2\gamma} t_s^{-1} \right] \quad (40)$$

It is evident from inspection of these expressions, that they do obey the correct scaling relations given by (37). Figures 7 and 8 show a comparison between the wave shapes computed by the fast Fourier transform method and those computed using the steepest descent approximation. They show an excellent agreement for the early part of the pulse, which includes most of the higher frequency information, while the steepest descent approximation underestimates the low frequency amplitudes in the later part of the pulse. This is not surprising since the assumptions involved in the steepest descent approximation break down at very low frequencies. This agreement contrasts with the result of *Minster* [1978a], who in his Figure 3 shows significant differences between arrivals computed using FFT methods and those computed using analytical expansions.

So far we have only considered the pulse propagation in homogeneous materials and given scaling relations applicable to materials with the same value of  $Q$ . As the wave shapes plotted in Figure 3 show a great deal of similarity for different values of  $Q$ , it should be possible to give scaling relations for different values of  $Q$  as well as for different distances.

When  $Q^{-2} \ll 1$ , the tangents in (22) and (25) may be replaced by their arguments. Thus (29) and (25) may be written as

$$B(\omega) \approx \exp \left\{ -\frac{x|\omega|}{2Qc} - i\omega \frac{x}{c} \right\} \quad (41)$$

where

$$c \approx c_0 \left| \frac{\omega}{\omega_0} \right|^{1/\pi Q} \quad (42)$$

By use of the Maclaurin series expansion of the exponential function, (42) may be written as

$$\frac{c}{c_0} = 1 + \frac{1}{\pi Q} \ln \left| \frac{\omega}{\omega_0} \right| + \frac{1}{2!} \left[ \frac{1}{\pi Q} \ln \left| \frac{\omega}{\omega_0} \right| \right]^2 + \dots \quad (43)$$

When all the frequencies of interest satisfy the condition

$$\frac{1}{\pi Q} \ln \left| \frac{\omega}{\omega_0} \right| \ll 1 \quad (44)$$

sufficient precision may be maintained by including only the first two terms of the expansion given in (43). The result is the dispersion relation given by many of the NCQ papers [e.g., *Kanamori and Anderson*, 1977]. Using the approximation indicated in (43), and dropping all terms involving the second or higher powers of  $1/Q$ , (41) becomes

$$B'(\omega) = \exp \left\{ -\frac{x\omega}{c_0} \left[ \frac{\text{sgn}(\omega)}{2Q} + i - \frac{i}{\pi Q} \ln \left| \frac{\omega}{\omega_0} \right| \right] \right\} \quad (45)$$

The similarity and shift theorems [*Bracewell*, 1965, p. 101] may now be used to relate the approximate impulse response  $b'(t)$  that has  $B'(\omega)$  as its Fourier transform, as indicated by the following relations.

$$b'(t) = rb_1'(t') \quad (46)$$

where

$$t' = rt - Q + \frac{1}{\pi} \ln \frac{r}{\omega_0} \quad (47)$$

$$r = \frac{c_0 Q}{x} \quad (48)$$

and  $b_1'(t)$  is the inverse Fourier transform of

$$B_1'(\omega') = \exp \left\{ -\omega' \left[ \frac{1}{2} \text{sgn}(\omega') - \frac{i}{\pi} \ln |\omega'| \right] \right\} \quad (49)$$

As long as the condition given by (44) holds, it is possible to obtain wave shapes for materials with different  $Q$  as well as different travel times by a combination of scaling and shifting of a single pulse shape. In particular, it follows from (46) and (48) that the amplitude of the pulse will be approximately proportional to  $Q$ . This result, combined with the exact scaling relations (37), implies that the function  $C(Q)$ , defined by (38) approaches a constant value as  $Q$  becomes large. In order to test the usefulness of (38) we have evaluated numerically the value of  $C(Q)$ . The results are plotted in Figure 9 for two pulse width definitions and three different travel time definitions. These curves show that the value of  $C(Q)$  is practically inde-

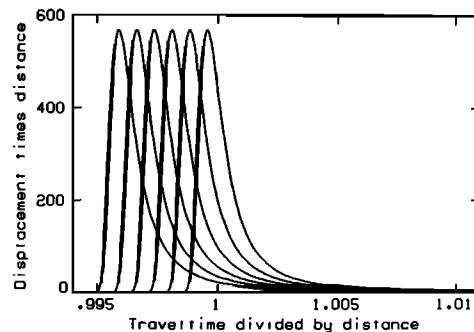


Fig. 6. Seismograms resulting from sources at distances of 0.01, 0.1, 1, 10, 100, and 1000 times  $c_0$  plotted in the same manner as in Figure 5, for  $Q = 1000$ . This shows that the dispersion effect, relative to the pulse width, is independent of  $Q$  when  $Q \gg 1$ .

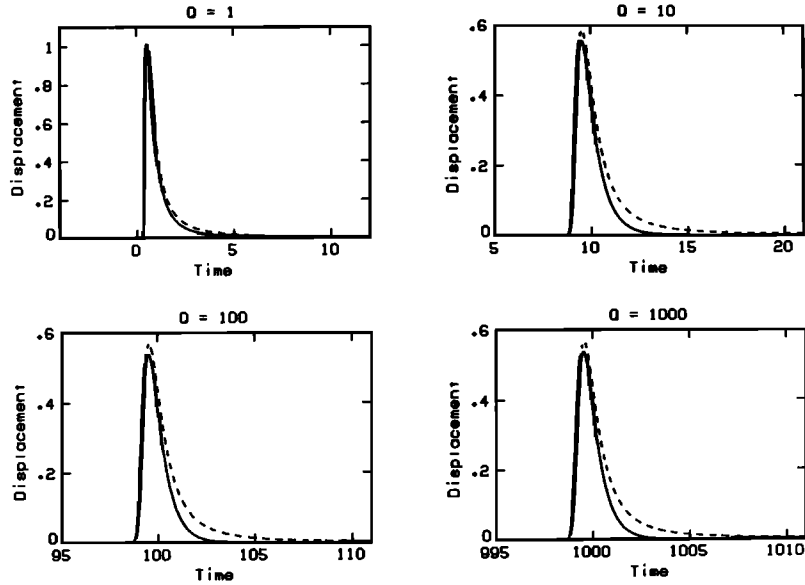


Fig. 7. Comparison of waveforms computed using (39) (solid line), to the waveforms from Figure 3 (dashed line).

pendent of  $Q$ , for  $Q$  greater than about 20. The similarity of the pulse shape for different values of  $Q$  implies that the pulse broadening along the wave path may be summed and (38) written as

$$\tau \approx \int C(Q) \frac{dT}{Q} \approx C \int \frac{dT}{Q} \quad (50)$$

This relation may provide the basis for a practical method for inverting models for the anelastic properties of rocks in situ when the wave sources are sufficiently impulsive and the waves are recorded on broadband instruments. The ambiguities involved in using the pulse breadth in this manner are far less than those involved in the use of amplitudes in a narrow frequency band, since a number of purely elastic effects, such as focusing from curved interfaces, can have large effects on the amplitudes of seismic signals. It has the advantage over spectral methods that the measurement may be done on a

clearly defined phase of the wave form [Gladwin and Stacey, 1974]. It should be noted that (38) and (50) apply for other pulsewidth measures than risetime, but the value of  $C(Q)$  will of course be different.

FIELD MEASUREMENTS OF ATTENUATION

There have been relatively few field studies of the propagation of transient wave pulses in rocks. Gladwin and Stacey [1974] found that the rise time  $\tau$ , which they defined as the maximum amplitude divided by the maximum slope on the seismogram, could be fitted by an expression of the form

$$\tau = \tau_0 + C \frac{T}{Q} \quad (51)$$

where  $\tau_0$  indicates the rise time of the source and  $C$  was a constant with a value of  $0.53 \pm 0.04$ . This value is in reason-

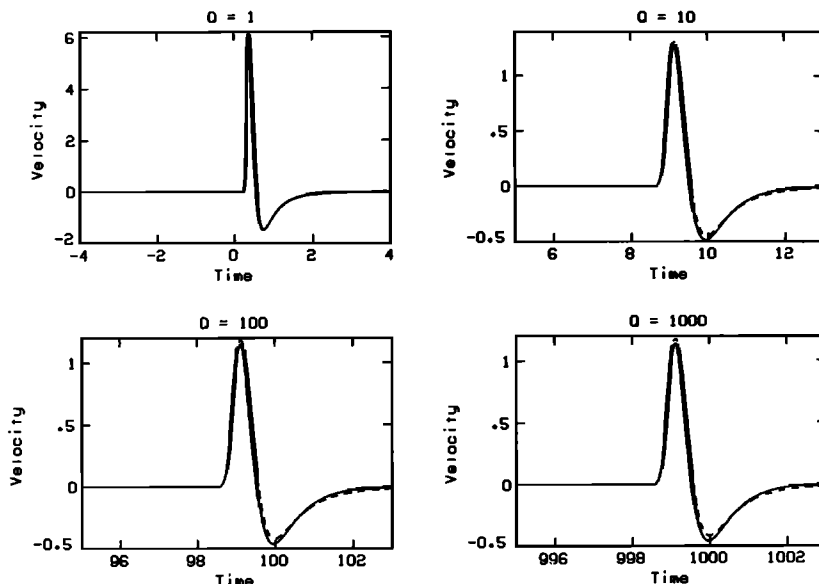


Fig. 8. Comparison of waveforms computed using (40) (solid line), to waveforms computed using numerical FFT algorithms (dashed line).

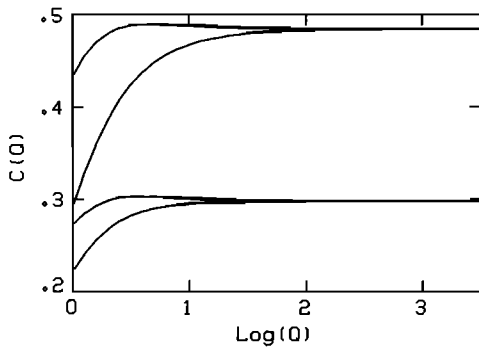


Fig. 9. Plot of the function  $C(Q)$  defined by (39). Each pair of curves was computed using as a pulse width measure, the rise time definition of *Gladwin and Stacey* [1974], i.e., maximum amplitude divided by maximum slope. The top pair of curves applies to the impulse response  $b(t)$ , and the lower curve applies to its derivative. The lower curve in each pair was computed using as travel time  $T$  the arrival time of the peak of the pulse, and the upper was computed using the arrival time of maximum slope. The asymptotic values are 0.485 and 0.298.

ably good agreement with the value predicted on the basis of the  $CQ$  theory of 0.485 for large  $Q$  (Figure 9).

*McDonal et al.* [1958] performed experiments in wells drilled into the Pierre shale formation near Limon, Colorado. Fourier analysis of their data indicated that individual Fourier components of the wave forms decayed exponentially in amplitude with distance and that this decay was proportional to frequency. The attenuation per 1000 feet (305 m) was given in decibels as 0.12 times frequency. Substitution of this value into (41) and using a velocity of 7000 feet/s (2130 m/s) gives  $Q$  equal to 32. This result was obtained at depths of several hundred feet. Deep reflections indicated that the attenuation decreased with depth with the average attenuation down to a depth of 4000 feet (1220 m) corresponding to a  $Q$  of approximately 100. Their wave forms did not show a large amount of broadening over a ratio of 5 in travel times; this indicates that the sources were long compared to the impulse response of the wavepath so the assumption of a delta function source is not appropriate. However, if the rise times of the wave forms shown in Figures 3 and 6 of *McDonal et al.* [1958], are fitted to the expression (51), a reasonable fit may be obtained using  $C = 0.5$  and  $Q = 30$ . This is consistent with the first part of the source being approximately a delta function in velocity or a step function in displacement.

*Ricker* [1953, 1977] described experiments done in 1948 in the same formation. Wave forms were recorded by three geophones at depths of 422, 622, and 822 feet (129, 190, and 251 m), for shots at depths less than 300 feet (92 m) in adjacent wells. Figure 10 shows a plot of pulse width versus travel time [*Ricker*, 1977, Figure 15.23]. *Ricker* fitted these data by a function of the form

$$\tau = at^{1/2} \quad (52)$$

This relation is in direct conflict with (37), as well as the experimental result of *Gladwin and Stacey* [1974]. According to *Ricker* [1977, p. 198], this observation is the strongest, if not the only evidence supporting the applicability of his theory to seismic waves. By inspection of Figure 10 it appears that the data could just as well be fitted by a function of the form (51) used by *Gladwin and Stacey* [1974]. *McDonal et al.* [1958] criticized *Ricker's* experiment on the basis that each shot was recorded by no more than three geophones, and that wave

forms from different shots were not comparable because 'One can not shoot a second time in the same hole because the same hole is not there any more.' This is probably the reason for some of the scatter in *Ricker's* data, particularly from the 300 foot shots. This error can be reduced, however by adjusting the parameter  $\tau_0$  in (51) for each shot, provided that it is recorded by at least two geophones. Thus we have fitted the wavelet breadth data to a model given by

$$\tau = \tau_0 + C \int \frac{dT}{Q} \quad (53)$$

In order to facilitate the integration, the travel time data were fitted to the form

$$T = a(x_g - x_s) + b(x_g^2 - x_s^2) \quad (54)$$

where  $x_g$  is the depth to the geophone and  $x_s$  is the depth to shot. This expression implies that the velocity as function of depth will be given by

$$V = \frac{1}{a + 2bx} \quad (55)$$

As *Ricker* did not specify which of the data points were obtained from the same shot, it was only possible to determine the source widths for each shot depth. For the pulse width measure used by *Ricker*, the value of the parameter  $C$  in (53) is approximately unity. Figure 11 shows a plot of the data from Figure 10, with the source width subtracted, compared to a straight line with a slope of  $1/Q = 1/32$ . The data points for the geophone at 622 feet tend to be above the curve; this can be explained by attenuation decreasing with depth. This result implies that both *Ricker's* data and the data of *McDonal et al.* are consistent with the linear constant  $Q$  model, and both give the same value for  $Q$ . This is particularly significant in light of the fact that they interpreted their data very differently, and that neither of them considered a constant or near constant linear attenuation in the interpretation of their data. The apparent conflict between the observations of *Ricker* [1953] and *McDonal et al.* [1958] has been noted by many authors including *Gladwin and Stacey* [1974], *Reiter and Monfort* [1977], and *Bless and Ahrens* [1977].

#### COMPARISON WITH NEARLY CONSTANT $Q$ THEORIES

*Lomnitz* [1956] investigated the transient creep in rocks at low stress levels. He found that the shear strain resulting from

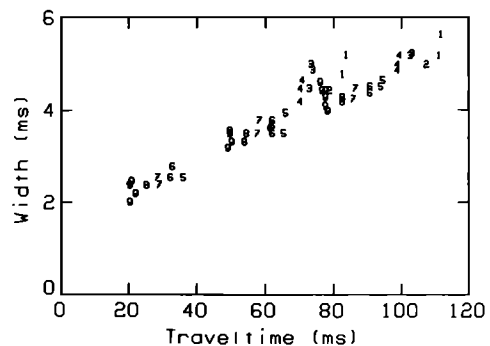


Fig. 10. Pulse width as a function of travel time in Pierre shale. Data from Figure 15.23 in *Ricker* [1977]. Geophones are at depths of 422, 622, and 822 feet (129, 190, and 251 m). Sources are at 25 foot (7.6 m) intervals at depths from 100 to 300 feet (30.5 to 91.5 m). Numbers indicate sources, 1 for 100 feet (30.5 m), to 9 for 300 feet (91.5 m).



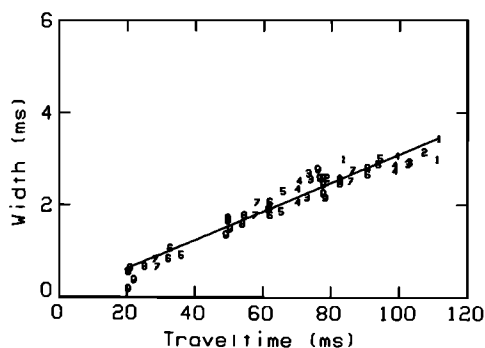


Fig. 11. The data in Figure 10, after subtraction of the initial pulse widths, compared with predicted pulse widths for  $Q = 32$ . Both  $Q$  and the source widths were determined by simultaneous least-square inversion.

a step in applied stress could be described to within the experimental error with a creep function of the form

$$\Psi(t) = \frac{1}{M_0} [1 + q \ln(1 + at)] \quad (56)$$

where  $a$  is a frequency much greater than the sample rate or the time resolution of the experiment. He found that the fit to the data was insensitive to the value of  $a$ , as long as it was large. For  $Q$  greater than about 20, (56) is approximately equal to the CQ creep function (14). By using the first two terms from the MacLaurin series expansion of the exponential function, (14) may be rewritten

$$\Psi(t) = \frac{1}{M_0} e^{2\gamma \ln(t/t_0)} \approx \frac{1}{M_0} \left[ 1 + \frac{2}{\pi Q} \ln\left(\frac{t}{t_0}\right) \right]$$

when  $t_0 \ll t$ , this is approximately equal to

$$\Psi(t) = \frac{1}{M_0} \left[ 1 + \frac{2}{\pi Q} \ln\left(1 + \frac{t}{t_0}\right) \right] \quad (57)$$

Later, Lomnitz [1957, 1962] used his creep law and the superposition principle to derive a model for wave attenuation with  $Q$  approximately independent of frequency for large  $Q$ . Pandit and Savage [1973] measured  $Q$  for several rock samples with  $Q$  ranging from 30 to 300 and found good agreement between values determined at sonic frequencies and those derived from transient creep measurements over several tens of seconds.

Kolsky [1956] did experiments on the propagation of ultrasonic pulses in polymers and found the pulse width to be proportional to travel time. To model his data, he used a viscoelastic model with  $Q$  approximately independent of frequency and with a phase velocity that varied according to

$$\frac{c}{c_0} = 1 + \frac{1}{\pi Q} \ln\left(\frac{\omega}{\omega_0}\right) \quad (58)$$

Equation (58) follows from (43) when the condition given in (44) is satisfied. Futterman [1962] arrived at the same formula by imposing causality on the wave pulse and assuming the parameter  $\alpha$  in (29) to be exactly proportional to frequency over a restricted range of frequencies.

There are two difficulties inherent in Futterman's approach, which necessitate limits on the range where  $Q$  is nearly constant, at both low and high frequencies. Collins and Lee [1956] showed that the assumption of a nonzero limit for the phase velocity as frequency approaches zero, implies that  $Q$  must approach infinity at zero frequency. Futterman's formulation was based on a finite value of the refractive index at zero frequency and is thus incompatible with constant  $Q$ , where the

phase velocity has no nonzero limit as frequency approaches zero. It can also be shown [e.g., Azimi *et al.*, 1968], that  $\alpha$  proportional to frequency at high frequencies leads to a violation of causality.

It appears that these limitations, which are peculiar to Futterman's approach, have led many workers to assume that a physically realizable formulation with  $Q$  exactly independent of frequency was not possible. Liu *et al.* [1976] and Kanamori and Anderson [1977] have used viscoelastic distributions to derive dispersion relations of the form shown in (58). Viscoelastic density functions are discussed in the appendix, and it is shown how the constant  $Q$  model can be derived from distributions of dashpots and springs.

## DISCUSSION

Of the two assumptions that provide the basis for the constant  $Q$  model, linearity is the more fundamental, and it has also been more frequently questioned in the literature than the frequency independence of  $Q$ . Nonlinear, rate independent friction was originally proposed [e.g., Born, 1941] to explain the frequency independence of  $Q$ , since at that time no simple linear models were available that could account for this observation. As summarized in Table 1, all of the nonlinear friction mechanisms that have been proposed have several features in common. These include the dependence of the effective elastic moduli on strain amplitude, proportionality of  $1/Q$  to strain at low amplitudes, frequency independence of both  $Q$  and the moduli, distortion of waveforms and cusped stress-strain loops, and the absence of any transient creep or relaxation. Mindlin and Deresiewicz [1953] analyzed the losses due to friction between spheres in contact, and found the attenuation to be proportional to amplitude at low amplitudes. White [1966] claimed that the introduction of static friction into this model had the effect of making  $Q$  independent of amplitude. This claim cannot be correct since it may be shown [Mavko, 1979], that static friction cannot increase the loss. Walsh [1966] considered the sliding across barely closed elliptical cracks and found the loss for closed cracks with zero normal force to be independent of amplitude. However this model cannot, as shown by Savage [1969], explain loss independent of amplitude for the whole rock. The required distributions of elliptical cracks would imply that the effective elastic moduli of the rock, as functions of confining pressure, are discontinuous at all values of confining pressure. Mavko [1979] has considered a more general case of nonelliptical cracks and found the attenuation to depend on amplitude in much the same manner as in the contact sphere model of Mindlin and Deresiewicz. All of the above models feature a decrease in the effective moduli with strain amplitude due to the increase in area of the sliding surfaces. Decrease of both velocity and  $Q$ , similar to what would be expected on the basis of the above models, has been observed in laboratory studies of rocks, [Gordon and Davis, 1968; Winkler *et al.*, 1979], but only at strains greater than about  $10^{-6}$  to  $10^{-5}$ . At lower strains both  $Q$  and wave velocities are found to be independent of amplitude.

The dependence of the wave velocity on frequency is such that it is difficult to separate it from the effects of spatial heterogeneities. There is however an increasing amount of evidence in support of the frequency dependence of the elastic moduli. Seismic models for the whole earth show much improved agreement with the free oscillation data when the frequency dependence of the elastic moduli is taken into account [Anderson *et al.*, 1977]. It is also well established that for many

rocks the elastic moduli derived from ultrasonic pulse measurements are significantly greater than the moduli derived from low frequency deformation experiments [Simmons and Brace, 1965]. This difference is generally larger for lossy materials. *Gretener* [1961] analyzed well logging data from several oil wells in Canada and found statistically significant differences between observed travel times from surface sources to geophones in wells and travel times predicted on the basis of high frequency continuous velocity logs. *Strick* [1971] showed that these differences could be explained by the dispersion associated with linear attenuation with  $Q$  nearly independent of frequency.

*Brennan and Stacey* [1977] measured both  $Q$  and elastic moduli in low frequency deformation experiments, at strains of  $10^{-6}$ , and found the moduli to vary with frequency as predicted by linearity. The stress-strain loops were elliptical although earlier experiments at larger amplitudes showed cusped stress-strain loops [McKavanagh and Stacey, 1974].

Because the principle of superposition does not apply to the nonlinear solid friction models, it is difficult to predict their effects on the propagation of transient stress pulses. *Walsh* [1966] pointed out that the losses due to friction cannot be described through the use of complex moduli although this is frequently attempted [e.g., *Johnston and Toksoz*, 1977]. It is easily shown [e.g., *Gladwin and Stacey*, 1974], that the use of complex frequency independent moduli leads to acausal waveforms that arrive before they are excited. *Savage and Hasegawa* [1967] used the stress-strain hysteresis loops implied by several different friction models, to model wave propagation. The results showed significant amounts of distortion which has never been observed experimentally.

From these observations it may be concluded that at strain amplitudes of interest in seismology, the propagation and attenuation of waves are dominated by linear effects, with some nonlinear effects showing up at strains of  $10^{-5}$  or greater. This amplitude corresponds to a stress amplitude of 5 bars, since the ambient seismic noise level is on the order of  $10^{-11}$  in strain, and studies of earthquake source mechanisms indicate stress changes of 1–100 bars [Hanks, 1977]; it is evident that nonlinear effects can only be significant very near the source.

While a good case can be made for the linearity of the absorption of seismic energy at low amplitudes, no such simple answer can be given to the question of the frequency dependence of the attenuation. Theoretical models of specific attenuation mechanisms are often formulated in terms of relaxation times, each of which implies a creep function that is a decaying exponential. A model that has a single relaxation time is often referred to as the standard linear solid and has  $Q$  proportional and inversely proportional to frequency at high and low frequencies, respectively. Cases where inertial effects may play a role, such as in the flow of low viscosity fluids [Mavko and Nur, 1979], feature even stronger variation of attenuation with frequency. It may be shown [Kjartansson, 1978] that, in materials with sharply defined heterogeneities (e.g., grain boundaries or pores), absorption due to processes controlled by diffusion, such as phase transformations or thermal relaxation, leads to  $Q$  proportional to  $\omega^{1/2}$  and  $\omega^{-1/2}$  at high and low frequencies, even for uniform distributions of identical pores or crystals.

For these types of mechanisms, the approximate frequency independence of  $Q$  that is observed indicates distributions of time constants associated with the individual absorbing elements. It may be shown, for example, that the frequency at which maximum absorption occurs for mechanisms involving

the diffusion of heat, is inversely proportional to the square of the minimum dimension of the inhomogeneities involved. The empirical observation that  $Q$ , in solids, varies much slower than even the square root of frequency, is thus an expression of the statistical nature of the inhomogeneities. It is interesting that dielectric losses in solids show the same type of frequency dependence as do the energy losses in stress waves [Jonscher, 1977].

While  $Q$  is probably not strictly independent of frequency, there is no reason to believe that any of the band-limited near-constant  $Q$  theories better approximate the wave propagation in real materials than the constant  $Q$  model. Therefore nothing is gained in return for the mathematical complexity and potential inconsistency in using, for example, the absorption band model of *Liu et al.* [1976].

*Strick* [1967] obtained a transfer function for wave propagation of which the constant  $Q$  is a special case. He rejected the CQ case, however, on the basis that the lack of an upper bound for the phase velocity was in violation of causality. *Strick's* three-parameter model is equivalent to the CQ model, with an additional time delay applied to the waveform. *Strick* [1970] computed waveforms for his models, and found that the detectable onset of the signal always arrived significantly later than the applied time shift. He termed this delay 'pedestal' and attributed to it significance that has been subject to some controversy. For the CQ case, the pedestal arrives when the source is excited. *Minster* [1978b] argued that the presence of the pedestal was an indication of the need for a high frequency cutoff of the type built into the model of *Liu et al.* This pedestal controversy points to a limitation shared by all of continuum mechanics; no continuum model, including the CQ model, can have any significance at wavelengths shorter than the molecular separation nor at periods longer than the age of the universe. This covers approximately 32 orders of magnitude in frequency, which for a  $Q$  of 100 implies a change in velocity of about 26%. The possibility that some 'calculable' energy might arrive 26% earlier than any detectable energy, is hardly a sufficient reason to introduce a high frequency cutoff. Calculable values of physical parameters outside the observable range are common in other fields, such as in solutions to the diffusion equation and in statistics. *Minster* [1978b] and *Lundquist* [1977] suggest that the cutoff should be at periods between 0.1 and 1 s for the mantle. Such cutoffs have never been observed for any of the rocks that have been studied in the laboratory, where the range of frequencies extends up to about 1 MHz.

*Lomnitz's* [1957] attenuation model has often been criticized [Kogan, 1966; *Liu et al.*, 1976; *Kanamori and Anderson*, 1977] on the basis that the lack of an upper bound for the transient creep would not permit mountains or large scale gravity anomalies to last through geologic time. Since the Lomnitz creep function is practically equivalent to the constant  $Q$  creep function for large values of time and  $Q$ , this criticism applies equally to the constant  $Q$  model. However, it does not pass the test of substituting numbers into the expressions (56) or (14). For example, for a material with a  $Q$  of 100, the strain that results from the application of a unit stress is only about 33% larger over a period of one billion years, than for the first millisecond of applied stress. Thus neither the constant  $Q$  theory, nor any of the NCQ theories can explain the large strains required by plate tectonics. The fact that brittle deformation only takes place in the uppermost part of the crust, with exception of localized areas of unusually rapid tectonic activity, may indicate that over geologic time most of the earth

deforms as a viscous fluid with  $Q$  for shear near zero. The assumption, implicit in the band-limited NCQ model of Liu *et al.* [1976], that  $Q$  approaches infinity outside the range of observations, is thus particularly inappropriate for low frequency shear deformations in the mantle.

### CONCLUSIONS

Contrary to what has often been assumed in the past, it is possible to formulate a description of wave propagation and attenuation with  $Q$  exactly independent of frequency, that is both linear and causal. The wave propagation properties of materials can be completely specified by only two parameters, for example,  $Q$  and phase velocity at an arbitrary reference frequency. This simplicity makes it practical to derive exact expressions describing, in the frequency domain, the wave propagation for any positive value of  $Q$ . The dispersion that accompanies any linear energy absorption leads to a propagation velocity of any transient disturbance that is not only a function of the material, but also of the past history of the wave. Review of available data indicates that the assumption of linearity is well justified for seismic waves, but it is likely that  $Q$  is weakly dependent on frequency. There is, however, no indication that any of the NCQ theories that we have discussed provide a better description of the attenuation in actual rocks than the constant  $Q$  theory does.

### APPENDIX: VISCOELASTIC MODELS

In the literature on viscoelasticity, it is common to describe the behavior of materials through networks of springs and dashpots, often characterized by either relaxation or retardation spectra. It has been claimed that only attenuation models given in terms of such networks are physically realizable, and models derived by other means have been termed 'ad hoc' [e.g., Minster, 1978a].

While it is possible to give physical models for attenuation that can not be modeled by spring-dashpot networks, [e.g., Mavko and Nur, 1979], the formulation of viscoelastic models in terms of relaxation spectra is often useful. Gross [1953] has summarized the relationships between the various functions that have been used to characterize viscoelastic materials. In his notation the retardation frequency density function  $N(s)$ , is related to the creep function according to

$$\Psi(t) = - \int_0^{\infty} N(s)e^{-ts} ds \quad (\text{A1})$$

and the relaxation frequency density function  $\bar{N}(s)$ , is related to the relaxation function according to

$$\bar{\Psi}(t) = \int_0^{\infty} \bar{N}(s)e^{-ts} ds \quad (\text{A2})$$

Kanamori and Anderson [1977] used a relaxation function of the form

$$\begin{aligned} \bar{N}(s) &= As^{-1} & s_1 < s < s_2 \\ \bar{N}(s) &= 0 & \text{elsewhere} \end{aligned} \quad (\text{A3})$$

to derive an absorption band NCQ model. The constant  $Q$  model may be specified by

$$\bar{N}(s) = \frac{M_0 \sin(2\pi\gamma)}{\pi} (st_0)^{2\gamma} s^{-1} \quad (\text{A4})$$

Using the definition of the gamma function and the identity

$$\Gamma(z)\Gamma(1-z) = \frac{\pi}{\sin(\pi z)} \quad (\text{A5})$$

the constant  $Q$  relaxation function (20), is readily obtained. Since the constant  $Q$  model is mathematically a special case of the power law models of Strick [1967] and Azimi *et al.* [1968], it follows that those models do also have spring-dashpot representations.

**Acknowledgments.** This work has been greatly stimulated by numerous discussions with Amos Nur and Michael Gladwin. The author has enjoyed discussions with many individuals about particular aspects of this theory, including David M. Boore, Jon Claerbout, George Moeckel, Bernard Minster, Henry Swanger and Kenneth Winkler. This work was supported by National Science Foundation grant EAR76-22501 and by the U.S. Department of Energy, Office of Basic Energy Sciences contract EY-76-03-0325. The author was supported by a Cecil and Ida Green Fellowship in Geophysics during part of this work.

### REFERENCES

- Anderson, D. L., H. Kanamori, R. S. Hart, and H.-P. Liu, The earth as a seismic absorption band, *Science*, **196**, 1104-1106, 1977.
- Azimi, S. A., A. V. Kalinin, V. V. Kalinin, and B. L. Pivovarov, Impulse and transient characteristics of media with linear and quadratic absorption laws, *Phys. Solid Earth*, **1968**, 88-93, 1968.
- Balch, A. H., and F. R. Smolka, Plane and spherical transient Voigt waves, *Geophysics*, **35**, 745-761, 1970.
- Bland, D. R., *The Theory of Linear Viscoelasticity*, Pergamon, New York, 1960.
- Bless, S. J., and T. J. Ahrens, Measurements of the longitudinal modulus of Pierre clay shale at varying strain rates, *Geophysics*, **42**, 34-40, 1977.
- Boltzmann, L., Zur Theorie der elastische Nachwirkung, *Ann. Phys. Chem. Erganzung*, **7**, 624-654, 1876.
- Boore, D. M., K. L. Larner, and K. Aki, Comparison of two independent methods for the solution of wave-scattering problems: Response of a sedimentary basin to vertically incident SH waves, *J. Geophys. Res.*, **76**, 558-569, 1971.
- Born, W. T., The attenuation constant of earth materials, *Geophysics*, **6**, 132-148, 1941.
- Bracewell, R., *The Fourier Transform and Its Applications*, 381 pp., McGraw-Hill, New York, 1965.
- Brennan, B. J., and F. D. Stacey, Frequency dependence of elasticity of rock—Test of seismic velocity dispersion, *Nature*, **268**, 220-222, 1977.
- Clark, G. B., and G. B. Rupert, Plane and spherical waves in a Voigt medium, *J. Geophys. Res.*, **71**, 2047-2053, 1966.
- Collins, F., Plane compressional Voigt waves, *Geophysics*, **25**, 483-504, 1960.
- Collins, F., and C. C. Lee, Seismic wave attenuation characteristics from pulse experiments, *Geophysics*, **21**, 16-40, 1956.
- Futterman, W. I., Dispersive body waves, *J. Geophys. Res.*, **67**, 5279-5291, 1962.
- Gladwin, M. T., and F. D. Stacey, Anelastic degradation of acoustic pulses in rock, *Phys. Earth Planet. Interiors*, **8**, 332-336, 1974.
- Gordon, R. B., and L. A. Davis, Velocity and attenuation of seismic waves in imperfectly elastic rock, *J. Geophys. Res.*, **73**, 3917-3935, 1968.
- Gretener, P. E. F., An analysis of the observed time discrepancies between continuous and conventional well velocity surveys, *Geophysics*, **26**, 1-11, 1961.
- Gross, B., *Mathematical Structure of the Theories of Viscoelasticity*, 74 pp., Hermann, Paris, 1953.
- Hanks, T. C., Earthquake stress drops, ambient tectonic stresses and stresses that drive plate motions, *Pure Appl. Geophys.*, **115**, 441-458, 1977.
- Jaramillo, E. E., and J. D. Colvin, Transient waves in a Voigt medium, *J. Geophys. Res.*, **75**, 5767-5773, 1970.
- Johnston, D. H., and N. Toksoz, Attenuation of seismic waves in dry and saturated rocks (abstract), *Geophysics*, **42** 1511, 1977.
- Jonscher, A. K., The "universal" dielectric response, *Nature*, **267**, 673-679, 1977.
- Jordan, T. H., and S. A. Sipkin, Estimation of the attenuation operator for multiple ScS waves, *Geophys. Res. Lett.*, **4**, 167-170, 1977.
- Kanamori, H., and D. L. Anderson, Importance of physical dispersion in surface wave and free oscillation problems: Review, *Rev. Geophys. Space. Phys.*, **15**, 105-112, 1977.
- Kjartansson, E., Thermal relaxation, an attenuation mechanism for porous rocks (abstract), *Eos Trans. AGU*, **59**, 324, 1978.

- Knopoff, L.,  $Q$ , *Rev. Geophys. Space Phys.*, 2, 625-660, 1964.
- Kogan, S. Y., A brief review of seismic wave absorption theories, II, *Phys. Solid Earth*, 1966, 678-683, 1966.
- Kolsky, H., The propagation of stress pulses in viscoelastic solids, *Phys. Mag.*, 1, 693-710, 1956.
- Liu, H.-P., D. L. Anderson, and H. Kanamori, Velocity dispersion due to anelasticity; Implications for seismology and mantle composition, *Geophys. J. Roy. Astron. Soc.*, 47, 41-58, 1976.
- Lockner, D. A., J. B. Walsh, and J. D. Byerlee, Changes in seismic velocity and attenuation during deformation of granite, *J. Geophys. Res.*, 82, 5374-5378, 1977.
- Lomnitz, C., Creep measurements in igneous rocks, *J. Geol.*, 64, 473-479, 1956.
- Lomnitz, C., Linear dissipation in solids, *J. Appl. Phys.*, 28, 201-205, 1957.
- Lomnitz, C., Application of the logarithmic creep law to stress wave attenuation in the solid earth, *J. Geophys. Res.*, 67, 365-368, 1962.
- Lundquist, G., Evidence for a frequency dependent  $Q$  (abstract), *Eos Trans. AGU*, 58, 1182, 1977.
- Mavko, G. M., Frictional attenuation: An inherent amplitude dependence, *J. Geophys. Res.*, 84, in press, 1979.
- Mavko, G. M., and A. Nur, Wave attenuation in partially saturated rocks, *Geophysics*, 44, 161-178, 1979.
- McDonal, F. J., F. A. Angona, R. L. Mills, R. L. Sengbush, R. G. van Nostrand, and J. E. White, Attenuation of shear and compressional waves in Pierre shale, *Geophysics*, 23, 421-439, 1958.
- McKavanagh, B. M., and F. D. Stacey, Mechanical hysteresis in rocks at low strain amplitudes and seismic frequencies, *Phys. Earth Planet. Interiors*, 8, 246-250, 1974.
- Mindlin, R. D., and H. Deresiewicz, Elastic spheres in contact under varying oblique forces, *J. Appl. Mech.*, 20, 327-344, 1953.
- Minster, J. B., Transient and impulse responses of a one-dimensional linearly attenuating medium, I, Analytical results, *Geophys. J. Roy. Astron. Soc.*, 52, 479-501, 1978a.
- Minster, J. B., Transient and impulse responses of a one-dimensional linearly attenuating medium, II, A parametric study, *Geophys. J. Roy. Astron. Soc.*, 52, 503-524, 1978b.
- Munasinghe, M., and G. W. Farnell, Finite difference analysis of Rayleigh wave scattering at vertical discontinuities, *J. Geophys. Res.*, 78, 2454-2466, 1973.
- O'Connell, R. J., and B. Budiansky, Measures of dissipation in viscoelastic media, *Geophys. Res. Lett.*, 5, 5-8, 1978.
- Pandit, B. I., and J. C. Savage, An experimental test of Lomnitz's theory of internal friction in rocks, *J. Geophys. Res.*, 78, 6097-6099, 1973.
- Reiter, L., and M. E. Monfort, Variations in initial pulse width as a function of anelastic properties and surface geology in central California, *Bull. Seismol. Soc. Amer.*, 67, 1319-1338, 1977.
- Ricker, N., The form and laws of propagation of seismic wavelets, *Geophysics*, 18, 10-40, 1953.
- Ricker, N., *Transient Waves in Visco-Elastic Media*, 278 pp., Elsevier, Amsterdam, 1977.
- Savage, J. C., Comments on 'Velocity and attenuation of seismic waves in imperfectly elastic rock' by R. B. Gordan and L. A. Davis, *J. Geophys. Res.*, 74, 726-728, 1969.
- Savage, J. C., and H. S. Hasegawa, Evidence for a linear attenuation mechanism, *Geophysics*, 32, 1003-1014, 1967.
- Simmons, G., and W. F. Brace, Comparison of static and dynamic measurements of compressibility of rocks, *J. Geophys. Res.*, 70, 5649-5656, 1965.
- Strick, E., The determination of  $Q$ , dynamic viscosity and creep curves from wave propagation measurements, *Geophys. J. Roy. Astron. Soc.*, 13, 197-218, 1967.
- Strick, E., A predicted pedestal effect for pulse propagation in constant- $Q$  solids, *Geophysics*, 35, 387-403, 1970.
- Strick, E., An explanation of observed time discrepancies between continuous and conventional well velocity surveys, *Geophysics*, 36, 285-295, 1971.
- Voigt, W., Uber innere Reibung fester Korper, insbesondere der Metalle, *Ann. Phys. Chem. Neue Folge*, 47, 671-693, 1892.
- Walsh, J. B., Seismic wave attenuation in rock due to friction, *J. Geophys. Res.*, 71, 2591-2599, 1966.
- White, J. E., Static friction as a source of seismic attenuation, *Geophysics*, 31, 333-339, 1966.
- Winkler, K., A. Nur, and M. Gladwin, Friction and seismic attenuation in rocks, *Nature*, 277, 528-531, 1979.

(Received June 8, 1978;  
revised January 8, 1979;  
accepted February 6, 1979.)