

Contact mechanics of the human finger pad under compressive loads

Dzidek, Brygida; Adams, Michael; Andrews, James; Zhang, Zhibing; Johnson, Simon

DOI:

[10.1098/rsif.2016.0935](https://doi.org/10.1098/rsif.2016.0935)

License:

None: All rights reserved

Document Version

Peer reviewed version

Citation for published version (Harvard):

Dzidek, B, Adams, M, Andrews, J, Zhang, Z & Johnson, S 2017, 'Contact mechanics of the human finger pad under compressive loads', *Journal of The Royal Society Interface*, vol. 14, no. 127, 20160935. <https://doi.org/10.1098/rsif.2016.0935>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

Contact mechanics of the human finger pad under compressive loads
Brygida M. Dzidek, Michael J. Adams, James W. Andrews, Zhibing Zhang, Simon A. Johnson
J. R. Soc. Interface 2017 14 20160935; DOI: 10.1098/rsif.2016.0935. Published 8 February 2017

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

INTERFACE

Contact mechanics of the human finger pad under compressive loads

Journal:	<i>Journal of the Royal Society Interface</i>
Manuscript ID	rsif-2016-0935.R1
Article Type:	Research
Date Submitted by the Author:	12-Jan-2017
Complete List of Authors:	Dzidek, Brygida; University of Birmingham, School of Chemical Engineering Adams, Mike; University of Birmingham, School of Chemical Engineering Andrews, James; University of Birmingham, School of Chemical Engineering Zhang, Zhibing; University of Birmingham, School of Chemical Engineering Johnson, Simon; Unilever R&D Port Sunlight, Strategic Science Group
Categories:	Life Sciences - Physics interface
Subject:	Biomechanics < CROSS-DISCIPLINARY SCIENCES, Biophysics < CROSS-DISCIPLINARY SCIENCES, Biomaterials < CROSS-DISCIPLINARY SCIENCES
Keywords:	tribology, friction, touch, fingerprint, skin

SCHOLARONE™
Manuscripts

1
2
3 **Contact mechanics of the human finger pad**
4
5
6 **under compressive loads**
7
8
9

10
11 Brygida M. Dzidek¹, Michael J. Adams^{1,*}, James W. Andrews¹,

12
13
14 Zhibing Zhang¹, and Simon A. Johnson²
15
16

17
18 ¹*School of Chemical Engineering, University of Birmingham, Birmingham B15 2TT, UK*
19

20
21 ²*Unilever R&D Port Sunlight, Bebington, Wirral, CH63 3JW, UK*
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

*Author for correspondence (m.j.adams@bham.ac.uk).

Abstract

The coefficient of friction of most solid objects is independent of the applied normal force because of surface roughness. This behaviour is observed for a finger pad except at long contact times (> 10 s) against smooth impermeable surfaces such as glass when the coefficient increases with decreasing normal force by about a factor of five for the load range investigated here. This is clearly an advantage for some precision manipulation and grip tasks. Such normal force dependence is characteristic of smooth curved elastic bodies. It has been argued that the occlusion of moisture in the form of sweat plasticises the surface topographical features and their increased compliance allows flattening under an applied normal force so that the surfaces of the fingerprint ridges are effectively smooth. While the normal force dependence of the friction is consistent with the theory of elastic frictional contacts, the gross deformation behaviour is not and, for commonly reported values of the Young's modulus of *stratum corneum*, the deformation of the ridges should be negligible compared with the gross deformation of the finger pad even when fully-occluded. The current paper describes the development of a contact mechanics model that resolves these inconsistencies and is validated against experimental data.

1. Introduction

The finger pad is a particularly interesting region of glabrous skin because of its role in touch and grip, which critically depend on normal and tangential mechanical interactions [1]. In touch, for example, the tactile perception of softness is partly determined by the compressive deformation of the finger pad since the resulting sub-surface strain fields affect how slowly-adapting cutaneous mechanoreceptors respond

1
2
3 [2,3,4]. While in grip, for example, skin hydration governs the contact area that
4
5 develops during compressive and tangential loading and this affects both the static
6
7 friction forces [5] and the dynamics of how slippage occurs [6]. Understanding
8
9 compressive and tangential interactions in a relatively small force regime (< 2 N) is
10
11 also important in the design of effective flat-screen haptic displays [7,8].
12
13

14
15
16 Friction arises from the dissipation of energy at the interface and in the bulk, which
17
18 may be approximated by the *two-term model* as the sum of the adhesion and
19
20 deformation components [9]. The adhesion component is the product of the contact
21
22 area, A , and the interfacial shear strength, τ (refer to Appendix A for the nomenclature
23
24 used in this paper and the Electronic Supplementary Material). It accounts primarily
25
26 for the friction of glabrous skin since measurements of the rolling friction of the inner
27
28 forearm established that the deformation coefficient of friction is considerably smaller
29
30 for sliding against smooth surfaces [10]. Hence, as is described below, friction
31
32 measurements as a function of load allow the contact area to be probed, provided that
33
34 account is taken of the pressure dependence of the interfacial shear strength. A
35
36 deformation component could arise from sub-surface viscoelastic hysteresis or from
37
38 the energy dissipated by abrasion against rough surfaces [11]. For example, it has
39
40 been argued that this mechanism would be more important for sliding against ridged
41
42 surfaces [12,13].
43
44
45
46
47
48

49
50 During continuous sliding against a smooth impermeable surface, the friction of a
51
52 finger pad, F , depends on the normal force, W , to some power $n \in [2/3, 1]$, viz.,
53
54 $F = k_f W^n$ where n is termed the frictional load index and k_f is a load-dependent
55
56 coefficient of friction [1,14]. It has been shown recently that, during a period of tens
57
58
59
60

1
2
3 of seconds, n tends towards a steady state value of about $2/3$ from an initial value of
4
5 about unity [15]. The latter corresponds to the dry Coulombic limit, *viz.*,
6
7 $F = \mu W$ where μ is the coefficient of friction that is independent of the normal force.
8
9
10 However, in the fully-occluded state, $\mu = k_f W^{-1/3}$ and hence μ increases with
11
12 decreasing normal force. This could be an advantage in some precision manipulation
13
14 and grip tasks in both the fully-occluded state or when smooth objects are damp.
15
16
17

18
19 Multiple asperity contacts exhibit Coulombic rather than non-linear friction [9] and,
20
21 reasonably, it might be expected that this would be the case for finger pads, which are
22
23 topographically rough. It was believed that the reduction in n arises from the moisture
24
25 secreted by the large number of sweat pores in the fingerprint ridges, which plasticises
26
27 the *stratum corneum* so that the surface topographical features become flattened under
28
29 the action of a normal force. This was termed an occlusion mechanism and involves a
30
31 mechanical transition of the *stratum corneum* from a glassy to a rubbery state [1,14].
32
33 It was also observed that there was a corresponding increase in the coefficient of
34
35 friction that was ascribed to the increase in the contact area arising from the
36
37 topographical flattening, assuming that the reduction in the interfacial shear strength
38
39 due to the plasticisation was a much smaller factor.
40
41
42
43
44
45

46 The contact mechanics, and hence the contact area, are influenced by the
47
48 characteristic length scales associated with the curvature of the gross geometry, the
49
50 shape and pattern of the fingerprint ridges, as well as the topography of the ridge
51
52 surfaces. According to the Hertz equations [16], if it is assumed that a finger pad in
53
54 the fully-occluded state is treated as a smooth linear elastic body with the fingerprint
55
56 ridges having a trapezoidal cross-section, the gross contact area, A_g , would scale with
57
58
59
60

1
2
3 the normal force as a power $m_g = 2/3$. Moreover, if complete topographical
4
5 flattening of the ridges occurred in the fully-occluded state and the contact area of the
6
7 ridges, A_r , is independent of the normal force, then the ridge contact area should also
8
9 increase with a load index of $m_r = 2/3$ since the governing factor would only be the
10
11 increase in the number of contacting fingerprint ridges with increasing load [15]. On
12
13 this basis, according to the adhesion model, n should be equal to $2/3$. In practice, the
14
15 steady state value of n can be slightly greater than $2/3$ because the interfacial shear
16
17 strength, which arises from the intermittent formation and rupture of molecular
18
19 junctions at the sliding interface, depends linearly on the mean contact
20
21 pressure, $p = W / A$, i.e. $\tau = \tau_0 + \alpha p$ where τ_0 is the intrinsic value of τ at $p = 0$ and
22
23 α is a pressure coefficient [14]. Consequently, the frictional force is given by
24
25 $F = \tau_0 A + \alpha W$ so that n depends on the relative values of the two terms although the
26
27 frictional load index for the finger pad in the fully-occluded state is $\sim 2/3$ [15], which
28
29 suggests that the second term is relatively small.
30
31
32
33
34
35
36
37

38 A major difficulty with the above simple model of a finger pad as a smooth, linearly-
39
40 elastic, ellipsoidally-capped body, with the contact area reduced by the valleys
41
42 between the finger pad ridges, is that the normal force dependence of the gross contact
43
44 area is not Hertzian; even though the contact area of the fingerprint ridges seems
45
46 Hertzian on the basis of the load index of the friction. The load dependence of the
47
48 contact area depends on the finger selected, the orientation of the finger and possibly
49
50 the load range considered as reviewed by van Kuilenburg *et al.* [17]. The frictional
51
52 measurements described previously were recorded using an index finger in a
53
54 relatively parallel orientation to the counter-surface and with a normal force range of
55
56 $0.02 - 2$ N [15]. It has been reported by Soneda & Nakano [18], using an optical
57
58
59
60

1
2
3 method, that the values of m_g and m_r are 0.52 ± 0.06 and 0.68 ± 0.09 for an index
4
5
6 finger in a similar orientation and in the load range 0.1 – 5 N. A corresponding value
7
8 of $m_r = 0.58 \pm 0.017$ was reported for the load range 0.03 – 1.6 N using ink
9
10 impressions [19]. More recently, Lin *et al.* [20] have reported a relatively small value
11
12 of $m_r = 0.43$ for a load range from 0.2 – 2 N, but this was for a relatively flat
13
14 orientation of the finger pad more relevant to grip. Optical coherence tomography has
15
16 also established that the contact width of the ridges increase with the applied normal
17
18 force to a power 0.17 for a load range of 0.14 – 12 N [21]. This confirms that the
19
20 ridges are deformable in the occluded state despite the gross finger pad being
21
22 relatively soft. That the index is smaller than the value observed for the whole finger
23
24 pad was ascribed to the relatively small area that could be scanned.
25
26
27
28
29

30
31 The aim of the current paper is to understand why the friction of a fully-occluded
32
33 finger pad apparently may be described by Hertzian deformation although the gross
34
35 loading behaviour is non-Hertzian. There are a number of papers that describe the
36
37 application of finite element analysis to a finger pad [e.g. 22-28], which has the
38
39 advantage of capturing the complex anatomical structure and geometry albeit
40
41 involving significant approximation and computational cost. Pawluk & Howe [29]
42
43 adopted a simpler approach by treating a finger pad as homogeneous and extending
44
45 the Hertzian model in order to incorporate non-linear elasticity coupled with linear
46
47 viscoelasticity. The model was shown to account for the measured radial contact
48
49 pressure distribution as a function of the applied load and the stress relaxation, with
50
51 the longest relaxation time being ~ 3 s. The instantaneous elastic response was
52
53 described by an empirical exponential function of the displacement due to Fung [30].
54
55
56
57
58
59
60

1
2
3 Pawluk & Howe [31] also used this function to describe the velocity dependent
4
5 loading curves of a finger pad as did Jindrich *et al.* [32].
6
7

8
9
10 During loading, a finger pad is compressed against the *distal phalanx*. This is
11
12 analogous to the indentation of a soft layer on a rigid substrate. If the ratio of the
13
14 contact radius to the thickness of the layer is greater than about 0.1, the sub-surface
15
16 stress field in the layer interacts with the rigid substrate, which acts as a constraint.
17
18 Consequently, there will be an increase in the measured elastic modulus of the layer
19
20 compared to that for a half-space. This is consistent with the measured upper bound of
21
22 the gross contact area of a finger pad that has been measured for loads of greater than
23
24 ~ 5 N [33]. There is an extensive literature on modelling the indentation of layered
25
26 solids but they involve layers of uniform thickness [34] that would not be applicable
27
28 to the ellipsoidal geometry of the finger pad with a central hard bone. A
29
30 phenomenological approach is proposed here that captures the physics of the induced
31
32 constraint and that is consistent with the loading behaviour. The rate dependence is
33
34 neglected in the current work since the relaxation times of the finger pad are short
35
36 compared with the occlusion times associated with the frictional behaviour described
37
38 previously [15]. They are also short compared with the times involved with measuring
39
40 the contact areas, which includes measurement made in the current work using ink
41
42 impressions. An advantage of the approach is that it allows the deformation of the
43
44 fingerprint ridges to be modelled and hence also their contact area as a function of
45
46 load. There is some evidence from confocal microscopy that the surfaces of the
47
48 fingerprint ridges have pronounced curvature [35] rather than being flat and additional
49
50 such topographical data will be presented later. Consequently, their geometry will be
51
52 described as being cylindrically capped. A concentric circular representation of a
53
54
55
56
57
58
59
60

1
2
3 fingerprint will also be adopted, which has been employed previously [36] but which
4
5 corresponded to a planar finger pad and the ridges were assumed to have a trapezoidal
6
7 cross-section. The shape of the ridges was partly based on optical coherence
8
9 tomography data mentioned previously [21] but whether the peaks of the cross-
10
11 sectional profiles were flat or circular was equivocal.
12
13

14
15
16 The undeformed finger pad may be approximated as an ellipsoidal cap with a mean
17
18 radius of curvature, R_{0g} , that depends on the contact location and hence on the
19
20 orientation of the finger. A method for calculating R_{0g} from the three semi-axes of the
21
22 ellipsoid is described in the Electronic Supplementary Material, as well as procedures
23
24 for obtaining the semi-axes from photographic images.
25
26
27
28
29
30
31
32

33 **2. Experimental**

34 **2.1. Finger pad**

35
36 The measurements were carried out on the left-hand index finger of the subject
37
38 (female aged 27 yr) who gave her informed consent. The finger pad was cleaned by
39
40 wiping with a dilute (10%) aqueous solution of the surfactant *Neutracon* (ex Decon
41
42 Laboratories Ltd., UK), rinsed thoroughly in copious amounts of demineralised water,
43
44 dried with tissue paper and allowed to equilibrate for at least 120 s before any
45
46 measurements were made.
47
48
49
50

51
52 The values of the three ellipsoidal semi-axes characterising the undeformed gross
53
54 geometry of the finger pad were obtained from photographic images taken in three
55
56 planes. By accounting for the orientation relative to the inclined finger support at
57
58
59
60

1
2
3 angles of 30° and 45°, it is possible to calculate the mean radii of curvature (see
4
5 Electronic Supplementary Material).
6
7

8
9
10 A silicone elastomer impression material (*Silflo*, ex Cuderm, USA) was used to obtain
11
12 negative replicas of the finger pad. Surface texture imaging of the replicas was carried
13
14 out using a 3D optical profiler (*S neox*, ex Sensofar-Tech, Spain), in order to
15
16 characterise the fingerprint ridge geometry and spacing.
17
18

20 21 **2.2. Compression**

22
23 A Universal Materials Testing Machine (model no. 5566, ex Instron, UK) with a 10 N
24
25 load transducer was used to measure the loading behaviour of the finger pad in
26
27 addition to the evolution of the contact area. A glass plate (20 x 20 mm), which acted
28
29 as a platen, was mounted on a rod using double-sided adhesive tape and the rod was
30
31 attached to the load transducer. A finger support wedge was fixed to a rigid stand on
32
33 the base plate of the testing machine as shown in figure 1. Double-sided adhesive tape
34
35 was attached to the sloping surface of the wedge in order to fix the position of the
36
37 finger so that the *dorsum* was elevated at angles of either 30° or 45° with the respect to
38
39 the axis of the *distal phalanx*. The position of the cross-head of the testing machine
40
41 was adjusted so that there was a sufficient initial air gap between the contact point of
42
43 the finger pad and the platen in order to allow for the acceleration of the cross-head to
44
45 the selected approach velocity, which was in the range 0.1 – 8 mm/s. The upper load
46
47 limit was set to 4 N, which was greater than the range analysed (0 - 2 N), to avoid any
48
49 errors due to the deceleration of the cross-head as it approached the set load. The
50
51 force and displacement data were recorded at 500 Hz, and all measurements were
52
53
54
55
56
57
58
59
60

1
2
3 carried out in an environmentally-controlled laboratory at $21 \pm 1^\circ\text{C}$ and $55 \pm 5\%$
4
5 relative humidity.
6
7

8 9 **2.3. Contact area**

10 The finger pad was brought into contact with a rubber stamp pad (*Dormy*, no. 3) to
11
12 apply a thin ink film. In the case of the contact area measurements, adhesive backed
13
14 paper labels were attached to the glass plates. Finger pad compression was done using
15
16 a cross-head velocity of 2 mm/s to 12 loads in the range 0.02 – 2 N; with a 2 s dwell
17
18 at each maximum load prior to decompression and 4 ink prints being taken for each
19
20 load. The ink prints were scanned and the gross and ridge areas were determined
21
22 using image analysis software (Image J, <http://imagej.nih.gov/ij/>).
23
24
25
26
27
28
29
30
31

32 **3. Results**

33
34 The mean radii of curvature calculated for the finger pad orientations of 30° and 45°
35
36 were calculated to be 18.7 and 13.2 mm using the method described in §2.1.
37
38

39
40 Figure 2 shows a typical 3D profile of the fingerprint ridges and line scans that
41
42 demonstrate the approximately circular cross-section of the peaks of the ridges. The
43
44 topography was characterised by fitting arcs of a circle with radius R_r and a centre-
45
46 to-centre spacing of sR_r . The values of R_r and s are $0.32 (\pm 0.02)$ mm and $1.33 (\pm$
47
48 $0.01)$, which corresponds to a mean centre-to-centre distance of $426 \mu\text{m}$. A simple
49
50 geometric analysis gives the peak-to-valley height to be $81 \mu\text{m} \left(= R_r - R_r \sqrt{1 - s^2 / 4} \right)$.
51
52
53
54
55
56 Comparable data were reported in a recent study of 26 subjects for which the centre-
57
58 to-centre distance was $458 \pm 71 \mu\text{m}$ and the peak-to-valley height was $102 \pm 26 \mu\text{m}$
59
60

1
2
3 [37]. However, the authors did not comment on whether or not the ridges were
4
5 cylindrically capped and it is not obvious from the published image.
6
7

8
9
10 The compressive force as a function of displacement, ξ , for a velocity of 8 mm/s and
11
12 orientations of the finger pad of 30° and 45° is shown in figure 3. The compressive
13
14 displacement, ξ , is obtained from the displacement of the platen such that $\xi = 0$
15
16 corresponds to initial contact. The force at given displacement is greater for the
17
18 orientation of 45° compared to 30° and it was relatively independent of the
19
20 displacement velocity for the range examined.
21
22

23
24
25 Figure 4 exemplifies a typical finger print image obtained at a normal force of 2 N
26
27 and orientation of 45°. Figure 5 shows the gross and ridge contact areas (mean and ± 1
28
29 standard deviation), calculated from such images, as a function of the compressive
30
31 force for orientations of the finger pad of 30° and 45°. The data were fitted to a power
32
33 law expression of the following form that was discussed in the introductory section:
34
35

$$36 \quad A = kW^m, \quad (3.1)$$

37
38
39 where k and m are the load coefficient and load index, and $m = m_g$ and $k = k_g$ when
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

where k and m are the load coefficient and load index, and $m = m_g$ and $k = k_g$ when
 $A = A_g$, and $m = m_r$ and $k = k_r$ when $A = A_r$. The best fit values of these parameters
are given in Table 1.

Figure 6 shows experimental data for the gross contact area as a function of the
compressive displacement for the two finger pad orientations; the maximum
displacements correspond to a normal force of 2 N.

4. Discussion

The values of m_g and m_r given in Table 1 are smaller than those reported by Soneda & Nakano [18] that were discussed previously; the values of k were not reported by these authors. While the ridge indices (*ca.* 0.5) are slightly less than the Hertzian value (0.67), the gross values are much less (*ca.* 0.35). An important feature of such data is they demonstrate that the contact area of the ridges increases with increasing normal load at a rate that is greater than that of the gross finger pad. This must arise because the ridges deform under a compressive load as discussed previously. The quality of the power law fits in figure 5 is relatively poor for the gross areas, which indicates that the data do not accurately fit a simple power law. An alternative model is described below that accounts for the constraint provided by the *distal phalanx*.

The loading curves measured here, examples of which are shown in figure 3, have a similar exponential form to those published previously in the velocity range 0.2 – 80 mm/s [31]. However, in this previous work, the data appeared to be much more rate dependent but a greater range of velocities was examined and the trend was not entirely systematic, which suggests that there were some uncertainties in the data. To be consistent with the observed Hertzian parabolic radial pressure distribution [31], a finger pad also should exhibit Hertzian compliance as defined by the following expression [16]:

$$A_g = \pi R_g \xi, \quad (4.1)$$

where R_g is the effective radius of the finger pad; *i.e.* the radius of a sphere with the equivalent compression/contact area relationship.

1
2
3 The best fits to this equation are shown in figure 6 for the two finger pad orientations.
4
5 From the gradients, the mean values of R_g are calculated to be 20.5 ± 0.4 mm and
6
7 14.5 ± 0.4 mm for the orientations of 30° and 45° . They are $< 10\%$ greater than those
8
9 calculated from the undeformed geometry of the finger pad ($R_{0g} = 18.7$ and 13.4 mm),
10
11 but this will inevitably involve some errors in fitting ellipses. In addition, as described
12
13 in the Electronic Supplementary Material, these values of the effective radii have to
14
15 be corrected when applied to an ellipsoid because the pressure distribution, and hence
16
17 the displacements, are a function of the location on the perimeter of the elliptical
18
19 contact region [16]. The corrected values are 19.9 and 14.0 mm respectively, which is
20
21 sufficiently similar to those obtained from the loading curves that it is reasonable to
22
23 assume the Hertzian compliance relationship may be applied to the finger pad.
24
25 Consequently, the radii from the compliance plots will be employed in subsequent
26
27 calculations as being more representative of the measured contact mechanics.
28
29
30
31
32
33
34

35 **4.1. Secant modulus and loading response**

36
37 The Hertz equation for the loading of a finger pad in contact with a smooth rigid plane
38
39 may be written in the following form [16]:
40
41
42

$$43 \quad W = \frac{4}{3} R_g^{1/2} E_g^* \zeta^{3/2}, \quad (4.2)$$

44
45
46
47
48 where the reduced elastic modulus is given by $E_g^* = E_g / (1 - \nu_g^2)$ such that E_g and ν_g
49
50 are the elastic modulus and Poisson's ratio of the finger pad; the value of ν_g was
51
52 taken to be 0.5 [22]. If the loading could be described by equation (4.2) then the
53
54 modulus, E_g , would correspond to the Young's value, E_{0g} . However, since the
55
56
57
58
59
60

1
2
3 loading is non-Hertzian (*e.g.* the data shown in figure 3 do not follow a power law
4
5 with a displacement index of $3/2$), E_g is a secant modulus but it might be expected
6
7 that $E_g^* \rightarrow E_{0g}^*$ as $W \rightarrow 0$. The secant modulus, E_g , calculated from the data obtained
8
9 at a displacement velocity of 8 mm/s using equation (4.2) is plotted in figure 7a as a
10
11 function of displacement for the orientations of 30° and 45° . The initial values are
12
13 relatively large, ~ 300 kPa and rapidly decrease before gradually increasing. At small
14
15 displacements, and hence at small contact radii, the upper layers of the skin will be
16
17 sensed since the maximum sub-surface shear stress occurs at about $0.7a_g$ for a
18
19 Hertzian contact [16], where a_g is the contact radius. Consequently, the *stratum*
20
21 *corneum* will make a large contribution to the modulus but in a complicated way
22
23 given the nature of the anatomical structure and surface topography of the finger pad.
24
25 The region of increasing modulus would then correspond to deeper and softer layers
26
27 nearer the bone. For displacements up to ~ 0.9 mm in the region of increasing
28
29 modulus, the rate of increase is relatively small so that it may be regarded as
30
31 approximately Hertzian with a modulus of ~ 40 kPa. This was found to be the case in
32
33 previous work and the calculated Young's moduli for a groups of male and female
34
35 subjects were 59 ± 13 and 82 ± 20 kPa [37]. These values were calculated using the
36
37 geometric mean of the radii of curvature with a value of 13.3 ± 3 mm. The angle of
38
39 the finger pads was not stated but appeared to be comparable to $\sim 30^\circ$. If this were the
40
41 case, then the difference would be explained partly by the smaller radius of curvature.
42
43
44
45
46
47
48
49
50

51 In order to account for the constraint arising from the *distal phalanx* described
52
53 previously, it was assumed that the relative change in the secant modulus was
54
55 proportional to some power law function of the strain as follows:
56
57
58
59
60

$$\frac{E_g^* - E_{0g}^*}{E_g^*} = (C\varepsilon)^\eta, \quad (4.3)$$

such that $\varepsilon \in [0, 1/C]$ where C is termed a constraint coefficient and ε is the strain. As will be described below, it was found that the experimental data could most accurately be described with $\eta = 3$. Essentially, this is a consequence of the experimental observation that the secant modulus is a linear function of the load; as will be shown later in this section. The appropriate expression for the Hertzian strain [38] may be written as follows by substituting in equation (4.1) using $a_g = \sqrt{A_g / \pi}$:

$$\varepsilon = 0.2 \frac{a_g}{R_g} = 0.2 \left(\frac{\xi}{R_g} \right)^{1/2}. \quad (4.4)$$

In the case of an ellipsoidal finger pad, both a_g and R_g are the radii associated with the equivalent spherical contact.

Thus from equations (4.3) and (4.4), the secant modulus may be written in the following form:

$$E_g^* = E_{0g}^* [1 - (C\varepsilon)^3]^{-1} = E_{0g}^* \left[1 - (0.2C)^3 \left(\frac{\xi}{R_g} \right)^{3/2} \right]^{-1}. \quad (4.5)$$

The maximum displacement was ~ 1.6 mm, which corresponds to a maximum strain of ~ 0.066 according to equation (4.4) and thus satisfies the condition $\varepsilon \leq 1/C$ for

equation (4.3). Strictly, the Hertz equation is only applicable to small strains but the limit is not clearly defined. However, in practice it appears to fit experimental data to quite high strains; for example, maximum values of 0.08 [38] and ~ 0.3 [39] have been reported.

To derive an expression for the contact areas as a function of load, it is necessary to determine the influence of load on the secant modulus. Rearranging equation (4.5) yields:

$$\xi = R_g E_{0g}^* \left[\frac{(E_{0g}^{*-1} - E_g^{*-1})}{(0.2C)^3} \right]^{2/3}. \quad (4.6)$$

Equations (4.2) and (4.6) lead to a linear relationship between E_g^* and W , as discussed previously:

$$E_g^* = E_{0g}^* \left[1 + \frac{3(0.2C)^3}{4R_g^2 E_{0g}^*} W \right] = E_{0g}^* (1 + \beta W), \quad (4.7)$$

where the load coefficient $\beta = 3(0.2C)^3 / 4R_g^2 E_{0g}^*$. Figure 7b shows the secant modulus, E_g^* , as a function of the load for a displacement velocity of 8 mm/s and the orientations of 30° and 45°. Best-fit straight lines to the data yield values for E_{0g}^* and β and, hence, C . The values for E_{0g}^* and C are plotted as function of velocity in figures 7c and 7d respectively. There does not appear to be a significant trend of these fitted parameters with increasing velocity. The mean values of E_{0g}^* are 30.6 and

36.2 kPa for orientations of the finger pad of 30° and 45°, which is similar to the value of 40 kPa measured for the inner forearm [10]. The mean values of C are 15.4 and 14.2 for orientations of the finger pad of 30° and 45°, while the corresponding mean values of β are 1.27 and 1.72 N⁻¹. The mean values together with their standard deviations are given in Table 2.

Equations (4.2) and (4.5) lead to the following loading relationship:

$$W = \frac{4}{3} R_g^{1/2} E_{0g}^* \left[1 - (0.2C)^3 \left(\frac{\xi}{R_g} \right)^{3/2} \right]^{-1} \xi^{3/2}. \quad (4.8)$$

The best fits of this equation to the data at a velocity of 8 mm/s are shown in figure 3. The compressive force at a given displacement is greater for the steeper orientation of 45° compared with 30° as a result of larger values of β and E_{0g} and, hence, of E_g , but not of C (Figure 7 and Table 2).

4.2. Gross contact area

The gross contact area may be obtained by substitution of equation (4.7) in the appropriate form of the Hertz equations given by equations (4.1) and (4.2) [16]:

$$A_g = \pi \left[\frac{3 R_g W}{4 E_g^*} \right]^{2/3} = \pi \left[\frac{3 R_g W}{4 E_{0g}^* (1 + \beta W)} \right]^{2/3} = \hat{k}_g \left[\frac{W}{1 + \beta W} \right]^{2/3}. \quad (4.9)$$

1
2
3 It is noted that the form of this equation is such that if $\beta = 0$ then the Hertz equation
4
5 is recovered ($n = 2/3$), while if $\beta W \gg 1$ then A_g is load-independent ($n = 0$), which is
6
7 the observed behaviour at large loads.
8
9

10
11 Figure 8a shows best fits of this equation using the values β (1.35 and 1.53 N^{-1}) for
12
13 the 30° and 45° orientations obtained for the same velocity as used for the contact
14
15 area measurements; *viz.*, 2 mm/s . The smaller value of R_g for the data at the 45°
16
17 orientation (14.5 mm) compared with that at 30° (20.5 mm) is the main cause of the
18
19 smaller contact area at a given load, since the fitted values of E_{0g}^* are similar (29 and
20
21 28 kPa for 30° and 45° respectively, which are similar to the values obtained from the
22
23 secant modulus analysis in §4.1). By comparing the curves in Figures 5 and 7a, it may
24
25 be seen that equation 4.9 is more accurate than a simple power law in fitting the A_g
26
27 data over the whole load range.
28
29
30
31
32
33
34
35

36 4.3. Ridge contact area

37 The ridge contact area as a function of load may be obtained by an elastic contact
38
39 analysis of the geometry shown schematically in figure 9. This analysis is described in
40
41 Appendix B, and leads to the following expression (equation B.9):
42
43
44
45

$$46 A_r = 3.56 \frac{R_g^{1/3}}{s^{1/2} E_r^{*1/2} E_{0g}^{*1/3}} \left[\frac{W^{5/6}}{(1 + \beta W)^{1/3}} \right] = \hat{k}_r \left[\frac{W^{5/6}}{(1 + \beta W)^{1/3}} \right]. \quad (4.10)$$

47
48
49
50
51
52

53 It is noted that the values of A_r calculated from this equation are nominal ridge
54
55 contact areas since the model assumes the ridges are both smooth and continuous and
56
57 ignores their surface texture. The form of the equation is such that the load index can
58
59
60

1
2
3 range between $n = 0.83$ ($\beta = 0$) and $n = 0.5$ ($\beta W \gg 1$), which is within the range
4
5 deduced through friction measurements for the fully-occluded state [15].
6
7
8
9

10 **4.4. Ridge elastic modulus**

11 The measured nominal contact areas of the fingerprint ridges are plotted as a function
12 of load in figure 8b and show the best fits of equation (4.10) to the data. The values of
13
14 E_r obtained from the fittings are $108 (\pm 11)$ and $134 (\pm 12)$ kPa for the orientations of
15
16 30° and 45° . The fits are less accurate at the highest loads and this may arise from the
17
18 variability associated with using ink prints to calculate the ridge areas, or deficiencies
19
20 in the simple geometric model used in the elastic contact analysis. That the values are
21
22 approximately independent of the orientation of the finger pad within experimental
23
24 error, as should be the case, provides some support for the validity of the model.
25
26 However, the values are considerably smaller than the range of $1 - 1000$ MPa
27
28 typically reported for the Young's modulus of *stratum corneum* [40,41]; the large
29
30 range arises partly from the sensitivity to the nominal moisture levels and strain rates
31
32 at which the measurements are made. Generally, for *ex vivo* samples, such values are
33
34 obtained by tensile measurements, which may behave differently from *in vivo stratum*
35
36 *corneum*, and is associated with experimental uncertainties such as eliminating the
37
38 natural crimping. *In vivo* indentation measurements are complicated by the multi-layer
39
40 structure of skin and the underlying tissues, and the through-thickness moisture
41
42 gradient. Consequently, the results depend on the indenter geometry and indentation
43
44 depth [40] and the model used to interpret the data. Thus the reported Young's moduli
45
46 are essentially ill-defined mean values over the stress field of the sub-surface volume
47
48 on which the indenter acts.
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 Dynamic optical coherence elastography is a much more direct method for measuring
4 the *in vivo* biomechanical properties of skin since the spatial resolution and
5 directionality are clearly defined. Using this technique, Liang *et al.* [42] have reported
6 values of the Young's modulus in the range 23 – 300 kPa depending on the hydration
7 state of the *stratum corneum* and the applied frequency. The current values are within
8 this range and thus provide further evidence of the reliability of the model. More
9 conclusively, the current values of the ridge modulus are only about a factor of three
10 greater than those of the gross finger pad at small strains and are comparable at larger
11 strains. If the ridge modulus was much greater, the ridge deformation under the action
12 of a normal force may be insufficient to account for both the observed ridge contact
13 area and the frictional behaviour.
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29

30 **4.5. Rate dependence**

31 The application of a linear elastic model of the finger pad that is homogeneous and
32 isotropic but is constrained by the *distal phalanx* is consistent with the loading
33 behaviour and the gross and nominal contact areas of the fingerprint ridges. Phillips &
34 Johnson [43,44] established the value of such models, but without constraint, by the
35 close agreement between the calculated strains arising from the contact with gratings
36 and the measured response of one type of mechanoreceptor (SAI) that innervates the
37 finger pad. However, clearly it is not possible to determine accurately the sub-surface
38 stress field with this approach since the structure of finger pad involves two outer
39 layers of skin comprising the *epidermis* and *dermis* and an inner region of biphasic fat
40 and water in addition to the *distal phalanx*. The deformation of the skin is viscoelastic
41 and anisotropic [45] and it is probable that the fatty component will be poroelastic
42 with a Poisson's ratio that is a function of strain. Pawluk & Howe [29,31] have
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 established that the deformation of the finger pad is rate dependent but, for the range
4 of displacement velocities examined here, the behaviour appears to be approximately
5 steady state even though the deformation time at the highest velocity exceeds the
6 relaxation time determined by these authors. They also demonstrated that the
7 separation of the strain and strain rate is a viable strategy for deriving analytical
8 solutions of the contact mechanics. For example, incorporating the strain rate
9 dependence is critical for understanding the performance of flat screen haptic displays
10 based on vibration at ultrasonic frequencies [8].
11
12
13
14
15
16
17
18
19
20
21
22
23
24

25 **5. Conclusion**

26
27 An analytical elastic contact model, based on a geometric simplification of the finger
28 pad and the fingerprint ridges and a secant modulus that is linearly proportional to the
29 load, gives expressions for the gross and ridge contact areas as a function of load.
30 They are consistent with experimental contact area data obtained both directly from
31 ink print images and indirectly from friction measurements of a finger pad against
32 smooth surfaces. The Young's modulus of the ridges calculated from the experimental
33 data using this model is considerably less than the wide range of reported values of
34 *stratum corneum* using mechanical measurements even at high water activities. This
35 finding is consistent with values obtained more directly using dynamic optical
36 coherence elastography. Moreover, the current values are of the order of that for the
37 gross finger pad and this is essential for there to be sufficient deformation to account
38 for both the ridge contact area and the frictional behaviour. This also highlights the
39 difficulty of measuring and interpreting the Young's modulus of using mechanical
40 measurements.
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 The model is limited to the fully-occluded state where it is reasonable to assume that
4 the fingerprint ridges make complete contact with the surface due to the plasticisation
5 induced by the secretion of moisture as sweat. In the initial and partially occluded
6 states it will be necessary to account for the influence of the topography of the ridge
7 surfaces that are not completely flattened due to the limited plasticisation [46].
8
9 However, in these states the model may still be used to calculate the gross contact
10 area.
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

For Review Only

Ethics

The experimental protocols adopted for *in vivo* finger compression were approved by the local ethics committee, and the subject provided informed consent.

Data accessibility

The parameters given in the tables are obtained from experimental data shown in the figures. They can be used to generate the fitted curves shown in the figures, and enable comparisons to be obtained with past or future experiments.

Competing interests

The authors do not have competing interests.

Authors' contributions

BMD and MJA designed and coordinated the study and drafted the manuscript; BMD and SAJ performed the experiments and conducted the data analysis; JWA and ZZ participated in the statistical analysis and contact modelling. All authors made substantial contributions to the critical revision of the submitted manuscript.

Funding

This work was funded by the FP7 Marie Curie Initial Training Network PROTOTOUCH, grant agreement No. 317100.

Appendix A. Nomenclature

symbol	description	units
a_g	equivalent contact radius of the finger pad = $\sqrt{A_g / \pi}$	m
a_r	semi-contact width of fingerprint ridge	m
k	power law load coefficient for contact area	$\text{m}^2 \text{N}^{-m}$
k_f	load-dependent coefficient of friction	$\text{m}^2 \text{N}^{-n}$
k_g	power law load coefficient for finger pad gross contact area	$\text{m}^2 \text{N}^{-m_g}$
\hat{k}_g	load coefficient for finger pad gross contact area	$\text{m}^2 \text{N}^{-2/3}$
k_r	power law load coefficient for fingerprint ridge contact area	$\text{m}^2 \text{N}^{-m_r}$
\hat{k}_r	load coefficient for fingerprint ridge contact area	$\text{m}^2 \text{N}^{-5/6}$
ℓ_a	semi-axis to palmar face of finger pad ellipsoid	m
ℓ_b	semi-axis to distal face of finger pad ellipsoid	m
ℓ_c	semi-axis to ulnar/radial faces of finger pad ellipsoid	m
m	power law load index for contact area	
m_g	power law load index for finger pad gross contact area	
m_r	power law load index for fingerprint ridge contact area	
n	power law load index for frictional force	
p	mean contact pressure = W / A	Pa
$p_g(r)$	finger pad pressure radial distribution	Pa
q	number of fingerprint ridges in an annulus of width δr	
r	radial coordinate from contact centre	m
s	fingerprint ridge spacing factor	
u	palmar axis angular coordinate of point on finger pad ellipsoid	rad
v	radial axis angular coordinate of point on finger pad ellipsoid	rad
w	fingerprint ridge load per unit length	Nm^{-1}
x	palmar coordinate of point on finger pad ellipsoid	m
y	distal coordinate of point on finger pad ellipsoid	m
z	ulnar/radial coordinate of point on finger pad ellipsoid	m
A	contact area	m^2
A_g	finger pad gross contact area	m^2
A_r	fingerprint ridge contact area	m^2
A'_r	contact area of a fingerprint ridge at radius r in region $\delta\theta$	m^2
C	constraint coefficient for secant modulus	
E_g	secant modulus of the finger pad	Pa

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

E_g^*	reduced secant modulus of the finger pad = $E_g / (1 - \nu_g^2)$	Pa
E_{0g}	Young's modulus of the finger pad	Pa
E_{0g}^*	reduced Young's modulus of the finger pad = $E_{0g} / (1 - \nu_g^2)$	Pa
E_r	elastic modulus of the fingerprint ridge	Pa
E_r^*	reduced elastic modulus of the fingerprint ridge = $E_r / (1 - \nu_r^2)$	Pa
F	friction force	N
H_{0g}	mean curvature of the finger pad ellipsoid	m^{-1}
R_g	effective radius of the finger pad	m
R_{0g}	mean radius of curvature of the finger pad ellipsoid	m
R_r	radius of cylindrically-capped fingerprint ridge	m
W	normal force	N
α	pressure coefficient of interfacial shear strength	
β	load coefficient for secant modulus	N^{-1}
ε	compressive Hertzian strain	
η	strain index for secant modulus	
θ	angular coordinate about contact centre	rad
μ	coefficient of friction = F / W	
ν_g	Poisson's ratio of the finger pad	
ν_r	Poisson's ratio of the fingerprint ridge	
ξ	compressive displacement	m
τ	interfacial shear strength	Pa
τ_0	intrinsic interfacial shear strength (at $p = 0$)	Pa

Appendix B. Ridge contact area

In order to calculate the nominal contact area of the ridges, the finger pad was simplified to a spherical cap of radius R_g with concentric cylindrically capped fingerprint ridges of radius R_r and spacing $s R_r$ between their centres as shown schematically in figure 9, which is consistent with the topographical data shown in figure 2. It is clear from figure 4 that the contact is non-circular but the spherical cap model is assumed to be an equivalent axi-symmetric point contact. It is also assumed that the spherical cap is compressed along its axis of symmetry against a smooth rigid platen irrespective of the orientation of the finger pad, which is accounted for by the equivalent radius of curvature. The expression for the Hertzian radial pressure distribution [16] is modified by incorporating the load dependence of the modulus given by equation (4.7) as follows:

$$P_g = \left(\frac{6 E_g^* W}{\pi^3 R_g^2} \right)^{1/3} \left(1 - \frac{r^2}{a_g^2} \right)^{1/2} = \left[\frac{6 E_{0g}^* (1 + \beta W)^2 W}{\pi^3 R_g^2} \right]^{1/3} \left[1 - \frac{r^2}{a_g^2} \right]^{1/2}, \quad (\text{B.1})$$

where r is a radial coordinate with an origin at the centre and in the plane of the platen. In practice, the radial pressure distribution will be lumpy, rather than a smooth parabolic Hertzian profile, due to the presence of the fingerprint ridges. However, the relative contribution of the ridges will decay with increasing normal load as $R_r / a_g \rightarrow 0$. Consequently, a first order approximation of the load carried by any ridge may be calculated from equation (B.1) by ignoring the influence on the pressure distribution.

The load acting on a control area $r \delta \theta \delta r$ is given by:

$$\delta W = p_g r \delta r \delta \theta = \left[\frac{6 E_{0g}^{*2} (1 + \beta W)^2 W}{\pi^3 R_g^2} \right]^{1/3} \left[1 - \frac{r^2}{a_g^2} \right]^{1/2} r \delta r \delta \theta, \quad (\text{B.2})$$

where θ is the angular coordinate.

The number of ridges, q , in an annulus of width δr is given by:

$$q = \frac{\delta r}{s R_r}. \quad (\text{B.3})$$

The load per unit length, w , acting on each ridge in the control area is given by:

$$w = \frac{\delta W}{q r \delta \theta} = \frac{s R_r \delta W}{r \delta r \delta \theta} = s R_r \left[\frac{6 E_{0g}^{*2} (1 + \beta W)^2 W}{\pi^3 R_g^2} \right]^{1/3} \left[1 - \frac{r^2}{a_g^2} \right]^{1/2}. \quad (\text{B.4})$$

It will be assumed that a fingerprint ridge is linear elastic with an elastic modulus E_r and Poisson's ratio $\nu_r = 0.3$ [41] so that it acts as a Hertzian line contact under a load w per unit length. The semi-contact width, a_r , can then be obtained from the following expression [16]:

$$a_r = \left[\frac{4 R_r w}{\pi E_r^*} \right]^{1/2}. \quad (\text{B.5})$$

Consequently, the contact area, A'_r , for each ridge in a region $\delta\theta$ can be derived from equations (B.4) and (B.5):

$$A'_r = 2a_r r \delta\theta = 4 \left[\frac{R_r}{\pi E_r^*} \right]^{1/2} w^{1/2} r \delta\theta$$

$$= \frac{6^{1/6} 4}{\pi} \frac{s^{1/2} R_r E_{0g}^{*1/3}}{R_g^{1/3} E_r^{*1/2}} \left[(1 + \beta W)^2 W \right]^{1/6} \left[1 - \frac{r^2}{a_g^2} \right]^{1/4} r \delta\theta. \quad (\text{B.6})$$

The nominal ridge area of contact in a control area $\delta A_r = r \delta r \delta\theta$ is given by $q A'_r$:

$$\delta A_r = q A'_r = \frac{\delta r}{s R_r} A'_r. \quad (\text{B.7})$$

Substituting equation (B.6) in (B.7) and integrating with the limits $r=0, a_g$ and $\theta=0, 2\pi$ yields:

$$A_r = \frac{6^{1/6} 16}{5} \frac{E_{0g}^{*1/3}}{s^{1/2} R_g^{1/3} E_r^{*1/2}} \left[(1 + \beta W)^2 W \right]^{1/6} a_g^2. \quad (\text{B.8})$$

Finally, equations (4.9) and (B.8) give:

$$A_r = 3.56 \frac{R_g^{1/3}}{s^{1/2} E_r^{*1/2} E_{0g}^{*1/3}} \left[\frac{W^{5/6}}{(1 + \beta W)^{1/3}} \right] = \hat{k}_r \left[\frac{W^{5/6}}{(1 + \beta W)^{1/3}} \right]. \quad (\text{B.9})$$

References

1. Adams MJ, Johnson SA, Lefèvre P, Lévesque V, Hayward V, André T, Thonnard J-L. 2013 Finger pad friction and its role in grip and touch. *J. R. Soc. Interface* **10**, 20120467. (doi: 10.1098/rsif.2012.0467)
2. Friedman RM, Hester KD, Green BG, LaMotte RH. 2008 Magnitude estimation of softness. *Exp. Brain. Res.* **191**, 133–142. (doi: 10.1007/s00221-008-1507-5)
3. Condon M, Birznieks I, Hudson K, Chelvanayagam DK, Mahns D, Olausson H, Macefield VG. 2014 Differential sensitivity to surface compliance by tactile afferents in the human finger pad. *J. Neurophysiol.* **111**, 1308–1317. (doi: 10.1152/jn.00589.2013)
4. Hudson KM, Condon M, Ackerley R, McGlone F, Olausson H, Macefield VG, Birznieks I. 2015 Effects of changing skin mechanics on the differential sensitivity to surface compliance by tactile afferents in the human finger pad. *J. Neurophysiol.* **114**, 2249–2257. (doi: 10.1152/jn.00176.2014)
5. André T, Lefèvre P, Thonnard J-L. 2010 Fingertip moisture is optimally modulated during object manipulation. *J. Neurophysiol.* **103**, 402–408. (doi: 10.1152/jn.00901.2009)
6. André T, Lévesque V, Hayward V, Lefèvre P, Thonnard J-L. 2011 Effect of skin hydration on the dynamics of fingertip gripping contact. *J. R. Soc. Interface* **8**, 1574–1583. (doi: 10.1098/rsif.2011.0086)
7. Sednaoui T, Vezzoli E, Dzidek B, Lemaire-Semail B, Chappaz C, Adams MJ. 2015 Experimental evaluation of friction reduction in ultrasonic devices. *Proc. IEEE World Haptics Conf., Chicago, USA, 22–26 June 2015*, pp. 37–42. (doi: 10.1109/WHC.2015.7177689)

- 1
2
3 8. Vezzoli E, Dzidek B, Sednaoui T, Giraud F, Adams MJ, Lemaire-Semail B. 2015
4 Role of fingerprint mechanics and non-Coulombic friction in ultrasonic devices. *Proc.*
5
6 *IEEE World Haptics Conf., Chicago, USA, 22–26 June 2015*, pp. 43–48.
7
8 (doi: 10.1109/WHC.2015.7177689)
9
10
11 9. Bowden FP, Tabor D. 1954 *Friction and lubrication of solids*. Oxford, UK:
12 Clarendon Press.
13
14
15 10. Adams MJ, Briscoe BJ, Johnson SA. 2007 Friction and lubrication of human skin.
16 *Tribol. Lett.* **26**, 239–253. (doi: 10.1007/s11249-007-9206-0)
17
18
19 11. Derler S, Preiswerk M, Rotaru GM, Kaiser JP, Rossi RM. 2015 Friction
20 mechanisms and abrasion of the human finger pad in contact with rough surfaces.
21 *Tribol. Int.* **89**, 119–127. (doi: 10.1016/j.triboint.2014.12.023)
22
23
24 12. Tomlinson SE, Carré MJ, Lewis R, Franklin SE. 2011 Human finger contact with
25 small, triangular ridged surfaces. *Wear* **271**, 2346–2353.
26
27 (doi: 10.1016/j.wear.2010.12.055)
28
29
30 13. Tomlinson SE, Lewis R, Carre MJ, Franklin SE. 2013 Human finger friction in
31 contacts with ridged surfaces. *Wear* **301**, 330–337. (doi: 10.1016/j.wear.2012.12.039)
32
33
34 14. Pasumarty SM, Johnson SA, Watson SA, Adams MJ. 2011 Friction of the human
35 finger pad: influence of moisture, occlusion and velocity. *Tribol. Lett.* **44**, 117–137.
36
37 (doi: 10.1007/s11249-011-9828-0)
38
39
40 15. Dzidek BM, Adams M, Zhang Z, Johnson S, Bochereau S, Hayward V. 2014 Role
41 of occlusion in non-Coulombic slip of the finger pad. In *Haptics: Neuroscience,*
42 *Devices, Modeling, and Applications Part 1*, pp. 109–116. Berlin, DE: Springer-
43 Verlag. (doi: 10.1007/978-3-662-44193-0_15)
44
45
46 16. Johnson KL. 1985 *Contact mechanics*. Cambridge, UK: Cambridge University
47 Press.
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 17. van Kuilenburg J, Masen MA, van der Heide E. 2015 A review of fingerpad
4 contact mechanics and friction and how this affects tactile perception. *Proc. IMechE.*
5
6
7 *Part J: J. Eng. Tribol.* **229**, 243–258. (doi: 10.1177/1350650113504908)
8
9
10 18. Soneda T, Nakano K. 2010 Investigation of vibrotactile sensation of human
11 fingerpads by observation of contact zones. *Tribol. Int.* **43**, 210–217.
12
13 (doi: 10.1016/j.triboint.2009.05.016)
14
15
16 19. Warman PH, Ennos AR. 2009 Fingerprints are unlikely to increase the friction of
17 primate fingerpads. *J. Exp. Biol.* **212**, 2016–2022. (doi: 10.1242/jeb.028977)
18
19
20 20. Lin H-T, Hong T-F, Li W-L. 2015 Grip performance affected by water-induced
21 wrinkling of fingers. *Tribol. Lett.* **58**, 38. (doi: 10.1007/s11249-015-0515-4)
22
23
24 21. Liu X, Lu Z, Lewis R, Carré MJ, Matcher SJ. 2013 Feasibility of using optical
25 coherence tomography to study the influence of skin structure on finger friction.
26
27
28 *Tribol. Int.* **63**, 34–44. (doi: 10.1016/j.triboint.2012.08.020)
29
30
31 22. Srinivasan MA, Dandekar K. 1996 An investigation of the mechanics of tactile
32 sense using two-dimensional models of the primate fingertip. *J. Biomech. Eng.* **118**,
33
34
35 48–55. (doi: 10.1115/1.2795945)
36
37
38 23. Dandekar K, Raju BI, Srinivasan MA. 2003 3-D finite-element models of human
39 and monkey fingertips to investigate the mechanics of tactile sense. *J. Biomech. Eng.*
40
41
42 **125**, 682–691. (doi: 10.1115/1.1613673)
43
44
45 24. Wu JZ, Dong RG, Rakheja S, Schopper AW, Smutz WP. 2004 A structural
46 fingertip model for simulating of the biomechanics of tactile sensation. *Med. Eng.*
47
48
49 *Phys.* **26**, 165–175. (doi: 10.1016/j.medengphy.2003.09.004)
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 25. Wu JZ, Welcome DE, Dong RG. 2006 Three-dimensional finite element
4 simulations of the mechanical response of the fingertip to static and dynamic
5 compressions. *Comp. Meth. Biomech. Biomed. Eng.* **9**, 55–63.
6
7 (doi: 10.1080/10255840600603641)
8
9
10
11 26. Shao F, Childs THC, Barnes CJ, Henson B. 2010 Finite element simulations of
12 static and sliding contact between a human fingertip and textured surfaces. *Tribol. Int.*
13
14 **43**, 2308–2316. (doi: 10.1016/j.triboint.2010.08.003)
15
16
17 27. Jiyong H, Xin D, Rubin W. 2010 Effect of fingerpad mechanics and anatomical
18 structures on tactile detection of compliant objects. *Proc. IEEE Sixth Int. Conf. on*
19
20 *Natural Computation, Yantai, China, 10–12 August 2010*, pp. 2097–2101.
21
22 (doi: 10.1109/ICNC.2010.5582435)
23
24
25
26 28. Somer DD, Perić D, de Souza Neto EA, Dettmer WG. 2015 A multi-scale
27 computational assessment of channel gating assumptions within the Meissner
28 corpuscle. *J. Biomech.* **48**, 73–80. (doi: 10.1016/j.jbiomech.2014.11.003)
29
30
31
32 29. Pawluk DT, Howe RD. 1999 Dynamic contact of the human fingerpad against a
33 flat surface. *J. Biomech. Eng.* **121**, 605–611. (doi: 10.1115/1.2800860)
34
35
36
37 30. Fung YC. 1993 *Biomechanics: mechanical properties of living tissues*. New York,
38 USA: Springer-Verlag.
39
40
41
42 31. Pawluk DT, Howe RD. 1999 Dynamic lumped element response of the human
43 fingerpad. *J. Biomech. Eng.* **121**, 178–183. (doi: 10.1115/1.2835100)
44
45
46
47 32. Jindrich DL, Zhou Y, Becker T, Dennerlein JT. 2003 Non-linear viscoelastic
48 models predict fingertip pulp force-displacement characteristics during voluntary
49 tapping. *J. Biomech.* **36**, 497–503. (doi: 10.1016/S0021-9290(02)00438-4)
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 33. Derler S, Gerhardt L-C, Lenz A, Bertaux E, Hadad M. 2009 Friction of human
4 skin against smooth and rough glass as a function of the contact pressure. *Tribol. Int.*
5
6
7 42, 1565–1574. (doi: 10.1016/j.triboint.2008.11.009)
8
9
10 34. Hsueh CH, Miranda P. 2004 Master curves for Hertzian indentation on
11 coating/substrate systems. *J. Mater. Res.* **19**, 94–100. (doi: 10.1557/jmr.2004.19.1.94)
12
13 35. Zahouani H, Mezghani S, Vargiolu R, Hoc T, Mansori ME. 2013 Effect of
14 roughness on vibration of human finger during a friction test. *Wear* **301**, 343–352.
15
16 (doi: 10.1016/j.wear.2012.11.028)
17
18 36. Duvefelt K, Olofsson U, Johannesson CM, Skedung L. 2014 Model for contact
19 between finger and sinusoidal plane to evaluate adhesion and deformation component
20 of friction. *Tribol. Int.* **96**, 389–394. (doi: 10.1016/j.triboint.2014.12.020)
21
22 37. Cornuault PH, Carpentier L, Bueno MA, Cote JM, Monteil G. 2015 Influence of
23 physico-chemical, mechanical and morphological fingerpad properties on the
24 frictional distinction of sticky/slippery surfaces. *J. R. Soc. Interface* **12**, 20150495.
25
26 (doi: 10.1098/rsif.2015.0495)
27
28 38. Lin DC, Shreiber DI, Dimitriadis EK, Horkay F. 2009 Spherical indentation of
29 soft matter beyond the Hertzian regime: numerical and experimental validation of
30 hyperelastic models. *Biomech. Modeling Mechanobiol.* **8**, 345–358.
31
32 (doi: 10.1007/s10237-008-0139-9)
33
34 39. Yan Y, Zhang Z, Stokes JR, Zhou QZ, Ma GH, Adams MJ. 2009 Mechanical
35 characterization of agarose micro-particles with a narrow size distribution. *Powder*
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52 40. van Kuilenburg J, Masen MA, van der Heide E. 2013 Contact modelling of human
53 skin: What value to use for the modulus of elasticity? *Proc. IMechE. Part J: J. Eng.*
54
55
56
57
58
59
60

- 1
2
3 41. Leyva-Mendivil MF, Page A, Bressloff NW, Limbert G. 2015 A mechanistic
4 insight into the mechanical role of the stratum corneum during stretching and
5
6 compression of the skin. *J. Mech. Behav. Biomed. Mater.* **49**, 197–219.
7
8 (doi: 10.1016/j.jmbbm.2015.05.010)
9
10
11 42. Liang X, Boppart SA. 2010 Biomechanical properties of in vivo human skin from
12 dynamic optical coherence elastography. *IEEE Trans. Biomed. Eng.* **57**, 953–959.
13
14 (doi: 10.1109/TBME.2009.2033464)
15
16
17 43. Johnson KO, Phillips JR. 1981 Tactile spatial resolution. I. Two-point
18 discrimination, gap detection, grating resolution, and letter recognition. *J.*
19
20
21
22
23
24
25
26 44. Phillips JR, Johnson KO. 1981 Tactile spatial resolution. II. Neural representation
27 of bars, edges, and gratings in monkey primary afferents. *J. Neurophysiol.* **46**, 1192–
28
29
30
31 1203.
32
33 45. Wang Q, Hayward V. 2007 In vivo biomechanics of the fingerpad skin under local
34 tangential traction. *J. Biomech.* **40**, 851–860. (doi: 10.1016/j.jbiomech.2006.03.004)
35
36
37 46. Dzidek BM, Adams M, Johnson S, Bochereau S, Hayward V. 2016 Frictional
38 dynamics of finger pads are governed by four length-scales and two time-scales.
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Table captions

Table 1. Best fit parameters of the contact area data (figure 5) to the power law equation (3.1). The values given in parentheses are standard errors.

Table 2. Geometric and mechanical parameters for the finger pad, as calculated using a fingerprint geometry given by $R_r = 0.32$ mm and $s = 1.33$, and with the assumption that $\nu_g = 0.5$ and $\nu_r = 0.3$. The values given in parentheses are standard errors for the best-fit parameters R_g (figure 6) and E_r (figure 8b), and standard deviations for the mean parameters E_{0g} (figure 7c), C (figure 7d) and β .

Figure captions

Figure 1. A photograph of the inked finger in contact with the compression platen resting on the 30° wedge support.

Figure 2. (a) A 3D rendering of the fingerprint geometry, where the curvature of the finger pad replica itself has been removed. The full range of the colour bar represents a height difference of 130 μm . (b) Shows typical line profiles extracted from (a) that exemplify the approximately circular cross-section of the peaks of the ridges.

Figure 3. The compressive force, W , as a function of the imposed compressive displacement for a loading velocity of 8 mm/s corresponding to orientations of the finger pad of 30° (blue diamonds) and 45° (red circles). The full line (blue) and dashed line (red) are the best fits to equation (4.8) for 30° and 45° orientations respectively.

1
2
3 **Figure 4.** A typical fingerprint image obtained at a normal force of 2 N for a finger
4 pad orientation of 45°.
5
6
7

8
9
10 **Figure 5.** The gross finger pad (open points) and fingerprint ridge (full points) contact
11 areas as a function of the compressive force for orientations of the finger pad of (a)
12 30° and (b) 45°. The full and dashed lines are the best power law fits to equation (3.1)
13 for the gross and ridge areas respectively.
14
15
16
17

18
19
20 **Figure 6.** The gross contact area of the finger pad, A_g , as a function of the
21 compressive displacement for orientations of the finger pad of 30° (blue diamonds)
22 and 45° (red circles). The full line (blue) and dashed line (red) are the best straight line
23 fits to equation (4.1) for 30° and 45° orientations respectively, and used to obtain
24 corresponding values for the mean finger pad radius of curvature, R_g .
25
26
27
28
29
30
31
32

33
34
35 **Figure 7.** (a) The secant modulus, E_g , as a function of compressive displacement for a
36 compressive velocity of 8 mm/s calculated from equation (4.2) for orientations of the
37 finger pad of 30° (blue diamonds) and 45° (red circles). (b) The secant modulus, E_g , as
38 a function of the compressive force. The data are taken from the increasing region of
39 figure 7a. The full line (blue) and dashed line (red) are the best straight line fits to
40 equation (4.7) for 30° and 45° orientations respectively, and used to obtain
41 corresponding values for the Young's modulus, E_{0g} , and the load coefficient of the
42 secant modulus, β . (c) The Young's modulus, E_{0g} , as a function of the compressive
43 velocity. The full line (blue) and dashed line (red) are the mean values for 30° and 45°
44 orientations respectively. (d) The constraint coefficient, C , as a function of the
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 compressive velocity, as calculated from the values of β , E_{0g}^* and R_g . The full line
4
5
6 (blue) and dashed line (red) are the mean values for 30° and 45° orientations
7
8 respectively.
9

10
11
12 **Figure 8.** (a) The gross contact area, A_g , as a function of the compressive force for
13 orientations of the finger pad of 30° (blue diamonds) and 45° (red circles); the data are
14 taken from figure 5. The upper (blue) and lower (red) lines are for the 30° and 45°
15 orientations respectively and represent best-fits to equation (4.9) using the
16 corresponding values of R_g (Table 2) and values of β of 1.35 and 1.53 N⁻¹ (which
17 are the best fit values obtained for a compressive velocity of 2 mm/s). The fitted
18 values of the Young's modulus, E_{0g} , (\pm one standard error) are 28.6 ± 0.3 kPa and
19 27.7 ± 0.5 kPa for the 30° and 45° orientations respectively (assuming $\nu_g = 0.5$). (b)
20 The fingerprint ridge contact area, A_r , as a function of the compressive force; the data
21 are taken from figure 5. The upper (blue) and lower (red) dashed lines for 30° and 45°
22 orientations respectively are best fits to equation (4.10) using the same values of β
23 and E_{0g} used for (a). The fitted values of E_r (\pm one standard error) are 108 ± 11 and
24 134 ± 12 kPa, assuming that $s = 1.33$ and $\nu_r = 0.3$.
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45

46 **Figure 9.** Schematic diagram (a) of a spherically-capped finger pad of radius R_g with
47 cylindrically-capped concentric fingerprint ridges of radius R_r and spacing $s R_r$,
48
49 between their centres as shown in (b).
50
51
52
53
54
55
56
57
58
59
60

Table 1. Dzidek et al.


orientation	W (N)	k_g ($\text{mm}^2\text{N}^{-m_g}$)	m_g	k_r ($\text{mm}^2\text{N}^{-m_r}$)	m_r
30°	2	91.9 (± 2.7)	0.37 (± 0.03)	54.4 (± 1.7)	0.52 (± 0.04)
45°	2	70.9 (± 2.9)	0.36 (± 0.04)	42.9 (± 1.2)	0.51 (± 0.03)

Table 2. Dzidek et al.

orientation	R_g (mm)	E_{0g} (kPa)	C	β (N ⁻¹)	E_r (kPa)
30°	20.5 (± 0.4)	31 (± 2)	15.4 (± 0.4)	1.27 (± 0.08)	108 (± 11)
45°	14.5 (± 0.4)	36 (± 5)	14.2 (± 0.2)	1.72 (± 0.29)	134 (± 12)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Figure 1. Dzidek et al.

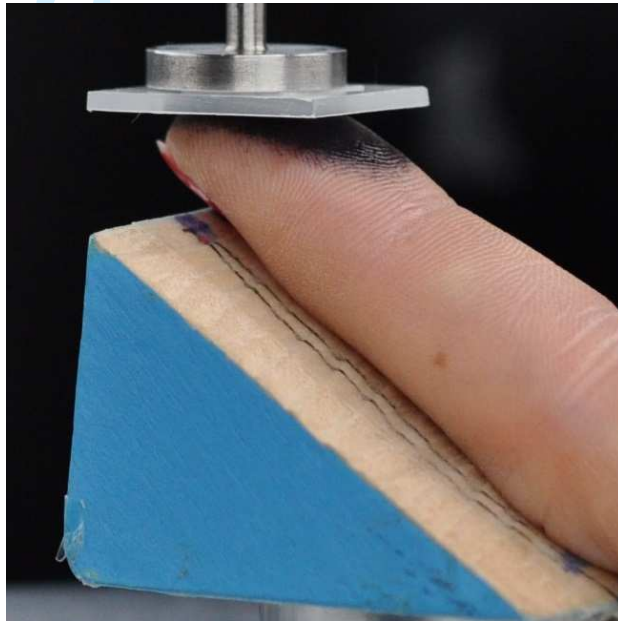

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Figure 2. Dzidek et al.


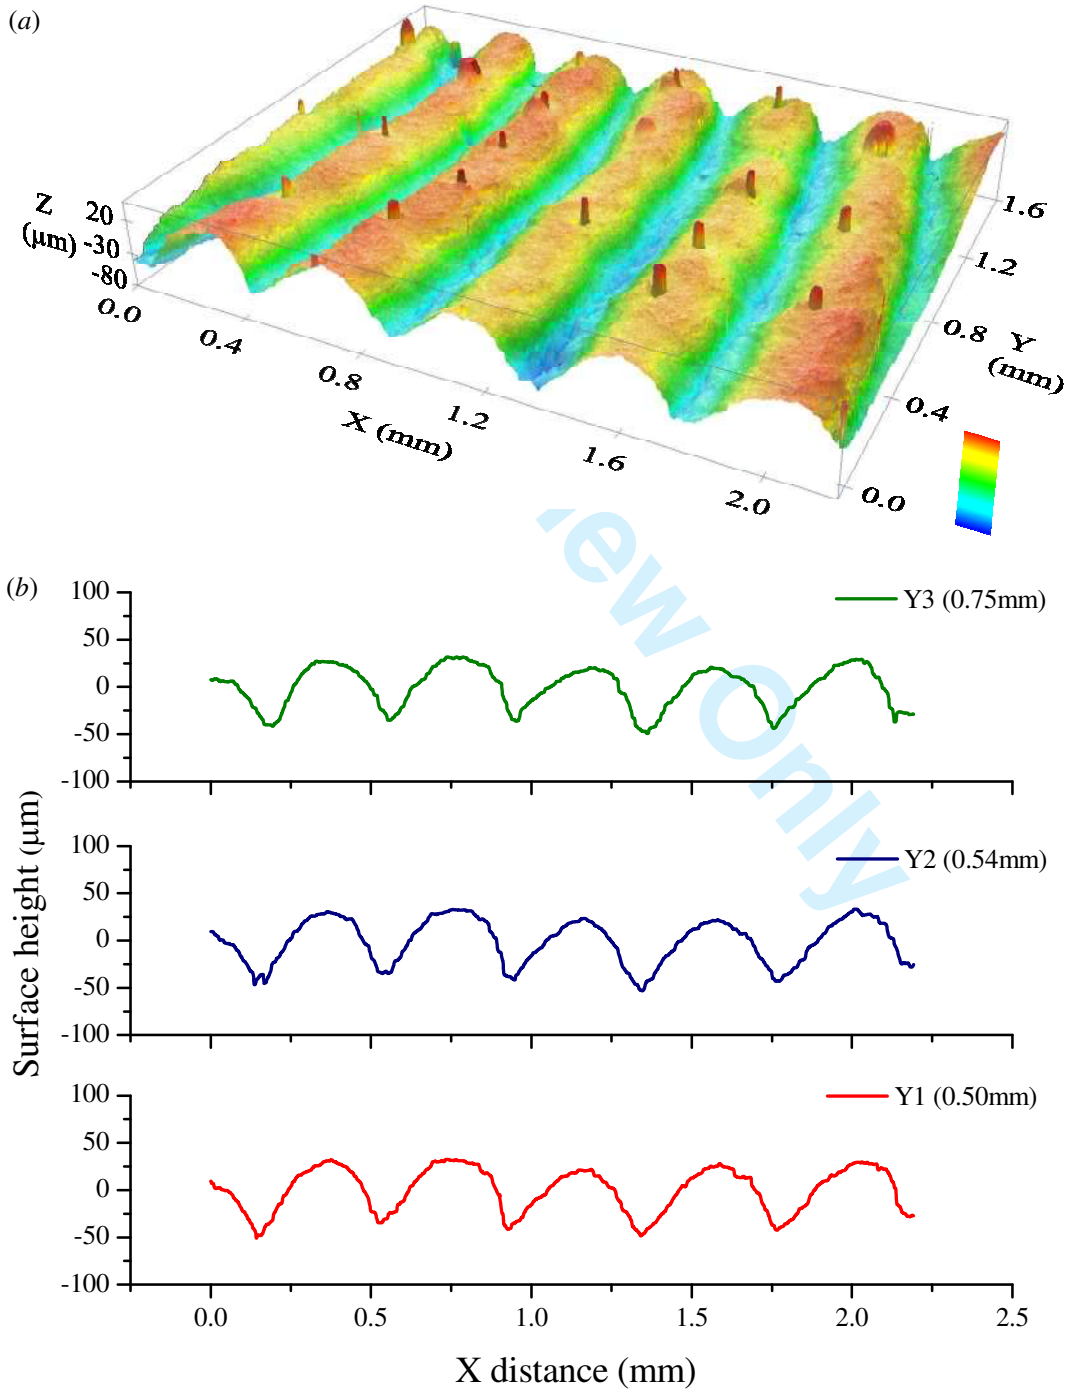


Figure 3. Dzidek et al.

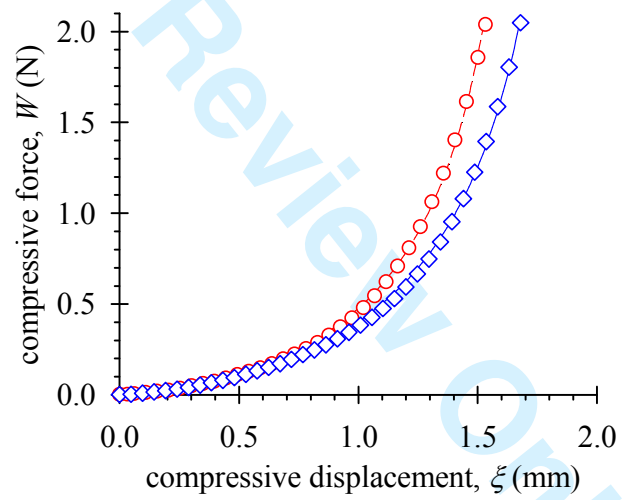


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Figure 4. Dzidek et al.



Figure 5. Dzidek et al.

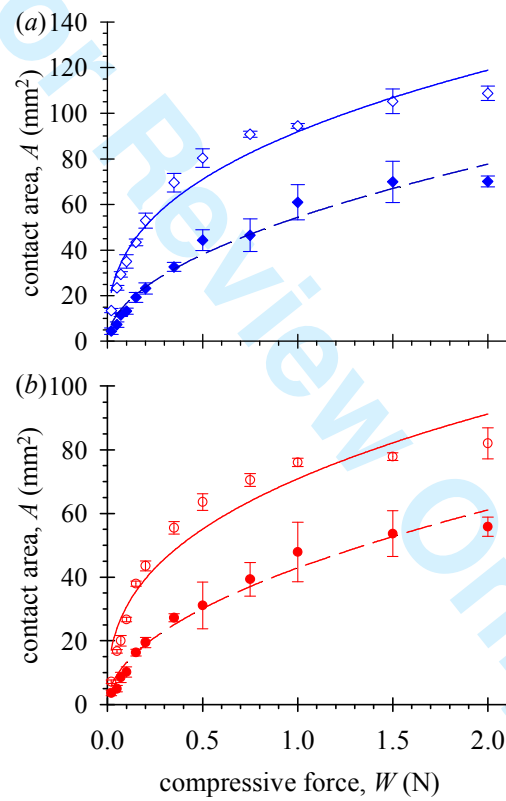

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Figure 6. Dzidek et al.

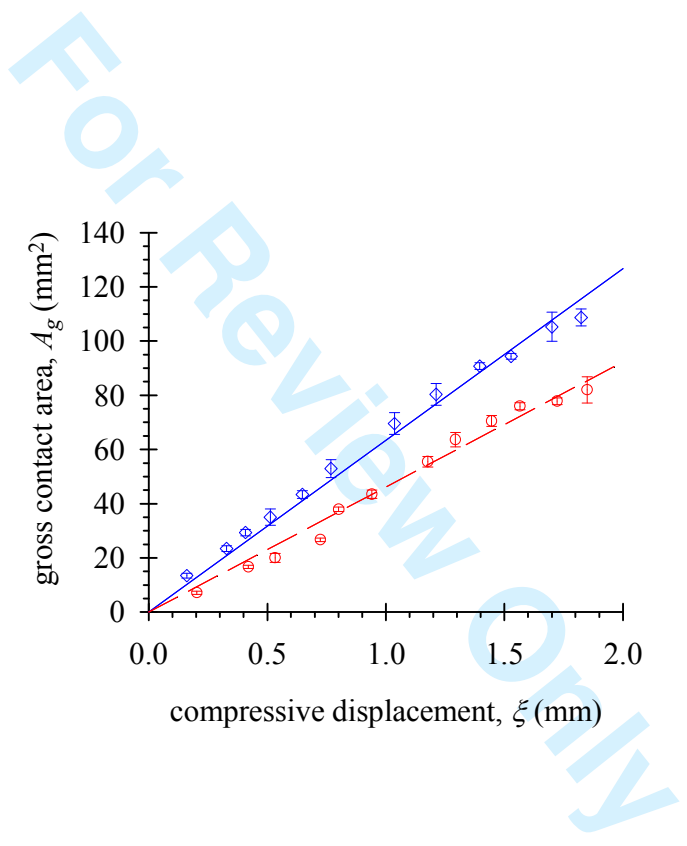


Figure 7. Dzidek et al.

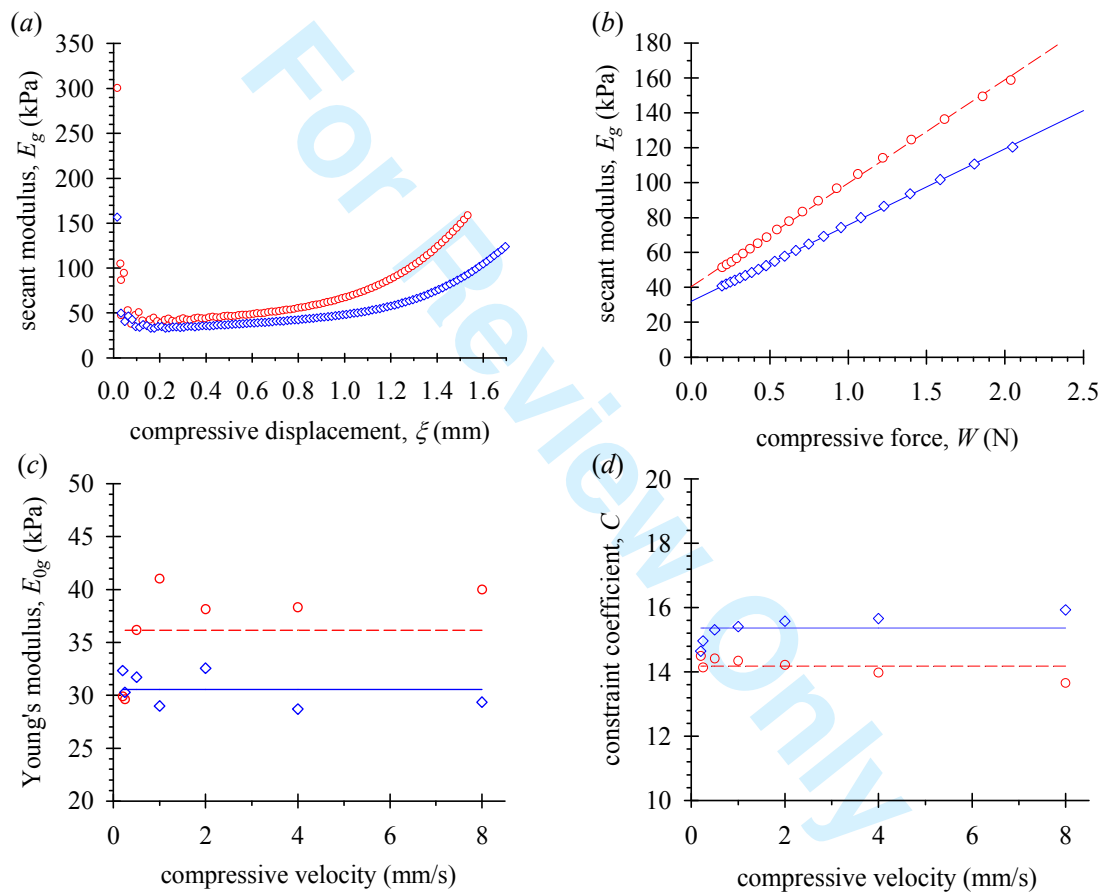


Figure 8. Dzidek et al.

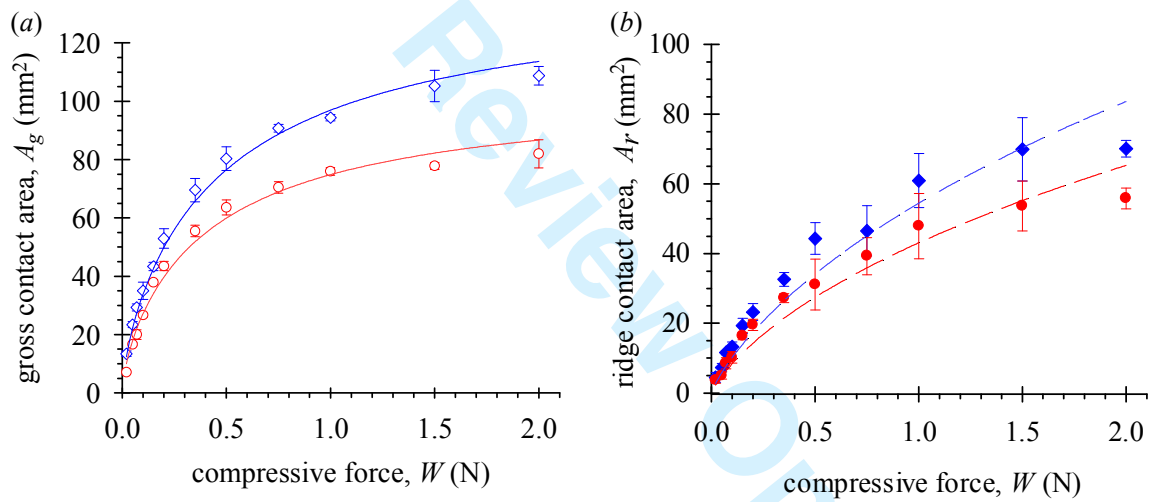


Figure 9. Dzidek et al.

