

COMMENTS AND CORRECTIONS

# Corrections to “Integration of D2D, Network Slicing, and MEC in 5G Cellular Networks: Survey and Challenges”

LUBNA NADEEM<sup>1</sup>, MUHAMMAD A. AZAM<sup>2</sup>, YASAR AMIN<sup>1</sup>, MOHAMMED A. AL GHAMDI<sup>3</sup>, KOK KEONG CHAI<sup>4</sup>, MUHAMMAD F. NADEEM<sup>5</sup>, AND MUHAMMAD A. KHAN<sup>6</sup>

<sup>1</sup>Department of Telecommunication Engineering, University of Engineering and Technology, Taxila 47050, Pakistan

<sup>2</sup>Technology and Innovation Research Group, School of Information Technology, Whitecliffe 6011, New Zealand

<sup>3</sup>Computer Science Department, Umm Al-Qura University, Mecca 74200, Saudi Arabia

<sup>4</sup>Department of Electronic Engineering and Computer Science, Queen Mary University of London, London E1 4NS, U.K.

<sup>5</sup>Department of Electrical Engineering, University of Engineering and Technology, Taxila 47050, Pakistan

<sup>6</sup>Faculty of Computing, Riphah School of Computing and Innovation, Riphah International University at Lahore Campus, Lahore 54000, Pakistan

Corresponding author: Lubna Nadeem (lubna.nadeem@uettaxila.edu.pk)

This work was supported by the Data and Artificial Intelligence Scientific Chair at Umm Al-Qura University, Makkah City, Saudi Arabia.

In the above article [1], reference [2] was missing. The corrections are made in Section VI of [1]. Figures 5 and 7 of [1] are also cited.

## I. D2D COMMUNICATION TECHNOLOGY

In cellular networks, the base stations (BS) are involved to set-up the connection between the transmitter and receiver user equipment. The transmitter sends its data to BS using the uplink (UL) channel and then the BS redirects the data to a corresponding receiver in the downlink (DL) channel. D2D communication refers to a radio technology that allows devices to directly exchange data without the use of a BS or its core network [2]. Fig. 1 clearly explains the idea of a direct communication link.



FIGURE 1. Communication links [2].

### A. INBAND COMMUNICATION

D2D communication uses a cellular network licensed spectrum. Based on spectrum sharing methods, inband D2D

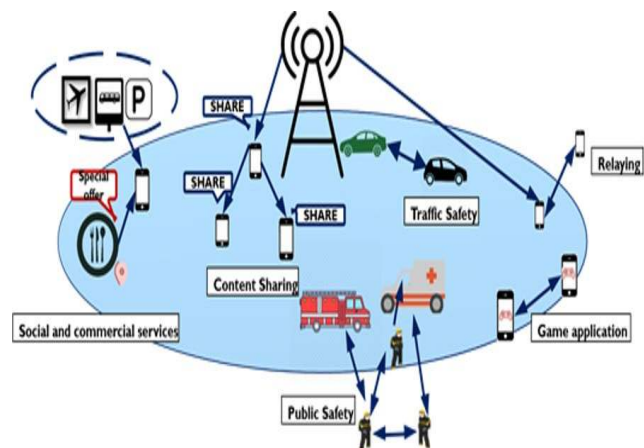


FIGURE 2. Examples of D2D application scenarios [2].

communication is divided into the overlay and underlay modes. In the overlay inband, D2D and cellular users are assigned orthogonal resources (e.g., time/frequency). Hence, there is no interference between D2D and cellular users. However, it is insufficient in terms of spectrum efficiency (SE). In underlay inband, D2D and cellular users share time/frequency resources. Therefore, resulting in co-channel interference and efficient interference management techniques are required. Also, this method increases SE [2].

### B. OUTBAND COMMUNICATION

D2D communication exploits the unlicensed ISM band also called industrial, scientific, and medical. Out-band

communication eliminates interference between the users due to using a separate band instead of reusing; therefore, it requires an extra radio interface. This type of communication adapts to other wireless technologies transmitting in the unlicensed band like Bluetooth and Wi-Fi. Out-band communication is further divided into two types autonomous and controlled D2D-based communication [2].

## REFERENCES

- [1] L. Nadeem, M. A. Azam, Y. Amin, M. A. Al-Ghamdi, K. K. Chai, M. F. N. Khan, and M. A. Khan, "Integration of D2D, network slicing, and MEC in 5G cellular networks: Survey and challenges," *IEEE Access*, vol. 9, pp. 37590–37612, Mar. 2021.
- [2] A. Algedir, "The coexistence of D2D communication under heterogeneous cellular networks (HetNets)," Ph.D. dissertation, School Elect. Comput. Eng., Univ. Oklahoma, Tulsa, OK, USA, Jul. 2019.

...