

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2017.Doi Number

# Data-Driven Remaining Useful Life Estimation for Milling Process: Sensors, Algorithms, Datasets, and Future Directions

Sameer Sayyad<sup>1</sup>, Satish Kumar<sup>2\*</sup>, Arunkumar Bongale<sup>1</sup>, Pooja Kamat<sup>1</sup>, Shruti Patil<sup>2\*</sup>, Ketan Kotecha<sup>2</sup>

<sup>1</sup>Symbiosis Institute of Technology, Symbiosis International (Deemed University), Pune, MH 412115 INDIA

<sup>2</sup>Symbiosis Centre for Applied Artificial Intelligence, Symbiosis International (Deemed University), Pune, MH 412115 INDIA

Corresponding author: Satish Kumar (e-mail: [satish.kumar@sitpune.edu.in](mailto:satish.kumar@sitpune.edu.in)) and Shruti Patil (e-mail: [shruti.patil@sitpune.edu.in](mailto:shruti.patil@sitpune.edu.in)).

Funding: Research Support Fund (RSF) of Symbiosis International (Deemed University), Pune, India.

**ABSTRACT** An increase in unplanned downtime of machines disrupts and degrades the industrial business, which results in substantial credibility damage and monetary loss. The cutting tool is a critical asset of the milling machine; the failure of the cutting tool causes a loss in industrial productivity due to unplanned downtime. In such cases, a proper predictive maintenance strategy by real-time health monitoring of cutting tools becomes essential. Accurately predicting the useful life of equipment plays a vital role in the predictive maintenance arena of industry 4.0. Many active research efforts have been done to estimate tool life in varied directions. However, the consolidated study of the implemented techniques and future pathways is still missing. So, the purpose of this paper is to provide a systematic and comprehensive literature survey on the data-driven approach of Remaining Useful Life (RUL) estimation of cutting tools during the milling process. The authors have summarized different monitoring techniques, feature extraction methods, decision-making models, and available sensors currently used in the data-driven model. The authors have also presented publicly available datasets related to milling under various operating conditions to compare the accuracy of the prediction model for tool wear estimation. Finally, the article concluded with the challenges, limitations, recent advancements in RUL prognostics techniques using Artificial Intelligence (AI), and future research scope to explore more in this area.

**INDEX TERMS** Artificial Intelligence, milling process, predictive maintenance, remaining useful life, sensors, tool wear

## I. INTRODUCTION

In the manufacturing industry, the milling process plays a crucial role because of its flexibility in production [1]. The productivity, quality, and cost of the final product depend directly or indirectly on the lifespan of the cutting tool during the machining [2]. The failure of the cutting tool is responsible for productivity and monetary loss of industry. Tool failure causes a higher rejection rate and increased unscheduled downtime of the machine. According to recent statistical data, the cutting tool acquired \$5 billion US dollars in value (\$ 1.9 billion for milling cutting tools), around 1.5% of the annual Gross Domestic Product (GDP) of the US

market [3]. In manufacturing or any other industries, the plant has some fixed cost (equipment cost, land, wages, etc.) and variable cost (power, raw material, electricity, etc.) to manufacture a product that generates the profit of the organization after selling it into the market [4]. Figure 1(a) shows the graphical representation of fixed cost, the variable cost, and profit relation under standard working condition plant (without equipment failure/ downtime). Once the equipment or components fails, it does not contribute to profit, and additional unplanned maintenance costs come into the picture.

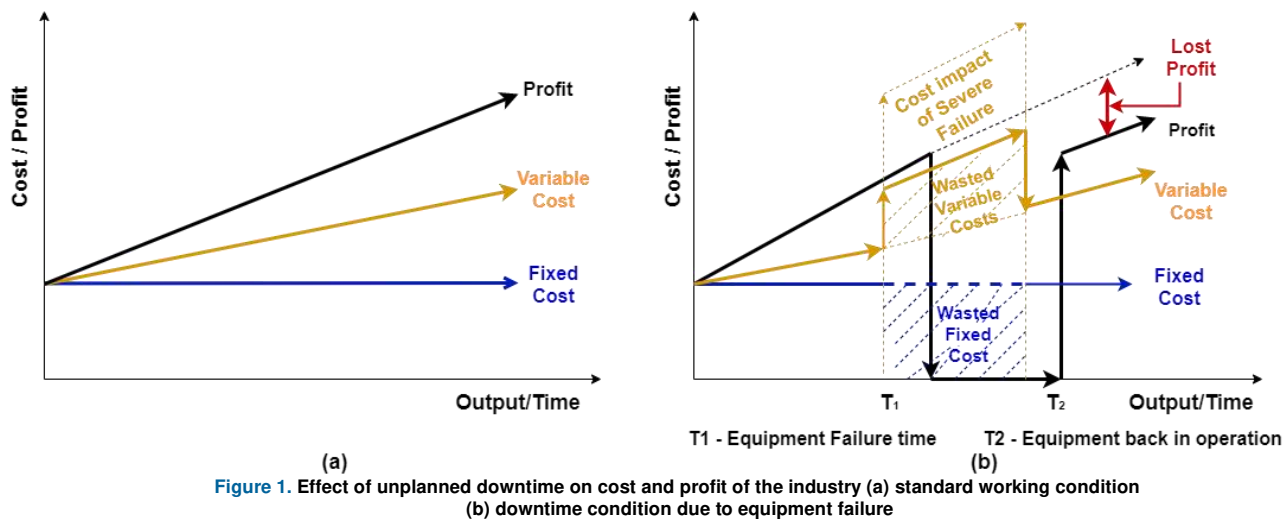


Figure 1. Effect of unplanned downtime on cost and profit of the industry (a) standard working condition (b) downtime condition due to equipment failure

As shown in Figure 1(b), equipment fails at time  $T_1$  and returns to normal working conditions at time  $T_2$ . When equipment fails, fixed cost continuously accumulating, but it gets wasted because no production is carried out. Simultaneously, the overall variable cost also increases (cost of consumables decreases but the cost of maintenance increases). These losses continue until the plant gets back into working condition. In such a case, the cost of a severe outage failure cause due to unplanned downtime can be much more than the profit made in the same duration of time. In many cases, equipment gets replaced at a too early stage before its end of life, so one cannot utilize that useful life of the equipment effectively. In another case, equipment gets failed before replacing and causes unplanned downtime.

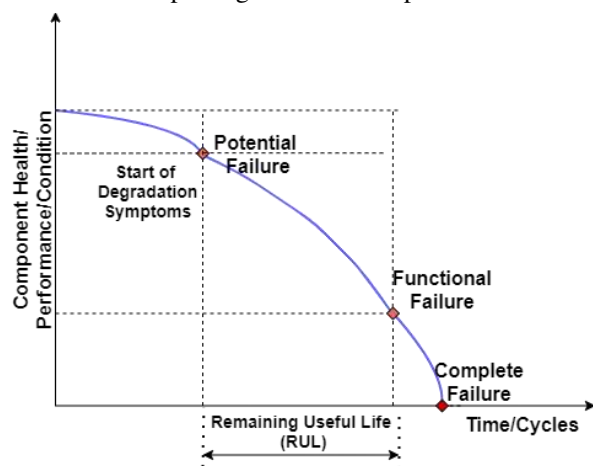


Figure 2. Illustration of RUL of an equipment

Proper estimation of useful life is necessary to predict the life of equipment cost-effectively. As shown in figure 2, potential failure and function failure need to be found based on the degradation symptoms to understand the useful life of the equipment.

#### A. SIGNIFICANCE OF STUDY:

Progress in the manufacturing domain is at a rapid pace. The milling machine, in particular, has seen an upward trend with the usage of highspeed machining tools and hard workpiece materials (>45 HRC) [5]. Premature tool failures are often costly to repair, and they ultimately result in workpiece damage and possible harm to the machine and its operators [6]. There is a need to implement research-based solutions that estimate the RUL of the milling tool. RUL estimation is considered a core and challenging aspect of the Prognostics and Health Management (PHM) of machines or processes. In the PHM of the system, RUL is the key aspect [7]. It helps to predict the current health status of the degrading system by indicating systems performance degradation and prevention against sudden failure [8]. RUL provides cost-effective solutions in maintenance and provides the reliability of the system [9]. According to ISO 13381, using a prognostic approach, the industry can determine the risk and time of system failure [10]. The main objective of the prognostic is to estimate the RUL of the system by providing the machine's past operation status and current condition to predict the useful life before failure occurs. RUL estimation becomes essential in today's economic climate [11]. RUL estimation is favorable in many critical applications such as machine's essential components, aircraft, nuclear power plants, etc. From the conventional approach, one can calculate the useful life, but it considers only the static condition of the machine. As industries are moving towards the era of Industry 4.0, one can estimate the RUL of dynamic systems with real-time monitoring. RUL plays a vital role in condition-based maintenance [12], [13]. In a raw way, RUL is a period from the current time to the end of the functional life of the product [9]. RUL prediction is also helpful for checking the operational performance of equipment, inventory management, maintenance activity planning, etc. The forecasting from (2021-26), predictive and prescriptive maintenance will capture around \$ 22.72 billion by 2026 with a Compound Annual Growth Rate (CAGR) of 19.68% [14]. According to a survey, machine downtime average cost

is around \$260,000/ hour, including all business types [15]. In auto industries, downtime costs are around \$50,000 per minute, approximately \$3 million per hour [16]. About 70% of the industrial sectors are not aware when equipment needs maintenance or replacement due to lacking RUL estimation knowledge [17]. In manufacturing industries, on average, up to 20% of machine downtime occurs due to the failure of the cutting tool. It is necessary to select the proper maintenance strategy and estimate its useful life to minimize this unplanned downtime. The accurate system monitoring improves productivity from 10-40%, with cost-saving up to 40% [18], [19].

### B. MOTIVATION:

In milling operation, accurate tool life estimation is essential to maximize the functional life of the cutting tool. Continuous real-time monitoring of the cutting tool with appropriate maintenance strategies must be defined to avoid unplanned downtime. Advanced sensor technology and emerging AI techniques provide more insightful information about milling machine health. As shown in Figure 3, based on Scopus database publications over the last ten years, the publication trend in milling RUL estimation is rising, indicating that the importance of RUL estimation is increasing in recent years. To the best of our knowledge, very little exhaustive research covering the aspects of sensors, monitoring methods, algorithms, datasets on RUL estimation using a data-driven approach has been published yet. This study also provided the advancement in RUL, and future directions, which will motivate PHM researchers to explore data-driven strategies for RUL prediction of critical machinery.

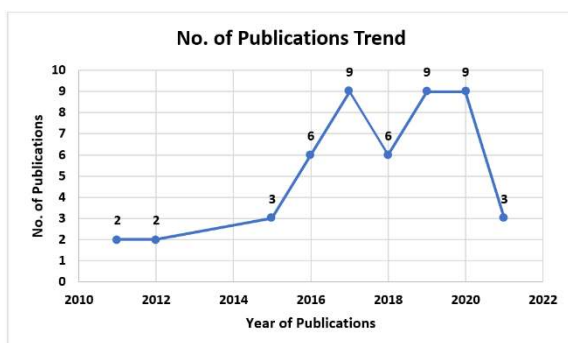


Figure 3. Year-wise publication trend in RUL prediction in milling (2011-2021) Source: <https://www.scopus.com> (accessed on March 24, 2021)

### C. TERMS AND TERMINOLOGY:

Following are the few terms that are frequently used in RUL estimation research of milling tools:

**RUL:** RUL is defined as "the length from the current time to the end of the useful life" [20]. RUL helps estimate the inspection or maintenance period and minimize excessive inventory by reducing unplanned failure [21].

**Milling process:** Milling is the machining process in which rotary cutters remove the material of the workpiece, which is machined by advancing the cutter towards the workpiece.

**Tool Wear:** During the machining, the workpiece and cutting tool contact each other, which causes the change in tool morphology known as tool wear [22].

**Flank wear:** Flank wear is a type of tool wear at the flank face (the tool surface that comes in contact with the workpiece) of the cutting tool due to interaction between tool and workpiece.

**Tool life:** Tool life is the duration of actual cutting time after which the tool is no longer able to perform its required function. In general, tool life is the time duration of maximum acceptable wear.

**Predictive maintenance:** It is a condition-based maintenance process that uses data analytics to indicate the possible equipment failure time for scheduling maintenance. Proper maintenance scheduling helps to avoid unplanned or sudden equipment failure.

**Machine unplanned downtime:** Unplanned downtime occurs when a machine stops its working or production due to failure or unexpected shutdown.

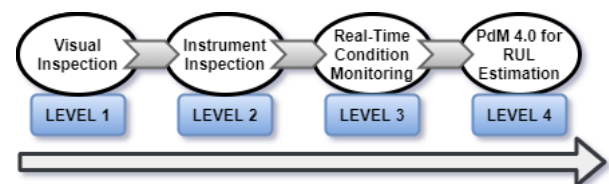


Figure 4: Evolution of RUL Estimation

### D. EVOLUTION OF RUL ESTIMATION

Predictive maintenance for RUL estimation has undergone significant evolution over the past four decades, as shown in figure 4. Recent advances in analytical software and remote sensing methods have enabled the accurate RUL estimation of machinery and enabled greater decision support for carrying out sustainable maintenance activities. Table I depicts the various stages of evolution in predictive maintenance strategies for RUL estimation [23]. During the initial phase, visual supervision was done, in which inspection of each component was done physically with the help of domain expert supervisors [24], [25]. Data was stored in software like MS office. In the next evolution phase, the instrument-based periodic inspection was carried out using embedded software with the help of trained supervisors. Real-time condition monitoring was done with continuous remote assessment using sensors with condition monitoring software in the next evolution phase. Now, industries are switching towards predictive maintenance 4.0 for RUL estimation for continuously remote monitoring by using sensor data. Automated inspection, verification, digital pattern analysis using simulation, advanced AI decision support are important source of performance measurement. In this phase of evolution, AI based decision models, Big-Data, cloud services are used by taking help from data scientists, reliability engineers and domain experts.

TABLE I  
EVOLUTION OF RUL ESTIMATION

Capability	Procedure	Features/Data	Performance Measures	Software	Workforce	References
<b>Visual Supervision</b>	<ul style="list-style-type: none"> <li>Scheduled physical inspection</li> <li>Log records</li> <li>Checklist</li> </ul>	<ul style="list-style-type: none"> <li>Paper-based data</li> <li>Multiple inspection points</li> </ul>	<ul style="list-style-type: none"> <li>Visual verification</li> <li>Domain expert supervision</li> <li>Paper-based trend analysis</li> </ul>	<ul style="list-style-type: none"> <li>MS office software</li> </ul>	<ul style="list-style-type: none"> <li>Domain experts and machine supervisors</li> </ul>	[24], [25]
<b>Instrument-led supervision</b>	<ul style="list-style-type: none"> <li>Periodic instrument inspection</li> </ul>	<ul style="list-style-type: none"> <li>Digital records of condition data</li> <li>Single inspection points</li> </ul>	<ul style="list-style-type: none"> <li>Automated verification</li> <li>Digital pattern analysis</li> <li>Domain expert supervision</li> </ul>	<ul style="list-style-type: none"> <li>Embedded software</li> </ul>	<ul style="list-style-type: none"> <li>Trained supervisors</li> </ul>	[26]
<b>Real-Time Condition Monitoring</b>	<ul style="list-style-type: none"> <li>Continuous remote inspection via sensors</li> <li>Digital records</li> </ul>	<ul style="list-style-type: none"> <li>Digital records of condition data</li> <li>Multiple inspection points</li> </ul>	<ul style="list-style-type: none"> <li>Automated verification</li> <li>Digital pattern analysis</li> <li>Continuous monitoring by condition monitoring software</li> </ul>	<ul style="list-style-type: none"> <li>Condition monitoring software</li> </ul>	<ul style="list-style-type: none"> <li>Reliability engineers</li> </ul>	[19], [27], [28], [29],
<b>Predictive Maintenance 4.0 for RUL Estimation)</b>	<ul style="list-style-type: none"> <li>Continuous remote monitoring</li> <li>Sensors and other maintenance data</li> <li>Digital recording</li> </ul>	<ul style="list-style-type: none"> <li>Multi-modal data including sound, images, and numerical data</li> <li>Multiple inspection points</li> <li>Digital maintenance history</li> </ul>	<ul style="list-style-type: none"> <li>Automated Verification</li> <li>Digital pattern analysis using simulation</li> <li>Prediction using digital twins</li> <li>Advanced decision support using AI</li> </ul>	<ul style="list-style-type: none"> <li>Artificial Intelligence-based models</li> <li>Big Data</li> <li>Cloud software</li> <li>Statistical software</li> </ul>	<ul style="list-style-type: none"> <li>Data scientists</li> <li>Reliability engineers and domain experts</li> </ul>	[21], [30]–[32], [33], [34]

TABLE II  
RESEARCH QUESTION AND DISCUSSION FOR ACHIEVING RESEARCH GOAL

Research Question	Discussion
<b>RQ-1:</b> How is maintenance carried out in the industry?	The different maintenance strategies applicable in industries are studied.
<b>RQ-2:</b> How can the dynamic nature of machining be monitored?	Study continuous real-time monitoring process in machining by using sensors.
<b>RQ-3:</b> Which sensors can be used to collect the data from the machine during machining?	Different industrial sensors and their usage are discussed in the paper.
<b>RQ-4:</b> How can the data be collected and integrated from the different types of multiple sensors?	A study regarding the multi-sensors use for data collection and data fusion techniques used in literature are considered.
<b>RQ-5:</b> Which algorithms are used to predict the RUL of the cutting tool?	Studies about the different RUL algorithms are listed.

Real-time condition monitoring mainly performs the diagnosis by uninterrupted monitoring via software with the help of different sensors. On the other hand, predictive maintenance 4.0 for RUL estimation focuses on the prognostic approach rather than just diagnosis. Prognostic helps to predict the future behavior of the equipment or component to predict its useful functional life.

#### E. RESEARCH GOAL:

The purpose of this paper is to provide a systematic and comprehensive literature survey on the data-driven RUL estimation tool during the milling process. Table II research questions help achieve the research goal by doing a detailed survey in data-driven RUL estimation.

#### F. CONTRIBUTION OF THE WORK:

In this survey, the authors have highlighted the adverse effect of unplanned downtime of the machines due to tool failure in the milling process. The paper has listed the various maintenance strategies used in industries to maintain equipment health and RUL estimation significance during milling. The authors also provide the existing monitoring techniques for equipment health. Brief detail about different sensors used for data collection is provided. Furthermore, the paper gives details on the different decision-making algorithms used in the data-driven approach. The authors have surveyed few papers that have used publicly available datasets related to milling under various operating conditions to compare the tool wear estimation accuracy of various prediction models. Finally, the authors mentioned challenges, limitations, recent AI advancements, and future scope in the area of RUL estimation.

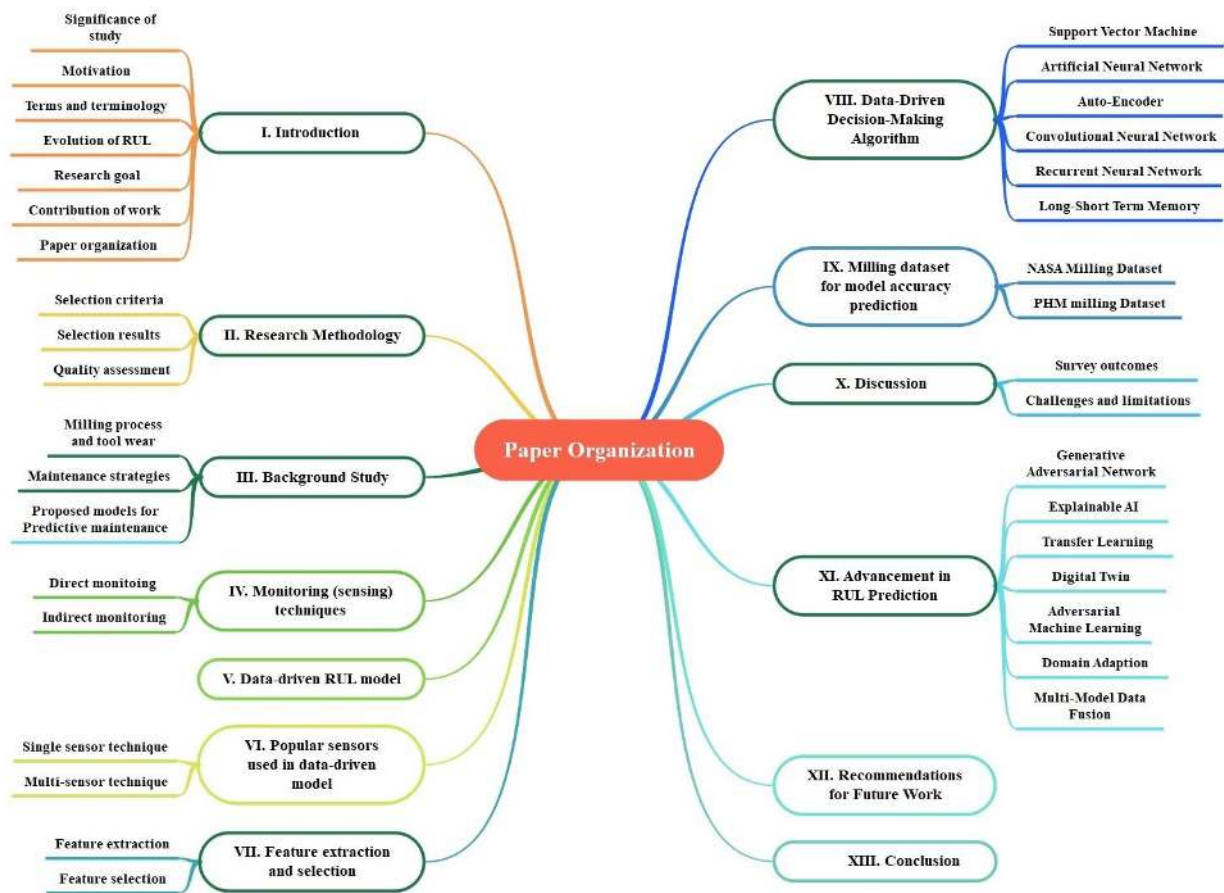


Figure 5: Paper organization

## G. PAPER ORGANIZATION

Figure 5 shows the organization of the paper along with tools and techniques used in RUL estimation, which is divided into a total of eleven sections. Section I has addressed the significance of study, motivation, terms, and terminology used in milling, the evolution of RUL estimation, research goals, the contribution of work and paper organization. In section II, research methodology is explained with selection criteria, selection results, and quality assessment. Section III presents the background study related to the milling process and tool wear, along with maintenance strategies and proposed PdM models. In Section IV, direct and indirect monitoring (sensing) techniques for signal or data collection in a data-driven model are explained. In section V, the data-driven model for RUL is described. In section VI, the popular sensors used in the in-direct monitoring technique and the need for multi-sensors over single sensor technique are explained. Section VII gives details regarding the different feature extraction and selection techniques. Section VIII shows the different data-driven algorithms used for monitoring and prediction. In section IX, few papers that have used publicly available datasets related to milling under various operating conditions to compare the accuracy of the prediction models for tool wear estimation are surveyed. Section X is the discussion section that represents the survey

outcome, challenges, and limitations. Section XI is about RUL advancement related to AI. Section XII provides recommendations for future work. Finally, section XII gives the conclusion of this review paper.

## II. RESEARCH METHODOLOGY

As the RUL estimation is a broader area, the authors have performed the literature survey using the systematic review process to address the research questions. The authors have divided methodology into three sections; selection criteria, selection results, and quality assessment.

### A. SELECTION CRITERIA

Authors mainly used Scopus, Web of Science, and IEEE databases to retrieve related documents. A special query (search string) is formulated to retrieve the research article using multiple database searches. Table III shows the search string (query executed) for finding the number of documents by joining master, primary, and secondary keywords using AND Boolean operator.

### B. SELECTION RESULTS

Table IV shows the records found out (n=91) after searching papers using different databases (Scopus- 46, Web of Science- 32, and IEEE- 13) from 2011 to 2021. Duplicate articles from each database are excluded (n=39).

TABLE III  
KEYWORDS USED IN THE SEARCH STRING (QUERY EXECUTED)

Keywords	Search String (Query Executed)
Master Keyword	("Remaining Useful Life" OR "RUL")
Primary Keyword	("Milling" OR "Milling process" OR "Milling Operation" OR "Milling Machine")
Secondary Keywords	("Predictive Maintenance" OR "Tool Wear" OR "Sensor" OR "Milling Dataset" OR "Dataset" OR "Decision-Making Models" OR "Algorithm" OR "Artificial Intelligence" OR "AI" OR "Machine Learning" OR "ML" OR "Data-Driven Model")

TABLE IV  
LITERATURE DATABASE AND QUERY EXECUTED

Database	Search string (Query Executed)	No. of Documents
Scopus	(TITLE-ABS-KEY ("Remaining Useful Life" OR "RUL") AND TITLE-ABS-KEY ("Milling Process" OR "Milling Operation" OR "Milling Machine" OR "Milling") AND TITLE-ABS-KEY ("Predictive Maintenance" OR "Tool Wear" OR "Sensor" OR "Milling Dataset" OR "Dataset" OR "Decision-Making Models" OR "Algorithm" OR "Artificial Intelligence" OR "AI" OR "Machine Learning" OR "ML" OR "Data-Driven Model" ) )	46
Web of Science	TOPIC: ("Remaining Useful Life" OR "RUL") AND ("Milling Process" OR "Milling Operation" OR "Milling Machine" OR "Milling") AND ("Predictive Maintenance" OR "Tool Wear" OR "Sensor" OR "Milling Dataset" OR "Dataset" OR "Decision-Making Models" OR "Algorithm" OR "Artificial Intelligence" OR "AI" OR "Machine Learning" OR "ML" OR "Data-Driven Model" ) )	32
IEEE	("Remaining Useful Life" OR "RUL" ) AND ( "Milling Process" OR "Milling Operation" OR "Milling Machine" OR "Milling" ) AND ( "Predictive Maintenance" OR "Tool Wear" OR "Sensor" OR "Milling Dataset" OR "Dataset" OR "Decision-Making Models" OR "Algorithm" OR "Artificial Intelligence" OR "AI" OR "Machine Learning" OR "ML" OR "Data-Driven Model" ) )	13


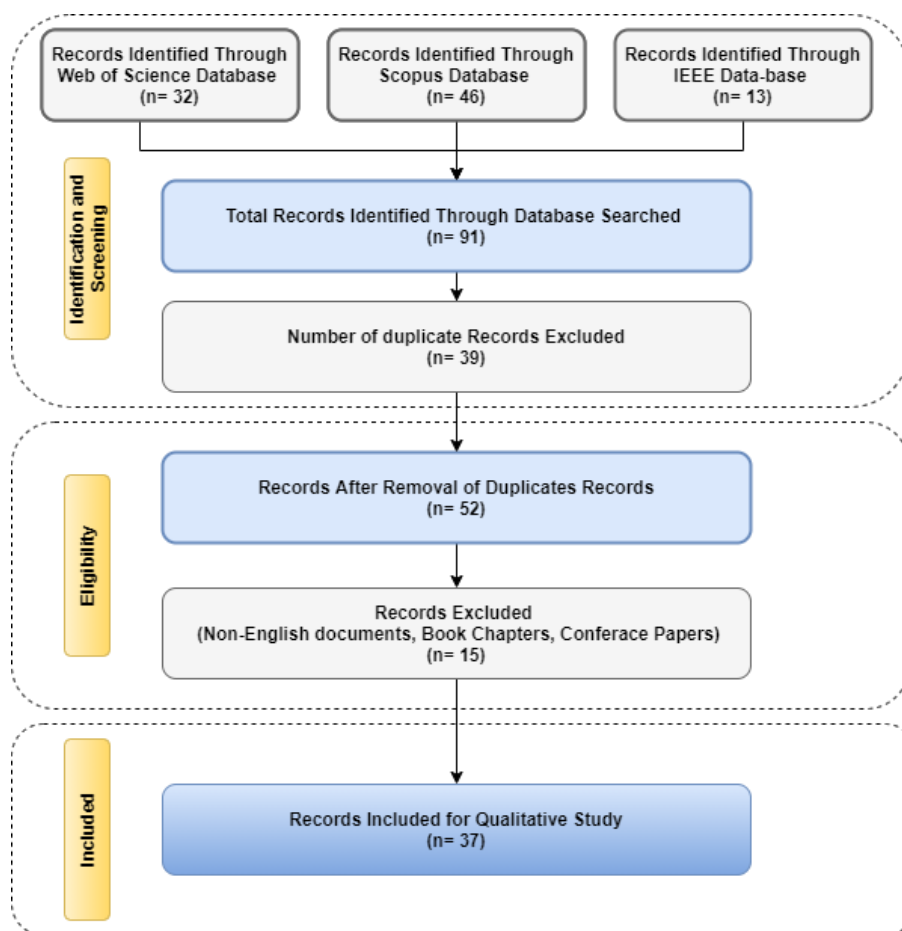


Figure 6: Literature review process

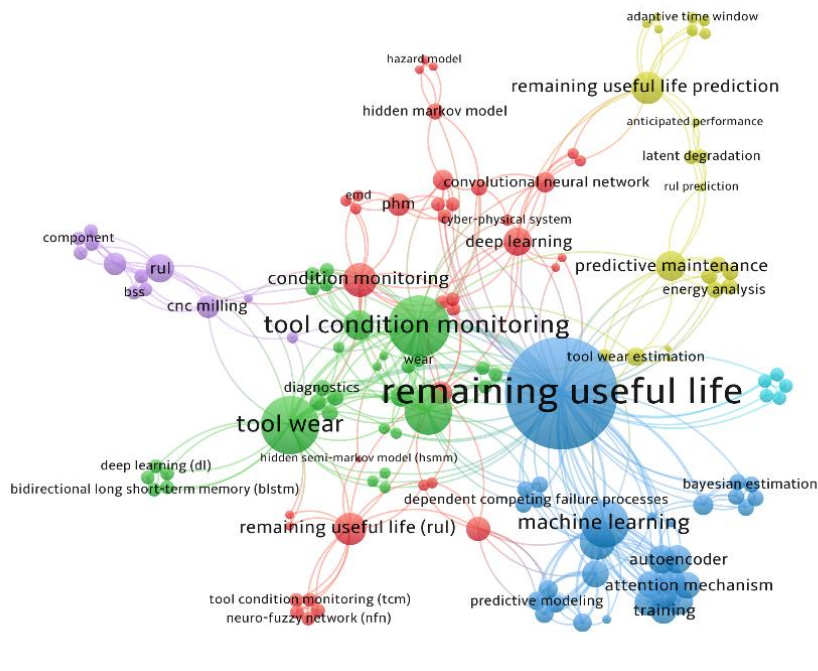

**Figure 7. Network visualization diagram based on keywords**  
(Source: <https://www.scopus.com/> and <https://www.vosviewer.com>)

Some more documents, such as non-English documents, book chapters, and conferences, are excluded (n=15). Finally, as shown in figure 6 total of 37 core documents related to milling RUL estimation are considered for study after excluding documents.

Figure 7 shows the network visualization diagram based on author keywords analysis. The size of the circle indicates the level of incidence of that keyword. If the distance between the network of the keywords is small, it shows a strong correlation between the keywords and vice versa. The network shows that, from extracted documents, the “remaining useful life” keyword having a strong influence with other keywords like “tool wear,” “condition monitoring,” “machine learning,” “predictive maintenance,” etc. The keywords with the same colors show that the formation of clusters by those keywords, a total of 6 different major clusters, is formed from the network visualization diagram.

### C. QUALITY ASSESSMENT

After applying selection criteria (shown in figure 6), few papers are short-listed. Based on research questions, a proper maintenance strategy need to study which is applicable to achieve the research goal. From shot-listed papers, the following points are considered for quality assessment in this paper.

- *Maintenance strategies:* Research emphasizes the different types of strategies used in the industries for maintenance.
- *Predictive maintenance:* Research work also emphasizes the different predictive maintenance models used in industries.

- *Data-driven RUL model:* Paper mainly focused on the data-driven technique for RUL estimation.
- *Sensors:* Research work also concentrated on the different sensors used in the milling machine for data collections.
- *Decision-making algorithms:* Paper also focused on the different decision-making algorithms used for the RUL estimation.
- *Advancement in RUL Prediction using AI:* Research also provides the recent advancement in AI, which can be applied for accurate and robust RUL estimation.

### III. BACKGROUND STUDY

In this paper, to perform a systematic literature review, a background survey is conducted on the tool wear issue of milling cutters. In the next stages, literature related to maintenance strategies, predictive maintenance models, monitoring (sensing) techniques, and the data-driven process is covered. Based on the tool wear issue of milling cutters, the authors first studied the different maintenance strategies used in the industries to understand the pros and cons of the individual approach for selecting a proper maintenance strategy. In the subsequent step, literature related to predictive maintenance is focused. In the final section, different proposed models for predictive maintenance are listed. And finally, based on the primary literature survey, our paper mainly focused on the data-driven predictive model used for the RUL estimation. To fully comprehend the phenomenon of tool life estimation, one must first understand the milling process concept and the tool-wear that takes place during the machining.

### A. MILLING PROCESS AND TOOL WEAR

In the milling process, machining is performed using multi-point rotating cutters or tools by moving them against the stationary workpiece.

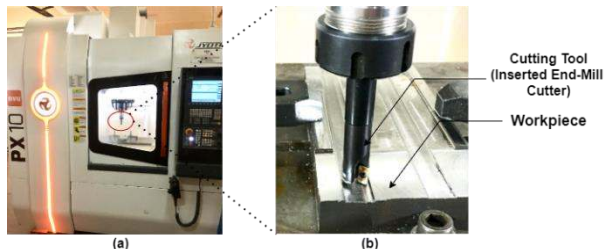


Figure 8. Milling setup (a) Milling machine (b) Milling process (cutting tool and workpiece)

Figure 8 shows the milling machine and arrangement of the milling cutting tool and workpiece during machining. While performing the machining operation, appropriate parameters such as feed, speed, and cutting depth are considered based on experience or parameter optimization techniques. The cutting tool is a crucial part of the machine as it is accountable for the surface finish and machining accuracy of the product [35]. Tool wear is caused by relative motion between the cutting tool and the workpiece [19]. The worn-out tool causes inferior surface and dimensional inaccuracy, responsible for shortening the life of the finished parts.

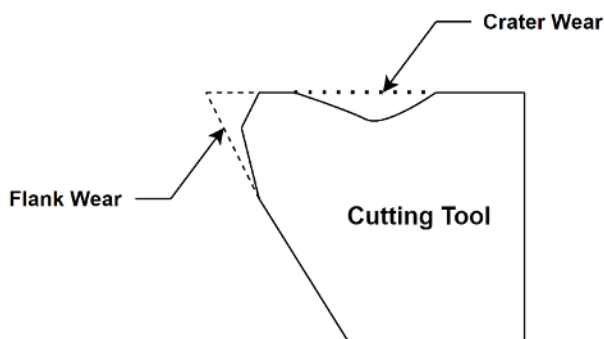


Figure 9: Wear in the cutting tool (flank and crater)

This tool wear due to a change in the shape of the cutting tool is responsible for finishing the final workpiece, dimensional accuracy of the final product, tool failure, etc. Generally, tool wear during machining takes place in two forms: flank wear ( $V_B$ ) and crater wear ( $K_B$ ). Figure 9 shows the changes in the geometry of the cutting tool due to flank and crater wear. Flank wear occurs due to contact between the tool and workpiece, whereas crater wear occurs due to relative motion between the tool and cutting chips. Figure 10 shows the (a) fresh unworn, and used (b) worn-out cutting insert showing flank wear. Many researchers concentrate on flank wear monitoring for tool life estimation. Flank wear is mainly responsible for the machining quality, reliability, and dimensional accuracy of the workpiece [2], [36].

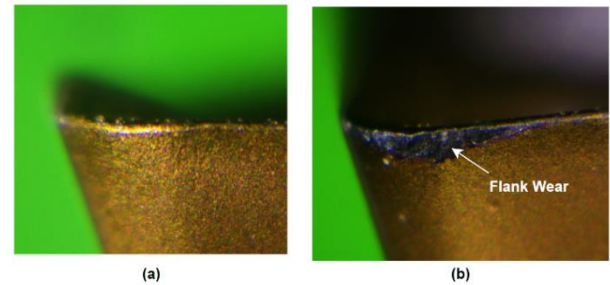


Figure 10. The cutting tool insert (a) unworn (b) worn tool (flank wear)

### B. MAINTENANCE STRATEGIES

Due to the advancement in manufacturing technologies concerning the industry 4.0 scenario, industries move from conventional to intelligent manufacturing approaches [37]. This intelligent manufacturing approach improves the quality, performance, and service of the product, reducing resource consumption by decreasing the rejection rate [38]. Due to this smart approach, the maintenance strategies of the manufacturing industry drawing more attention in recent years, and various prediction and diagnostic methods are used for maintenance purposes [39]. Figure 11 shows the different maintenance strategies used in industries such as reactive, preventive, and predictive maintenance [40],[41], [42]. Table V shows the maintenance strategies with suitable cases, unsuitable cases, benefits, and limitations.

#### 1. REACTIVE MAINTENANCE

Reactive maintenance does not restrict unplanned downtime, as the reactive maintenance component is replaced after it fails. It may cause further damage to the equipment or process [43], [44],[45], [46].

#### 2. PREVENTIVE MAINTENANCE

In preventive maintenance, maintenance activity is scheduled at an equal interval of time. The part is replaced at an equal interval of time, based on experience. But due to this strategy, the maximum life of the component is not utilized effectively. At the same time, it increased the inventory handling cost and planned downtime. So, now industries are trying to shift towards the PdM approach due to its remarkable benefits [44], [45], [47], [48].

#### 3. PREDICTIVE MAINTENANCE

It gives holistic insights into the health of the equipment and predicts component failure time. This smart manufacturing approach provides interaction between physical and cyber environments, predicting and improving the real-time behavior of the system. Figure 12 shows the maintenance approach used in reactive, preventive, and predictive maintenance [30]–[32],[33],[49].



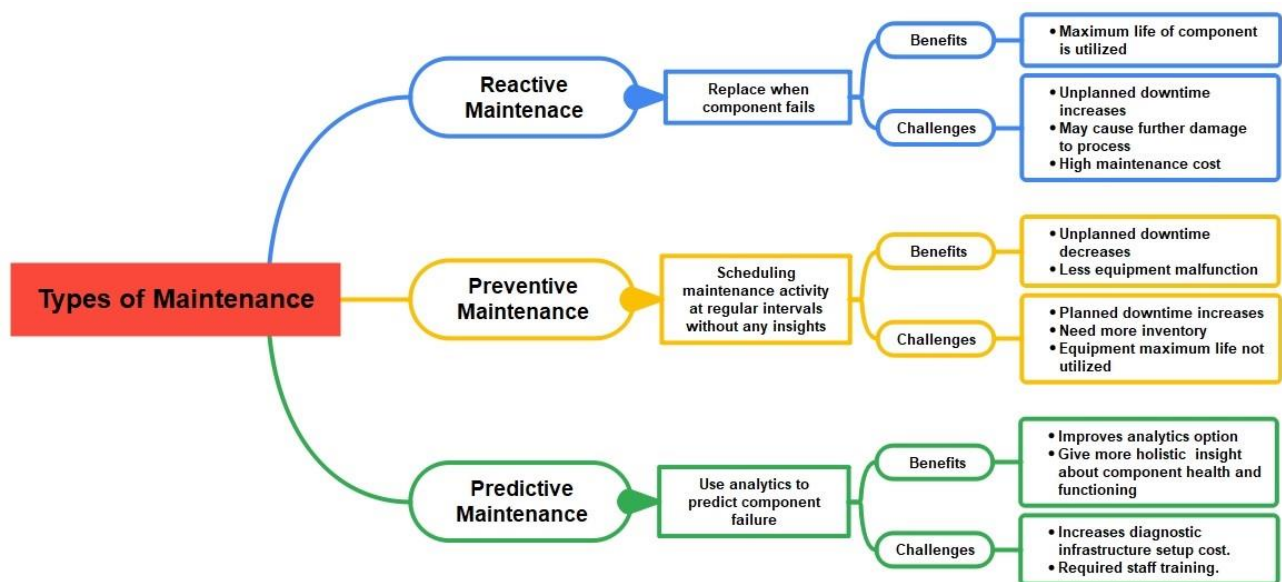


Figure 11. Different maintenance strategies used in industries

TABLE V  
DIFFERENT MAINTENANCE STRATEGIES USED IN INDUSTRIES

Maintenance Strategies	Strategy used	Suitable cases	Unsuitable cases	Implementation Cost	Benefits	Limitations	Study
<b>Reactive</b>	The component is replaced once it gets fails. (Run- to failure)	<ul style="list-style-type: none"> <li>Low-cost component</li> <li>Non-critical component</li> </ul>	<ul style="list-style-type: none"> <li>The high safety risk of human life.</li> <li>Continuously operating plants</li> </ul>	Low	<ul style="list-style-type: none"> <li>The maximum life of the component is utilized.</li> <li>Maximum production value/output.</li> <li>No planning required</li> </ul>	<ul style="list-style-type: none"> <li>Unplanned downtime increases</li> <li>Sudden failure may cause further damage to the process</li> <li>High maintenance cost</li> <li>Safety hazards</li> </ul>	[43], [44], [45], [46]
<b>Preventive</b>	The component replaced periodically	<ul style="list-style-type: none"> <li>Periodic consumable equipment.</li> <li>Failure occurs at equal intervals of time.</li> </ul>	<ul style="list-style-type: none"> <li>Irregular equipment failure</li> <li>Low inventory carrying capacity plants.</li> </ul>	Moderate	<ul style="list-style-type: none"> <li>Unplanned downtime decreases</li> <li>Less equipment malfunctioning.</li> <li>Less repair cost.</li> <li>Less expertise required</li> </ul>	<ul style="list-style-type: none"> <li>Planned downtime increases</li> <li>Need more inventory cost</li> <li>Component life is not utilized effectively.</li> </ul>	[44], [45], [47], [48]
<b>Predictive</b>	It uses data analytics to predict component failure	<ul style="list-style-type: none"> <li>Critical assets which required continuous monitoring.</li> <li>Real-time, cost-effective monitoring for prediction.</li> </ul>	Process in which sudden failure occurs without any warning.	High	<ul style="list-style-type: none"> <li>Give more holistic information about equipment or process.</li> <li>The functional life of the equipment is utilized effectively.</li> <li>It helps to identify the causes of failure.</li> <li>Less maintenance cost.</li> <li>Decision-making is condition-based.</li> </ul>	<ul style="list-style-type: none"> <li>Cost of analytic increases.</li> <li>Good knowledge of data- analytics required.</li> <li>System complexity increases.</li> <li>Setup cost increases due to the use of sensors, data acquisition devices, etc.</li> </ul>	[30]– [32], [33], [49], [50], [51], [52],

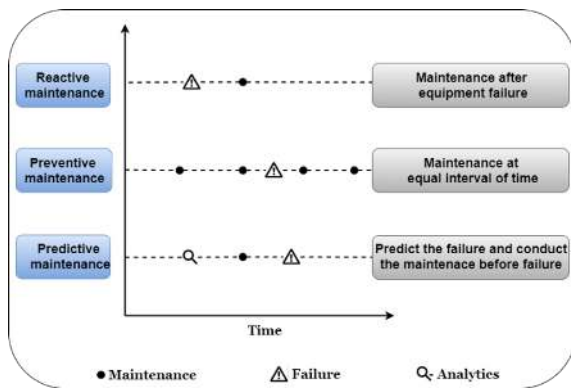


Figure 12. The maintenance approach used in maintenance strategies

Figure 13 shows that the annual average unplanned downtime of the PdM strategy is lower than other maintenance strategies [53]. The predictive maintenance approach is widely used in recent years to reduce unplanned downtime during machining. The goals of PdM are to boost the quality and productivity of the industry by reducing the unplanned downtime and maintenance cost of the equipment.

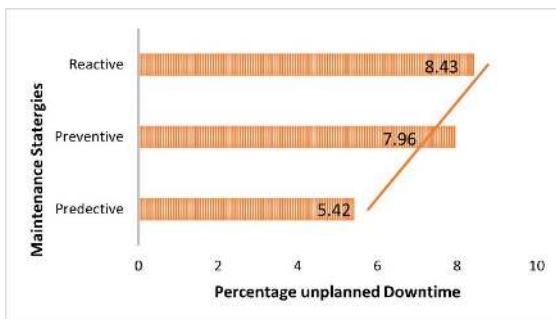


Figure 13. Annual average unplanned downtime in each strategy

One of the important aspects of predictive maintenance is the estimation of RUL [30]–[32]. According to the authors in [33], the prognostic approach is defined as "An estimation of time to failure and risk for one or more existing and future failure modes." Figure 14 shows the combined diagnostics and prognostics framework to determine the components' RUL. The authors in [54] divide the RUL prediction into four parts; fault detection (to detect the abnormal condition), fault isolation (to identify which component is failing), fault identification (estimating nature of fault), and RUL prediction (lead time to failure).

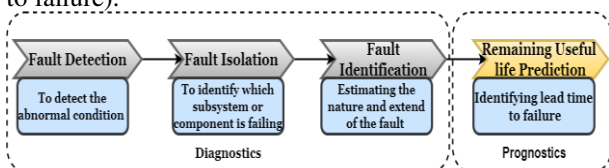


Figure 14. Combined diagnostics and prognostics framework

Predictive maintenance uses analytics to estimate the health of the system or equipment. Predictive maintenance aims to improve productivity and quality and reduce

maintenance costs by decreasing unplanned downtime. Figure 15 shows the principles, goals, and leading application area of predictive maintenance in the scope of industry 4.0 [40]. The basic principle of PdM is to perform diagnosis, prognosis, and analyze the capture signals from sensors. The goal of PdM is to improve productivity, quality by reducing downtime and maintenance costs. The major application domains are smart manufacturing, security, robotics, health, etc.

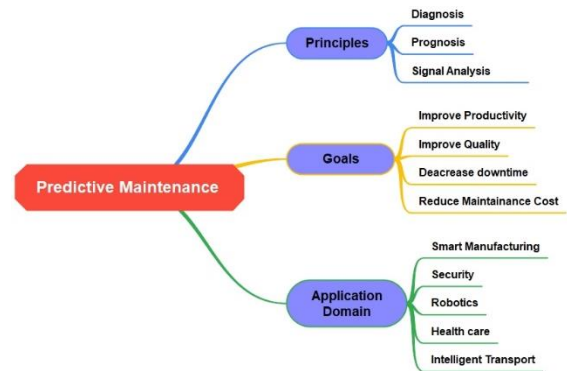


Figure 15. Principle, goals of Predictive maintenance

### C. PROPOSED MODELS FOR PDM

Commonly used PdM methods are knowledge-based model (reliability statistics model), physics-based model, and data-driven modeling approach, as shown in figure 16 [35][40]. Proper selection of these models is based on their applications and characteristics.

#### 1. STATISTICAL KNOWLEDGE-BASED MODEL

The Statistical knowledge-based model mainly uses past equipment failure or breakdown data for statistical characterization and makes fault prediction [55]. It uses the Bayesian method, fuzzy logic, Weibull distribution, etc., for the prediction of fault. This method does not consider system degradation, environmental effects. So, prediction accuracy is less compared to other methods. This method is not suitable for complex systems like CNC machines.

#### 2. PHYSICS-BASED MODEL:

In the physics-based model, mathematical models are built to reflect physical degradation behavior [56], [57]. This physics-based model includes a Gaussian mixture model [58], Markov process model [59], etc. It requires real-time machinery information as well as expert knowledge to build a high-fidelity model. It is challenging to develop a precise fault prediction model of a complicated system with different domains due to ignorance or the complexity of degradation mechanisms [56].

#### 3. DATA-DRIVEN MODEL

In the data-driven model, data is collected using sensors from the running devices to derive a predictive maintenance model [60]. Essential features are extracted from the raw data (signals) to get useful information.

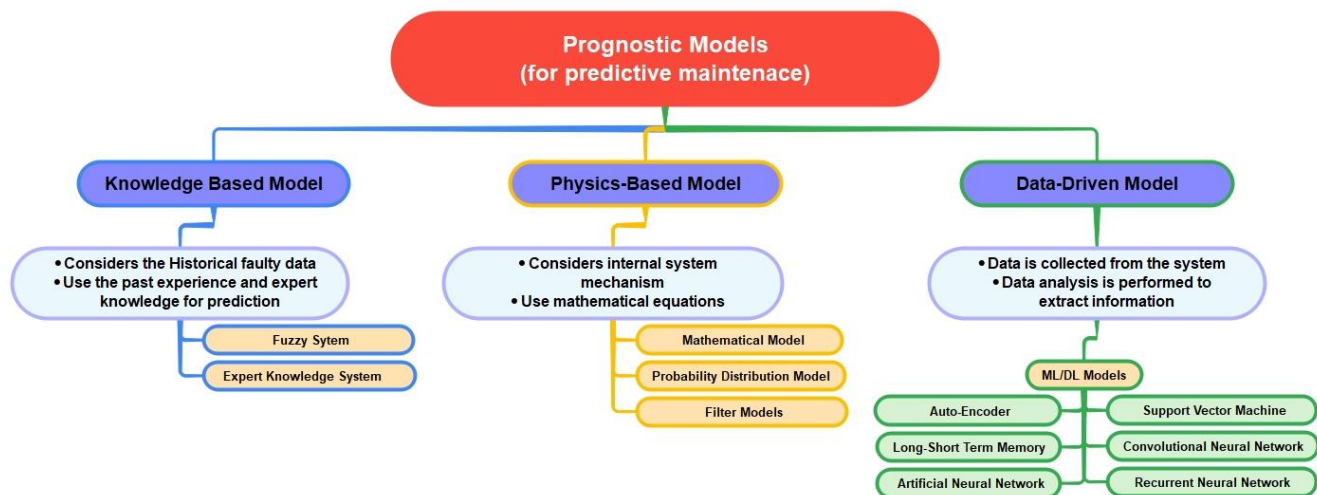


Figure 16. Prognostic models for predictive maintenance

TABLE VI  
PREDICTIVE MAINTENANCE MODELS

Predictive maintenance models	Approach	Suitable cases	Unsuitable cases	Tools used	Advantages	Limitation	Study
<b>Statistical Knowledge-Based</b>	Based on past available faulty data.	simple process or system	Complex process or system	<ul style="list-style-type: none"> <li>Fuzzy logic,</li> <li>Weibull distribution</li> <li>Bayesian etc.</li> </ul>	<ul style="list-style-type: none"> <li>Required less information</li> <li>It does not require a mathematical model</li> </ul>	<ul style="list-style-type: none"> <li>Hard to implement without past statistical data.</li> </ul>	[35], [55], [61],
<b>Physics-based</b>	Based on internal mechanism, a physical-mathematical model.	dynamic modeling	Complex degradation mechanism	<ul style="list-style-type: none"> <li>Mathematical models</li> <li>Probability distribution model etc.</li> </ul>	<ul style="list-style-type: none"> <li>It does not require collecting a lot of data</li> <li>Easy for validation</li> <li>Extrapolation easily possible</li> </ul>	<ul style="list-style-type: none"> <li>Not suitable for complex processes or machines.</li> <li>Required expert knowledge</li> <li>Considering all degradation mechanisms is a tough task</li> </ul>	[62]–[64], [65]
<b>Data-driven</b>	Based on data collected from the equipment	Continuous monitoring is required	Cost of analytics high as compare to the system (less critical assets or low-cost equipment)	<ul style="list-style-type: none"> <li>ANN</li> <li>SVM</li> <li>LSTM</li> <li>CNN etc.</li> </ul>	<ul style="list-style-type: none"> <li>It does not require a separate performance degradation process</li> </ul>	<ul style="list-style-type: none"> <li>A required large amount of data</li> <li>Accuracy depends on the training of algorithms</li> </ul>	[60], [65][66]–[69] [70]

Different algorithms such as SVM, Gaussian Regression, ANN [71], etc., are generally used to analyze the collected data. Sensor positioning plays a crucial part in the data-driven system. If the sensors are not installed at the proper location, it causes difficulty in the data acquisition system, leading to an error in prediction [72]. This review mainly focuses on the data-driven predictive maintenance approach for estimating the RUL of the milling tool. Table VI shows the predictive maintenance models with suitable cases, unsuitable cases, tools used, benefits, and limitations.

#### IV. MONITORING (SENSING) TECHNIQUES

Commonly used tool condition monitoring techniques for data-driven predictive maintenance are direct monitoring and indirect monitoring. Direct sensing techniques mainly include a microscope, lasers, cameras, Charge-Coupled Device (CCD) cameras, laser, ultra-sonic sensors. Direct monitoring provides direct information about machine conditions. While in in-direct methods, sensors are used to measure cutting forces (dynamometer), vibration (accelerometer), temperature, sound (microphone), current/ power, acoustic emissions are used, which provide indirect information about systems health. Figure 17 shows the different sensing techniques of direct and indirect monitoring methods with their benefits and limitations.

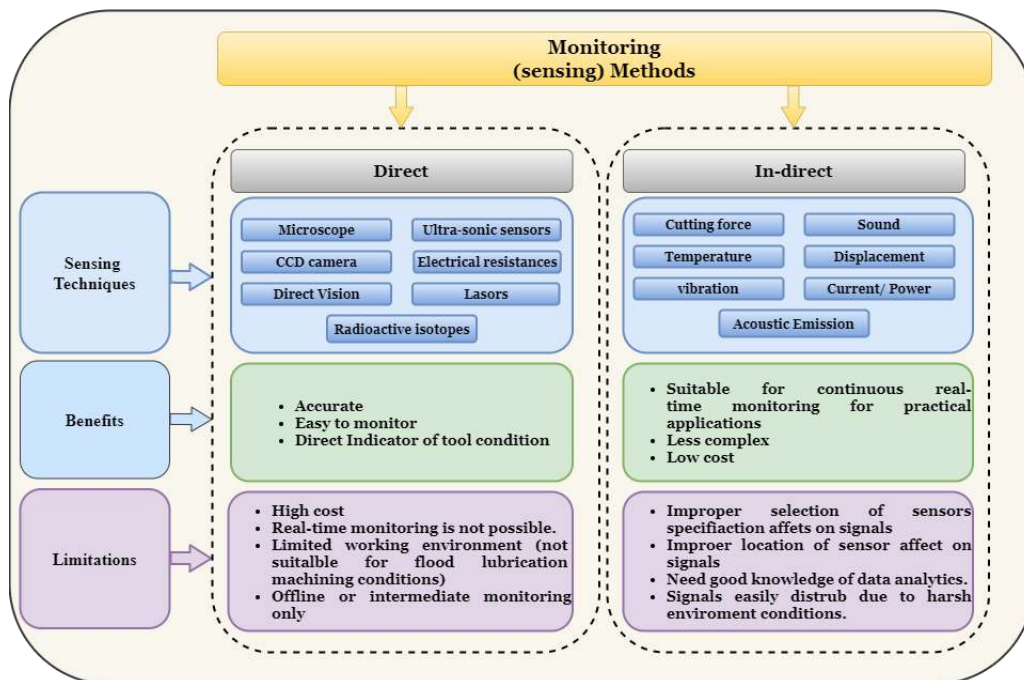


Figure 17: Benefits and limitations of direct and indirect monitoring methods

### A. DIRECT MONITORING

It consists of optical microscopes, direct vision, lasers, ultra-sonic sensors, radio-active sensors, etc. This method measures the actual size of the area worn on the tool. Direct sensors provide a more accurate tool state and measure any wear, such as crater, flank, notch, etc., using image processing algorithms. Tool conditions are obtained using the optical image and machine vision technique [27], [73].



Figure 18. Generalized direct tool condition monitoring method

Figure 18 shows the generalized flow of the direct tool condition monitoring method. The disadvantages of direct sensors are that they are not appropriate for online monitoring due to the machining environment, such as chips and coolant, which easily disturb the accuracy [74]. It increases the downtime of the machine and reduces production time. The monitoring processing time is not real-time as measurements are taken in tool holders only and measured data processed separately [75].

### B. INDIRECT MONITORING

Indirect condition monitoring methods are used to monitor the real-time tool condition without interfering with the machining process. Indirect monitoring is suitable for diagnostic as well as prognostic purposes. Figure 19 shows the generalized indirect data-driven TCM process.

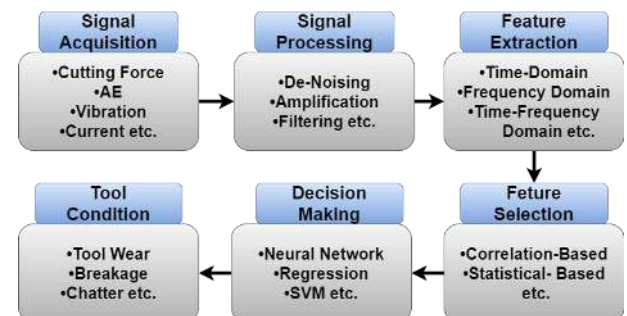


Figure 19. Generalized data-driven indirect tool condition monitoring method

### V. DATA-DRIVEN RUL MODEL

In the data-driven model, data is collected from the running devices with the help of sensors to predict the system run time behavior by monitoring its parameters [35]. The authors in [76] divided the complete RUL estimation process into four parts, as shown in figure 20; Data acquisition, Health indicator construction, Health stage division, and RUL prediction, respectively. The factories have been increasingly integrated cyber-physical systems and intelligent sensors to control complex machining environments and tooling; research is conducted on the data being tracked to automatically identify system and machining anomalies [77].



Figure 20. Stages for RUL prediction [76]

Data-driven algorithms have been suggested in recent years to improve the efficiency and precision of the diagnosis by combining rapid growth in smart sensors, data processing, and Deep Learning methods. The authors in [27] divide the data-driven model into two parts: an online monitoring model and model training. Online monitoring involves online monitoring by using sensors and making decisions. Simultaneously, the training model mainly consists of the configuration of the sensor, extraction of features, and monitoring model. Figure 21 shows the generalized flow of the data-driven model for RUL

prediction, in which the first sensor data is collected from the milling machine by using different sensors. Collected raw signals need to be de-noise by removing due noise environment or other factors. De-noised signals are pre-processed by doing signal conditioning, amplification, filtration, etc. In the subsequent stage, processed signals are used to extract and select important features related to the health of the machine tool. Selected features are used for the diagnosis or prognosis by using suitable decision-making algorithms to predict the RUL of the machine tool.

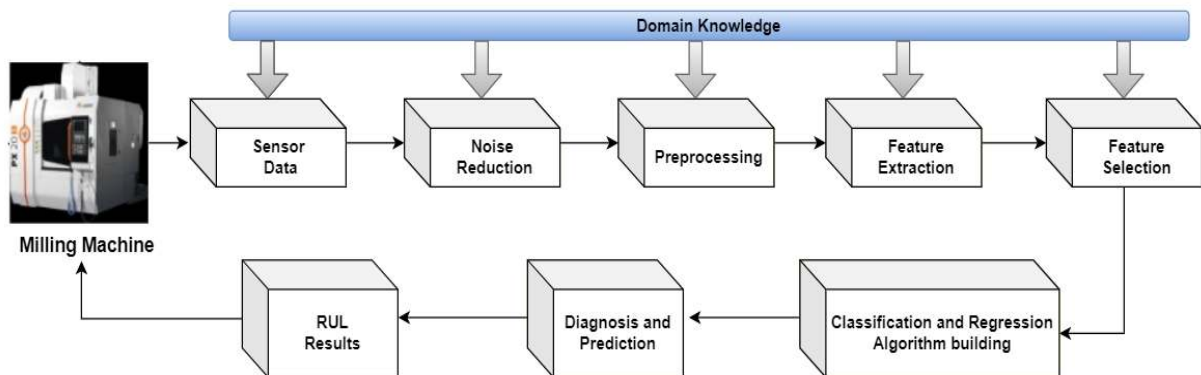


Figure 21. Data-Driven Model for RUL prediction

## VI. POPULAR SENSORS USED IN DATA-DRIVEN MODELS

Sensor configuration provides the sensor signals for feature extraction and extracted features related to monitoring tool conditions like tip fracture and tool wear. Sensor monitoring can be performed by using a single sensor or by using the multisensor fusion technique.

### A. SINGLE SENSOR MONITORING

In this method, analysis of signals captured from sensors is used to estimate tool conditions. Sensor monitoring is an in-direct monitoring technique of a data-driven model. Dynamometers, accelerometers, acoustic emission, current sensors are generally used in indirect monitoring methods.

#### 1. DYNAMOMETER

It provides cutting forces to describe the cutting process state during machining [78]. It shows an excellent response to cutting forces due to its high reliability and sensitivity. With progression in tool wear, a corresponding increase in cutting forces takes place in machining. Cutting forces is a sensitive element related to tool conditions to estimate tool state accurately. Two different types of dynamometers are used in milling machines; table-based dynamometer and rotating type of dynamometers [79]. A table-based dynamometer generally places between the interface of the workpiece and workbench; it shows an excellent response to a slight change in cutting forces during machining [79]. In comparison, the rotating dynamometer is connected to the tool holder or spindle [80]. The dynamometer selection is based on the amount of Kg-force (Kg-f) generated

during the machining. A dynamometer can track tool breakage that occurs as a peak in the signal functions. A neural network combined with a dynamometer offers a simple decision-making process for tool wear estimation [81].

**Drawbacks:** Along with the above advantages, the dynamometer also shows some limitations. It is unsuitable for large and medium-size workpieces in milling due to its physical properties [82]. Dynamometer, which is mounted on the worktable, limits the size of the workpiece [83]. Installation of the dynamometer is a challenging task as it is placed between the workpiece and worktable interface. Using a commercial dynamometer and its maintenance significantly increases its cost. The rotating type of dynamometer restricts the frequent tool change operation in automated Computer Numerical Control (CNC) milling machines[84].

#### 2. ACCELEROMETER

Vibrations are caused in the machine due to friction force or fractured inserts between the tool and workpiece during machining. Growth in tool wear responsible for increased cutting force and vibration amplitude. The selection of the vibration sensor depends on the speed of the spindle, operating frequency bandwidth (Hz), and operating range in "g" ( $1g=9.81 \text{ m/s}^2$ ) of the sensor. Vibration signal measurement follows ISO 10816 [22]. The accelerometer provides similar periodic signals as cutting force. As the cutting tool starts to deteriorate, vibration signal amplitude increasing accordingly.

**Drawbacks:** Accelerometer also shows some limitations like mounting position causes changes in signals. Machining speed should be within a specific range for better results. The harsh working environment like fluid lubrication, chip strike causes changes in generated signals.

### 3. ACOUSTIC EMISSION (AE)

AE signals are generated due to the transient elastic energy generated due to the mechanical deformation of the material [85]. Tool wear or stresses between tool and workpiece takes place due to chip fracture or friction between chips. The AE sensors detect such signals (noise comes from the machine) during machining. AE is nothing but the energy of the micro-level material due to deformation during machining [86]. The proper value of sensitivity (dB) and operating frequency (kHz) need to be considered for selecting the AE sensor. The machining process with dynamic bandwidth from 100 kHz to 1 MHz can be monitored using AE sensors [85], [87]. AE sensor signals do not disturb easily due to mechanical disturbance compared to vibration and cutting force signals and have a higher frequency range than environment frequency. Signals are easily recognized and quickly respond to the changing condition of the tool and the work material. AE

sensors are much beneficial in micro-milling operations [88].

**Drawbacks:** Along with this, AE signals are disturbed easily due to the noisy environment, which causes trouble in extracting valid signals by denoising the raw signal from the sensor [89].

### 4. CURRENT SENSORS

The cutting force increases with an increase in tool wear, the current drawn by the spindle motor increases accordingly [90]. Motor current sensors are found somewhat acceptable for manufacturing environments than those for cutting force sensors, owing to their comparatively straightforward design [91], [92]. The cutting tool gets blunt due to the gradual wear; current drawn from the spindle motor increases compared to the normal working condition [93]. Hall effect sensors collect the current signals in end milling operation to monitor the tool condition[83], [93].

**Drawbacks:** The motor current is highly sensitive to noise and significantly affected due to friction during machining and damping of the feed drive system. It was also found that at higher spindle speed, current signals are not much sensitive to change. Table VII shows the benefits and limitations of the individual sensor.

TABLE VII  
SENSORS AND THEIR USE WITH BENEFITS AND LIMITATIONS

Sensor	Use to measure	Benefits	Limitations
Dynamometer	Cutting Force	<ul style="list-style-type: none"> <li>It shows an excellent response to cutting forces due to its high reliability and sensitivity [94].</li> </ul>	<ul style="list-style-type: none"> <li>Not much suitable for a large and medium-size workpiece [82].</li> <li>Installation of the dynamometer is a challenging task [95].</li> </ul>
Accelerometer	Vibration	<ul style="list-style-type: none"> <li>Installation is simple and inexpensive [96].</li> <li>Establish a signal that is similar to the cutting force [97].</li> </ul>	<ul style="list-style-type: none"> <li>Signals are difficult to filter [98].</li> <li>Mounting position changes in signal response [74].</li> <li>The harsh working environment affects the signal [74].</li> </ul>
Acoustic Emission	Acoustic Emission	<ul style="list-style-type: none"> <li>Higher frequency range[99].</li> <li>Signals do not disturb easily due to mechanical disturbance [100].</li> </ul>	<ul style="list-style-type: none"> <li>Causes trouble in extracting valid signals.</li> <li>Highly sensitive to environmental noise [89].</li> </ul>
Current	Motor Current	<ul style="list-style-type: none"> <li>Less sensitive to environmental noise [90].</li> <li>Easy for the installation [91]</li> </ul>	<ul style="list-style-type: none"> <li>High-frequency components are lost by filtering [95].</li> </ul>

TABLE VIII  
PAPERS RELATED TO RUL AND CM ESTIMATION BY USING A DATA-DRIVEN APPROACH IN MILLING

Author	Cutting Tool Type	Decision-Making Algorithms	Sensors Used					Workpiece Material
			Dynamometer	Vibration	Acoustic Emission	Sound/Microphone	Current/Power	
S. Shankar et al. [101]	End mill cutter	"Adaptive Neuro-Fuzzy Inference System (ANFIS)"	√			√		7075-T6 Hybrid Aluminium Alloy Composite
K. Javed et al. [102]	3-flutes ball nose mill	"Summation Wavelet-Extreme Learning Machine"	√	√				Inconel 718
B. Cuka et al. [98]	Flat end-mill	"Fuzzy Inference System"	√	√	√		√	AISI 1045 Steel

J. Wang et al. [72]	3-flutes ball nose mill	"Support Vector Regression"	√	√		Stainless Steelhrc52
J. Yu et al. [103]	3-flutes face mill	"Weighted HMM"	√	√	√	HRC52 Stainless Steel
C. K. Madhusudana et al. [104]	Face mill	"Support Vector Machine"			√	Steel Alloy 42CrMo4
C. Zhang et al. [105]	Two-flute end mill	"Neuro-Fuzzy Network"		√		Tempered Steel (HRC52)
Jain et al. [106]	Three-flutes ball nose cutter	"Artificial Neural Network"	√	√	√	Stainless Steel (HRC 52)
A. Torabi Jahromi et al. [107]	Ball nose end mill	"Sequential Fuzzy Clustering Dynamic"	√	√	√	Inconel 718
C. Drouillet et al. [108]	Inserted end mill	"Artificial Neural Network"				√ Stainless Steel SS403
(Q. Ren et al. [88])	Two-flute uncoated micro-grain WC ball end mills (micro-milling)	"Type-2 fuzzy"	√		√	Tool Steel, 50HRC
Liu et al. [109]	-	"Support Vector Machine"	√	√		Aluminium Alloy
Madhusudana et al.[104]	face milling cutter (6 Carbide inserts	"Support Vector Machine"			√	steel alloy 42CrMo4
Li et al. [110]	Ball nose cutter	"Support Vector Machine"	√	√	√	√ Inconel 718

### B. MULTI-SENSOR TECHNOLOGY:

In machining, tool life prediction is a critical issue as the cutting process has dynamic and nonlinear behavior [111]. Sensors collect data from the machine from a particular location from where they have placed and generate the source of information in signals. As the machining and tool wear condition changes, it shows different behavior. Tool condition becomes critical due to behavior changes while using a single sensor. Hence, the multisensor technique is preferable for gaining the confidence to predict the proper tool behavior [112]. Simultaneously, to avoid drawbacks of the individual sensor discussed above (Section VI.A), the multisensory concept for TCM becomes more popular. Different sensors strongly correlate the tool condition of tool wear and overcome the sensor's sensitivity loss by other sensors. The multisensor approach increases robustness and better performance by reducing uncertainty in tool wear due to a single sensor. Table VIII shows a few

papers related to the RUL estimation and condition monitoring using a data-driven approach.

### VII. FEATURE EXTRACTION AND SELECTION:


The raw data collected from the sensors have large number of dimensions and processing such high dimensional data may require a lot of computing resources and time. Hence to get more insights into the data for efficient processing, we need to reduce the raw data dimensions such that it represents the original dataset completely and accurately. For data analysis purposes, relevant features are extracted from the signal. Further, feature selection is a process that helps to identify the important features of equipment and eliminates the features that contribute less to the output or target variables of the model. A proper feature selection process significantly improves the prediction accuracy and performance of the model.

#### A. FEATURE EXTRACTION

Feature extraction is performed to convert raw machinery data into more meaningful data which can be fed to the model. It aids in the reduction of the dimensions of the original signal information obtained across various signal processing domains. Signals captured by using the sensors need to convert from analog to digital form. For denoising the data, signals need to be passed through the low pass and high pass filters. Features that have a good correlation with target variables are selected, enhancing the learning rate during model training, and thereby improving the predictive performance of the model. Collected signal data is classified in the time, frequency, and time-frequency domains. Figure 22 shows the different feature extraction in the time, frequency, and time-frequency domain. The time-domain analysis mainly provides the change in incoming signals by identifying and determining the stereotype or transient information in the time series [113]. Graphical time-domain representation plots the change in signal over time while frequency-domain provides how much data or signal lies within a given frequency band over a range of frequency. The time-frequency domain provides the frequency band of the signal over the time interval.

### 1. TIME-DOMAIN

It extracts the features of the tool state from the acquired signals of the sensors using time series and different statistical parameters to reduce the dimension of the signal information.

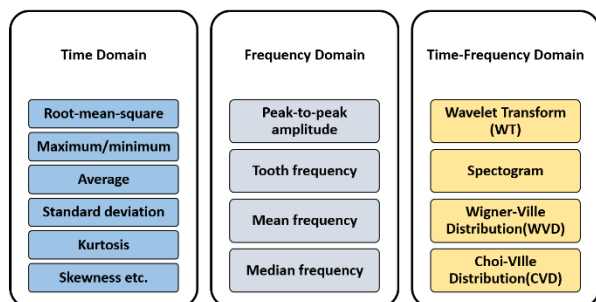

**Figure 22.** Feature extraction in time, frequency, and time-frequency domain.

Time-domain uses other dimensional and non-dimensional statistical parameters. Dimensional parameters such as average, Standard deviation, Root-Mean-Square (RMS) and non-dimensional parameters such as kurtosis, skewness, waveform, crest factor, etc., are extracted from the signals [114].

### 2. FREQUENCY-DOMAIN

It extracts the signals in a frequency domain from the pre-processed signals to relate them with the tool state. Before extracting the parameters of the feature in the frequency domain, the Fast Fourier Transform (FFT) is used to convert the time domain into the frequency domain. The frequency-domain signals are then used to extract the parameters such as tooth frequency, peak-to-peak amplitude, spectral skewness, spectral entropy, power spectrum, etc.[98].

### 3. TIME-FREQUENCY DOMAIN:

As the machining process is dynamic, it generates non-stationary signals during machining. Time-frequency domain features are more suitable for non-stationary signals [27]. Generally, a wavelet transform is used to extract the signals in the time-frequency domain. The author [115] uses the wavelet packet transform method for richer signal analysis in the high-speed milling process to predict the tool wear.

#### B. FEATURE SELECTION:

Once the features are extracted into different domains, they are correlated with the machine health condition. For proper feature selection, systematic feature ranking [116] methods such as regression models (random forest regressor, decision tree regressor, linear regression, etc.), classification models (random forest classifier, decision tree classifier, etc.), and few other methods such as Pearson's correlation coefficient, Principal component analysis (PCA), etc. are used, which helps to rank the important feature related with the machine health condition.

Pearson's correlation coefficient (Pearson's r coefficient) is generally used to select the extracted feature in a milling operation. Pearson's r coefficient gives the correlation between the tool wear and extracted features [35].

$$r = \frac{\sqrt{\sum_{i=1}^n (x-\bar{x})(y-\bar{y})}}{\sqrt{\sum_{i=1}^n (x-\bar{x})^2} \sqrt{\sum_{i=1}^n (y-\bar{y})^2}} \quad (1)$$

Equation (1) shows the Pearson's r coefficient, x and y represent the extracted feature and tool wear condition, respectively. The value of r varies from -1 to 1. Zero indicates no correlation, while 1 and -1 indicate a strong positive and strong negative correlation [52]. The correlation can be classified into three groups based on the value of r: weak correlation ( $0 < r < 0.3$ ), moderate correlation ( $0.3 < r < 0.7$ ), and strong correlation ( $0.7 < r < 1$ )[117]. Generally, the features which are having a correlation having an "r" value greater than 0.7 ( $r > 0.7$ ) are selected.

### VIII. DATA-DRIVEN DECISION-MAKING ALGORITHMS


Different monitoring and prediction Machine Learning (ML) models are available to analyze sensor data used in data-driven models. The author of [27] has reviewed different monitoring models in the milling for tool conditions. These models are used to monitor the tool condition in various machining processes for deciding tool conditions. Models such as SVM, ANN, CNN, AE, LSTM, etc., are used to track the performance of the tool.

#### A. SUPPORT VECTOR MACHINE (SVM):

SVM is a supervised classification algorithm based on statistical learning theory [27]. The main advantage of SVM is that it shows better performance even with a large



magnitude of data. In this method, a hyperplane is used to separate the data points.

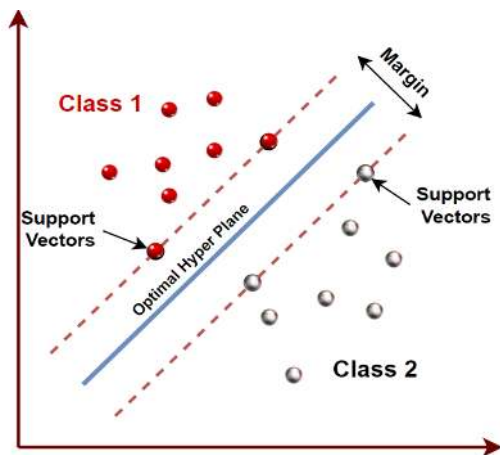


**Figure 23.** Working principle of SVM

Support vectors are responsible for the position and orientation of the hyperplane by employing the kernel function to construct a linear algorithm as a solution for the nonlinear problem. SVM maps the nonlinear input data to a high-dimensional feature space [118]. Figure 23 shows the working principle of SVM. Many researchers use the SVM for tool condition monitoring [6], [119]–[123]. The author of [124] uses a multi-sensor fusion technique to gather signals from the machine during machining and applies the SVM monitoring model using cutting parameters and signal features as an input vector. According to [125], SVM is a suitable ML technique to predict the RUL of equipment with time-series techniques. [104] use the SVM technique to classify milling tool conditions. Discrete wavelength transform extracts the feature from sound sensor signals and found that SVM is an efficient classifier compare to other classifiers use in face milling operation [104]. According to [126], the nonlinear feature reduction and SVM estimate the tool wear and calculate the RUL of the tool [126]. The authors in [109] use the SVM and multi-sensor fusion technique to monitor the tool and workpiece deformation and found that SVM shows a good result by considering the penalty coefficient.

### B. ARTIFICIAL NEURAL NETWORK (ANN)

ANN consists of nodes or units which are connected in a series of the hierarchical network. This model is inspired by the concept of working of the human brain. ANN contains the input and output layers and one or many hidden layers of nodes (neurons) connected. Figure 24 shows the working principle of ANN. Determining the number of nodes and hidden layers are challenging based on the individual's knowledge and experience. The connection between each neuron in layers is having some value called weight. These weight values of neurons obtained through sample training are adjusting such that

they try to minimize the errors in output to get the best possible solution. Many researchers have applied the ANN model for monitoring tools in a milling machine, which shows better performance in the estimation of tool wear [101], [127], [128].

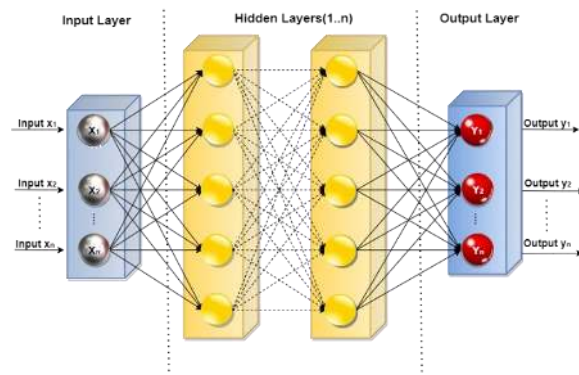


**Figure 24.** Working principle of ANN

The author of [106] considered the publically available PHM 2010 dataset [129] for estimating the wear in high-speed milling operation (10400 rpm) by using the ANN algorithm. ANN is also used in tool wear prediction in turning operation using the multi-sensor fusion technique [117].

### C. AUTO-ENCODER (AE):

AE mainly contains the two phases, encoder, and decoder, which help reconstruct the input data. Figure 25 shows the Auto-encoder architecture.

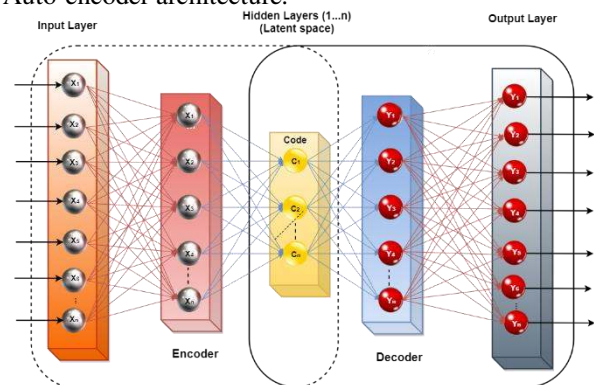

**Figure 25.** Architecture for Auto-Encoder

The encoder is used to compress the input into Latent Space Representation (LSR), and the decoder aims to reconstruct the input from the LSR by using the decoding function. The practical application of AE is to denoise the raw data and perform the dimensionality reduction to provide more insights into raw data. AE models are generally used for fault diagnostic. In RUL Prediction, AE models typically use the extraction of degradation features. The author of [130] uses the Neural Network and sparse AE to classify very closed-bearing vibration signals. Stacked sparse AE is used to predict the RUL of aircraft engines along with Logistic Regression [131]. A

combination of AE and Deep Neural Network (DNN) predicts the RUL of bearing [132].

#### D. CONVOLUTIONAL NEURAL NETWORK (CNN):

CNN is a feedforward multilayer Artificial Neural Network. CNN shows better outcomes in machine fault diagnosis and surface integration nitration [133].

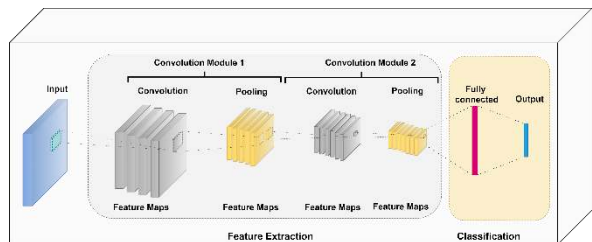


Figure 26. Basic CNN architecture

Figure 26 shows the basic CNN architecture network [134], [135]. The double-CNN framework is used for intelligent RUL prediction, offers a robust feature extraction ability of CNN by extracting features from the vibration signals [136]. New DL architecture in prognosis is developed for RUL estimation by using deep CNN [137]. CNN was used for the multi-scale feature extraction in the time-frequency domain for developing intelligent RUL prediction of bearing [138].

#### E. RECURRENT NEURAL NETWORK (RNN):

RNN is a Deep Learning architecture to process the dynamic information from preceding layers using feedback connections from hidden or output layers for the next layer [139].

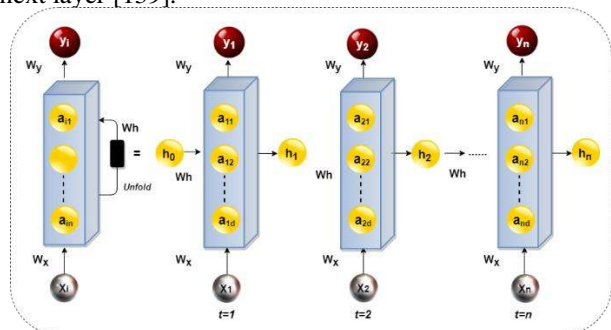


Figure 27. RNN architecture (a) Typical RNN loop (b) Unrolled RNN structure

#### F. LONG SHORT-TERM MEMORY (LSTM):

LSTM is proposed by Schmidhuber and Hochreiter [144], which is an advancement of the Recurrent Neural Network (RNN) to avoid the limitations of RNN by adding information in between the memory cells. It is made to avoid dependency issues by using gates to monitor memory cells [140]. LSTM is modeled in a chain structure and can store the information for an extended period. The figure 28 shows the LSTM architecture [140], [145], [146]. The sigmoidal function ( $\sigma$ ) takes the output from the last cell and the current input for processing. The sigmoidal function also determines which part of the previous cell

output should be eliminated from an individual cell. The authors of [129] consider the LSTM for extracting the in-depth features from the multi-sensor time-series data and temporal features to construct the new vector input for the tool wear prediction by providing it to a Nonlinear Regression Model.

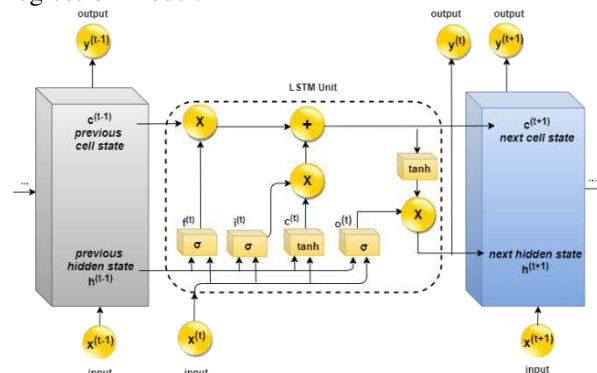


Figure 28. The structure of LSTM architecture

This validation of the models tested on PHM 2010 [129] and NASA milling datasets [129]. Table IX shows the different decision-making models with their applications, benefits, limitations, and percent accuracy.

### IX. MILLING DATASETS FOR MODEL ACCURACY PREDICTIONS

Very few publicly available milling datasets are available on which RUL prediction is applied. Most of the researchers used NASA and PHM 2010 milling datasets for the RUL prediction. These available milling datasets are considered for checking the accuracy of prediction models.

#### A. NASA DATASET FOR MILLING

NASA Dataset [147] is generated by considering various operating conditions on the milling machine (Matsura Machining Center MC-510V). During experimentation, cast iron and steel material are considered workpiece material, and a 60 mm face mill with six KC710 inserted tools are used for machining. Constant cutting speed (200m/min) and variable depth of cut (1.5mm and 0.75mm) and feed rate (0.5 mm/rev and 0.25 mm/rev) are considered. Sixteen different cases are considered for a different number of runs. Acoustic, vibration and current sensors are used to capture the signals during machining. Acoustic emission and vibration sensors are mounted on the spindle and worktable, while the current probe is attached to the spindle motor of the milling machine for capturing the signals. The authors of [129] use the LSTM algorithm for an available NASA dataset for milling. As compared to other models, LSTM shows good results for the prediction of tool wear.

#### B. THE 2010 PHM DATA CHALLENGE DATA SET FOR CNC MILLING

The authors of [129] use the PHM dataset generated under highspeed dry milling operation with a three-flute tungsten

TABLE IX  
DIFFERENT DECISION-MAKING MODELS WITH THEIR APPLICATIONS, BENEFITS, LIMITATIONS, AND % ACCURACY

Decision-Making Models	Applications	Advantages	Limitations	% Accuracy	Study
SVM	<ul style="list-style-type: none"> <li>Fault diagnosis</li> <li>RUL prediction</li> </ul>	<ul style="list-style-type: none"> <li>Shows better performance for adequate sample size</li> <li>Good performance with semi and unstructured data.</li> <li>Deal with high dimension data quickly.</li> </ul>	<ul style="list-style-type: none"> <li>Performance is susceptible to the Penalty parameter, which needs to be selected by the trial-and-error method.</li> <li>Standard kernel function not defined.</li> </ul>	<ul style="list-style-type: none"> <li>Madhusudana et al. – 83 % [104]</li> <li>Tran et al.-87.5 % [125]</li> <li>Widodo et al- 98.51% [148]</li> <li>Wang, G. et al.-96% [123]</li> <li>Li et al.- 85.13% [110]</li> </ul>	[6], [119]– [123], [124], [125], [104], [126], [109]
ANN	<ul style="list-style-type: none"> <li>Fault diagnosis</li> <li>Predicting RUL</li> </ul>	<ul style="list-style-type: none"> <li>Good adaptability, high tolerance for defects.</li> <li>Better noise suppression</li> <li>Good prediction and classification, and accuracy.</li> </ul>	<ul style="list-style-type: none"> <li>It is essential to collect a wide range of training sets. (It is expensive and time-consuming).</li> <li>Over-fits easily.</li> <li>Need to train many weights parameters.</li> <li>The standard network structure is not defined.</li> </ul>	<ul style="list-style-type: none"> <li>Salimiasl et al.- 95.2% [149]</li> <li>Jain et al. -87% [150]</li> </ul>	[101], [127], [128], [106], [117], [149], [150]
AE	<ul style="list-style-type: none"> <li>Fault diagnosis</li> <li>RUL prediction</li> <li>Degradation process estimation</li> </ul>	<ul style="list-style-type: none"> <li>Can combine and compressed multi-sensor data</li> <li>Not needed much previous knowledge.</li> </ul>	<ul style="list-style-type: none"> <li>It is essential to collect a wide range of training sets.</li> <li>Unable to identify relevant information.</li> </ul>	<ul style="list-style-type: none"> <li>Yan et al.- 80% [151]</li> </ul>	[130], [131], [132], [151]
CNN	<ul style="list-style-type: none"> <li>Fault diagnosis</li> <li>RUL prediction:</li> <li>Degradation process estimation</li> </ul>	<ul style="list-style-type: none"> <li>Required less storage.</li> <li>Good auto-detection feature.</li> <li>Less complex compares to ANN.</li> </ul>	<ul style="list-style-type: none"> <li>It is essential to collect a wide range of training sets. (It is expensive and time-consuming).</li> <li>Overfit easily</li> <li>Computational cost is high.</li> </ul>	<ul style="list-style-type: none"> <li>W. Cai et al.- 77.68% [129]</li> <li>Tao et al.- 87.30% [152]</li> </ul>	[136], [137], [138], [152], [153]
RNN	<ul style="list-style-type: none"> <li>Fault diagnosis</li> <li>RUL prediction</li> <li>Health indicator construction</li> </ul>	<ul style="list-style-type: none"> <li>Easy to process for long input</li> <li>Weight can be shared across time-steps.</li> <li>Model's time-sequential dependencies.</li> </ul>	<ul style="list-style-type: none"> <li>Computation takes a longer time</li> <li>Hard for training.</li> <li>Gradient vanishing problem.</li> <li>Not suitable for long sequences.</li> </ul>	<ul style="list-style-type: none"> <li>Song et al.-94% [154]</li> </ul>	[139], [142], [143], [155], [156],
LSTM	<ul style="list-style-type: none"> <li>Fault diagnosis</li> <li>RUL prediction</li> </ul>	<ul style="list-style-type: none"> <li>Suitable for time series data.</li> <li>Can deal with vanishing gradient problem.</li> </ul>	<ul style="list-style-type: none"> <li>It requires more time and resources for training.</li> </ul>	<ul style="list-style-type: none"> <li>Le et al.- 86% [140]</li> <li>Lei Ren et al. -95% [157]</li> <li>An et al. - 90% [158]</li> </ul>	[129], [159], [160], [161], [158], [157]

TABLE X  
AVERAGE PREDICTION ACCURACY OF DIFFERENT DECISION-MAKING MODELS

Datasets	Milling cutter	Sensors Used	Target Value	Average Prediction Accuracy % of Different Decision-Making Models				
				LSTM	CNN	MLP	SVR	LR
NASA Milling Dataset [129], [147]	Six flute face mill with KC710 insert	<ul style="list-style-type: none"> <li>Accelerometer</li> <li>Acoustic Emission</li> <li>Current</li> </ul>	Flank Wear (Vb)	90.06	43.36	43.49	47.53	41.98
	Three flute Endmill	<ul style="list-style-type: none"> <li>Accelerometer</li> <li>Acoustic Emission</li> </ul>		92.54	77.68	78.68	91.36	70.41
					92.04	63.26	68.47	75.39

<b>PHM-2010 Milling Dataset</b> [129], [162]	(tungsten carbide tool)	• Dynamometer					
	C6		89.56	72.57	80.83	80.46	52.22

carbide tool. During machining, the spindle runs at 10400 rpm with a feed rate of 1555 mm/min along the x-axis with a depth of cut 0.125mm and 0.2 mm in y and z directions, respectively. For capturing tool condition signals during machining AE, an accelerometer and dynamometer are used. AE and accelerometer are mounted on the workpiece while the dynamometer is placed between the interface of the workpiece and work-table. The microscope is used to measure the flank wear of each flute. Seven different signals (vibration along (x,y,z), Cutting force along (x,y,z), and AE rms) are captured. Signals are captured for six different cutters (C1 to C6), and corresponding tool wear is available only for cutter C1, C4, and C6 in the dataset. The LSTM model leads the high precision, around 92.54%, 92.04%, and 89.56% for cutter 1, 4, and 6, respectively, for the PHM dataset. Table X shows the accuracy of different models for predicting tool conditions [129]. Few more publically available datasets like the milling machine tool wear dataset of NUAA\_Ideahouse [163], "System-level Manufacturing and Automation Research Testbed" (SMART) at the University of Michigan [164] can be used for the RUL prediction in the future.

## X. DISCUSSION

This data-driven predictive maintenance approach to estimate the useful life of the tool provides valuable and critical information about machining complex operations. From literature, it was found that sensors like accelerometer, dynamometer, current, acoustic emission are effective and preferable in data-driven condition monitoring. Even though the initial setup cost increases due to expensive sensors and data analytics, overall benefits in decreasing downtime and increased industry productivity are significant.


### A. THE SURVEY OUTCOME:

This survey helps to understand the importance of data-driven PdM for RUL estimation in milling. The RUL of a machine is the amount of time it will likely run before it has to be repaired or replaced. Accurate RUL estimation can enable engineers to schedule their maintenance activities, optimize the use of maintenance resources and avoid unnecessary delays due to machine downtime. As a result, estimating nearly accurate RUL in predictive maintenance plans is essential. From an extensive literature survey, it is found that usage of multi-sensors gives more promising prediction results compared to a single sensor technique. Decision-making AI based algorithms like ANN, SVM, and LSTM are showing good responses for prediction accuracy.

### B. CHALLENGES AND LIMITATIONS IN THE ESTIMATION OF RUL

From the literature survey, the authors found some challenges and limitations in this area which are as follows:

- In-depth RUL estimation needs to be done by considering the machine performance from multiple faults perspective. These faults can be analyzed by collecting data from different sensors. However, this multi-sensor data is varied in formats, size, and measurement units, making it difficult to investigate using one common analysis framework. So, the development of technical AI-based frameworks and algorithms for effective utilization of the multi-sensors data is challenging and needs more attention in the future research work of RUL estimation.
- Data captured via sensors play a major role in implementing the intelligent RUL estimation setup. However, environmental factors such as factory floor noise, environmental temperature, working conditions (flood lubrication, machining chips, etc.) affect the input signals of the sensors leading to the generation of noisy data. This noisy data affects the accuracy of AI-based RUL predictions. So, effective data pre-processing techniques, outcome validation metrics, and autocorrecting AI algorithms are required.
- In order to develop an unbiased AI-based RUL estimation model, a large amount of historical data is required, which would have samples from various fault scenarios. The collection of such a large amount of data is sometimes unfeasible from the cost and time perspective. So, data augmentation techniques for the generation of synthetic data would be required.
- It is observed that similar prediction algorithms can't be applied for different fault data which is captured in different conditions. It would require an amalgamation of multiple fault prediction algorithms which are part of one AI system.
- Even though multiple sensors give a high confidence level decision-making model, it is difficult to identify the redundant and noisy signals from different sensors while performing a data preprocessing and feature extraction process.
- The results of the RUL estimation AI models must be more interpretable and logically understandable for users to comprehend why a certain RUL prediction was made at a certain instance of time and how the value is calculated.

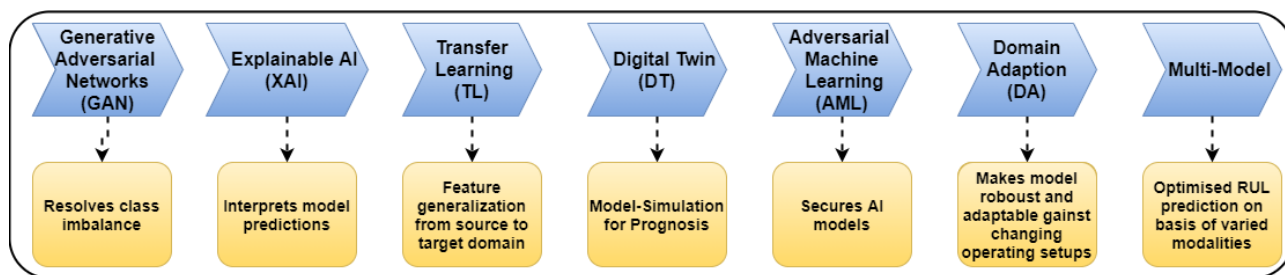

**Figure 29. Advancements for improving RUL estimation strategies**

TABLE XI  
RECENT ADVANCEMENTS IN RUL PROGNOSTICS TECHNIQUES USING AI

Sr no.	Challenges in current RUL Estimation Technique	AI-based Techniques	Solution	Technique	References
1.	Missing/incomplete data due to malfunctioning of machinery sensors	Generative Adversarial Techniques (GAN)	GANs can be used to solve class imbalance issues and replace missing sensor values with synthetically generated data	Condition monitoring sensory data such as vibrations, temperature, etc., are fed to the GAN model to generate additional training data.	[165], [166], [167]
2.	Lack of model interpretability to comprehend why a certain RUL prediction was made at a certain instant of time	Explainable AI (XAI)	Techniques such as Local Interpretable Model-agnostic Explanations (LIME) and Shapley additive explanation (SHAP) from XAI help to decode the “black box” and certify RUL estimations	XAI techniques interpret the pattern recognition to decode why a certain prediction of RUL was made at a certain instant of time. XAI can help in increasing the transparency of the decision-making models.	[168], [169], [170]
3.	Varied dynamic operating conditions of machinery can lead to a lack of comprehensive data with similar distribution for machine prognostics	Transfer Learning	Feature-based transfer learning techniques can help models generalize from limited run-to-failure experimentation data before deployment to make intelligent prognosis predictions for the target domain.	Transfer learning is useful wherein labels are available for the source domain and not the target domain by capturing transferable features, i.e., sensor readings. These features map how particular source machinery is different in comparison to its peers in the target domain.	[171], [172], [173]
4.	The incomplete feedback loop of RUL estimation cannot optimize the machinery maintenance schedule	Digital Twin (DT)	Digital twin-driven physical model-based and virtual model-based RUL estimation can help machine supervisor complete the feedback loop for predictive maintenance of machinery	The customized digital twin can identify Health Indicators (HI) for machine monitoring and potential alert failures. These alerts are combined with other condition monitoring data, such as maintenance updates and feedback to the digital twin model to optimize its accuracy.	[174], [175], [176]
5.	AI models are susceptible to adversarial perturbations and can further reduce the trustworthiness of RUL estimations in case of critical machinery	Adversarial ML	Adversarial-based crafting techniques from computer vision can help reduce threats of adversarial cyber-attacks on PHM datasets	Adversarial attack examples such as random noise are added to the PHM datasets, and the model is re-trained on such crafted datasets to improve the robustness of the models.	[177], [178], [179]

6.	Dynamic condition monitoring data, including fault modes, operating conditions, and noise distribution, is ineffective in training data-driven models assuming similar distribution across training-testing datasets.	Domain Adaption (DA)	DA strategies consider target-specific information when learning domain invariant features, thus achieving robustness over other state-of-art methods.	Unsupervised domain adaption techniques overcome data deficits in prognostics by training on labeled data in the source domain and unlabelled data captured under varying operating conditions as the target domain.	[180], [181], [182]
7.	Predictive maintenance strategies might not be efficient if trained on a single type of data.	Multi-modal data fusion	Multi-modal data fusion involves the fusion of data in the form of images, numeric data, historical records, and offline measurements.	Data fusion can transform data across different sensors at different points in time into a single representation for intelligent decision-making.	[183], [184], [185]

## XI. ADVANCEMENTS IN RUL PREDICTION

RUL prediction using Artificial Intelligence techniques has undergone major evolutions over the past few years which encompasses shallow-structure-based machine learning techniques to n-hidden layer-based deep learning techniques. In recent years, AI advancements have further strengthened the RUL estimation strategies. AI-led techniques such as generative adversarial networks, explainable AI, transfer learning, domain adaption, digital twin, adversarial machine learning, and domain adaption will help to resolve some of the open challenges faced in RUL estimation in predictive maintenance. Figure 29 and Table XI highlight some of these open issues and the solutions provided by these techniques with references.

### 1. GENERATIVE ADVERSARIAL NETWORKS (GAN):

In the manufacturing industry, sensors mounted to collect condition data of machines can malfunction due to inconsistent power supply and various such issues. In such cases, there could be a data deficit. Figure 30 shows the working principle of the Generative Adversarial Network (GAN) [186]. GANs can generate synthetic data in place of missing sensory values due to sensor failure. Shuai Zheng and Chetan Gupta propose discriminant GAN for equipment health classification to generate more separable data samples belonging to different health degradation stages of machinery [187].

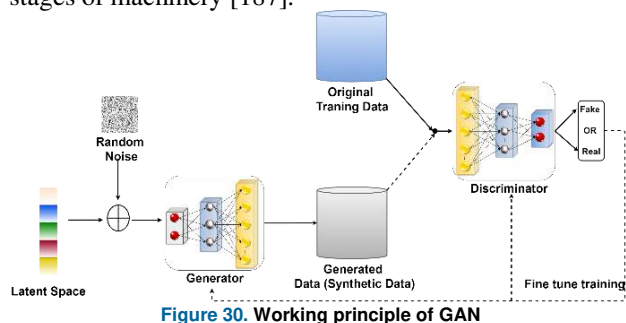


Figure 30. Working principle of GAN

Recently many researchers have proposed the use of GAN's for the generation of anomalous data or anomalous

features [188][189]. However, most of these techniques involve the conversion of vibration-based signals into images. A potential research approach is to see how such methods can be applied to more complex datasets consisting of vibration and time-series data [190]. A more thorough study on the physical credibility of the generated samples and the impacts of these synthetically produced multiple faults on algorithm results is needed.

### 2. EXPLAINABLE AI (XAI):

Most of the current machine learning models do not explain the predictions made. Explainable AI (XAI) techniques are an efficient model prediction interpretability tool that helps machine supervisors better understand fault diagnosis and prognosis. Figure 31 shows the working principle of XAI [191]. The authors of [192] have demonstrated the power of combining Explainable AI techniques such as ELI5 and LIME and domain knowledge for RUL estimation in industrial machinery.

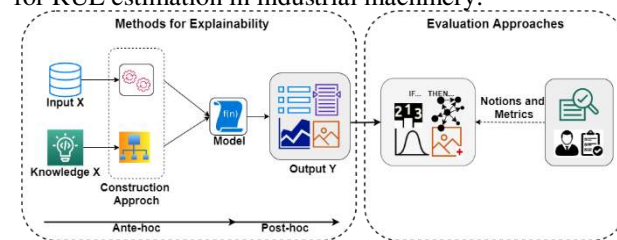



Figure 31. Working principle of Explainable AI (XAI)

Explainable AI has a promising future in machine diagnosis, and various research directions can be envisioned. The XAI interpretability results need to be further evaluated based on the quality, utility, and satisfaction of the explanations and the effect of explanations on the model's success and the supervisor's confidence and reliance [193]. Several XAI evaluation measurement techniques have been proposed recently, such as explanation satisfaction scale, utility checklist, explanation trustworthiness, and many more [194], [195]. In the future, counterfactual explanations will help the industry take corrective measures [196]. Counterfactual Explanations show how to make the smallest modifications to the input data to get a particular outcome. Consider a

case wherein the model predicted an anomaly in machinery's working, resulting in decreased RUL of the machine. Counterfactual explanation in such a case would tell the machine supervisor what changes in the operation of the machinery (input) would have avoided the anomaly and further improved its RUL [197].

### 3. TRANSFER LEARNING (TL):

Dynamic operating environments of the machinery can affect the model prediction. Transfer Learning (TL) algorithms can help improve model accuracy for pre and post-model deployment in dissimilar data distribution across the source and target domains. Figure 32 shows the working principle of TL [198].

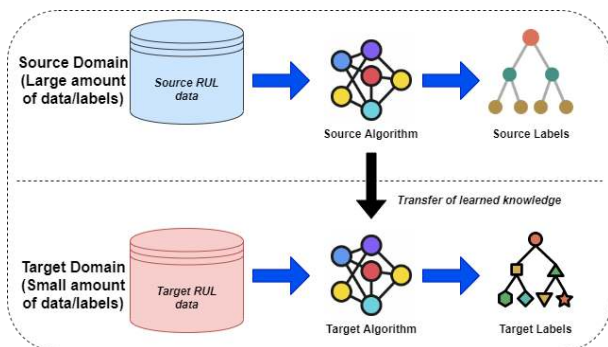

**Figure 32. Working principle of Transfer Learning (TL)**


The authors of [180] propose a novel transfer learning technique based on multiple layer perceptron (MLP) for dissimilar data distribution problems in RUL prediction of bearing machinery. However, many scopes to use self-supervised learning [199] and self-supervised contrastive learning [200] algorithms are fine-tuned on limited data. It is proved that self-supervised algorithms work better in data scarcity situations and where data labeling is time-consuming and costly. In self-supervised learning, the learning model trains itself by using one portion of the data to predict the other and produce labels automatically. Contrastive learning approaches are a class of self-supervised algorithms that learn to encode what makes two samples identical or different in order to construct representations. It is a discriminative method for grouping related samples together and separating diverse samples. These approaches are particularly useful in transfer learning, wherein the model trains only on the distinctive high-level features in the source domain, thereby reducing training time.

### 4. DIGITAL TWIN (DT):

Digital twin (DT) is the hybrid simulated version of the physical and data-driven machinery setup. It can help provide real-time condition monitoring of machinery over the cloud infrastructure. Figure 33 shows the digital twin approach used in milling machines [201]. Digital twins incorporate multi-physical, multi-probability variables from the various domains by using sensor technology, physical model, and simulation model [202]. While

modeling DT model for milling machine, it can be divided into DT descriptive model which describes structural and mathematical equations based on parameters and experience, DT mapping model which helps to map the real-time working condition with DT system and DT intelligent model to identify the irregularity in the system to predict the fault with the help of artificially intelligent algorithms [203]. In the Cyber-Physical System (CPS) scope, a digital twin may be described as the actual product's digital mapping model [204]. DT is widely used for predictive maintenance, fault diagnosis, detecting anomalies present in systems, inferring quality of the product, real-time monitoring of the system, etc. [35], [201], [205]–[207]. The authors of [181] propose a deep-learning-based digital twin model for a lithium-ion battery to map the relationship between various health indicators such as the cell voltage and the cell state-of-charge (SOC) on RUL estimation. The authors of [206] use a physical-based simulation model and digital twin concept to calculate the RUL to enable predictive maintenance of the machine.

Digital Twin is the model and data carrier that can carry out physical mapping in digital or virtual space and then bridge the digital and real world. Along with a predictive maintenance approach, one can develop a Digital Twin (DT) for the milling machine or critical part of the milling machine. DT can simulate the whole machining process using real-time process parameters along with consideration of machine degradation. In the context of RUL estimation, a twin model can be used to predict the useful functional life of the critical parts of the system by doing real-time simulation.

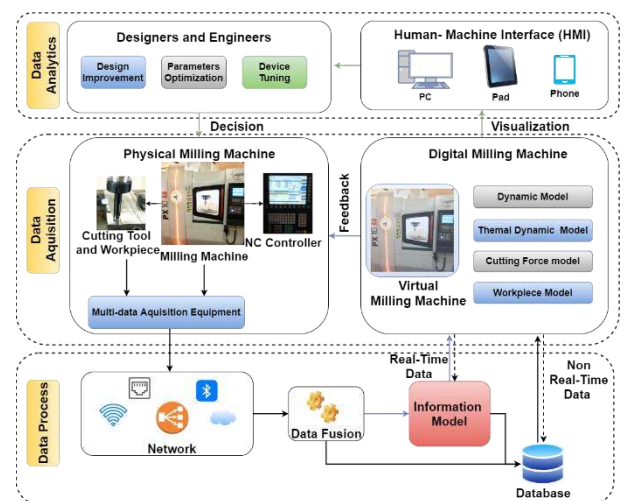

**Figure 33. Digital Twin (DT) framework for milling machine**

As in the digital twin, data exchange occurs between the physical and digital systems in a bi-directional way. DT can provide a more accurate RUL estimation with higher reliability. The DT-based approach provides more insightful information about the system by providing feedback between the real and digital world at every stage. If there is an anomaly in the machining process, the digital

twin provides feedback to the controller for making necessary changes. DT approach can also help to increase the functional RUL of equipment by taking action against identified abnormalities in the system or by doing parameter optimization at an early stage. So, digital twin-assisted predictive maintenance with the hybrid modeling approach can be used to predict the RUL of the system more accurately.

#### 5. ADVERSARIAL MACHINE LEARNING(AML):

Some machine learning models are efficient in making predictions but might not be effective against illegal intrusions. Adversarial Machine Learning (AML) models secure the model structure against any adversarial attacks that can jeopardize the robustness of the predictive maintenance framework.

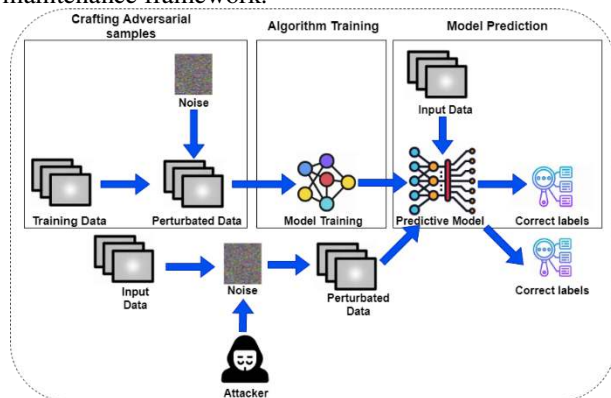


Figure 34. Working principle of Adversarial Machine Learning (AML)

Figure 34 shows the working principle of Adversarial Machine Learning (AML) [208][209]. Gautam Raj Mode and Khaza Anuarul Hoque have used the Fast Gradient Sign Method (FGSM) and Basic Iterative Method (BIM) for training adversarial examples on NASA’s turbofan engine dataset. The results show that the current PHM models are vulnerable to adversarial attacks and can hamper RUL estimation to a large extent [172]. Leveraging the benefits of Blockchain technology can be one of the future research directions for building a trustworthy XAI model against adversarial attacks. Decentralized AI systems are enhanced by blockchain, which provides an open-source and freely available digital ledger distributed among AI agents through peer-to-peer networks [210].

Since blockchain makes AI decisions transparent and visible to all AI nodes on the network, it becomes more difficult for AI agents to change or reject them[211]. Blockchain-enabled RUL estimation models can be resilient against security attacks as the RUL data can be made decentralized, and the integrity of the data can be maintained on the blockchain network.

#### 6. DOMAIN ADAPTION (DA):

RUL models are built considering a particular machinery setup, but a scenario might occur when they need to be applied to another machinery setup. This new machinery

setup is generally different from the previous one, and the model prediction accuracy might get hampered. Domain Adaption (DA) can help in efficient feature extraction in unlabeled machinery data, a common challenge faced by most real-time industries. Figure 35 shows the working principle of Domain Adaption (DA)[212]. The author [175] proposes a contrastive adversarial domain adaptation (CADA) method for cross-domain RUL prediction, and such techniques can help the model being robust against varying setups.

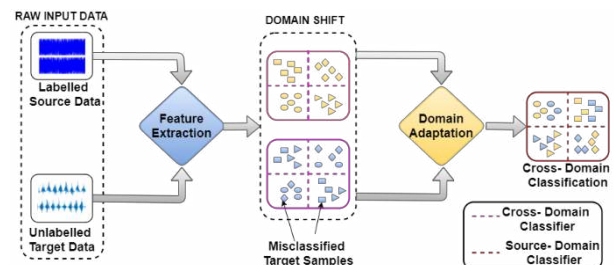


Figure 35. Working principle of Domain Adaption (DA)

Domain adaption analysis has mostly focused on homogeneous cases in which the source and target input spaces share the same characteristic feature set. However, real-time complex industrial applications are heterogeneous, consisting of varied condition monitoring scenarios. Sensor setups are also heterogeneous in nature, with variations in the type, location, and number of sensors deployed. The research on heterogeneous unsupervised domain adaptation, particularly when applied to complex physical structures, is still at a nascent stage, but it has a lot of potentials, especially for industrial applications. Another prospective research direction would be the use of simulation technology for the creation of the source domain and adapting it to the real-life target domain.

#### 7. MULTI-MODAL/MULTI-SENSOR DATA FUSION

Different types of sensors, instruments, measuring methods, experimental setups, and other sources are used to collect information about a phenomenon, such as predicting RUL. Multi-modal data fusion provides numerous benefits such as achieving a more coherent image and global view of the system in question, enhancing decision making, analyzing specific scenarios about the system through different modalities or time, extracting information from data for varied purposes. Figure 36 shows the multi-sensor data collection using Multi-Modal Data Fusion (MMDF) [213]. Anqi He & Xiaoning Jin implemented multi-modal data fusion on the Ion-Mill Etching process by collecting multi-sensor data from different run-to-failure cycles [214]. The designed method presented a more systematic failure prediction methodology. Using heterogeneous sensory and operational data under diverse operating conditions and contexts.

One of the future research directions in multi-modal data fusion strategy would be to accurately rate the important sensor modalities while simultaneously distinguishing the



important elements within each modality. Such a technique can guide the RUL estimation system for the contribution of each sensor for better diagnosis and prognosis. Also, most of the multi-modal data in smart manufacturing setup needs to be collected in dynamic environments indicating a variation in the data itself.

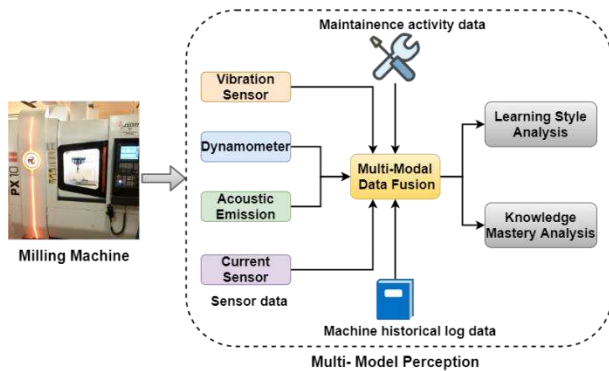


Figure 36. Multi-sensor data collection using Multi-Modal data fusion

Hence the design of online and incremental data fusion models that can learn new knowledge without losing historical knowledge is needed as part of future research work. Also, the data quality in multi-modal might not be very good, and the data can contain a lot of noise. Hence deep learning models for low-quality multimodal noisy data need to be strategized urgently [184].

## XII. RECOMMENDATIONS FOR FUTURE WORK

Apart from the above-mentioned future research work in each existing advancement, the authors would also like to put forth few more potential research directions in RUL estimation:

- *A hybrid modeling and decision-making approach for RUL:* It was found that many researchers individually consider the data-driven model or model-based approach to calculate the RUL of the tool, which may contain prediction errors due to uncertainties in individual models. A combined data-driven and model-based approach along with hybrid decision-making algorithms may decrease the errors in RUL prediction.
- *Machining parameters optimization:* Condition monitoring during predictive maintenance can also help optimize the input parameters of the machine to improve the RUL of the system. Researchers can consider the real-time process parameters and degradation machine state for optimizing the input process parameters.
- *Integrated de-noising method:* Sensor signals are contaminated by the changes in sensor working conditions, disturbance due to large machinery startup, high-frequency interference, etc. It is challenging to remove or filter the noise from the raw signals to improve the reliability and accuracy of the signal to extract the original features. To overcome industrial

sensor signal de-noising, one can use integrated de-noising based on energy-correlation analysis and wavelet transform packet.

- *Robust Condition-Base Predictive Maintenance (CBPM):* In a complex system, CBPM is still a challenging area due to heterogeneous data, remote location monitoring, and network infrastructure. The data collected from the system is in heterogeneous (discrete) forms, such as system state data, system errors data, system, and environmental sensors data, manually collected operator observation data and, maintenance action data, etc. For implementing the robust Condition-Base Predictive Maintenance (CBPM) for a complex system, researchers can use smart sensors, a hybrid-predictive analysis model, and secure network infrastructure. The smart sensors are capable of handling heterogeneous data. Hybrid predictive analysis models help analyze the data to produce the prognostic alarms, estimate RUL of key components, maintenance action needed, and comprehensive health management of the system. Secure network infrastructure helps to provide an extensible and flexible framework to apply CBPM for complex systems successfully.
- *Prescriptive maintenance:* Prescriptive maintenance approach aiming to automatize the maintenance process. It is not only monitored, predict, and provided the maintenance recommendations but can able to take its own maintenance steps decision with the help of advanced ML/DL and AI techniques.
- *Reinforcement Learning:* Reinforcement learning is a type of machine learning in which a program learns to perform a task by repeatedly interacting with a complex environment. Figure 37 shows the working principle of Reinforcement Learning (RL) [215].

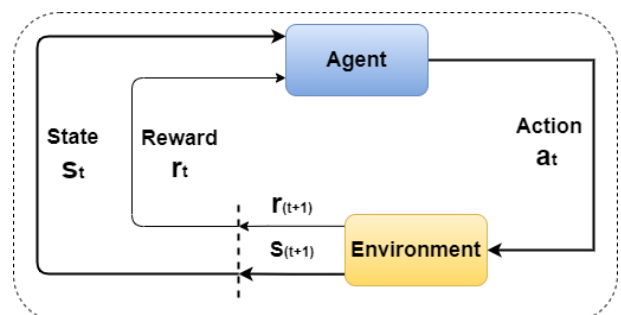


Figure 37. Working principle of Reinforcement Learning (RL)


The computer explores the world using an iterative trial-and-error method. This investigation produces evidence that the computer uses to decide the best course of action to complete its task.

Reinforcement learning can be utilized for real-time decision-making capability in predictive maintenance techniques. The reinforcement agent can be used to

optimize model predictions for RUL and achieving high utilization of resources simultaneously [216],[217],[218].

- **PHM as a Service:** Cloud Manufacturing applies cloud computing technology in the manufacturing domain [219]. Cloud Manufacturing is a customer-centric manufacturing paradigm that takes advantage of on-demand access to a pooled pool of diversified and dispersed manufacturing tools to form a single product [220]. Prognostics Health Management (PHM) can be offered as a service on the cloud providing SaaS, PaaS, and IaaS facilities. The service provider can provide Cloud-based data acquisition software and models for prognostic applications. The manufacturer can build a maintenance model using available platforms and leverage cloud infrastructure (storage and networking resources) to implement solutions [219].
- **Physics-induced deep learning prediction:** Physics-induced machine learning is a promising approach to stimulating interpretability in machine learning models, especially for applications beyond the image processing domain where visualizations cannot be easily extracted. Prior knowledge about the system's physical mechanics integrated with deep learning-based knowledge can help amplify the performance of the system and improve its interpretability [190],[221].
- **Generation of representative/benchmarking datasets:** One of the key demands of any deep learning application is the need for representative or benchmarked datasets which can be used to represent real-world scenarios. Computer vision and natural language processing domains have ample representative datasets, which are key drivers for exemplary research in those domains. However, in the context of Predictive Maintenance, the lack or insufficiency of representative datasets has discouraged the application of deep learning approaches in industrial applications to a certain extent. Generation of representative datasets using data augmentation techniques can be one of the potential research directions.
- **Federated Learning:** Centralised data for applying machine learning and deep learning models can be a practical challenge for real-time manufacturing industries. Consider the case study of a milling machinery company that wishes to predict a costly milling machine's RUL. Foremost the models require training data. However, the supervisor will have to test many milling machines before they failed to obtain the data. A less expensive solution would be to get client operating milling machine data representing real-world scenarios and operating setups for the milling machinery. The client training data would be a practical

and cheaper solution. However, the client might be apprehensive about sharing their data with the company considering privacy concerns and regulatory impediments. Another challenge could be that the client might be geographically located in another country, and sharing such enormous sensory data would be infeasible. Federated learning comes to the rescue in such scenarios.

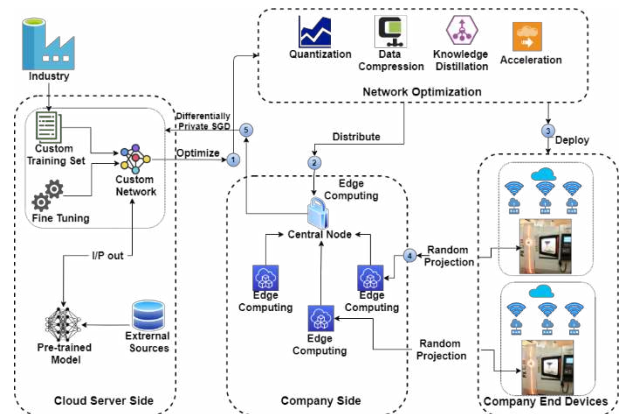

**Figure 38. Federated Learning (FL) framework for Industry**

A server synchronizes a network of nodes in federated learning, each of which has training data that it cannot exchange directly. The nodes each train their model, which they then exchange with the server. Figure 38 shows the framework of the FL in the context of Industry 4.0 [222]. Federated learning aims to ensure anonymity and reduce communication costs by not transferring the data itself. Since federated learning allows for training on a large volume of private data by only transmitting small models across the network, it has a lot of potential for industrial predictive maintenance [223].

### XIII. CONCLUSION

This paper reviews the data-driven predictive maintenance for the RUL estimation of the milling cutting tool. Existing literature shows that RUL prediction is an emerging area and has a lot of scope for development in industry 4.0. The paper also explores various open research questions faced by PHM researchers in this domain. The authors have discussed different data-driven monitoring methods, feature extraction methods, and decision-making models as well. Also, the paper covers datasets related to milling under various operating conditions to compare the accuracy of the prediction model for tool wear estimation. Effective RUL estimation aims to serve the purpose of Predictive Maintenance (PdM). Identifying the RUL of machinery can help us to strategize the predictive maintenance activities for the machinery. Accelerometer, acoustic, dynamometer, current are mainly used sensors for collecting the data signals from the milling machine. The multi-sensors technique provides better prediction and

more trustable results as compared to the single sensor technique. Due to the non-stationary behavior of acquired signals, the time-frequency domain wavelet analysis is preferable for milling feature extraction. ANN, SVM, LSTM are generally used as decision-making algorithms for condition monitoring and RUL prediction of the tool during the milling operation. The paper also presents challenges, limitations, AI advancement in RUL prediction, and future directions related to this area.

## REFERENCES

- [1] I. P. Girsang and J. S. Dhupia, "Machine Tools for Machining," in *Handbook of Manufacturing Engineering and Technology*, 2013, pp. 1–48.
- [2] P. Palanisamy, I. Rajendran, and S. Shanmugasundaram, "Prediction of tool wear using regression and ANN models in end-milling operation," *Int. J. Adv. Manuf. Technol.*, vol. 37, no. 1–2, pp. 29–41, 2008, doi: 10.1007/s00170-007-0948-5.
- [3] N. Santhanam, J. Thomsen, X. Tong, and S. Varanasi, "The US cutting-tools market: What changes lie ahead?," *McKinsey and Company*, no. June, pp. 1–7, 2018.
- [4] M. Sondalini, "Business Article - Equipment Failure and the Cost of failure." [Online]. Available: <https://bin95.com/articles/maintenance-management/equipment-failure-cost.htm>.
- [5] V. P. Astakhov, "Machining of hard materials - Definitions and industrial applications," in *Machining of Hard Materials*, 2011, pp. 1–32.
- [6] S. Cho, S. Asfour, A. Onar, and N. Kaundinya, "Tool breakage detection using support vector machine learning in a milling process," *Int. J. Mach. Tools Manuf.*, 2005, doi: 10.1016/j.ijmachtools.2004.08.016.
- [7] Y. C. Liu, Y. J. Chang, S. L. Liu, and S. P. Chen, "Data-driven prognostics of remaining useful life for milling machine cutting tools," *2019 IEEE Int. Conf. Progn. Heal. Manag. ICPHM 2019*, pp. 1–5, 2019, doi: 10.1109/ICPHM.2019.8819400.
- [8] Y. Duan, H. Li, M. He, and D. Zhao, "A BiGRU Autoencoder Remaining Useful Life Prediction Scheme with Attention Mechanism and Skip Connection," *IEEE Sens. J.*, vol. XX, no. XX, pp. 1–10, 2021, doi: 10.1109/JSEN.2021.3060395.
- [9] Q. Li, Z. Gao, D. Tang, and B. Li, "Remaining useful life estimation for deteriorating systems with time-varying operational conditions and condition-specific failure zones," *Chinese J. Aeronaut.*, vol. 29, no. 3, pp. 662–674, 2016, doi: 10.1016/j.cja.2016.04.007.
- [10] "ISO 13381-1:2015 Condition monitoring and diagnostics of machines — Prognostics — Part 1: General guidelines," *ISO*, 2015. [Online]. Available: <https://www.iso.org/standard/51436.html>.
- [11] M. El Koujok, R. Gouriveau, and N. Zerhouni, "From monitoring data to remaining useful life : an evolving approach including uncertainty.," in *34th European Safety Reliability & Data Association, ESReDA Seminar and 2nd Joint ESReDA/ESRA Seminar on Supporting Technologies for Advanced Maintenance Information Management.*, May 2008, San Sebastian, Spain, 2008, pp. 1–12.
- [12] N. Papakostas, P. Papachatzakis, V. Xanthakis, D. Mourtzis, and G. Chryssolouris, "An approach to operational aircraft maintenance planning," *Decis. Support Syst.*, vol. 48, no. 4, pp. 604–612, 2010, doi: 10.1016/j.dss.2009.11.010.
- [13] M. Gaperin, D. Juriić, P. Bokoski, and J. Viintin, "Model-based prognostics of gear health using stochastic dynamical models," *Mech. Syst. Signal Process.*, vol. 25, no. 2, pp. 537–548, 2011, doi: 10.1016/j.ymssp.2010.07.003.
- [14] "Prescriptive and Predictive Analytics Market - Forecast(2021 - 2026)," *IndustryARC*, 2021. [Online]. Available: <https://www.industryarc.com/Report/111/predictive-prescriptive-business-analytics-market.html>.
- [15] Jim Rapoza, "Maintaining Virtual System Uptime in Today's Transforming IT Infrastructure," *Aberdeen Group*, 2016. [Online]. Available: <https://www.stratus.com/assets/aberdeen-maintaining-virtual-systems-uptime.pdf>.
- [16] "Downtime Costs Auto Industry \$22k/Minute - Survey," 2006. [Online]. Available: <https://news.thomasnet.com/companystory/downtime-costs-auto-industry-22k-minute-survey-481017>.
- [17] D. Gallichan and T. Charles, "After The Fall: Cost, Causes and Consequences of Unplanned Downtime," 2017.
- [18] M. Rizal, J. A. Ghani, M. Z. Nuawi, C. Hassan, C. Haron, and B. Environment, "A Review of Sensor System and Application in Milling Process for Tool Condition," *Res. J. Appl. Sci. Eng. Technol.*, vol. 7, no. 10, pp. 2083–2097, 2014, doi: 10.19026/ajfst.7.502.
- [19] A. G. Rehorn, J. Jiang, and P. E. Orban, "State-of-the-art methods and results in tool condition monitoring: A review," *Int. J. Adv. Manuf. Technol.*, vol. 26, pp. 693–710, 2005, doi: 10.1007/s00170-004-2038-2.
- [20] X. S. Si, W. Wang, C. H. Hu, and D. H. Zhou, "Remaining useful life estimation - A review on the statistical data driven approaches," *Eur. J. Oper. Res.*, vol. 213, no. 1, pp. 1–14, 2011, doi: 10.1016/j.ejor.2010.11.018.
- [21] C. Hu, H. Pei, Z. Wang, X. Si, and Z. Zhang, "A new remaining useful life estimation method for equipment subjected to intervention of imperfect

- maintenance activities,” *Chinese J. Aeronaut.*, vol. 31, no. 3, pp. 514–528, 2018, doi: 10.1016/j.cja.2018.01.009.
- [22] L. Wang and R. X. Gao, *Condition Monitoring and Control for Intelligent Manufacturing*. 2006.
- [23] M. Haarman, M. Mulders, and C. Vassiliadis, “Predictive Maintenance 4.0 Predict the unpredictable,” PWC, 2017. [Online]. Available: <https://www.pwc.nl/en/publicaties/predictive-maintenance-40-predict-the-unpredictable.html>.
- [24] S. Gordon, “Visual Inspection of Couplings and Machinery Components,” *ACOEM BLOG*, 2019. [Online]. Available: <https://acoem.us/other-topics/visual-inspection-of-couplings-and-machinery-components/>.
- [25] W. E. Azab and S. Cousin, “Visual Inspection Practices of Cleaned Equipment: Part I,” *Steris Life Sciences*, 2019. [Online]. Available: [https://www.pda.org/pda-letter-portal/home/full-article/visual-inspection-practices-of-cleaned-equipment-part-i\[5/28/2020](https://www.pda.org/pda-letter-portal/home/full-article/visual-inspection-practices-of-cleaned-equipment-part-i[5/28/2020).
- [26] Y. Wang, P. Li, B. Liu, and G. Zhai, “A portable inspection instrument based on electromagnetic acoustic transducers,” *FENDT 2013 - Proc. 2013 Far East Forum Nondestruct. Eval. New Technol. Appl.*, pp. 192–196, 2013, doi: 10.1109/FENDT.2013.6635554.
- [27] Y. Zhou and W. Xue, “Review of tool condition monitoring methods in milling processes,” *Int. J. Adv. Manuf. Technol.*, vol. 96, no. 5–8, pp. 2509–2523, 2018, doi: 10.1007/s00170-018-1768-5.
- [28] Y. Wang, D. Xie, and Q. Han, “Automatic Visual Inspection and Condition-Based Maintenance for Catenary,” in *Intech*, 2019, pp. 1–16.
- [29] T. Mohanraj, S. Shankar, R. Rajasekar, N. R. Sakthivel, and A. Pramanik, “Tool condition monitoring techniques in milling process—a review,” *Journal of Materials Research and Technology*. 2020, doi: 10.1016/j.jmrt.2019.10.031.
- [30] J. Deutsch and D. He, “Using deep learning-based approach to predict remaining useful life of rotating components,” *IEEE Trans. Syst. Man, Cybern. Syst.*, 2018, doi: 10.1109/TSMC.2017.2697842.
- [31] I. Amihai, R. Gitzel, A. M. Kotriwala, D. Pareschi, S. Subbiah, and G. Sosale, “An industrial case study using vibration data and machine learning to predict asset health,” in *Proceeding - 2018 20th IEEE International Conference on Business Informatics, CBI 2018*, 2018, doi: 10.1109/CBI.2018.00028.
- [32] J. Man and Q. Zhou, “Prediction of hard failures with stochastic degradation signals using Wiener process and proportional hazards model,” *Comput. Ind. Eng.*, 2018, doi: 10.1016/j.cie.2018.09.015.
- [33] ISO13381-1, “Condition Monitoring and Diagnostics of Machines —Prognostics —Part 1: General Guidelines,” *International Standard, ISO*. 2015.
- [34] D. Wu, C. Jennings, J. Terpenney, and S. Kumara, “Cloud-based machine learning for predictive analytics: Tool wear prediction in milling,” *Proc. - 2016 IEEE Int. Conf. Big Data, Big Data 2016*, pp. 2062–2069, 2016, doi: 10.1109/BigData.2016.7840831.
- [35] W. Luo, T. Hu, Y. Ye, C. Zhang, and Y. Wei, “A hybrid predictive maintenance approach for CNC machine tool driven by Digital Twin,” *Robot. Comput. Integr. Manuf.*, vol. 65, no. September 2019, p. 101974, 2020, doi: 10.1016/j.rcim.2020.101974.
- [36] V. P. Astakhov, “The assessment of cutting tool wear,” *Int. J. Mach. Tools Manuf.*, vol. 44, no. 6, pp. 637–647, 2004, doi: 10.1016/j.ijmachtools.2003.11.006.
- [37] F. Tao, Q. Qi, L. Wang, and A. Y. C. Nee, “Digital Twins and Cyber-Physical Systems toward Smart Manufacturing and Industry 4.0: Correlation and Comparison,” *Engineering*, vol. 5, no. 4, pp. 653–661, 2019, doi: 10.1016/j.eng.2019.01.014.
- [38] J. Zhou, P. Li, Y. Zhou, B. Wang, J. Zang, and L. Meng, “Toward New-Generation Intelligent Manufacturing,” *Engineering*, vol. 4, no. 1, pp. 11–20, 2018, doi: 10.1016/j.eng.2018.01.002.
- [39] F. Tao, Y. Wang, Y. Zuo, H. Yang, and M. Zhang, “Internet of Things in product life-cycle energy management,” *J. Ind. Inf. Integr.*, vol. 1, pp. 26–39, 2016, doi: 10.1016/j.jii.2016.03.001.
- [40] S. Sayyad, S. Kumar, A. Bonagale, and S. Patil, “Estimating Remaining Useful Life in Machines Using Artificial Intelligence : A Scoping Review,” *Libr. Philos. Pract. (e-journal), Libr. Univ. Nebraska-Lincoln*, no. January 2021, 2021.
- [41] R. K. Mobley, *An Introduction to Predictive Maintenance (Second Edition)*. 2002.
- [42] L. Liao and F. Köttig, “Review of hybrid prognostics approaches for remaining useful life prediction of engineered systems, and an application to battery life prediction,” *IEEE Trans. Reliab.*, vol. 63, no. 1, pp. 191–207, 2014, doi: 10.1109/TR.2014.2299152.
- [43] L. Swanson, “Linking maintenance strategies to performance,” *Int. J. Prod. Econ.*, vol. 70, no. 3, pp. 237–244, 2001, doi: 10.1016/S0925-5273(00)00067-0.
- [44] R. K. Mobley, “Role of Maintenance Organization,” in *An Introduction to Predictive Maintenance*, 2002, pp. 43–59.
- [45] C. Kahraman and S. Ç. Onar, *Intelligent Techniques in Engineering Management theory and applications*, vol. 87. 2015.
- [46] K. Nita Ali, M. Sun, G. Petley, and P. Barrett, “Improving the business process of reactive

- maintenance projects,” *Facilities*, vol. 20, no. January, pp. 251–261, 2002, doi: 10.1108/02632770210435161.
- [47] E. Illyani, H. Izatul, and A.-S. Hasnida, “Preventive Maintenance (PM) planning: a review,” *J. Qual. Maint. Eng.*, vol. 23, no. 2, 2017, doi: 10.1108/JQME-04-2016-0014.
- [48] S. Wu, “Preventive maintenance models: A review,” in *Springer Series in Reliability Engineering*, vol. 43, 2011, pp. 129–140.
- [49] Y. Ran, X. Zhou, P. Lin, Y. Wen, and R. Deng, “A survey of predictive maintenance: Systems, purposes and approaches,” *arXiv*, vol. XX, no. Xx, pp. 1–36, 2019.
- [50] O. Motaghare, A. S. Pillai, and K. I. Ramachandran, “Predictive Maintenance Architecture,” *2018 IEEE Int. Conf. Comput. Intell. Comput. Res. ICCIC 2018*, pp. 1–4, 2018, doi: 10.1109/ICCIC.2018.8782406.
- [51] P. Strauß, M. Schmitz, R. Wöstmann, and J. Deuse, “Enabling of Predictive Maintenance in the Brownfield through Low-Cost Sensors, an IIoT-Architecture and Machine Learning,” *Proc. - 2018 IEEE Int. Conf. Big Data, Big Data 2018*, pp. 1474–1483, 2019, doi: 10.1109/BigData.2018.8622076.
- [52] D. Nettleton, “Selection of Variables and Factor Derivation,” in *Commercial Data Mining*, 2014.
- [53] B. Peter, “Downtime in Manufacturing: What’s the True Cost?,” *Oden Technologies*, 2020. [Online]. Available: <https://oden.io/blog/downtime-in-manufacturing-the-true-cost/>.
- [54] J. Z. Sikorska, M. Hodkiewicz, and L. Ma, “Prognostic modelling options for remaining useful life estimation by industry,” *Mech. Syst. Signal Process.*, vol. 25, no. 5, pp. 1803–1836, 2011, doi: 10.1016/j.ymsp.2010.11.018.
- [55] C. Li, Y. Zhang, and M. Xu, “Reliability-based maintenance optimization under imperfect predictive maintenance,” *Chinese J. Mech. Eng. (English Ed.)*, vol. 25, no. 1, pp. 160–165, 2012, doi: 10.3901/CJME.2012.01.160.
- [56] Y. Lei, N. Li, S. Gontarz, J. Lin, S. Radkowski, and J. Dybala, “A Model-Based Method for Remaining Useful Life Prediction of Machinery,” *IEEE Trans. Reliab.*, vol. 65, no. 3, pp. 1314–1326, 2016, doi: 10.1109/TR.2016.2570568.
- [57] B. Iung, M. Monnin, A. Voisin, P. Cochetoux, and E. Levrat, “Degradation state model-based prognosis for proactively maintaining product performance,” *CIRP Ann. - Manuf. Technol.*, vol. 57, no. 1, pp. 49–52, 2008, doi: 10.1016/j.cirp.2008.03.026.
- [58] J. Yu, “Health degradation detection and monitoring of lithium-ion battery based on adaptive learning method,” *IEEE Trans. Instrum. Meas.*, 2014, doi: 10.1109/TIM.2013.2293234.
- [59] L. Cui, Y. Xu, and X. Zhao, “Developments and applications of the finite markov Chain imbedding approach in reliability,” *IEEE Trans. Reliab.*, 2010, doi: 10.1109/TR.2010.2054172.
- [60] M. Baptista, S. Sankararaman, I. P. de Medeiros, C. Nascimento, H. Prendinger, and E. M. P. Henriques, “Forecasting fault events for predictive maintenance using data-driven techniques and ARMA modeling,” *Comput. Ind. Eng.*, 2018, doi: 10.1016/j.cie.2017.10.033.
- [61] M. Engeler, D. Treyer, D. Zogg, K. Wegener, and A. Kunz, “Condition-based Maintenance: Model vs. Statistics a Performance Comparison,” *Procedia CIRP*, vol. 57, pp. 253–258, 2016, doi: 10.1016/j.procir.2016.11.044.
- [62] J. L. Ortiz and R. Carrasco, “Model-based fault detection and diagnosis in ALMA subsystems,” vol. 9910, no. 2, p. 110, 2016, doi: 10.1117/12.2233204.
- [63] J. Liu, Y. An, R. Dou, and H. Ji, “Dynamic deep learning algorithm based on incremental compensation for fault diagnosis model,” *Int. J. Comput. Intell. Syst.*, 2018, doi: 10.2991/ijcis.11.1.64.
- [64] D. Kwon, M. R. Hodkiewicz, J. Fan, T. Shibutani, and M. G. Pecht, “IoT-Based Prognostics and Systems Health Management for Industrial Applications,” *IEEE Access*, vol. 4, pp. 3659–3670, 2016, doi: 10.1109/ACCESS.2016.2587754.
- [65] Y. Wang, Y. Zhao, and S. Addepalli, “Remaining useful life prediction using deep learning approaches: A review,” in *Procedia Manufacturing*, 2020, pp. 81–88, doi: 10.1016/j.promfg.2020.06.015.
- [66] J. Lee, C. Jin, and B. Bagheri, “Cyber physical systems for predictive production systems,” *Prod. Eng.*, 2017, doi: 10.1007/s11740-017-0729-4.
- [67] J. Wang, C. Liu, M. Zhu, P. Guo, and Y. Hu, “Sensor Data Based System-Level Anomaly Prediction for Smart Manufacturing,” in *Proceedings - 2018 IEEE International Congress on Big Data, BigData Congress 2018 - Part of the 2018 IEEE World Congress on Services*, 2018, doi: 10.1109/BigDataCongress.2018.00028.
- [68] D. Wu, C. Jennings, J. Terpenney, R. Gao, and S. Kumara, “Data-driven prognostics using random forests: Prediction of tool wear,” in *ASME 2017 12th International Manufacturing Science and Engineering Conference, MSEC 2017 collocated with the JSME/ASME 2017 6th International Conference on Materials and Processing*, 2017, doi: 10.1115/MSEC2017-2679.
- [69] M. Xia, T. Li, L. Liu, L. Xu, and C. W. de Silva, “Intelligent fault diagnosis approach with unsupervised feature learning by stacked denoising autoencoder,” *IET Sci. Meas. Technol.*,

- 2017, doi: 10.1049/iet-smt.2016.0423.
- [70] M. Baptista, S. Sankararaman, I. P. de Medeiros, C. Nascimento, H. Prendinger, and E. M. P. Henriques, "Forecasting fault events for predictive maintenance using data-driven techniques and ARMA modeling," *Comput. Ind. Eng.*, vol. 115, no. September 2017, pp. 41–53, 2018, doi: 10.1016/j.cie.2017.10.033.
- [71] J. Wang, J. Yan, C. Li, R. X. Gao, and R. Zhao, "Deep heterogeneous GRU model for predictive analytics in smart manufacturing: Application to tool wear prediction," *Comput. Ind.*, vol. 111, pp. 1–14, 2019, doi: 10.1016/j.compind.2019.06.001.
- [72] J. Wang, J. Xie, R. Zhao, L. Zhang, and L. Duan, "Multisensory fusion based virtual tool wear sensing for ubiquitous manufacturing," *Robot. Comput. Integr. Manuf.*, vol. 45, pp. 47–58, 2017, doi: 10.1016/j.rcim.2016.05.010.
- [73] S. Dutta, A. Kanwat, S. K. Pal, and R. Sen, "Correlation study of tool flank wear with machined surface texture in end milling," *Meas. J. Int. Meas. Confed.*, 2013, doi: 10.1016/j.measurement.2013.07.015.
- [74] C. Drouillet, J. Karandikar, C. Nath, A. C. Journeaux, M. El Mansori, and T. Kurfess, "Tool life predictions in milling using spindle power with the neural network technique," *J. Manuf. Process.*, 2016, doi: 10.1016/j.jmapro.2016.03.010.
- [75] S. Swain, I. Panigrahi, A. K. Sahoo, and A. Panda, "Adaptive tool condition monitoring system: A brief review," in *Materials Today: Proceedings*, 2020, doi: 10.1016/j.matpr.2019.05.386.
- [76] Y. Lei, N. Li, L. Guo, N. Li, T. Yan, and J. Lin, "Machinery health prognostics: A systematic review from data acquisition to RUL prediction," *Mech. Syst. Signal Process.*, vol. 104, pp. 799–834, 2018, doi: 10.1016/j.ymsp.2017.11.016.
- [77] Y. C. Liang, S. Wang, W. D. Li, and X. Lu, "Data-Driven Anomaly Diagnosis for Machining Processes," *Engineering*, vol. 5, no. 4, pp. 646–652, 2019, doi: 10.1016/j.eng.2019.03.012.
- [78] Y. Lyu, M. Jamil, N. He, M. K. Gupta, and D. Y. Pimenov, "Development and testing of a high-frequency dynamometer for high-speed milling process," *Machines*, vol. 9, no. 1, pp. 1–16, 2021, doi: 10.3390/machines9010011.
- [79] Y. Qin, Y. Zhao, Y. Li, Y. Zhao, and P. Wang, "A novel dynamometer for monitoring milling process," *Int. J. Adv. Manuf. Technol.*, vol. 92, no. 5–8, pp. 2535–2543, 2017, doi: 10.1007/s00170-017-0292-3.
- [80] G. Totis, G. Wirtz, M. Sortino, D. Veselovac, E. Kuljanic, and F. Klocke, "Development of a dynamometer for measuring individual cutting edge forces in face milling," *Mech. Syst. Signal Process.*, vol. 24, no. 6, pp. 1844–1857, 2010, doi: 10.1016/j.ymsp.2010.02.010.
- [81] T. Obikawa and J. Shinozuka, "Monitoring of flank wear of coated tools in high speed machining with a neural network ART2," *Int. J. Mach. Tools Manuf.*, vol. 44, no. 12–13, pp. 1311–1318, 2004, doi: 10.1016/j.ijmachtools.2004.04.021.
- [82] P. W. Prickett and C. Johns, "An overview of approaches to end milling tool monitoring," *Int. J. Mach. Tools Manuf.*, vol. 39, no. 1, pp. 105–122, 1999, doi: 10.1016/S0890-6955(98)00020-0.
- [83] X. Li and X. P. Guan, "Time-frequency-analysis-based minor cutting edge fracture detection during end milling," *Mech. Syst. Signal Process.*, vol. 18, no. 6, pp. 1485–1496, 2004, doi: 10.1016/S0888-3270(03)00096-7.
- [84] X. Li, "Detection of tool flute breakage in end milling using feed-motor current signatures," *IEEE/ASME Trans. Mechatronics*, vol. 6, no. 4, pp. 491–498, 2001, doi: 10.1109/3516.974863.
- [85] H. A. Kishawy, H. Hegab, U. Umer, and A. Mohany, "Application of acoustic emissions in machining processes: analysis and critical review," *Int. J. Adv. Manuf. Technol.*, vol. 98, no. 5–8, pp. 1391–1407, 2018, doi: 10.1007/s00170-018-2341-y.
- [86] M. Kuntoğlu, A. Aslan, H. Sağlam, D. Y. Pimenov, K. Giasin, and T. Mikolajczyk, "Optimization and analysis of surface roughness, flank wear and 5 different sensorial data via tool condition monitoring system in turning of aisi 5140," *Sensors (Switzerland)*, 2020, doi: 10.3390/s20164377.
- [87] X. Li, "A brief review: Acoustic emission method for tool wear monitoring during turning," *Int. J. Mach. Tools Manuf.*, vol. 42, no. 2, pp. 157–165, 2002, doi: 10.1016/S0890-6955(01)00108-0.
- [88] Q. Ren, M. Balazinski, L. Baron, K. Jemielniak, R. Botez, and S. Achiche, "Type-2 fuzzy tool condition monitoring system based on acoustic emission in micromilling," *Inf. Sci. (Ny)*, vol. 255, pp. 121–134, 2014, doi: 10.1016/j.ins.2013.06.010.
- [89] K. Zhu and B. Vogel-Heuser, "Sparse representation and its applications in micro-milling condition monitoring: Noise separation and tool condition monitoring," *Int. J. Adv. Manuf. Technol.*, vol. 70, no. 1–4, pp. 185–199, 2014, doi: 10.1007/s00170-013-5258-5.
- [90] A. H. Ammouri and R. F. Hamade, "Current rise criterion: A process-independent method for tool-condition monitoring and prognostics," *Int. J. Adv. Manuf. Technol.*, vol. 72, no. 1–4, pp. 509–519, 2014, doi: 10.1007/s00170-014-5679-9.
- [91] H. Shao, H. L. Wang, and X. M. Zhao, "A cutting power model for tool wear monitoring in milling," *Int. J. Mach. Tools Manuf.*, vol. 44, no. 14, pp. 1503–1509, 2004, doi: 10.1016/j.ijmachtools.2004.05.003.

- [92] M. Ritou, S. Garnier, B. Furet, and J. Y. Hascoet, "Angular approach combined to mechanical model for tool breakage detection by eddy current sensors," *Mech. Syst. Signal Process.*, vol. 44, no. 1–2, pp. 211–220, 2014, doi: 10.1016/j.ymssp.2013.02.004.
- [93] P. Y. Sevilla-Camacho, G. Herrera-Ruiz, J. B. Robles-Ocampo, and J. C. Jáuregui-Correa, "Tool breakage detection in CNC high-speed milling based in feed-motor current signals," *Int. J. Adv. Manuf. Technol.*, vol. 53, no. 9–12, pp. 1141–1148, 2011, doi: 10.1007/s00170-010-2907-9.
- [94] M. Wang and J. Wang, "CHMM for tool condition monitoring and remaining useful life prediction," *Int. J. Adv. Manuf. Technol.*, 2012, doi: 10.1007/s00170-011-3536-7.
- [95] R. Koike, K. Ohnishi, and T. Aoyama, "A sensorless approach for tool fracture detection in milling by integrating multi-axial servo information," *CIRP Ann. - Manuf. Technol.*, 2016, doi: 10.1016/j.cirp.2016.04.101.
- [96] P. Y. Sevilla, J. C. Jauregui, G. Herrera, and J. B. Robles, "Efficient method for detecting tool failures in high-speed machining process," *Proc. Inst. Mech. Eng. Part B J. Eng. Manuf.*, 2013, doi: 10.1177/0954405412473906.
- [97] P. Y. Sevilla-Camacho, J. B. Robles-Ocampo, J. C. Jauregui-Correa, and D. Jimenez-Villalobos, "FPGA-based reconfigurable system for tool condition monitoring in high-speed machining process," *Meas. J. Int. Meas. Confed.*, 2015, doi: 10.1016/j.measurement.2014.12.037.
- [98] B. Cuka and D. W. Kim, "Fuzzy logic based tool condition monitoring for end-milling," *Robot. Comput. Integr. Manuf.*, 2017, doi: 10.1016/j.rcim.2016.12.009.
- [99] K. Jemielniak and P. J. Arrazola, "Application of AE and cutting force signals in tool condition monitoring in micro-milling," *CIRP J. Manuf. Sci. Technol.*, 2008, doi: 10.1016/j.cirpj.2008.09.007.
- [100] V. A. Pechenin, A. I. Khaimovich, A. I. Kondratiev, and M. A. Bolotov, "Method of Controlling Cutting Tool Wear Based on Signal Analysis of Acoustic Emission for Milling," *Procedia Eng.*, vol. 176, pp. 246–252, 2017, doi: 10.1016/j.proeng.2017.02.294.
- [101] S. Shankar, T. Mohanraj, and R. Rajasekar, "Prediction of cutting tool wear during milling process using artificial intelligence techniques," *Int. J. Comput. Integr. Manuf.*, vol. 32, no. 2, pp. 174–182, 2019, doi: 10.1080/0951192X.2018.1550681.
- [102] K. Javed, R. Gouriveau, X. Li, and N. Zerhouni, "Tool wear monitoring and prognostics challenges: a comparison of connectionist methods toward an adaptive ensemble model," *J. Intell. Manuf.*, 2018, doi: 10.1007/s10845-016-1221-2.
- [103] J. Yu, S. Liang, D. Tang, and H. Liu, "A weighted hidden Markov model approach for continuous-state tool wear monitoring and tool life prediction," *Int. J. Adv. Manuf. Technol.*, 2017, doi: 10.1007/s00170-016-9711-0.
- [104] C. K. Madhusudana, H. Kumar, and S. Narendranath, "Face milling tool condition monitoring using sound signal," *Int. J. Syst. Assur. Eng. Manag.*, vol. 8, pp. 1643–1653, 2017, doi: 10.1007/s13198-017-0637-1.
- [105] C. Zhang, X. Yao, J. Zhang, and H. Jin, "Tool condition monitoring and remaining useful life prognostic based on wireless sensor in dry milling operations," *Sensors (Switzerland)*, vol. 16, no. 6, 2016, doi: 10.3390/s16060795.
- [106] A. K. Jain and B. K. Lad, "Data driven models for prognostics of high speed milling cutters," *Int. J. Performability Eng.*, vol. 12, no. 1, pp. 3–12, 2016.
- [107] A. Torabi Jahromi, M. J. Er, X. Li, and B. S. Lim, "Sequential fuzzy clustering based dynamic fuzzy neural network for fault diagnosis and prognosis," *Neurocomputing*, 2016, doi: 10.1016/j.neucom.2016.02.036.
- [108] C. Drouillet, J. Karandikar, C. Nath, A. C. Journeaux, M. El Mansori, and T. Kurfess, "Tool life predictions in milling using spindle power with the neural network technique," *J. Manuf. Process.*, vol. 22, pp. 161–168, 2016, doi: 10.1016/j.jmapro.2016.03.010.
- [109] C. Liu, Y. Li, G. Zhou, and W. Shen, "A sensor fusion and support vector machine based approach for recognition of complex machining conditions," *J. Intell. Manuf.*, 2016, doi: 10.1007/s10845-016-1209-y.
- [110] X. Li *et al.*, "Adaptive Network Fuzzy Inference System and support vector machine learning for tool wear estimation in high speed milling processes," *IECON Proc. (Industrial Electron. Conf.)*, pp. 2821–2826, 2012, doi: 10.1109/IECON.2012.6389448.
- [111] M. Kuntoğlu and H. Sağlam, "Investigation of signal behaviors for sensor fusion with tool condition monitoring system in turning," *Meas. J. Int. Meas. Confed.*, 2020, doi: 10.1016/j.measurement.2020.108582.
- [112] M. Kunto *et al.*, "A Review of Indirect Tool Condition Monitoring Systems and Decision-Making Methods in Turning: Critical Analysis and Trends A Review of Indirect Tool Condition Monitoring Systems and Decision - Making Methods in Turning: Critical Analysis and Trends," no. December 2020, 2021, doi: 10.3390/s21010108.
- [113] C. Herff and D. J. Krusienski, *Extracting features from time series*. 2018.
- [114] Y. Zhou and W. Xue, "A multisensor fusion method for tool condition monitoring in milling,"

- Sensors (Switzerland)*, 2018, doi: 10.3390/s18113866.
- [115] S. Laddada, T. Benkedjouh, M. O. S. Si-Chaib, and R. Drai, "A data-driven prognostic approach based on wavelet transform and extreme learning machine," *2017 5th Int. Conf. Electr. Eng. - Boumerdes, ICEE-B 2017*, vol. 2017-Janua, pp. 1–4, 2017, doi: 10.1109/ICEE-B.2017.8192142.
- [116] W. N. Cheng, C. C. Cheng, Y. H. Lei, and P. C. Tsai, "Feature selection for predicting tool wear of machine tools," *Int. J. Adv. Manuf. Technol.*, vol. 111, no. 5–6, pp. 1483–1501, 2020, doi: 10.1007/s00170-020-06129-5.
- [117] A. Caggiano, "Tool wear prediction in Ti-6Al-4V machining through multiple sensor monitoring and PCA features pattern recognition," *Sensors (Switzerland)*, 2018, doi: 10.3390/s18030823.
- [118] J. Shawe-Taylor and S. Sun, "A review of optimization methodologies in support vector machines," *Neurocomputing*, vol. 74, no. 17, pp. 3609–3618, 2011, doi: 10.1016/j.neucom.2011.06.026.
- [119] C. K. Madhusudana, N. Gangadhar, H. Kumar, and S. Narendranath, "Use of discrete wavelet features and support vector machine for fault diagnosis of face milling tool," *SDHM Struct. Durab. Heal. Monit.*, 2018, doi: 10.3970/sdhm.2018.01262.
- [120] Y. W. Hsueh and C. Y. Yang, "Prediction of tool breakage in face milling using support vector machine," *Int. J. Adv. Manuf. Technol.*, 2008, doi: 10.1007/s00170-007-1034-8.
- [121] A. Widodo and B. S. Yang, "Support vector machine in machine condition monitoring and fault diagnosis," *Mechanical Systems and Signal Processing*, 2007, doi: 10.1016/j.ymssp.2006.12.007.
- [122] S. Dutta, S. K. Pal, and R. Sen, "On-machine tool prediction of flank wear from machined surface images using texture analyses and support vector regression," *Precis. Eng.*, 2016, doi: 10.1016/j.precisioneng.2015.06.007.
- [123] G. F. Wang, Y. W. Yang, Y. C. Zhang, and Q. L. Xie, "Vibration sensor based tool condition monitoring using v support vector machine and locality preserving projection," *Sensors Actuators, A Phys.*, 2014, doi: 10.1016/j.sna.2014.01.004.
- [124] C. Liu, Y. Li, G. Zhou, and W. Shen, "A sensor fusion and support vector machine based approach for recognition of complex machining conditions," *J. Intell. Manuf.*, 2018, doi: 10.1007/s10845-016-1209-y.
- [125] V. T. Tran, H. Thom Pham, B. S. Yang, and T. Tien Nguyen, "Machine performance degradation assessment and remaining useful life prediction using proportional hazard model and support vector machine," *Mech. Syst. Signal Process.*, vol. 32, pp. 320–330, 2012, doi: 10.1016/j.ymssp.2012.02.015.
- [126] T. Benkedjouh, K. Medjaher, N. Zerhouni, and S. Rechak, "Health assessment and life prediction of cutting tools based on support vector regression," *J. Intell. Manuf.*, 2015, doi: 10.1007/s10845-013-0774-6.
- [127] N. Ghosh *et al.*, "Estimation of tool wear during CNC milling using neural network-based sensor fusion," *Mech. Syst. Signal Process.*, 2007, doi: 10.1016/j.ymssp.2005.10.010.
- [128] W. H. Hsieh, M. C. Lu, and S. J. Chiou, "Application of backpropagation neural network for spindle vibration-based tool wear monitoring in micro-milling," *Int. J. Adv. Manuf. Technol.*, 2012, doi: 10.1007/s00170-011-3703-x.
- [129] W. Cai, W. Zhang, X. Hu, and Y. Liu, "A hybrid information model based on long short-term memory network for tool condition monitoring," *J. Intell. Manuf.*, 2020, doi: 10.1007/s10845-019-01526-4.
- [130] H. O. A. Ahmed, M. L. D. Wong, and A. K. Nandi, "Intelligent condition monitoring method for bearing faults from highly compressed measurements using sparse over-complete features," *Mech. Syst. Signal Process.*, vol. 99, pp. 459–477, 2018, doi: 10.1016/j.ymssp.2017.06.027.
- [131] J. Ma, H. Su, W. L. Zhao, and B. Liu, "Predicting the remaining useful life of an aircraft engine using a stacked sparse autoencoder with multilayer self-learning," *Complexity*, 2018, doi: 10.1155/2018/3813029.
- [132] L. Ren, Y. Sun, J. Cui, and L. Zhang, "Bearing remaining useful life prediction based on deep autoencoder and deep neural networks," *J. Manuf. Syst.*, 2018, doi: 10.1016/j.jmsy.2018.04.008.
- [133] J. Wang, Y. Ma, L. Zhang, R. X. Gao, and D. Wu, "Deep learning for smart manufacturing: Methods and applications," *J. Manuf. Syst.*, 2018, doi: 10.1016/j.jmsy.2018.01.003.
- [134] V. H. Phung and E. J. Rhee, "A High-accuracy model average ensemble of convolutional neural networks for classification of cloud image patches on small datasets," *Appl. Sci.*, vol. 9, no. 21, 2019, doi: 10.3390/app9214500.
- [135] V. Maeda-Gutiérrez *et al.*, "Comparison of convolutional neural network architectures for classification of tomato plant diseases," *Appl. Sci.*, vol. 10, no. 4, 2020, doi: 10.3390/app10041245.
- [136] B. Yang, R. Liu, and E. Zio, "Remaining useful life prediction based on a double-convolutional neural network architecture," *IEEE Trans. Ind. Electron.*, 2019, doi: 10.1109/TIE.2019.2924605.
- [137] X. Li, Q. Ding, and J. Q. Sun, "Remaining useful life estimation in prognostics using deep convolution neural networks," *Reliab. Eng. Syst. Saf.*, 2018, doi: 10.1016/j.ress.2017.11.021.



- [138] X. Li, W. Zhang, and Q. Ding, "Deep learning-based remaining useful life estimation of bearings using multi-scale feature extraction," *Reliab. Eng. Syst. Saf.*, 2019, doi: 10.1016/j.ress.2018.11.011.
- [139] A. Malhi, R. Yan, and R. X. Gao, "Prognosis of defect propagation based on recurrent neural networks," *IEEE Trans. Instrum. Meas.*, 2011, doi: 10.1109/TIM.2010.2078296.
- [140] X. H. Le, H. V. Ho, G. Lee, and S. Jung, "Application of Long Short-Term Memory (LSTM) neural network for flood forecasting," *Water (Switzerland)*, vol. 11, no. 7, 2019, doi: 10.3390/w11071387.
- [141] M. Mohammadi, A. Al-Fuqaha, S. Sorour, and M. Guizani, "Deep learning for IoT big data and streaming analytics: A survey," *IEEE Commun. Surv. Tutorials*, vol. 20, no. 4, pp. 2923–2960, 2018, doi: 10.1109/COMST.2018.2844341.
- [142] Y. Zhang, R. Xiong, H. He, and M. G. Pecht, "Long short-term memory recurrent neural network for remaining useful life prediction of lithium-ion batteries," *IEEE Trans. Veh. Technol.*, vol. 67, no. 7, pp. 5695–5705, 2018, doi: 10.1109/TVT.2018.2805189.
- [143] L. Guo, N. Li, F. Jia, Y. Lei, and J. Lin, "A recurrent neural network based health indicator for remaining useful life prediction of bearings," *Neurocomputing*, 2017, doi: 10.1016/j.neucom.2017.02.045.
- [144] S. Hochreiter, "The Vanishing Gradient Problem During Learning Recurrent Neural Nets and Problem Solutions," *Int. J. Uncertainty, Fuzziness Knowledge-Based Syst.*, vol. 06, no. 02, pp. 107–116, 1998, doi: <https://doi.org/10.1142/S0218488598000094>.
- [145] I. R. Jenkins, L. O. Gee, A. Knauss, H. Yin, and J. Schroeder, "Accident Scenario Generation with Recurrent Neural Networks," *IEEE Conf. Intell. Transp. Syst. Proceedings, ITSC*, vol. 2018-Novem, no. March, pp. 3340–3345, 2018, doi: 10.1109/ITSC.2018.8569661.
- [146] C. W. Chen, S. P. Tseng, T. W. Kuan, and J. F. Wang, "Outpatient text classification using attention-based bidirectional LSTM for robot-assisted servicing in hospital," *Inf.*, vol. 11, no. 2, 2020, doi: 10.3390/info11020106.
- [147] K. Agogino, A., & Goebel, "Milling data set. In U. B. BEST lab (Ed.) NASA ames prognostics data repository NASA ames research center, mofett field, CA," 2007. [Online]. Available: <http://ti.arc.nasa.gov/project/%0Aprognostic-data-repository>.
- [148] A. Widodo and B. S. Yang, "Machine health prognostics using survival probability and support vector machine," *Expert Syst. Appl.*, vol. 38, no. 7, pp. 8430–8437, 2011, doi: 10.1016/j.eswa.2011.01.038.
- [149] A. Salimiasl and A. Özdemir, "Analyzing the performance of artificial neural network (ANN)-, fuzzy logic (FL)-, and least square (LS)-based models for online tool condition monitoring," *Int. J. Adv. Manuf. Technol.*, vol. 87, no. 1–4, pp. 1145–1158, 2016, doi: 10.1007/s00170-016-8548-x.
- [150] A. K. Jain and B. K. Lad, "Predicting Remaining Useful Life of high speed milling cutters based on Artificial Neural Network," *Proc. 2015 Int. Conf. Robot. Autom. Control Embed. Syst. RACE 2015*, no. February, 2015, doi: 10.1109/RACE.2015.7097283.
- [151] H. Yan, J. Wan, C. Zhang, S. Tang, Q. Hua, and Z. Wang, "Industrial Big Data Analytics for Prediction of Remaining Useful Life Based on Deep Learning," *IEEE Access*, vol. 6, no. c, pp. 17190–17197, 2018, doi: 10.1109/ACCESS.2018.2809681.
- [152] Z. Tao, Q. An, G. Liu, and M. Chen, "A novel method for tool condition monitoring based on long short-term memory and hidden Markov model hybrid framework in high-speed milling Ti-6Al-4V," *Int. J. Adv. Manuf. Technol.*, vol. 105, no. 7–8, pp. 3165–3182, 2019, doi: 10.1007/s00170-019-04464-w.
- [153] B. Wang, Y. Lei, T. Yan, N. Li, and L. Guo, "Recurrent convolutional neural network: A new framework for remaining useful life prediction of machinery," *Neurocomputing*, vol. 379, pp. 117–129, 2020, doi: 10.1016/j.neucom.2019.10.064.
- [154] Y. Song, L. Li, Y. Peng, and D. Liu, "Lithium-Ion Battery Remaining Useful Life Prediction Based on GRU-RNN," *Proc. - 12th Int. Conf. Reliab. Maint. Safety, ICRMS 2018*, no. 61771157, pp. 317–322, 2018, doi: 10.1109/ICRMS.2018.00067.
- [155] J. Chen, H. Jing, Y. Chang, and Q. Liu, "Gated recurrent unit based recurrent neural network for remaining useful life prediction of nonlinear deterioration process," *Reliab. Eng. Syst. Saf.*, vol. 185, no. December 2018, pp. 372–382, 2019, doi: 10.1016/j.ress.2019.01.006.
- [156] Q. Wu, K. Ding, and B. Huang, "Approach for fault prognosis using recurrent neural network," *J. Intell. Manuf.*, vol. 31, no. 7, pp. 1621–1633, 2020, doi: 10.1007/s10845-018-1428-5.
- [157] L. Ren, J. Dong, X. Wang, Z. Meng, L. Zhao, and J. Deen, "A Data-driven Auto-CNN-LSTM Prediction Model for Lithium-ion Battery Remaining Useful Life," *IEEE Trans. Ind. Informatics*, vol. 3203, no. c, pp. 1–1, 2020, doi: 10.1109/tii.2020.3008223.
- [158] Q. An, Z. Tao, X. Xu, M. El Mansori, and M. Chen, "A data-driven model for milling tool remaining useful life prediction with convolutional and stacked LSTM network," *Meas. J. Int. Meas. Confed.*, vol. 154, p. 107461, 2020, doi:

- 10.1016/j.measurement.2019.107461.
- [159] H. Miao, B. Li, C. Sun, and J. Liu, "Joint Learning of Degradation Assessment and RUL Prediction for Aeroengines via Dual-Task Deep LSTM Networks," *IEEE Trans. Ind. Informatics*, vol. 15, no. 9, pp. 5023–5032, 2019, doi: 10.1109/tii.2019.2900295.
- [160] Z. H. Liu *et al.*, "A Regularized LSTM Method for Predicting Remaining Useful Life of Rolling Bearings," *Int. J. Autom. Comput.*, 2021, doi: 10.1007/s11633-020-1276-6.
- [161] J. Zhang, Y. Zeng, and B. Starly, "Recurrent neural networks with long term temporal dependencies in machine tool wear diagnosis and prognosis," *SN Appl. Sci.*, vol. 3, no. 4, 2021, doi: 10.1007/s42452-021-04427-5.
- [162] "2010 phm society conference data challenge," *PHM Society*. [Online]. Available: <https://www.phmsociety.org/competition/phm/10>.
- [163] L. I. Yingguang, L. I. U. Changqing, L. I. Dehua, H. U. A. Jiaqi, and W. A. N. Peng, "Documentation of tool wear dataset of NUAA \_ Ideahouse," *IEEE Dataport*, 2021. [Online]. Available: <https://iee-dataport.org/open-access/tool-wear-dataset-nuaaideahouse>.
- [164] I. Kovalenko, M. Saez, K. Barton, and D. Tilbury, "SMART: A system-level manufacturing and automation research testbed," *Smart Sustain. Manuf. Syst.*, 2017, doi: 10.1520/SSMS20170006.
- [165] H. Lee, S. Y. Han, and K. J. Park, "Generative adversarial network-based missing data handling and remaining useful life estimation for smart train control and monitoring systems," *J. Adv. Transp.*, vol. 2020, 2020, doi: 10.1155/2020/8861942.
- [166] X. Zhang, Y. Qin, C. Yuen, L. Jayasinghe, and X. Liu, "Time-Series Regeneration with Convolutional Recurrent Generative Adversarial Network for Remaining Useful Life Estimation," *IEEE Trans. Ind. Informatics*, pp. 1–30, 2020, doi: 10.1109/TII.2020.3046036.
- [167] G. Hou, S. Xu, N. Zhou, L. Yang, and Q. Fu, "Remaining Useful Life Estimation Using Deep Convolutional Generative Adversarial Networks Based on an Autoencoder Scheme," *Comput. Intell. Neurosci.*, vol. 2020, 2020, doi: 10.1155/2020/9601389.
- [168] M. Baptista, M. Mishra, E. Henriques, and H. Prendinger, "Using Explainable Artificial Intelligence to Interpret Remaining Useful Life Using Explainable Artificial Intelligence to Interpret Remaining Useful Life Estimation with Gated Recurrent Unit," no. July, 2020, doi: 10.13140/RG.2.2.27721.36963.
- [169] C. W. Hong, C. Lee, K. Lee, M. S. Ko, D. E. Kim, and K. Hur, "Remaining useful life prognosis for turbofan engine using explainable deep neural networks with dimensionality reduction," *Sensors (Switzerland)*, vol. 20, no. 22, pp. 1–19, 2020, doi: 10.3390/s20226626.
- [170] A. Galli, V. Moscato, G. Sperlí, and A. De Santo, "An explainable artificial intelligence methodology for hard disk fault prediction," *Lect. Notes Comput. Sci. (including Subser. Lect. Notes Artif. Intell. Lect. Notes Bioinformatics)*, vol. 12391 LNCS, pp. 403–413, 2020, doi: 10.1007/978-3-030-59003-1\_26.
- [171] Y. Fan, S. Nowaczyk, and T. Rögnvaldsson, "Transfer learning for remaining useful life prediction based on consensus self-organizing models," *arXiv*, no. October, 2019.
- [172] Y. Cao, M. Jia, P. Ding, and Y. Ding, "Transfer learning for remaining useful life prediction of multi-conditions bearings based on bidirectional-GRU network," *Meas. J. Int. Meas. Confed.*, 2021, doi: 10.1016/j.measurement.2021.109287.
- [173] A. Zhang *et al.*, "Transfer learning with deep recurrent neural networks for remaining useful life estimation," *Appl. Sci.*, vol. 8, no. 12, 2018, doi: 10.3390/app8122416.
- [174] B. He, L. Liu, and D. Zhang, "Digital Twin-Driven Remaining Useful Life Prediction for Gear Performance Degradation: A Review," *J. Comput. Inf. Sci. Eng.*, vol. 21, no. 3, pp. 30801–308017, 2021, doi: <https://doi.org/10.1115/1.4049537>.
- [175] S. Meraghni, L. S. Terrissa, M. Yue, J. Ma, S. Jemei, and N. Zerhouni, "A data-driven digital-twin prognostics method for proton exchange membrane fuel cell remaining useful life prediction," *Int. J. Hydrogen Energy*, vol. 46, no. 2, pp. 2555–2564, 2021, doi: 10.1016/j.ijhydene.2020.10.108.
- [176] S. Kumar, A. Bongale, S. Patil, A. M. Bongale, P. Kamat, and K. Kotecha, "Demystifying Artificial Intelligence based Digital Twins in Manufacturing- A Bibliometric Analysis of Trends and Techniques," *Libr. Philos. Pract.*, vol. 2020, no. November, pp. 1–21, 2020.
- [177] G. R. Mode and K. Anuarul Hoque, "Crafting Adversarial Examples for Deep Learning Based Prognostics," *Proc. - 19th IEEE Int. Conf. Mach. Learn. Appl. ICMLA 2020*, no. December, pp. 467–472, 2020, doi: 10.1109/ICMLA51294.2020.00079.
- [178] B. Qolomany, I. Mohammed, A. Al-Fuqaha, M. Guizani, and J. Qadir, "Trust-Based Cloud Machine Learning Model Selection for Industrial IoT and Smart City Services," *IEEE Internet Things J.*, vol. 8, no. 4, pp. 2943–2958, 2021, doi: 10.1109/JIOT.2020.3022323.
- [179] X. Zhou, R. Canady, Y. Li, and A. Gokhale, "Overcoming Adversarial Perturbations in Data-driven Prognostics Through Semantic Structural Context-driven Deep Learning," *Annu. Conf. PHM Soc.*, vol. 12, no. 1, p. 11, 2020, doi:

- 10.36001/phmconf.2020.v12i1.1182.
- [180] M. Ragab *et al.*, “Contrastive Adversarial Domain Adaptation for Machine Remaining Useful Life Prediction,” *IEEE Trans. Ind. Informatics*, vol. 3203, no. c, pp. 1–1, 2020, doi: 10.1109/tii.2020.3032690.
- [181] P. R. de O. da Costa, A. Akçay, Y. Zhang, and U. Kaymak, “Remaining useful lifetime prediction via deep domain adaptation,” *Reliab. Eng. Syst. Saf.*, vol. 195, 2020, doi: 10.1016/j.res.2019.106682.
- [182] C. Liu and K. Gryllias, “Unsupervised Domain Adaptation based Remaining Useful Life Prediction of Rolling Element Bearings,” *Phme 2020*, pp. 1–10, 2020.
- [183] Z. Liu, N. Meyendorf, and N. Mrad, “The role of data fusion in predictive maintenance using digital twin,” *AIP Conf. Proc.*, vol. 1949, no. April 2018, 2018, doi: 10.1063/1.5031520.
- [184] J. Gao, P. Li, Z. Chen, and J. Zhang, “A Survey on Deep Learning for Multimodal Data Fusion,” *Neural Comput.*, vol. 32, pp. 1–36, 2020, doi: 10.1162/neco\_a\_01273.
- [185] M. Huang, Z. Liu, and Y. Tao, “Mechanical fault diagnosis and prediction in IoT based on multi-source sensing data fusion,” *Simul. Model. Pract. Theory*, vol. 102, no. August, p. 101981, 2020, doi: 10.1016/j.simpat.2019.101981.
- [186] Z. Wang *et al.*, “Revisiting Recent and Current Anomaly Detection based on Machine Learning in Ad-Hoc Networks,” *J. Phys. Conf. Ser.*, vol. 1288, no. 1, 2019, doi: 10.1088/1742-6596/1288/1/012075.
- [187] S. Zheng and C. Gupta, “Discriminant generative adversarial networks with its application to equipment health classification,” *ICASSP 2020 - 2020 IEEE Int. Conf. Acoust. Speech Signal Process.*, pp. 3067–3071, 2020.
- [188] Y. Yu, B. Tang, R. Lin, S. Han, T. Tang, and M. Chen, “CWGAN: Conditional Wasserstein generative adversarial nets for fault data generation,” in *IEEE International Conference on Robotics and Biomimetics, ROBIO 2019*, 2019, no. December, pp. 2713–2718, doi: 10.1109/ROBIO49542.2019.8961501.
- [189] F. Zhou, S. Yang, H. Fujita, D. Chen, and C. Wen, “Deep learning fault diagnosis method based on global optimization GAN for unbalanced data,” *Knowledge-Based Syst.*, vol. 187, p. 104837, 2020, doi: 10.1016/j.knosys.2019.07.008.
- [190] O. Fink, Q. Wang, M. Svensén, P. Dersin, W. J. Lee, and M. Ducoffe, “Potential, challenges and future directions for deep learning in prognostics and health management applications,” *Eng. Appl. Artif. Intell.*, vol. 92, no. January, p. 103678, 2020, doi: 10.1016/j.engappai.2020.103678.
- [191] G. Vilone and L. Longo, “Explainable Artificial Intelligence: a Systematic Review,” *arXiv*, 2020.
- [192] O. Serradilla, E. Zugasti, C. Cernuda, A. Aranburu, J. R. De Okariz, and U. Zurutuza, “Interpreting remaining useful life estimations combining explainable artificial intelligence and domain knowledge in industrial machinery,” *IEEE Int. Conf. Fuzzy Syst.*, vol. 2020-July, 2020, doi: 10.1109/FUZZ48607.2020.9177537.
- [193] A. Barredo Arrieta *et al.*, “Explainable Explainable Artificial Intelligence (XAI): Concepts, taxonomies, opportunities and challenges toward responsible AI,” *Inf. Fusion*, vol. 58, no. December 2019, pp. 82–115, 2020, doi: 10.1016/j.inffus.2019.12.012.
- [194] R. Hoffman, S. Mueller, G. Klein, and J. Litman, “Metrics for Explainable AI Challenges and Prospects.pdf.” XAI Metrics, 2018.
- [195] S. Mohseni, N. Zarei, and E. D. Ragan, “A multidisciplinary survey and framework for design and evaluation of explainable AI systems,” *ACM Trans. Interact. Intell. Syst.*, vol. 1, no. 1, 2020.
- [196] S. Wachter *et al.*, “Counterfactual explanations without opening the black box: automated decisions and the GDPR,” *Harv. J. Law Technol.*, vol. 31, no. 2, 2018.
- [197] R. McGrath and L. Costabello, “Interpreting AI ‘Black Boxes’ with counterfactual explanations,” *Accenture*, 2019. [Online]. Available: <https://www.accenture.com/us-en/blogs/technology-innovation/costabello-mcgrath-ai-counterfactual-explanations>.
- [198] “Transfer Learning Explained,” *The integrate.ai blog*, 2018. [Online]. Available: <https://medium.com/the-official-integrate-ai-blog/transfer-learning-explained-7d275c1e34e2>.
- [199] L. Jing and Y. Tian, “Self-supervised visual feature learning with deep neural networks: A survey,” *arXiv*, pp. 1–24, 2019, doi: 10.1109/tpami.2020.2992393.
- [200] A. Jaiswal, M. Z. Zadeh, A. R. Babu, D. Banerjee, and F. Makedon, “A survey on contrastive self-supervised learning,” *arXiv*, pp. 1–21, 2020, doi: 10.3390/technologies9010002.
- [201] X. Tong, Q. Liu, S. Pi, and Y. Xiao, “Real-time machining data application and service based on IMT digital twin,” *J. Intell. Manuf.*, 2020, doi: 10.1007/s10845-019-01500-0.
- [202] S. Boschert and R. Rosen, “Digital Twin—The Simulation Aspect,” in *Mechatronic Futures*, 2016.
- [203] W. Luo, T. Hu, W. Zhu, and F. Tao, “Digital twin modeling method for CNC machine tool,” in *ICNSC 2018 - 15th IEEE International Conference on Networking, Sensing and Control*, 2018, doi: 10.1109/ICNSC.2018.8361285.
- [204] J. Chen *et al.*, “CPS Modeling of CNC Machine Tool Work Processes Using an Instruction-

- Domain Based Approach,” *Engineering*, 2015, doi: 10.15302/J-ENG-2015054.
- [205] Y. Xu, Y. Sun, X. Liu, and Y. Zheng, “A Digital-Twin-Assisted Fault Diagnosis Using Deep Transfer Learning,” *IEEE Access*, vol. 7, pp. 19990–19999, 2019, doi: 10.1109/ACCESS.2018.2890566.
- [206] P. Aivaliotis, K. Georgoulas, and G. Chryssolouris, “The use of Digital Twin for predictive maintenance in manufacturing,” *Int. J. Comput. Integr. Manuf.*, vol. 32, no. 11, pp. 1067–1080, 2019, doi: 10.1080/0951192X.2019.1686173.
- [207] P. Zheng and A. S. Sivabalan, “A generic tri-model-based approach for product-level digital twin development in a smart manufacturing environment,” *Robot. Comput. Integr. Manuf.*, vol. 64, no. February, p. 101958, 2020, doi: 10.1016/j.rcim.2020.101958.
- [208] F. Ozgur Catak, “Adversarial Machine Learning Mitigation: Adversarial Learning,” *Towards data science*, 2020. [Online]. Available: <https://towardsdatascience.com/adversarial-machine-learning-mitigation-adversarial-learning-9ae04133c137>.
- [209] F. O. Catak and S. Y. Yayilgan, “Deep Neural Network Based Malicious Network Activity Detection Under Adversarial Machine Learning Attacks,” in *International Conference on Intelligent Technologies and Applications*, 2021, no. June, pp. 280–291, doi: 10.1007/978-3-030-71711-7\_23.
- [210] “Nebula AI (NBAI) — Decentralized AI Blockchain whitepaper,” *Nebula AI Inc. NEBULA*, 2018. [Online]. Available: [https://neuronix.io/documents/whitepaper/4082/NBAI\\_whitepaper\\_EN.pdf](https://neuronix.io/documents/whitepaper/4082/NBAI_whitepaper_EN.pdf).
- [211] H. R. Hasan and K. Salah, “Combating Deepfake Videos Using Blockchain and Smart Contracts,” *IEEE Access*, vol. 7, no. c, pp. 41596–41606, 2019, doi: 10.1109/ACCESS.2019.2905689.
- [212] A. Ainapure, X. Li, J. Singh, Q. Yang, and J. Lee, “Deep learning-based cross-machine health identification method for vacuum pumps with domain adaptation,” *Procedia Manuf.*, vol. 48, no. 2019, pp. 1088–1093, 2020, doi: 10.1016/j.promfg.2020.05.149.
- [213] J. Yang and B. Zhang, “Artificial intelligence in intelligent tutoring robots: A systematic review and design guidelines,” *Appl. Sci.*, vol. 9, no. 10, pp. 1–18, 2019, doi: 10.3390/app9102078.
- [214] A. He and X. Jin, “Failure Detection and Remaining Life Estimation for Ion Mill Etching Process Through Deep-Learning Based Multimodal Data Fusion,” *J. Manuf. Sci. Eng.*, vol. 141, no. 10, pp. 1–8, 2019, doi: 10.1115/1.4044248.
- [215] I. R. Galatzer-Levy, K. V. Ruggles, and Z. Chen, “Data Science in the Research Domain Criteria Era: Relevance of Machine Learning to the Study of Stress Pathology, Recovery, and Resilience,” *Chronic Stress*, vol. 2, pp. 1–14, 2018, doi: 10.1177/2470547017747553.
- [216] D. Kozjek, A. Malus, and R. Vrabič, “Multi-objective adjustment of remaining useful life predictions based on reinforcement learning,” *Procedia CIRP*, vol. 93, pp. 425–430, 2020, doi: 10.1016/j.procir.2020.03.051.
- [217] L. Zhou, L. Zhang, and B. K. P. Horn, “Deep reinforcement learning-based dynamic scheduling in smart manufacturing,” *Procedia CIRP*, vol. 93, pp. 383–388, 2020, doi: 10.1016/j.procir.2020.05.163.
- [218] E. Skordilis and R. Moghaddass, “A deep reinforcement learning approach for real-time sensor-driven decision making and predictive analytics,” *Comput. Ind. Eng.*, vol. 147, p. 106600, 2020, doi: 10.1016/j.cie.2020.106600.
- [219] L. S. Terrissa, S. Meraghni, Z. Bouzidi, and N. Zerhouni, “A new approach of PHM as a service in cloud computing,” *Colloq. Inf. Sci. Technol. Cist*, vol. 0, pp. 610–614, 2016, doi: 10.1109/CIST.2016.7804958.
- [220] D. Wu, M. J. Greer, D. W. Rosen, and D. Schaefer, “Cloud manufacturing: drivers, current status, and future trends,” in *Proceedings of the ASME 2013 International Manufacturing Science and Engineering Conference*, 2016, pp. 1–10.
- [221] A. Karpatne, W. Watkins, J. Read, and V. Kumar, “Physics-guided neural networks (PGNN): An application in lake temperature modeling,” *arXiv*, no. October, 2017.
- [222] S. Elnagar and M. A. Thomas, “Federated deep learning: A conceptual model and applied framework for industry 4.0,” *26th Am. Conf. Inf. Syst. AMCIS 2020*, no. July, 2020.
- [223] “Federated Learning,” *Cloudera Fast Forward Labs*, 2018. [Online]. Available: <https://federated.fastforwardlabs.com/>.