



Design of a Domain-Specific Language for Material Flow Analysis using Microsoft DSL tools: An Experience Paper

Zarrin, Bahram; Baumeister, Hubert

Published in:

Proceedings of the 14th Workshop on Domain-Specific Modeling (DSM '14)

Link to article, DOI:

[10.1145/2688447.2688452](https://doi.org/10.1145/2688447.2688452)

Publication date:

2014

[Link back to DTU Orbit](#)

Citation (APA):

Zarrin, B., & Baumeister, H. (2014). Design of a Domain-Specific Language for Material Flow Analysis using Microsoft DSL tools: An Experience Paper. In *Proceedings of the 14th Workshop on Domain-Specific Modeling (DSM '14)* (pp. 23-28) <https://doi.org/10.1145/2688447.2688452>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Design of a Domain-Specific Language for Material Flow Analysis using Microsoft DSL tools: An Experience Paper

Bahram Zarrin

Technical University of Denmark
baza@dtu.dk

Hubert Baumeister

Technical University of Denmark
huba@dtu.dk

Abstract

Material Flow Analysis (MFA) is the procedure of measuring and assessing the mass flows of matter (solid waste, water, food...) and substances (carbon, phosphorus ...) within a process or a system for the period of time. In this paper we propose a Domain-Specific Language (DSL) to model MFA in a waste management modeling context. The result is that we integrate the DSL within a waste management modeling software called EASETECH and we show how the proposed DSL allows the domain experts to extend the software without involving of software developers.

Categories and Subject Descriptors D.3.3 [*Programming Languages*]: Specialized application languages

General Terms Languages, Design

Keywords Domain-specific modeling languages, Material Flow, MS DSL tools

1. Introduction

Domain-Specific Languages (DSLs) are languages which are specialized for a specific application domain. In recent years they have become mostly used to improve the productivity of software developers and the quality of a software. In this paper we show another application of them which is to utilize a DSL by domain experts to extend a software in order to fulfill new requirements.

EASETECH¹ is a novel modeling tool for life-cycle assessment (LCA) within the waste-management domain. The tool analyses waste flows, environmental emissions and resource consumption from waste-management systems and

delivers a comprehensive impact assessment in relation to photochemical ozone formation, ozone depletion, potential global warming, acidification, nutrient enrichment, etc. [2]. The software employs a model consisting of a set of catalogs and material processes in order to describe scenarios of a solid waste system. A material process in EASETECH can be either a template material process or a composite material process based on several of these templates. A combination of these material processes models a waste scenario.

At the moment the template material processes, which are the basis and fundamental elements in waste scenarios, have been implemented in C#. This makes it difficult for the researchers and domain experts to add a new template material process to the software. One of the objectives of our research is to design a domain-specific language for waste-management modeling in order to describe different aspects of these waste processes and replace the hard-coded library of EASETECH with the compiler of this DSL. This allows the domain experts to extend EASETECH without dealing with any software-development activity.

In this paper we propose a DSL to describe material flows within a material process and we implement the DSL based on Microsoft DSL tools. This paper is organized as follows: first we have a brief introduction to Material-Flow Analysis in Sect. 2, then we design the proposed DSL and explain its semantics in Sect. 3. Afterwards we discuss the implementation of the DSL, related technologies, simulation and integration of the DSL in EASETECH in Sect. 4. We consider the related work in Sect. 5 and conclude our work in Sect. 7.

2. Material-Flow Analysis

The objective of using material-flow analysis (MFA) is to evaluate the totality and consistency of material flows between inputs and outputs of a certain system or process. One of the methods used commonly to do MFA is material-flow networks (MFNs) which were introduced many years ago and have been used regularly for Life Cycle Assessment (LCA)[3]. A material-flow network for a process can be defined as a set of inputs, outputs, transformers and transitions and it can be modeled as a directed graph such that inputs,

¹ <http://www.easetech.dk/>

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

DSM '14, October 21, 2014, Portland, OR, USA..

Copyright is held by the owner/author(s). Publication rights licensed to ACM.

ACM 978-1-4503-2156-3/14/10...\$15.00.

<http://dx.doi.org/10.1145/2688447.2688452>

them. We identify the two ends of a transition $t \in T$ by writing $\uparrow t$ as the source of the transition and $\downarrow t$ as the target of transition, with the understanding that material moves from $\uparrow t$ to $\downarrow t$, $\uparrow t \in I \cup E$, $\downarrow t \in E \cup O$ and $\uparrow t \neq \downarrow t$.

According to the meta-model defined for the DSL, different material transformers are defined. Therefore, the set E of transformers is the disjoint union (denoted \uplus) of four sets: the set E_{FD} of fraction distributors, the set E_{SD} of substance distributors, the set E_{FH} of fraction hubs, and the set E_{SH} of substance hubs:

$$E = E_{FH} \uplus E_{SH} \uplus E_{FD} \uplus E_{SD} \quad (2)$$

The following functions are defined in order to assign different attributes to the different kinds of transformers: $\text{deg} : E \rightarrow \mathbb{R}$, is a function that assigns a real as degradation value to $e \in E$.

$\text{sn} : E_{SD} \rightarrow SN$, is a function that assigns a substance name to each substance distributor in E_{SD} .

$\text{fn} : E_{FD} \rightarrow FN$, is a function that assigns a fraction name to each fraction distributor in E_{FD} .

$\text{hb} : E_{FD} \uplus E_{SD} \rightarrow FH \uplus SH$, is a partial function which specifies the hub that uses the given distributor as a port.

$\text{sd} : E_{SH} \rightarrow \mathcal{P}(E_{SD})$, is a function that assigns a set of substance distributors as ports to each substance hub in E_{SH} .

$\text{fd} : E_{FH} \rightarrow \mathcal{P}(E_{FD})$, is a function that assigns a set of fraction distributors as ports to each fraction hub in E_{FH} .

According to the meta-model, the set T of transitions is the disjoint union of two sets: the set T_{MF} of material flows, and the set T_{RF} of residues flows:

$$T = T_{MF} \uplus T_{RF} \quad (3)$$

A function, $\text{value} : T_{MF} \rightarrow \mathbb{R}$, is defined to assign a real value as the amount to the material flows. This value specifies the percentage amount of the material which the flow transfers from its source to its target. This value is undefined for residues flows.

In order to give semantics to the DSL, the following semantic functions for each syntactic category in process P for given material input $I_0 : I \rightarrow M$ are defined as follows:

- $\llbracket _ \rrbracket^I : I \times (I \rightarrow M) \rightarrow M$, determines the material value for an input element.
- $\llbracket _ \rrbracket^O : O \times (I \rightarrow M) \rightarrow M$, determines the material value for an output element.
- $\llbracket _ \rrbracket^E : E \times (I \rightarrow M) \rightarrow M$, calculates the transformed material by a transformer.
- $\llbracket _ \rrbracket^T : T \times (I \rightarrow M) \rightarrow M$, calculates the material value transferred by a material transition.

Two more semantic functions $\llbracket _ \rrbracket_{in}^E$ and $\llbracket _ \rrbracket_{out}^E$ need to be defined in order to calculate $\llbracket _ \rrbracket^E$. The first function evaluates the total material transferred into a material transformer by a set of transitions. The second function calculates the total material transferred out from a transformer through a set of

transitions. Based on these semantic functions, we can define the semantic equations as follows:

For each input ($i \in I$), the evaluated material is the value assigned to i in the given material input.

$$\llbracket i \rrbracket^I(I_0) = I_0(i) \quad (4)$$

For the material transitions MF , the value is the percentage of the transformed material specified by its source element, while this value for the residues flows RF is the subtraction of the transformed material and the total material output of its source:

$$\begin{aligned} \llbracket mf \rrbracket^T(I_0) &= \frac{\text{value}(mf)}{100} * \begin{cases} \llbracket \uparrow mf \rrbracket^I(I_0), & \uparrow mf \in I \\ \llbracket \uparrow mf \rrbracket^E(I_0), & \uparrow mf \in E \end{cases} \\ \llbracket rf \rrbracket^T(I_0) &= \llbracket \uparrow rf \rrbracket^E(I_0) - \llbracket \uparrow rf \rrbracket_{out}^E(I_0) \end{aligned} \quad (5)$$

The total material input, $\llbracket _ \rrbracket_{in}^E$, for each material transformer, if the transformer is a distributor and it belongs to a hub, is the material value of its hub $\llbracket _ \rrbracket^E$, otherwise it is the sum of all the material transferred to the transformer by the transitions.

$$\llbracket e \rrbracket_{in}^E(I_0) = \begin{cases} \llbracket \text{hb}(e) \rrbracket^E(I_0), & e \in E_{FD} \cup E_{SD} \wedge \text{hb}(e) \neq \perp \\ \sum_{t \in T \wedge \uparrow t = e} \llbracket t \rrbracket^T(I_0), & \text{else} \end{cases} \quad (6)$$

The total material output, $\llbracket _ \rrbracket_{out}^E$, for each fraction distributor and substance distributor is defined as follows:

$$\begin{aligned} \llbracket fd \rrbracket_{out}^E(I_0) &= \sum_{t \in T \wedge \uparrow t = fd} \llbracket t \rrbracket^T(I_0) \\ \llbracket sd \rrbracket_{out}^E(I_0) &= \sum_{t \in T \wedge \uparrow t = sd} \llbracket t \rrbracket^T(I_0) \end{aligned} \quad (7)$$

The total material output, $\llbracket _ \rrbracket_{out}^E$, for each fraction hub or substance hub is the sum of material outputs of their distributors;

$$\begin{aligned} \llbracket fh \rrbracket_{out}^E(I_0) &= \sum_{fd \in \text{fd}(fh)} \llbracket fd \rrbracket_{out}^E(I_0) \\ \llbracket sh \rrbracket_{out}^E(I_0) &= \sum_{sd \in \text{sd}(sh)} \llbracket sd \rrbracket_{out}^E(I_0) \end{aligned} \quad (8)$$

The semantic equations for the material transformers are defined as follows:

$$\begin{aligned} \llbracket fh \rrbracket^E(I_0) &= \frac{100 - \text{deg}(fh)}{100} \llbracket fh \rrbracket_{in}^E(I_0) \\ \llbracket fd \rrbracket^E(I_0) &= \frac{100 - \text{deg}(fd)}{100} \llbracket fd \rrbracket_{in}^E(I_0) |_{fn(fd)} \\ \llbracket sh \rrbracket^E(I_0) &= \frac{100 - \text{deg}(sh)}{100} \llbracket sh \rrbracket_{in}^E(I_0) \\ \llbracket sd \rrbracket^E(I_0) &= \frac{100 - \text{deg}(sd)}{100} \llbracket sd \rrbracket_{in}^E(I_0) |_{sn(sd)} \end{aligned} \quad (9)$$

The semantic function for output elements is defined as follows:

$$\llbracket o \rrbracket^O(I_0) = \sum_{t \in T \wedge \downarrow t = o} \llbracket t \rrbracket^T(I_0) \quad (10)$$

Based on these semantics functions, we can give semantics to a material process P as well. Since the purpose of the material process is to calculate the outputs of the process based on given inputs, then the semantic function for a process P and given input, $I_0 : I \rightarrow M$, is defined as follows:

$$\begin{aligned} \llbracket P \rrbracket &: P \times (I \rightarrow M) \rightarrow (O \rightarrow M) \\ \llbracket P \rrbracket(I_0) &= \lambda o : O. \llbracket o \rrbracket^{\mathcal{O}}(I_0) \end{aligned} \quad (11)$$

4. Implementation

The DSL definition diagram for the proposed DSL is presented in Fig. 2. A domain class *Material Process* is used as the root element of the diagram which represents the model. Two abstract domain classes *Element* and *MaterialElement* derived from *Element* are used in the model as the base classes. The *Element* class is used as the base class for all of the elements and the *MaterialElement* class is the base class for all of the material elements in the model.

An abstract domain class *MaterialOperator* derived from *MaterialElement* is defined as the base class for all of the operators that can be defined for a material process. Another abstract domain class *FlowOperator* is added to the diagram as the base class for all of the material flow operators that are dealing with material transformation. This class is derived from *MaterialOperator*. Two abstract domain classes *Hub* and *Distributor* inherited from *MaterialOperator* are defined in the model as the base class for Hub and Distributor operators.

For each type of the hub and distributor operators, a related domain class derived from the related abstract class is defined. Finally, for all of the non-abstract domain classes, an embedding relationship is defined between the domain class and *MaterialProcess*. A shape class is also defined for each of them and mapped to the domain class to describe the concrete syntax of the operator.

For material-transformation flow between the material operators, two reference relationships are defined. The first is defined between *Element* and itself, which allows each element of the diagram to be linked to the other elements. This reference relationship is called *MaterialFlow* and is described by means of a domain relationship class. The relationship class has one property called *value* which specifies the percentage amount of the material that should be transferred from the source to the target of the relation. The other reference relationship *ResiduesFlow* is defined between *FlowOperator* and *Element*, which allows one to transfer the residues material from a flow operator to any element in the diagram. To represent the links between the elements in the model diagram, for each reference relationship in the model a connector shape class is created and mapped to the relation.

4.1 Semantics of the Proposed DSL

In order to implement the semantics explained in Sect. 3.1, The generated codes for the proposed DSL are extended. To

achieve this goal, a material property is added to the *MaterialElement* domain class which is the base class for all the material elements of the model. This property is defined as a calculated property for the domain class, which means that the DSL designer will generate a *GetMaterialVlaue* in the generated code for the domain class and expects this method to be implemented in the related partial class. A partial class is created for each domain class in the DSL definition, and since they are inherited from *MaterialElement*, they can override *GetMaterialVlaue* with their own calculation according to the semantic functions $\llbracket _ \rrbracket^{\mathcal{T}}$, $\llbracket _ \rrbracket^{\mathcal{O}}$ and $\llbracket _ \rrbracket^{\mathcal{E}}$ explained in Sect. 3.1.

4.2 Simulation

To enable the user to generate material in order to simulate the model, two properties are added to the *MaterialInput* domain class. The first property is the amount of the material that should be generated, and the second property is a list of the fractions which should be included in the material composition. On the basis of these properties, a material will be generated and considered as the process input for the simulation.

Two different views are created to visualize the material composition and material generation. Another view called *MaterialView* is created, which surrounds the other views and swaps the views based on the selected element in the diagram. If the selected element is a material input element, it shows the material-generation view, otherwise it shows the material-composition view. In order to show the material view for the selected element in Visual Studio, *MaterialFlowWindow* class is defined. This class creates a tool window in Visual Studio IDE and shows the *MaterialView* whenever a DSL diagram is loaded in Visual Studio.

4.3 Code Generation

In order to make the generated code simple and reusable, some base classes are defined in a new assembly called *EASETECH.DSL.Lib*. These classes are *TCMaterialProcessTemplate*, *MaterialProcessTemplate* and *MaterialOutputTemplate*, and are derived from the related classes in *EASETECH*. They are implementing some basic functionalities required by the generated classes. To generate a material process template, two T4 templates are defined on the basis of an instance of the proposed model. One of them, called *TCTableCodeGenrator*, is used to generate a class based on *TCMaterialProcessTemplate* that is responsible for material calculation of the material-process outputs. The other template, which is called *MaterialProcessCodeGenerator*, is used to generate a material-process class based on *MaterialProcessTemplate*. Whenever an instance of the DSL is compiled, an assembly will be generated to be used in *EASETECH*.

In order to generate material-calculation code, a T4 template is defined for each domain class in the DSL definition. The template generates a class for each element in the

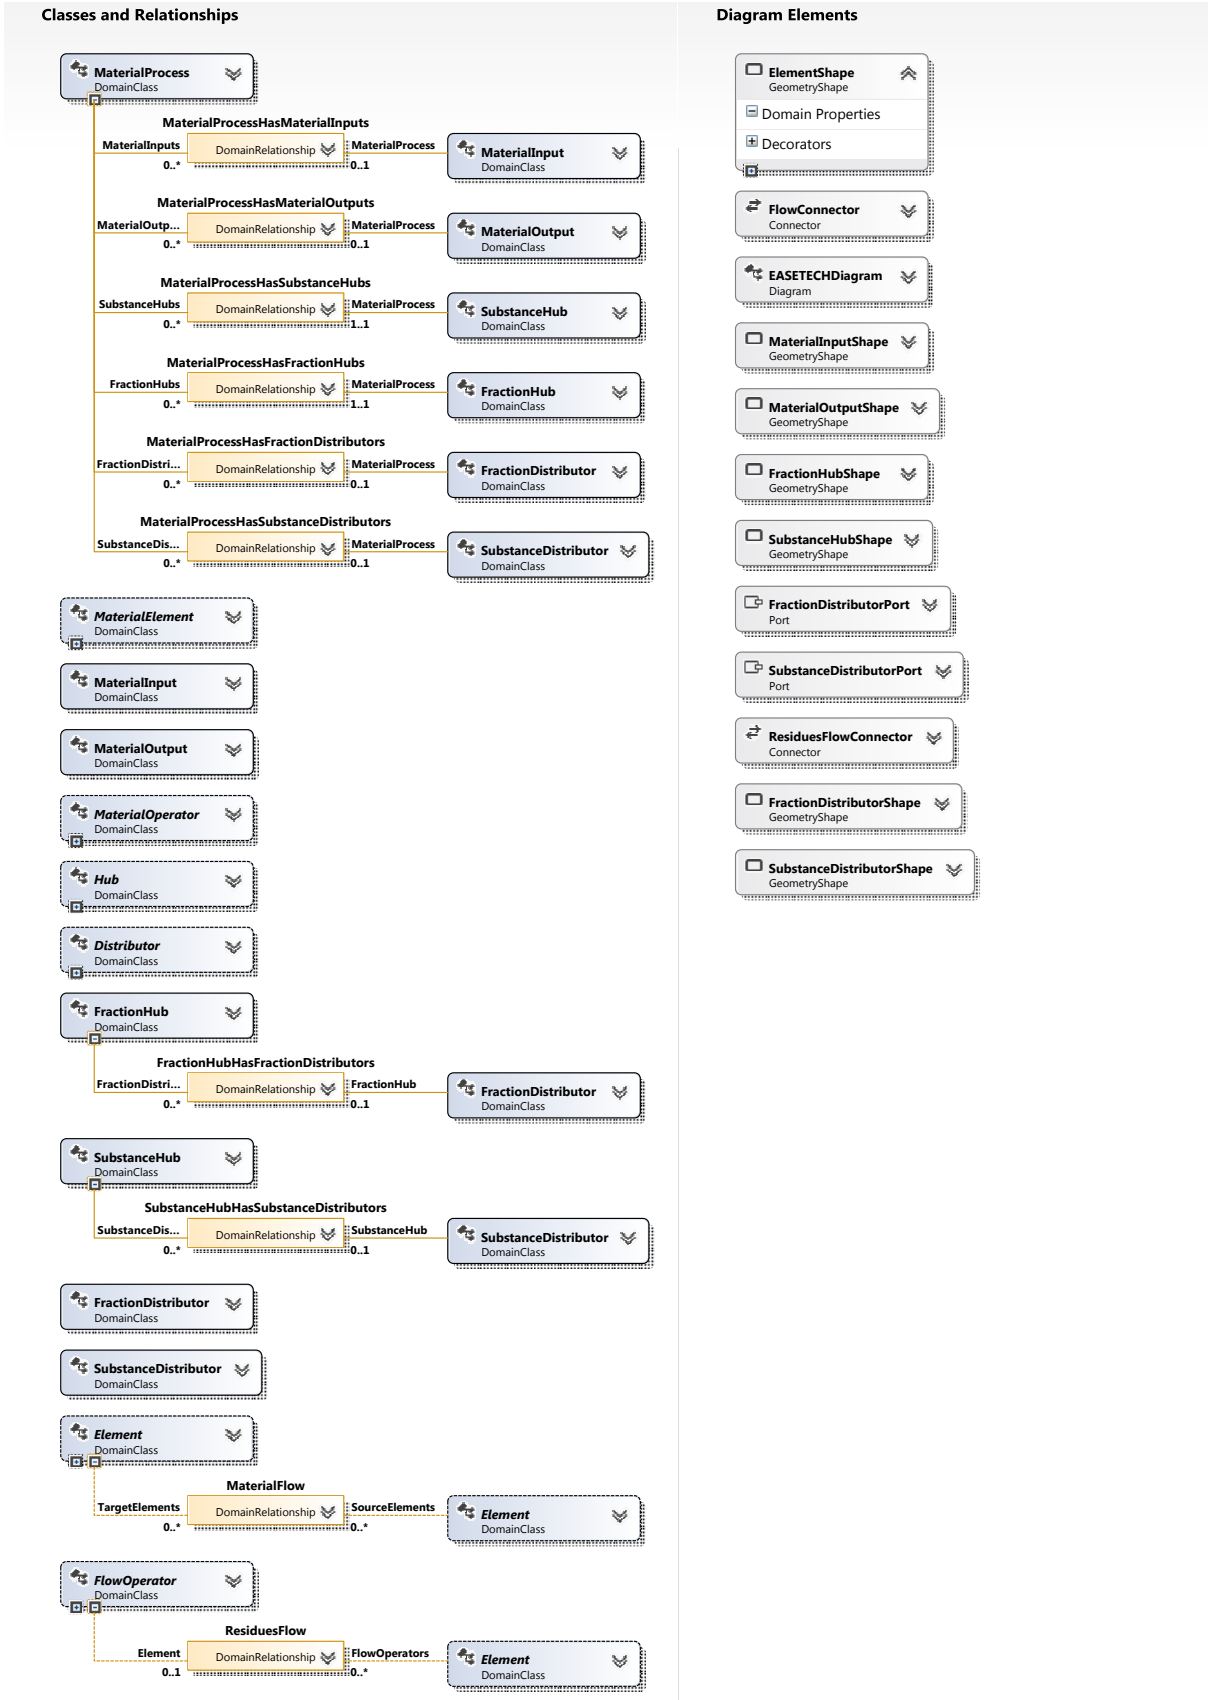


Figure 2. Meta Model of the Material Process model. This diagram is modified in order to fit in one page.

model which has the same type as the domain class of the T4 template. The template also adds the following functions to the classes; *GetMaterialInputs*, *GetMaterialValue*, *GetResiduesMaterial* and *GetMaterialOutputs*. The implementation and availability of these functions are generated according to the type of the element and the semantic of the element, which is explained in Sect. 3.1.

5. Related Work

In recent years, material-flow networks [5] have been known as one of the appropriate methods of doing MFAs [4]. Different tools and approaches have been proposed to model and simulate MFA within different contexts, and the most relevant of these are mentioned in this section. Umberto was developed in 1997 as an initial material-flow analysis tool [6]. This tool is one of the powerful material-flow analysis tools and it provides interfaces to other programs. In 2006, the Vienna University of Technology developed a freeware software for MFA called STAN (short for subSTANCE flow ANalysis), which supports MFA according to the Austrian Standard ONORM S 2096 and allows consideration of data uncertainties [1]. Unlike the mentioned tools, a component-based approach to MFA is presented in [7] which integrates material-flow analysis and discrete event simulation into a component-based framework to ease both model development and maintenance.

In comparison of our work with the related work, most of these approaches offer a generic tool for material-flow analysis, which has been developed based on non-model-driven approaches. In contrast, we propose a specific material-flow analysis tool in the context of waste-management, and we use a model-driven and language-oriented approach to address the problem.

6. Results and Discussions

On the basis of this experience, we found that DSL tools are mature enough to develop a complete DSL project. VMSDK provides a special editor to describe a meta-model together with a graphical notation for a DSL. It generates a strongly typed implementation of the domain classes for the model, which runs in a transaction-based store, a model explorer and a diagram editor, serialization objects which store the models in XML format, and mechanisms for generating code or other artifacts from the model by using text templates.

One of the drawbacks of implementing DSLs based on this framework is the lack of support to formalize the semantic of the DSL, which led us to implement the DSL semantic in an informal way twice for simulation and code-generation purposes. This made the semantic verification and maintenance of the DSL more difficult.

The other problem we found in this experience is the visualization of the meta-model for a DSL which is presented in Fig. 2. Although the mapping between the abstract syntax and concrete syntax of the DSL is presented well here,

understanding the meta-model of the DSL in this diagram, compared to the meta-model diagram in EMF (Fig. 1), is more difficult, especially when the DSL definition is more complex.

While in other frameworks, like EMF, the meta-model of a DSL can be reused to design different types of DSL (such as textual or graphical languages), DSL tools can only be used to develop graphical languages, and the DSL definition cannot be reused to develop textual languages.

7. Conclusions

In this work we proposed a Domain-Specific Language for Material-Flow Analysis with a stand-alone tool support. This DSL can help researchers to model and simulate material flows of a material process. We also shared our experience in developing DSLs with Microsoft DSL tools.

In addition, in this paper we showed that, thanks to DSL technologies, a software like EASETECH can be extended with new requirements directly by the domain experts. Before this, the environmental scientists had to ask the developers of EASETECH to add new contributions or requirements to the software. Now, by using this DSL, they will be able to do it themselves.

References

- [1] O. Cencic and H. Rechberger. Material flow analysis with software STAN. In M. S. E. Andreas Moeller, Bernd Page, editor, *Shaker Verlag*, pages 440–447. Shaker Verlag, 2008.
- [2] T. Christensen, G. Bhandar, H. Lindvall, A. Larsen, T. Fruergaard, A. Damgaard, S. Manfredi, A. Boldrin, C. Riber, and M. Hauschild. Experience with the use of LCA-modelling (EASEWASTE) in waste management. *Waste Management and Research*, 25:257–262, 2007.
- [3] H. Lambrecht and M. Schmidt. Material flow networks as a means of optimizing production systems. *Chemical Engineering and Technology*, 33(Issue 4):610–617, 2010.
- [4] H. Lambrecht and M. Zimmermann. Combination of optimization methods and material flow analysis for improvement of operational material use (KOMSA): Concept and its implementation. In M. S. E. Andreas Moeller, Bernd Page, editor, *Shaker Verlag*, pages 310–318. Shaker Verlag, 2008.
- [5] L. e. a. Möller A., Stoffstromnetze. In Hilty. Material flow networks as a means of optimizing production systems. *Informatik und Umweltschutz*, 33(Band 2):610–617, 1994.
- [6] H. Schmidt, Möller and Beilschmidt. Environmental material flow analysis by network approach. In *11th International Symposium of the German Society for Computer Science (GI)*, pages 768 – 779. Umweltinformatik, 1997.
- [7] V. Wohlgenuth, B. Page, and W. Kreutzer. Combining discrete event simulation and material flow analysis in a component-based approach to industrial environmental protection. *Environmental Modelling and Software*, 21(11):1607 – 1617, 2006.