

This item was submitted to Loughborough's Institutional Repository (https://dspace.lboro.ac.uk/) by the author and is made available under the following Creative Commons Licence conditions.



Attribution-NonCommercial-NoDerivs 2.5

You are free:

• to copy, distribute, display, and perform the work

Under the following conditions:



 ${\bf Attribution.}\ {\bf You}\ {\bf must}\ {\bf attribute}\ {\bf the}\ {\bf work}\ {\bf in}\ {\bf the}\ {\bf manner}\ {\bf specified}\ {\bf by}$ the author or licensor.



Noncommercial. You may not use this work for commercial purposes.



No ${\bf Derivative\ Works}$. You may not alter, transform, or build upon this work.

- For any reuse or distribution, you must make clear to others the license terms of this work
- Any of these conditions can be waived if you get permission from the copyright holder.

Your fair use and other rights are in no way affected by the above.

This is a human-readable summary of the Legal Code (the full license).

Disclaimer 🗖

For the full text of this licence, please go to: http://creativecommons.org/licenses/by-nc-nd/2.5/

Development of a Tool for Building Shared Representations among Industrial Designers and Engineering Designers

Dr Eujin Pei, Dr R. I. Campbell, Dr M. A. Evans

Department of Design & Technology, Loughborough University,

Loughborough, United Kingdom

Abstract

Previous studies have demonstrated the importance of multi-disciplinary collaboration in New Product Development (NPD). As such, interactions between industrial designers and engineering designers have become increasingly important. This research project aims to build a shared understanding between the 2 disciplines during NPD. Following empirical research that revealed collaboration-related problem areas, as well as collecting data concerning the use of design representations, a card system was developed to provide information on the role and significance of design representations, leading to joint understanding, improved communication and creation of shared knowledge. When asked in the validation study if the system would foster collaboration, 68.2% of industrial designers and 63.2% of the engineering designers gave a good and excellent rating, indicating that the system could play a significant role towards the support of multi-disciplinary teamwork.

Keywords

collaboration, design representation, industrial design, engineering design, new product development, product design

Correspondence Details

Corresponding Author: Dr Mark Evans

Email address: M.A.Evans@lboro.ac.uk

Postal address: Department of Design & Technology

Loughborough University

Leicestershire LE11 3TU

United Kingdom

Dr Eujin Pei eujin.global@gmail.com

Dr R. I. Campbell R.I.Campbell@lboro.ac.uk

Dr M.A. Evans M.A. Evans@lboro.ac.uk

(Word count: 6545 words)

1. Introduction

1.1 Inter-disciplinary Collaboration during NPD

The complex and competitive nature of New Product Development (NPD) requires effective integration where members are drawn from different functions to integrate their expertise in conceptualising, developing and commercialising innovative products (Nemhard and Edmondson, 2009). Despite the importance of inter-disciplinary collaboration, few studies have examined the relationship between industrial design and engineering design.

For this study, industrial design encompasses the specification of product form including aesthetic judgement, semantics, user interface and social requirements (IDSA, 2006; Tovey, 1994; Flurscheim, 1983). In contrast, the term engineering design broadly encompasses mechanical, electrical and electronic engineering (Fielden, 1963), all of which employ science-based problem solving methods (Hurst, 1999). The aim of this research was to investigate problems associated with collaborative interaction between industrial designers and engineering designers. More specifically, it was proposed that having a standardised understanding in the use of design representations could potentially bridge the gap between both disciplines during the NDP process.

Disharmony during NPD may occur when team members approach a project differently. For instance, industrial designers adopt open-ended solutions, using instinct and trial-and-error to embody personal creativity for the design, whilst engineering designers viewed problems as precise and focus on functionality, specifications and performance (Kim and Philpott, 2006). In

terms of deliverables, engineering designers produce technical details for manufacture, based on quality, performance and cost (Flurscheim, 1983); while industrial designers deliver visual representations such as sketches and physical models. As a result, their dissimilar views and contrasting outcomes may create conflict (Persson, 2002).

Previous research has mainly focused on inter-disciplinary collaboration between engineering design and manufacturing (Beskow, 1997; Ulrich and Eppinger, 2000) and engineering with marketing (Griffin and Hauser, 1996; Shaw and Shaw, 1998). With the exception of Persson and Warell (2003) who identified methods and tools adopted by industrial designers and engineering designers, little research has been done to investigate the collaborative interaction between industrial designers and engineering designers. Persson and Warell (ibid) also reported that communication, social factors, personality differences and physical settings were key factors in influencing professional interaction. Persson (2005) went on to propose a collaborative workspace with a joint mindset by means of socialisation and mediating instruments to enhance collaboration. Other integrating mechanisms included social organisation (Kahn, 1996; Jassawalla and Sashittal, 1998), the use of intercommunal negotiation for better cross-functional teamwork (Brown and Duguid, 2001), having boundary-spanning and good teaming skills (Nemhard and Edmondson, 2009) and employing information and communication technology (Sproull and Kiesler, 1991; Toye, et al. 1993). Although other established methods such as Quality Function Deployment (QFD) and stagegate solutions are available (Ulrich and Eppinger, 2000), they are primarily designed for engineers. As such, very few integrating mechanisms are

available to enable, facilitate or improve collaboration been industrial designers and engineering designers.

Rothwell (1992) proposed that effective communication and cross-functional linkages are the primary factors for successful NPD. Communication can be made effective by transmitting symbols precisely; ensuring that the meaning is relayed correctly; receiving the intended meaning accurately; and reaching the audience through proper distribution (Chiu, 2002). right Although communication mechanisms do exist, researchers have observed that industrial designers and engineering designers still do not understand each other well (Fiske, 1998). For instance, identical words may not have the same meaning; or 2 different words can mean the same. Communication only becomes accurate and effective when the team develops a common vocabulary and by understanding the communicative codes and language within the message content (Persson and Warell, 2003). In addition, collaboration represents a higher level relationship when compared to communication that is limited to information exchange. Jassawalla and Sashittal (1998) stated that collaboration occurs when participants command equal interest, adopt transparency with high awareness, are mindful through integrated understanding, and perform with synergy. Collaboration allows members from different teams to divide work effectively, assist each other in maximising their joint contribution, and communicating accurate information such as through the use of precise design representations.

1.2 Standardising the Use of Design Representations

Design representations can be expressed through language, graphic or artefacts (Goel 1995; Goldschmidt, 1997) and they refer to models of the

object being symbolised (Palmer, 1987). During the early stages of NPD, representations such as sketches are quick and unstructured. As the design develops, more structured methods such as drawings and models appear. Leonard-Barton (1991) noted that the progression of having more information embedded within a representation enhances the understanding of the design. On a personal level, sketches contribute to visualisation, communication and information storage (Tang, 1991); for externalising ideas (Larkin and Simon, 1987); to assist in thinking (Ferguson, 1992; Suwa, Purcell and Gero, 1998); to verify decisions (Herbert, 1993); and to allow a range of interpretations for a design solution (Scrivener, 2000). Therefore, accurate and effective representations not only aid the design process at an individual level but also enhance collaboration within multi-disciplinary teams.

While many forms of design representations are available, sketching is seen as being central during the early stages of NPD. Goel (1995) sees sketches as the first step of the design process to externalise and visualise ideas at an individual level. At the next stage, representations are used to communicate with others and include presentation drawings and physical models. In the later stages, detailed technical drawings and prototypes are used for communicating details (Goldschmidt, 1992). In comparing the differences between representations favoured by the 2 disciplines, Veveris (1994) observed that engineering designers used models associated with engineering principles, functional mechanisms, production issues; whereas industrial designers applied representations related to appearance and usability. Despite the various attempts to classify representations by other authors (Tjalve et al. 1979; Ullman, 1988; Tovey, 1989; Evans, 1992; Ferguson, 1992; Goldschmidt, 1992; Veveris, 1994; Kavakli et al., 1998;

Cross, 1999; Do *et al.*, 2000; Otto and Wood, 2001; Cain, 2005; Olofsson and Sjölén 2005; Pavel 2005; Pipes 2007; Eissen and Steur 2008), they are largely incomplete or do not incorporate both industrial design and engineering design representations. In addition, researchers have noted problems with their use when symbolic elements become unclear. The more incomplete or vague a representation is, the greater and wider the perceptual interpretation space becomes. Despite such drawbacks, ambiguous representations allow for creativity and to generate open-ended solutions (Rodriguez 1992, Ehrlenspiel and Dylla 1993, Fish 1996). They enable seeing things in a different way that in turn produces new designs and allows flexibility in terms of design attributes.

Although ambiguous representations possess benefits, their ill-defined nature makes it difficult for engineering designers to comprehend and recognise how they work in relation to a product's technical parameters (Saddler, 2001). It may be difficult for a viewer other than the originator to understand the embodied meaning, context or scale (McGown, et al., 1998). The need for accurate and effective representations has been shown by Stacey and Eckert (2003) who provided an example of confusing sketches used in the knitwear industry. They cited that although the lines of a garment sketch were intended to describe the structure pattern, they could be misinterpreted as being stripes on the fabric.

In light of these theoretical arguments, the authors sought to conduct a series of investigations to first examine and confirm the potential barriers between the 2 disciplines occurring during NPD before developing a tool that would enhance understanding between the 2 disciplines.

2. Empirical Research

For this study, empirical research by means of quantitative and qualitative methods through semi-structured interviews and observations were used. The research was undertaken as a 2-stage process whereby the purpose of first part was to investigate and confirm the potential barriers between the 2 disciplines. The objective of the second part was to understand the application of design representations employed by industrial designers and engineering designers during NPD. The next section discusses the initial investigations that were carried out.

2.1 Initial Investigation

2.1.1 Interview Study

In the first part of the investigation, 10 weeks were spent interviewing experienced industrial designers and engineering designers from 17 industrial design consultancies specialising in consumer electronic products and from tertiary institutions. There was a good balance of large (more than 10 design staff), medium (between 6-10 design staff) and small industrial design consultancies (less than 5 designers) to allow a wider sampling and to obtain findings from a larger pool of respondents. Altogether, 61 interviews were conducted with an equal number of industrial design and engineering design managers, academics and practitioners. By interviewing the practitioners, it enabled first-hand accounts to be obtained; while interviewing project managers allowed the research to obtain a management perspective. Interviewing the educators enabled their views concerning this research to be heard from an academic viewpoint and whether the design representations were correctly identified. For consistency, the respondents had the same

interviewer and were subjected to same interview process with the same interview questions. In addition, the companies chosen had to be involved in NPD concerning consumer electronic products, employing both industrial designers and engineering designers during the design process.

A semi-structured interview was used as it would sufficiently explore issues yet providing flexibility within an organised format. It allowed respondents to fully describe their personal experiences relating to group interaction and inter-disciplinary collaboration. The interviews lasted a total of 45 hours which first introduced the aims of the study. The respondents were asked 10 questions in order to gather general demographic data about their educational background, work experience and the company structure (Table 1).

Background questions

- 1. Date of interview
- 2. Name of Interviewee
- 3. Position of respondent
- 4. Role & Responsibility
- 5. Educational background
- 6. Years of experience
- 7. Company name and type
- 8. Number of industrial designers / engineering designers in company
- 9. Number of industrial designers / engineering designers in the project
- 10. Describe the company structure and culture

Table 1: Background questions

Next, they were asked project-specific questions to identify factors that might have influenced collaborative work. It required an example of a project, relating experiences of group interaction, reasons for project successes and failures, as well as tools and methods used for the project (Table 2).

Research-specific questions

- 1. Describe a recent project undertaken
- 2. Describe the design approach and strategy adopted
- 3. What was the project deliverable?
- 4. What activities were involved?
- 5. Describe the tools and methods used
- 6. What design representation methods were used?
- 7. Did collaboration between industrial designers and engineering designers occur during the project?
- 8. Describe the quality of group interaction and teamwork
- 9. What factors might have influenced group work?
- 10. Were there any leadership or management issues?
- 11. Name the success or failure factors
- 12. What is your view of the final product?
- 13. Did you have any personal concerns working with the other discipline?
- 14. Suggest some improvements for future collaborative work

Table 2: Research-specific questions

The interviews identified 61 issues relating to inter-disciplinary collaboration which were encoded into a spreadsheet. A coding and clustering technique was then used to analyse the qualitative data and to help build theory (Miles and Huberman, 1994), as well as reducing data into themes and relationships (Strauss and Corbin, 1990). Such pattern coding has been similarly used by other researchers (Purcell *et al.*, 1996) in order to summarise findings into condensed categories. The 61 issues were re-organised with the most frequently occurring problems in a descending order as shown on the right column of the chart (Table 3). From the matrix, it became evident that 3 main problem areas were barriers to collaboration among industrial designers and engineering designers which are now discussed:

_																			Occurances	ony
	Issues	-	-	an	-		Inc.		1 2		9920		1221		100		1.2		ccur	Category
1	Having knowledge of the other field	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	8	A
2	Conflict in Principles	- 2		8 3	Н			-				7							6	A
3	Choosing the right tools and methods							100	Г			5- E						П	6	В
4	Communication Skills					7 - 0						(f ')			4 15				6	B
_	Use of Representation														- 83				6	В
6	Understanding each other								_										5	Α
7	Fixed Engineering Mindset	-	\vdash		\vdash			_									-		5	C
9	Individual Differences & Attitude Direction of Project Manager	-	\vdash		\vdash				Н	H	-			-				Н	5	A
-	Use of Rapid Prototype for Representation	+						0)	\vdash	Н						_		Н	4	8
	Designers and Engineers having Different Values								\vdash	Н									4	С
	Having a Common Goal																		3	A
	Get-together updates / Milestones											. (-)	-						3	B
	Informal Meetings																		3	А
	Understanding through Experience	2 8						14, 1							. 2		8		3	С
_	Translation from 2D to 3D	2 0						a :		1 .		83 0			: 3		9 3		3	В
	Company Emphasis on Design or Engineering	-				3 3		×				2		_					3	A
18	Educational Background of Individual			_		_	_	e	-	-		_	-	_	_	_			3	C
20	Western vs Asian approach of working Conflict in Interest	-	-	-		-			-	Н				-	-				2	C
		-	Н	-		-			\vdash	Н		-		-	-	-	2 0	\vdash	2	-
	Location of support members	+			Н			2000	\vdash	Н								Н	2	1
	Trust as a high-level understanding																		2	-
	Knowing the technical requirements		П		\vdash											П			2	-
25	Working towards Joint-Solutions																		2	-
_	Production & Manufacturing Limitations																		2	-
27	Company Culture											0 6							2	-
	Engineers do not Understand Role of Designers		_	_	_				_	Н	_	2 0			_			L	2	-2
29	Teamworking & Team Dynamics	-	-		\vdash	-			⊢	H	_	-	-	_	_	_	-	_	2	2
31	Having standard Computer files Limitations in Time leading to Poor Engineering	-			\vdash	-		H	\vdash	Н	_		-	-	-	-			2	-
32	Limitations to size of Electronic Components	-	\vdash	-	\vdash	-		-	\vdash	Н	-	-		_	-	-		_	2	Ė
33		_			\vdash				\vdash									Н	2	-
34	Marketing controls Budget affecting Design Quality											3000							2	-
	Language as a Probable Barrier																		2	2
	Knowing who is in charge / Roles & Responsibilities																		2	-
	Team Dynamics								_						_				1	-
	Being specific	-							_							<u> </u>			1	-
	Designers getting carried away & fall behind time Using standard codes	+	H	9 %					_			(A)	- 10	_	-	-		H	1	*
41	Having Multi-cultural Teams			-		-		-	\vdash		_	200		-		Н	2 15	\vdash	1	-
42	Having Multi-disciplinary Teams	-				-		-	\vdash	Н		37 5	-	-	2 03	-		\vdash	1	
	Fostering Team-spirit	+						1				G: 5			1			Н	1	-
	Complexity of Project			-				EX :-										Т	1	-
45	Marketing Understand Designers Working			8		8		8 8				38 S			: 8		K 5		1	*
	Designers Understand Manufacturing Constrains			- 13				8				9 1							1	
	Testing, Reviewing, Changing, Refining																		1	-
	Marketing should be faster to React											7							1	-
	Engineering Issues affecting Design Aesthetics	-	\vdash							Н								\vdash	1	-
50 51	Client Changes affecting Design Process Designers not understanding Marketing Viewpoint	65 0		2 1				, y		\vdash		22 8					3 3		1	-
52	Trimming Cost affecting Design Aesthetics		\vdash		\vdash			0. 9	\vdash	Н		(Z)							1	-
53				8								9							1	-
54	How Company & Organization Values each field																		1	-
55	Software Incompetence											3							1	-
	Proper justification for each decision to Understand											oi s							1	-
57	Using Technology for Enhanced Communication			3-6						-		Ţ-,							1	
58	Changes in Design due to Safety Requirements			-				ç v				.(-)			-		,		1	
-	Client Involvement in Design Stage			-				Pr. 1							- 1				1	
60	Education as a means to close gap btw Eng & Des		\vdash					8				9 9		_			8		1	
61	Difference between a Designer and Artist											45-7							1	-

Table 3: Matrix of 61 problem categories tabulated from interviews

The 3 key problem areas identified from the interviews were:

1. Problem Category A - Conflicts in values and principles:

The first category is concerned with differences in values and working principles. It was found that engineering designers worked systematically based on quantified solutions. In contrast, industrial designers favoured an open-ended approach and used open solutions.

2. Problem Category B - Differences in design representation

The investigations noted the use of different representation methods. Engineering designers often used technical terms and facts that included calculations, technical information and specifications; whereas industrial designers used freehand sketches and drawings to communicate ideas.

3. Problem Category C - Education differences

It was found that engineering designers were taught to employ systematic problem solving and to justify solutions with facts; whereas industrial designers were taught to solve problems intuitively, rarely relying on quantified data. Due to differences in their educational background, both professions had different specialisations, approaches and expectations.

2.1.2 Observation Study

Following the interviews, observations were conducted to obtain detailed information by being close to the field of study. The use of observations is advantageous as it allows the researcher to examine interaction taking place between engineering designers and industrial designers in their natural working environment and to record potential barriers that might have occurred. The observations took place throughout a commercial project over 2

consecutive weeks and involved the design of a consumer product with an industrial designer and an engineering designer working together. They were conducted at a design consultancy within its normal work environment and took place from the beginning of the project (design briefing) to the embodiment stage (3D CAD modelling). As video and voice recordings were not allowed due to project confidentiality, note taking was used as it allowed conversations to be recorded and enabled first-hand accounts of the interaction to be documented. Reliability was achieved by cross-checking records (done during breaks to minimise work disruption). Other documents, including reports, specification lists and physical or virtual artefacts provided a better understanding of the activities. To obtain a holistic view of issues within the project, the observations included the project leader, industrial designer and engineering designer.

From the observations, it was found that formal and informal meetings were extremely valuable in enhancing collaboration. Co-location was an important factor since both industrial designers and engineering designers were closely located and had greater interaction as compared to other departments who were on a different floor in the building. The observations recorded different working approaches. Engineering designers focused on technical properties and cost whereas industrial designers emphasised on form and expression. In addition, the lack of a common language in design representations caused miscommunication where certain words were interpreted wrongly. For example, the engineers had intended simple sketches yet the designers interpreted their task as creating renderings, which the engineers regarded as time-consuming and unnecessary at that stage. The generic term 'sketch' did

not fully describe the requirements and deliverables for both parties. The observation also found that the loosely rendered sketches from the industrial designers were imprecise. For example, the elliptical shapes drawn in perspective became hard to translate into a 3D solid in CAD.

2.1.3 Outcome of Interviews & Observations

The interview study had identified 3 problem areas in collaborative design as discussed in section 2.1.1. They were: A) Conflicts in values and principles; B) Differences in design representation and C) Education differences. In addition, the observations revealed the significance of formal and informal meetings, the importance of co-located members and issue of having different interpretations of design representation terminology. Of these, the problem area of design representations was found to be highly significant in both interviews and observations and a decision was made to conduct a further investigation.

2.2 Investigating the Use of Design Representations

The aim of the second stage was to understand the application of design representations employed by industrial designers and engineering designers during NPD. By undertaking an extensive review of the literature, a total of 35 design representations, as well as key design and technical information employed by industrial designers and engineering designers during NPD were mapped out (Table 4).

Sketches	Idea Sketch Study Sketch Referential Sketch Memory Sketch Coded Sketch	Information Sketch Renderings Inspiration Sketch Prescriptive Sketch
Drawings	Concept Drawings Presentation Drawings Scenario & Storyboard Diagram Single-View Drawing	Multi-View Drawing General Arrangement Drawing Technical Drawing Technical Illustration
Models	3D Sketch Model Design Development Model Appearance Model Functional Concept Model	Concept of Operation Model Production Concept Model Assembly Concept Model Service Concept Model
Prototypes	Appearance Prototype Alpha Prototype Beta Prototype Pre-Production Prototype Experimental Prototype	System Prototype Final Hardware Prototype Tooling Prototype Off-Tool Prototype

Design Information	Design Intent Form & Detail Visual Character Usability and Operation Scenario of Use	Single Views Multi Views Areas of Concern Texture & Surface Finish Colour
Technical Information	Dimensions Construction Assembly Components	Mechanism Part & Section Profile Lines Exploded Views Material

Table 4: Types of Representations and Design & Technical Information

The design representations were classified as 4 types of representations (sketches, drawings, models and prototypes) and 2 types of information (design information and technical information) (Pei, et al., 2009). The area of design information is concerned with visualisation, aesthetics and usability of the product; while technical information concerned issues such as assembly, mechanism and materials (ibid). This classification was subjected to a series of face-to-face interviews to validate whether the 35 representations and 2 types of information were recognised by both disciplines. The interview structure and process was identical to that of the first stage of interviews and

involved 27 participants of which there were 13 industrial designers, 10 engineering designers and 4 project managers. Of the 27 respondents, 6 were academics who were all former industrial design or engineering design practitioners with at least 3 years of work experience.

In the interviews, the first section sought to gather demographic data from the respondents about their background, job scope and projects undertaken. The second section (Figure 1) was structured in the form of a matrix that required the respondent to indicate which design representations were employed during each of the 4 stages of the design process. The purpose was to validate whether the 35 representations were recognised and if they were commonly used by industrial designers and engineering designers at the concept design, concept development, embodiment design and detail design stages of NPD. The matrix shows rows of design representations; while the columns were for the 4 design stages. Recalling a project in mind as an example, the respondents had to decide for each design representation, which stage of the design process it was used in and then tick the respective box. This took approximately 25 minutes to complete.

The interview results are shown in a quantitative format in percentage showing the use of design representations employed during the design process (Table 5). These figures were further translated into bar charts to allow visual comparisons to be made (Table 6).

					DE	SIGN	STA	GE
Name: 					CONCEPT DESIGN	CONCEPT DEVELOPMENT	EMBODIMENT DESIGN	DETAIL DESIGN
				Idea Sketch				
			nal	Study Sketch	1			
			Personal Sketches	Referential Sketch				
The Matrix:		ES		Memory Sketch				
		SKETCHES	pe g	Information Sketch				
This matrix aims to understand which design		SKE	Shared	Coded Sketch				
representations are used		3/9		Inspiration Sketch				
during the design stages			Persuasive Sketches	Renderings				
of the product development process.			and	Prescriptive Sketch	1			
			- 40	Concept Drawings	1			\vdash
			Industrial Design Drawings	Presentation Drawings				
			Pa o Pa	Scenarios & Storyboards	1			
				General Arrangement Drawings				
		DRAWINGS	1	Technical Drawings				T
	z	ZAW.	esign	Technical Illustrations				T
In admiration as	읃	ä	Engineering Design Drawings	Single-view Drawings				
Instructions:	¥		ginee	Multi-view Drawings				
The matrix is divided into	SE		<u> </u>	Tape Drawings				
4 rows of design stages and classified into	RE		2	Diagrams				\vdash
columns of design	G.	\vdash		Appearance Models	1			
representations.	SIGN REPRESENTATION		Industrial Design Models	Design Development Models	1			
By going through each	86		E D M	Foam Models	+			\vdash
stage at a time, tick the	DE	l "		Functional Concept Models	1			
appropriate design		MODELS	5	Production Concept Models	1			
representation if you have used it during that		o M	Engineering Design Models	Assembly Concept Models	+			\vdash
particular stage.			eering	Concept-of-Operation Models	\vdash			\vdash
			Engin	Service Concept Models				\vdash
			9	Environment Concept Models	1			\vdash
			2	Appearance Prototype				
			Industrial Design Prototypes	Alpha Prototype	+			
			strial (Beta Prototype				\vdash
		SES	Indu	Pre-Production Prototype	+			\vdash
		PROTOTYPES		Experimental Prototype	1			\vdash
		ROT	esign	System Prototype				\vdash
		<u> </u>	ring Di	Final Hardware Prototype				\vdash
			Engineering Design Prototypes	Tooling Prototype				\vdash
			Ē	Off-Tool Prototype	+			\vdash

Figure 1: Matching appropriate representations to the stage of product development

		In Perce	ntage of	18 Inter	viewees		In Perce	entage of	f 9 Interv	iewees
		% of	Industri	ial Design	ners		% of I	Engineer	ing Desig	gners
	in %	Concept Design	Concept Development	Embodiment Design	Detail Design		Concept Design	Concept Development	Embodiment Design	Detail Design
1	ldea Sketch	94.4	27.7	16.6	16.6		77.7	11.1	0	0
2	Study Sketch	72.2	33.3	16.6	16.6		88.8	0	0	0
3	Referential Sketch	66.6	11.1	0	0		11.1	0	0	0
4	Memory Sketch	72.2	16.6	5.5	5.5	_	0	0	0	0
5	Information Sketch	55.5	72.2	11.1	5.5	_	11.1	11.1	11.1	0
6	Coded Sketch	33.3	27.7	11.1	0		11.1	0	0	0
7	Inspiration Sketch	5.5	11.1	5.5	0		0	0	0	0
8	Renderings	11.1	44.4	5.5	5.5		0	11.1	0	0
9	Prescriptive Sketch	11.1	61.1	33.3	33.3		44.4	66.6	11.1	0
10	Concept Drawings	38.8	83.3	27.7	22.2		11.1	11.1	0	0
11	Presentation Drawings	16.6	55.5	22.2	22.2		0	11.1	11.1	0
12	Scenarios & Storyboards	61.1	50	0	0		11.1	11.1	0	0
13	General Arrangement Drawings	0	16.6	22.2	27.7		0	22.2	11.1	0
14	Technical Drawings	0	5.5	22.2	16.6		11.1	0	55.5	22.2
15	Technical Illustrations	0	0	11.1	16.6	_	11.1	0	0	0
16	Single-View Drawings	16.6	33.3	22.2	16.6		0	0	0	0
17	Multi-View Drawings	11.1	22.2	55.5	38.8		44.4	77.7	22.2	22.2
18	Tape Drawings	0	0	0	0		0	0	0	0
19	Diagrams	11.1	22.2	5.5	5.5		22.2	0	0	0
20	Appearance Models	0	16.6	55.5	44.4		2	0	33.3	11.1
21	Design Development Models	27.7	55.5	5.5	0		1	0	11.1	0
22	Foam Models	22.2	61.1	27.7	5.5		0	11.1	22.2	0
23	Functional Concept Models	16.6	27.7	27.7	16.6		44.4	55.5	22.2	0
24	Production Concept Models	0	0	0	0		0	0	0	22.2
25	Assembly Concept Models	0	11.1	0	5.5		0	0	11.1	11.1
26	Concept of Operation Models	5.5	16.6	5.5	5.5		11.1	11.1	11.1	0
27	Service Concept Models	0	5.5	5.5	0		0	0	0	11.1
28	Environment Concept Models	0	0	0	0		0	0	0	0
29	Appearance Prototype	5.5	5.5	27.7	61.1		0	0	22.2	33.3
30	Alpha Prototype	0	0	11.1	11.1		0	0	11.1	11.1
31	Beta Prototype	0	0	11.1	5.5		0	0	11.1	0
32	Pre-Production Prototype	0	0	5.5	22.2		0	0	0	22.2
33	Experimental Prototype	0	5.5	5.5	5.5		33.3	33.3	22.2	11.1
34	System Prototype	0	0	0	5.5		0	11.1	22.2	22.2
35	Final Hardware Prototype	0	0	0	5.5		0	0	11.1	33.3
36	Tooling Prototype	0	0	5.5	16.6		0	0	11.1	22.2
37	Off-Tool Prototype	0	0	0	5.5		0	0	0	22.2

Table 5: Results from respondents showing use of design representations used during the 4 stages of the design process in percentage

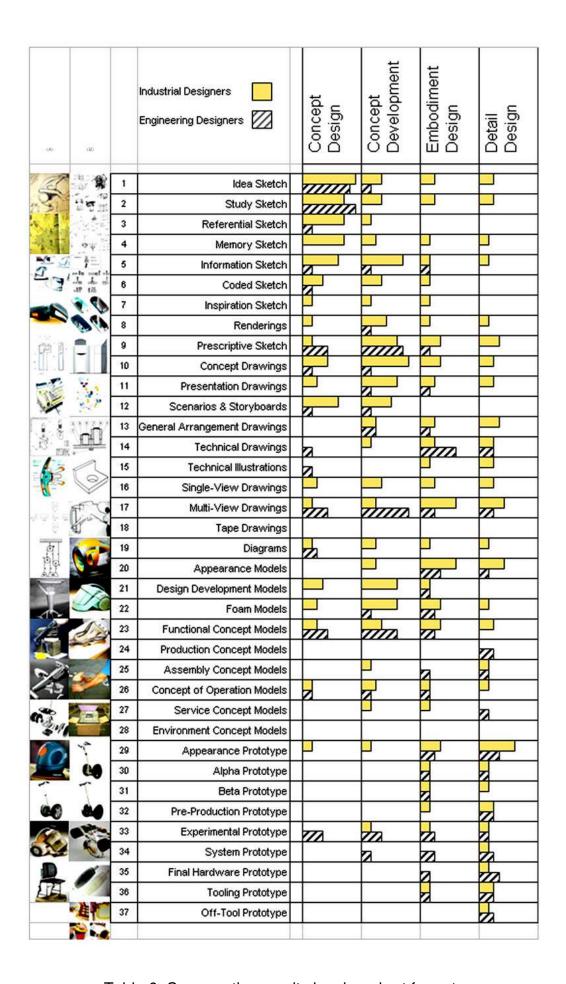


Table 6: Comparative results in a bar chart format

From the results, it can be observed that most design representations were employed by both disciplines, although some were more commonly used by industrial designers and others more commonly used by engineering designers. For example, inspiration sketches were used by industrial designers and were never employed by engineering designers. Similarly, experimental prototypes were more commonly used by engineering designers as compared to industrial designers. A pattern can also be observed whereby the concept design and concept development stages show that most design representations to be used much more by industrial designers than engineering designers. In addition, sketches and drawings were used more commonly by industrial designers throughout the 4 design stages, while the engineering designers only sketched and drew mainly at the concept design and concept development stages. Both industrial designers and engineering designers used models throughout the design process. On the other hand, prototypes were seldom used by the industrial designers and were only employed by engineering designers at the embodiment design and detail design stages.

The interview results are in line with those of Yu and Song, et al. (1998) and Buxton (2007) who established that less structured forms of representations such as sketches and models are more commonly used during the concept design stage, while detailed technical drawings and prototypes were more commonly used during the detail design stages of new product development. Similarly, a separate survey also found that industrial designers used sketches more commonly in the task clarification and conceptual stages of design, while simple and complex models were shown to be more frequently used during the later stages of design (Romer, et al., 2001). It was also found

that results from other researchers investigating the characteristics of some design representations were in line with the interview findings. For instance, McGown, et al. (1998) showed that perspective, isometric and axonometric drawings were commonly used by industrial designers in the concept development stages; while in terms of models, Pipes (2007) described that physical models were used by industrial designers commonly in the embodiment stages; while appearance models and appearance prototypes would be more commonly used during the specification stages of the design process (Evans, 2002).

For the last part of the interview, the respondents were asked to complete a matrix (Figure 2) that aimed to investigate the type of design or technical information present within a design representation.

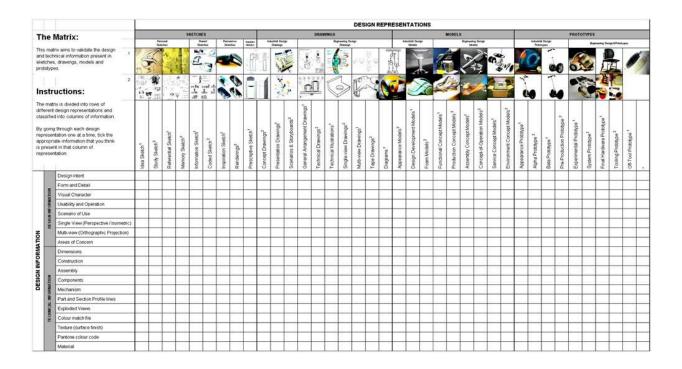


Figure 2: Matching the level of information present in a design representation

In the matrix, the rows contained design and technical information, such as design intent; while the columns comprised of design representations (sketches, drawings, models and prototypes). Working on a representation at a time, each respondent had to identify the design or technical information that might be present within the representation. This took approximately 35 minutes to complete. To allow the respondents to better recognise a representation, a thumbnail image was inserted above each column. All respondents had access to a booklet that provided larger visuals with a detailed description of each representation. The interview results are tabulated as a percentage showing industrial designers (Figure 3) or engineering designers (Figure 4) recognising the level of a design or technical information present within a particular representation.

	_	_	_	- 23	(A)(5)(26)(0)(5	S	_	_	_	_	_	_		AUSSI	0.9500	_	_	_		_	_	-		HIVE WAS	20	_	_	_	_	_	_	- 3	200000	W000000		_	_
		Per Per	onal	5	KETCHE	red	Person	nive .	Name:		ustrial Desig	ion .		DRAW	mitage .	nearing Dec	rian				luctrial Dec	ian	. 2	MODELS		a Destion			Щ,	Industrial	el Design	- 2	PROTOT	approxime.			
	792.5	She	total total	S-141	Sket Ma_/4	shes	Persua Skets	hes	Setter	-	Drawings	_	phones		-	Drawings	*		200	77	Models	*		A .	Engineering Milid		- 1	_		Protect)941 		_	Engine	eering Desig	ADPONUEYS	jes:
1	5		.0	1		A K	•	0	:E				200	- 60 II		Sol .	40		P	10			7		2		W.	10		2		0	6	2		I	
2	141	* T		\$	oring or	coef of	4	1		1	Y	2		ď		3		66	9				2				-	F	0	•	-	•	O. N.		重		
in %	Idea Sketch ¹	Study Sketch ²	Referential Sketch ¹	Memory Sketch ²	Information Sketch*	Coded Sketch ²	Inspiration Sketch*	Renderings ²	Prescriptive Sketch ¹	Concept Drawings ²	Presentation Drawings*	Scenarios & Storyboards ²	General Arrangement Drawings*	Technical Drawings ²	Technical Illustrations ¹	Single-view Drawings ²	Multi-view Drawings ¹	Tape Drawings ²	Diagrams	Appearance Models ²	Design Development Models 1	Foam Models ²	Functional Concept Models ¹	Production Concept Models 2	Assembly Concept Models ¹	Concept-of-Operation Models ²	Service Concept Models1	Environment Concept Models ²	Appearance Prototype ¹	Alpha Prototype 2	Beta Prototype 1	Pre-Production Prototype 2	Experimental Prototype 1	System Prototype ²	Final Hardware Prototype 1	Tooling Prototype 2	Off-Tool Prototype 1
Design intent	94.4	38.8	27.7	33.3	61.1		11.1	16.6	-	38.8	11.1					11.1	5.5			22.2	16.6	16.6	5.5		1/2	5.5		-	50	5.5		11.1					
Form and Detail	66.6	50	22.2	38.8	88.8		11,1	33.3	38.8	77.7	33.3			5.5	11.1	16.6	16.6			38.8	22.2	38.8							38.8	5.5		5.5	П			5.5	
Visual Character	77.7	38.8	50	38.8	66.6		22.2	61.1	5.5	72.2	22.2	5.5								38.8	11,1	16.6	5.5						58	11,1	5.5	5.5					
Usability and Operation	22.2	11.1	11.1	5.5	55.5	22.2				11.1	5.5	55.5							16.6	5.5	16.6	27.7	38.8			16.6			11.1	11.1	11.1	5.5	5.5				
Scenario of Use	11.1		11.1	313	22.2			5.5		5.5	5.5	77.7								5.5	5.5	11.1	11.1			5.5			5.5								
Single View (Perspective / Isometric)	16.6	11.1	П		27.7		5.5	11.1	5.5		33.3				5.5	44.4																					
Multi-view (Orthographic Projection)		11.1							33.3	55.5	27.7			11.1			66.6																				
Areas of Concern	11.1	55.5	11.1	22.2	27.7	5.5			5.5			11.1					5.5		5.5	5.5	33.3	33.3	5.5														Г
Dimensions		5.5			22.2				72.2	66.6	16.6		27.7	33.3			44.4			33.3	11.1	16.6	11.1						44.4	5.5	31.1	31.1	5.5			5.5	5.5
Construction		5.5			16.6				27.7		27.7		27.7	22.2	16.6		22.2			11.1	16.6	11,1	16.6		5.5				33.3	16.6	16.6	16.6	5.5			5.5	5.5
Assembly	5.5	11.1		5.5	16.6				16.6		27.7		22.2	22.2	16.6		16.6			5.5	11.1	11.1	16.6	31.1	11.1				22.2	11.1	11.1	31.1		5.5	5.5	31.1	5.5
Components		38.8	5.5	5.5	44.4	27.7		5.5	50	50	33.3		22.2	27.7	16.6		22.2		16.6	27.7	33.3	22.2	38.8		11.1	11.1	5.5		44.4	11.1	11.1	11.1	5.5	5.5	5.5	16.6	5.5
Mechanism	5.5	33.3		5.5	38.8	11.1			22.2	5.5	11.1			11.1	5.5		5.5		5.5	5.5	22.2	11.1	11.1			5.5	5.5		38.8	5.5	11.1	31.1	5.5	5.5	5.5	313	5.5
Part and Section Profile lines													5.5	5.5						5.5	5.5	5.5							11.1								Г
Exploded Views		5.5			5.5				31.1		44.4		5.5																								Г
Colour match file			П		5.5			5.5		5.5			5.5													П			5.5	5.5	5.5	5.5				5.5	5.5
Texture (surface finish)	5.5			5.5	72.2		22.2	65.5		88.8	11.1									50	5.5								61.1	11.1	11.1	31.1				313	5.5
Partone colour code					61.1		16.6	44.4		72.2	5.5									38.8	5.5								50	5.5	5.5	5.5				5.5	Г
Material	5.5	5.5		5.5	77.7		22.2	55.5	5.5	72.2	11.1			22.2						44.4	55								50	5.5	5.5	5.5			5.5	5.5	г

Figure 3: Level of Design Information present in Design Representations used by Industrial Designers (in percentage)

		Le	ve	Ιo	f C)es	ig	n Ir	ıfo	rm	ati	ion	р	es	en	t iı	n D)es	igı	n R	ep	re	se	nta	tic	ns	us	sed	b	y E	nç	gin	ee	rin	g [De	sig	ne
				-	s	KETCH	ES		-						DRAW	INGS								-	MODELS									ROTOT	YPES			
_			Pers	onal .		20	and tribet	Perso	stive	Kater Setie:	hd	ustrial Desig Drawings	r	_		tho	nearing De Drawings	sign			ind	ustrial Desi	ign.			Dignesting Milds	Dasign				Industrial France	Design		000000000	Byre	ering Desig	обрики	ei
	919	5		1		2		4	0					26	- CO		Jan	40		0.0	0-0	V	F	3		Z	7	C.	40		2		0	6	2			
	2	Day Day	第2日		*温	- in	oost ob	1			1		?		Ü		3		66	S				Z			Ø.	20		0	•		•			進		
	in %	Idea Sketch*	Study Sketch ²	Referential Sketch*	Memory Sketch ²	Information Sketch ¹	Coded Sketch ²	Inspiration Sketch	Renderings ²	Prescriptive Sketch*	Concept Drawings ²	Presentation Drawings*	Scenarios & Storyboards ²	General Arrangement Drawings ¹	Technical Drawings ²	Technical Illustrations*	Single-view Drawings ²	Multi-view Drawings*	Tape Drawings ²	Diagrams 1	Appearance Models ²	Design Development Models	Foam Models ²	Functional Concept Models1	Production Concept Models ²	Assembly Concept Models1	Concept-of-Operation Models ²	Service Concept Models1	Environment Concept Models ²	Appearance Prototype ¹	Alpha Prototype 2	Beta Prototype 1	Pre-Production Prototype 3	Experimental Prototype 1	System Prototype ²	Final Hardware Prototype 1	Tooling Prototype 2	Off-Tool Prototype 1
	Design intent	22.2	22.2	11.1		11.1	-	_												11.1	11.1	11.1	11.1	11.1						33.3								
	Form and Detail	33.3	22.2			11.1				11.1								11.1		П	22.2	11.1	11.1							33.3								11.1
ORMATION	Visual Character	22.2				11.1															33.3									33.3								
1	Usability and Operation	33.3	11.1		П	11.1					11.1		22.2							11.1		11.1	22.2	77.7			33.3		\neg					22.2				
	Scenario of Use	11.1	11.1			11.1					11.1		22.2											22.2			22.2											
3	Single View (Perspective / Isometric)																																					
,	Multi-view (Orthographic Projection)		11.1							313	11.1			11.1	11.1			44.4																				
7	Areas of Concern	11.1	88.8		П															11.1		11.1	33.3	11.1							11.1			11.1	11.1	22.2	11.1	
1	Dimensions		44.4			11.1				77.7	22.2			33.3	66.6			88.88			11.1			11.1	31.1					33.3	22.2	11.1	22.2	11,1	11.1	33.3	22.2	22.2
(Construction	22.2	66.6			11.1	11.1			33.3	11.1			33.3	86.6			55.5					11.1	11.1	22.2	11.1				33.3	11.1	11.1	11.1	22.2	11,1	22.2	11.1	11.1
1	Assembly	22.2	66.6			11.1	11.1			44.4				33.3	44.4	11.1		55.5			22.2	11.1	11,1	22.2	22.2	11.1		11.1		33.3	11.1	11.1	11,1	22.2	11.1	22.2	11.1	11.1
	Components	44.4	66.6	11.1		33.3	11.1			66.6	22.2			33.3	55.5	11.1		66.6			22.2	11.1	22.2	77.7			22.2			44.4	22.2	11.1	22.2	44.4	33.3	33.3	22.2	22.2
,	Mechanism	44.4	66.6			33.3	11.1			44.4				22.2	44.4			22.2			31.3			77.7			22.2			33.3	11.1	11.3	11,1	44.4	33.3	33.3	22.2	22.2
F	Part and Section Profile lines														11.1															11.1								
8	Exploded Views														11.1	11.1																						
(Colour match file																													\neg								
1	Fexture (surface finish)					33.3					22.2					11.1					33.3									44.4	22.2	11.1	22.2			31.3	11.1	22.2
F	Pantone colour code					33.3					22.2					11.1					33.3							\neg		44.4	22.2	11.1	22.2			11.1	11.1	22.2
A,	Vaterial		11.1	-		33.3		-		31.1	22.2			11.1	33.3	11.1					33.3									44.4	22.2	11.1	22.2			11.1	11.1	22.2

Figure 4: Level of Design Information present in Design Representations used by Engineering Designers (in percentage)

From the analysis, a pattern was observed where in general, sketches, drawings and models provided a good balance of design and technical information, while prototypes were mainly concerned with technical information. It was also found that design information is more commonly used by industrial designers as compared to engineering designers. Conversely, technical information has been more commonly used by engineering designers as compared to industrial designers, as expected.

In summary, the interviews determined the various design representations employed by industrial designers and engineering designers during the 4 phases of NPD, showing that some were more commonly employed by industrial designers or engineering designers. The findings revealed

differences in the level of design and technical information present within a visual design representation when employed by both disciplines. It was found that sketches, drawings and models provided design and technical information, while prototypes were mainly concerned with technical information. It was also observed that design information was more associated with industrial designers as compared to engineering designers who were seen to be more concerned with technical information. With these in mind, the following section discusses the tool development, justifying its need and covering issues relevant to the formulation of the design aid.

4. Tool Development

The purpose of the tool is to provide a comprehensive resource that would support and enhance understanding between industrial designers and engineering designers. Although collaboration mechanisms such as colocation, personnel movement, informal social systems and organisational structures can be employed (Griffin and Hauser, 1996), they require physical changes to the environment. The proposed design tool would not require modifications to the workspace and would be a stand-alone product.

For the development of the design tool, several factors were used to determine the tool specification. According to Saddler (2001), the industrial design profession has representations that are ill-defined, imprecise and lack in communicative power. In addition, communication could be improved by having a common understanding of shared definitions (Matthew, 1997). Therefore, the primary feature of the design tool serves to clarify the terminology of design representations and to act as an effective means of communicating these shared definitions.

Taking a step further, the design aid should provide a common vocabulary through the use of standardised communicative codes and language (Persson and Warell, 2003). Translating this as a design specification, the tool should be able to communicate the meanings accurately by reaching the audience through a suitable medium (Chiu, 2002). To meet this requirement, several physical formats were developed, including matrices, flowcharts, wheel diagrams and Rolodex systems. Digital formats were also considered but this meant that users would need to have constant access to a computer and it would be impractical to carry a laptop at all times. While personal digital assistants, tablets or mobile phones presented more portable options, the dissimilar operating systems, short battery life and small screens would create additional problems for information retrieval. In addition, Wi-Fi or internet-based tools would be limited to subscribers or connectivity.


Following an appraisal by the authors, the card format was selected because its tangible format and ease of portability would encourage immediate interaction between users. The cards allowed instant access to information and could be shared and distributed quickly among members, thereby facilitating socialisation and shared knowledge. It is envisaged that the cards would be used by industrial design and engineering design practitioners as a portable tool that could be carried around as a reference guide or kept as an office resource or a learning tool.


To facilitate and enhance access to the information, a total of 114 cards were colour-coded, with the red pack (57 cards) giving information on industrial design practice and the blue pack (57 cards) on engineering design practice. The 57 cards of each pack consists of 4 cards describing the 4 design stages

of NPD (Set 1), 10 design information cards and 8 technical information cards (Set 2), and 35 design representations (Set 3) which are now discussed.

Set 1: Design Stages

This set consists of 4 cards from each coloured pack (red for industrial designers, blue for engineering designers) that describe the 4 design stages of NPD (Figure 5).

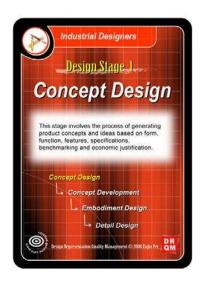

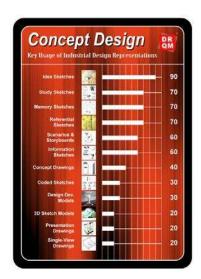




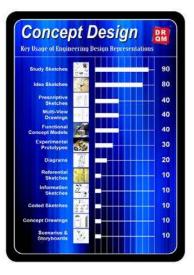


Figure 5: Set 1 – Key stages of the NPD process

The front face provides the definition of a design stage which was derived from the literature review. The bar graphs and numbers on the rear show the popularity of use by practitioners for a particular design representation during each stage of NPD. The popularity is given as a percentage that was generated from responses by the practitioners interviewed during the second empirical research.

Set 2: Design & Technical Information

The second set consists of 10 cards showing design information and 8 cards showing technical information used by industrial designers and engineering designers (Figure 6).

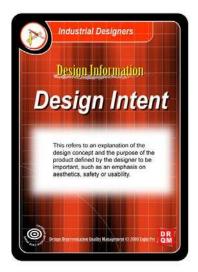

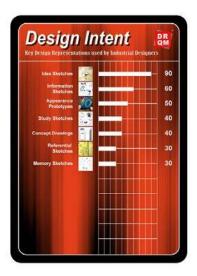




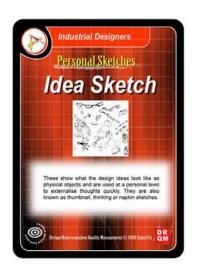


Figure 6: Set 2 – Key design and technical information

The front face identifies if the card is for design or technical information. The rear illustrates the popularity of use for design representations via bar graphs and numbers obtained from the second round of empirical research. The categorisation of design information is based on data relating to industrial design decision making, such as form and detail, visual character and colour. Technical information includes data on features such as mechanisms, assembly and construction.

Set 3: Design Representations

The third set (Figure 7) represents key design representations used by industrial designers and engineering designers during NPD.








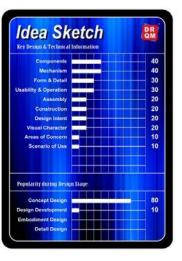


Figure 7: Set 3 – Design Representations

The front face provides the name, definition and a visual example of the representation and the rear shows the associated design and technical information. Details on the popularity of use during each design stage is also provided.

There is no pre-defined way of using the card system. It is a resource that provides information on the nature of the design process and relevant information required. It does this from both an industrial design and engineering design perspective, providing data on the different ways that each group employs design representations during NPD. To illustrate an application, a scenario might involve an engineering designer wanting to know the most effective design representation that the industrial designer could supply / produce to communicate a product proposal's 'form and detail'. By selecting the red industrial design pack and looking at the form and detail card (Figure 8) the popularity of use on the reverse face indicates that the most effective representation would be the information sketch, as 90% of the industrial designers surveyed used this to communicate this attribute.

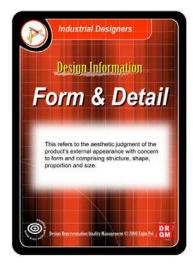


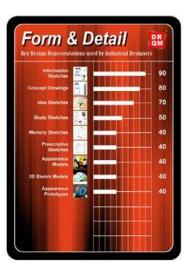


Figure 8: Form and detail card from the industrial design set


5. Appraisal and Validation

5.1 Pilot Study

Having defined the draft design aid, the appraisal process commenced with a pilot study that involved interviews with 10 design practitioners. Feedback indicated that a numerical referencing system would support faster access to information and a larger card format (ISO B8 size of 62×88 mm) would improve readability. Other improvements include a simplified layout with less text and larger images. The background was also redesigned for less visual clutter. The revised design is shown in Figure 9.

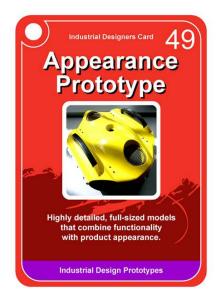



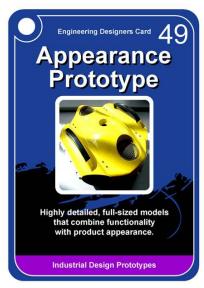

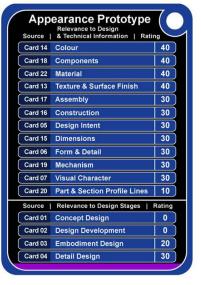


Figure 9: Improved version of the cards after pilot appraisal

5.2 Validation

Having integrated several improvements, the validation was undertaken through a 3-phase strategy. The first phase utilised semi-structured interviews asking final year industrial design and engineering design undergraduates who had worked together on an industrial project. The second phase involved the same questions with experienced practitioners to obtain feedback on the format and the system. The third phase involved the use of observations to study how the cards would be used during the design of a consumer product at an industrial design consultancy. A design diary was developed to record end-of-the-day thoughts and activities, as well as details of where the cards were used and why they were used.

The first phase of the validation involved 4 industrial design and 14 engineering design final year undergraduates who had worked together for an academic semester (4 months) on an industry-based project. Due to the academic curriculum, it was not feasible to introduce a new design exercise. A decision was made to conduct an interview to find whether the tool could have improved collaboration. As the project was organised by the engineering department, there were more engineering design student participants. The cards were first introduced to the students and they were given an hour to familiarise with the design tool. Subsequently, the industrial design and engineering design students had the opportunity to regroup and discuss if their collaboration might have been better enhanced through the use of the cards.

The interviews comprised of 10 questions relating to the content and format of the design tool as shown in Table 7. The respondents could either agree or disagree according to a 5-point Likert scale: excellent, good, neutral, poor, very poor (Gadsden, 2006). The average Likert scores were tabulated into a matrix and then represented as pie-charts. This method of calculating average scores has been considered to be appropriate when dealing with Likert scales (Engelbrektsson and Soderman, 2004). To improve reliability, the results were rechecked with the respondents after each session.

Research-specific questions

- 1. How do you generally feel about the card format?
- 2. How do you feel about the physical size of the cards?
- 3. How would you rate the clarity and understandability of the textual content and pictorial data?
- 4. How would you rate the ability of the cards to provide you with an enhanced understanding and clearer definition of design representations?
- 5. How do you feel about the effectiveness of the cards to provide a common understanding of design representations between IDs and EDs?
- 6. How would you rate the use of bar charts that show key design and technical information?
- 7. How would you rate the ability of the cards to help you identify the representation most commonly used during different stages of the design process?
- 8. How do you feel about the ability of the cards to foster enhanced collaboration between IDs and EDs?
- 9. How do you feel about the ability of the cards to improve design collaboration between yourself and other industrial designers / engineering designers?
- 10. Would you have any suggestions or additional feedback to help us improve the cards?

Table 7: Research-specific questions

All industrial design students (100%) and 92.9% of engineering design students gave a good and excellent feedback regarding the physical format of the cards. All industrial design students and 85.5% of engineering design students felt that the tool would provide an enhanced understanding of design representations. 66.7% of industrial design students and 64.3% of the engineering design students felt that the cards would be effective in creating common understanding of design representations. While some students found

it hard to search for the right cards, it was argued that if a systematic approach was followed, the required cards could be quickly identified. Most importantly, all industrial design students and 85.8% of engineering design students felt that the tool would have helped to foster enhanced collaboration.

The second part of the interviews involved the same 10 questions with 43 practitioners from 15 organisations with an average professional experience of 10 years. Reliability was maximised by surveying a mix of industrial design and engineering design managers and non-managers from small and large multi-national design consultancies. When asked about the physical format, 86.4% of industrial designers and 89.5% of engineering designers gave a good and excellent rating. Similarly, 86.4% of the industrial designers and 89.5% of the engineering designers agreed that the tool would provide an enhanced understanding and clearer definition of design representations. The practitioners (industrial designers 86.4%; engineering designers 84.2%) also agreed that the system would create a common understanding of design representations. Some respondents requested more information to be included, such as the tools needed for creating a certain design representation. This was not implemented as it was not part of the criteria.

When asked if the system would foster enhanced collaboration, 68.2% of industrial designers gave a good and excellent rating and 27.3% were neutral. 63.2% of the engineering designers gave a good and excellent rating and 36.8% were neutral. A small number of participants had claimed that experienced practitioners did not need these cards. However, it was argued by the authors that these cards would not be solely used by senior practitioners but for all levels of users. In summary, the results indicated that a

high percentage of interviewees were confident that the tool would provide a common ground when using design representations, thereby contributing to enhanced collaboration.

The third phase of the validation covered a period of 3 weeks that tested the tool within a small design consultancy with 10 employees. It involved the design of a consumer product that started at the concept generation stage and ended at the embodiment design stage. Observing how the tool would be used within a commercial context was clearly useful as the authors could not predict exactly how the tool would be received by the users during practice. To maximise the reliability of the findings, the observations were conducted within the normal work environment. Recordings made through a design diary at the end of the day minimised disruptions to work. To obtain holistic feedback, the industrial designers, engineering designers and team leader were observed and interviewed at the end of each day. The design diary approach as employed by Pedgley (2007) captured and enabled analysis of activities on a daily basis and allowed events to be described in a chronological order (Figure 10).







Figure 10: The design diary used to record findings

During the observations, it was noted that the cards were useful as a clarification tool during the design process. On commencement of the third week, it became apparent that both industrial designers and engineering designers used identical keywords that had been learnt from the cards, thereby minimising the potential for misunderstanding. For example, the engineering designer would now request for a more specific type of representation as compared to using 'sketch' as a generic term. This allowed for more precise and relevant representations to be delivered. Similarly, when there was a need for a specific type of technical information, the industrial designer could now refer to the cards to find the exact data that was required. The findings from the observations reinforced results from the practitioner interviews and provided further evidence of the potential for the tool to foster collaboration in a multi-disciplinary environment. From the validation, it was found that most participants gave an excellent and good rating for the design tool. However, the results should be considered in the light of study constraints that was limited to 65 respondents. Therefore generalisation of the findings should be made with caution. Also, as the tool was tested within a relatively short time frame and this should be noted.

6. Summary

6.1 Discussion

The aim of this research was to develop a collaborative design tool for use by industrial designers and engineering designers. To achieve this, a literature review was undertaken to understand the working relationship between the two disciplines in NPD. Following this, empirical research through interviews and observations outlined three problem areas: conflicts in values and

principles; differences in education; and differences in representational tools and methods. The latter was chosen because the problem area of design representations was found to be highly significant.

In looking at bridging differences in design representations, a taxonomy comprising 35 forms of sketches, drawings, models and prototypes was generated. A second stage of empirical research was conducted to establish the popularity of each representation and the type of design / technical information that industrial designers and engineering designers communicated with. The information was indexed into a design tool in the form of cards that would enable the 2 disciplines to gain joint understanding and create shared knowledge when using visual design representations. When asked in the validation study if the system would foster collaboration, 68.2% of industrial designers and 63.2% of the engineering designers gave a good and excellent rating, indicating that the system could play a significant role towards the support of multi-disciplinary teamwork. However, the results should be considered in the light of study constraints that were limited to 65 respondents and that the tool was tested only within a short time frame.

6.2 Conclusions

Design representations are an integral component of NPD as they support innovation through the communication of design ideas and intent. The fact that communication, design representation and collaboration are closely linked means that the use of the design aid can enhance professional practice by presenting itself as a language platform to standardise vocabulary, facilitating social networks and enhancing understanding between the partners. The context where the tool can be used is not limited to industrial

designers and engineering designers, but has the potential for use by other stakeholders, including marketing and production engineering. Additionally, the tool has a prospective application as a teaching and learning tool in design education.

Whilst the formalisation embodied in the tool might be seen as introducing rules and procedures which, at times may have a negative impact (Burns and Stalker, 1961), the authors believe that a focused system would minimise misinterpretation and lead to more accurate communication. By including key design and technical information, the tool serves as a decision-making guide and helps identify representations used during design stages. It also allows users to be aware of each others' working practice and aids the coordination of actions, task management and the anticipation of actions by others (Gutwin and Greenberg, 1996). Through the use of the proposed tool, inter-disciplinary teams are able to develop a shared language to communicate effectively. By simplifying processes and communication, interaction becomes easier, operations are quickened and parallel processing achieved. Users are able to eliminate unnecessary design representations, saving time, accelerating NPD and achieving a common ground between industrial designers and engineering designers.

Future research would include testing the tool for a longer duration and involving a larger sample of participants. This would help establish a more comprehensive and thorough feedback before being developed for volume production and its launch as a commercial product.

7. References

Beskow, C., 1997. Product Development in Change - Cross-functional Cooperation and PDM Implementations. Licentiate Thesis. Department of Machine Design, Royal Institute of Technology, Stockholm. Quoted in: Persson, Sara and Warell, Anders, 2003. Relational Modes between Industrial Design and Engineering Design - A Conceptual Model for Interdisciplinary Design Work. Proceedings of the 6th Asian Design International Conference, Tsukuba.

Brown, J. S., and P. Duguid, 2001. Knowledge and Organization: A Social-Practice Perspective. *Organisation Science*, Vol. 12 No. 2: pp. 198-213.

Burns, T. and G. M. Stalker, 1961. *The Management of Innovation*. London: Tavistock. Quoted in: Leenders, Mark A. A. M. and Wierenga, Berend, 2002. The Effectiveness of Different Mechanisms for Integrating Marketing and R&D. *Journal of Product Innovation Management*, Vol. 19: pp. 305-309.

Buxton, B., 2007. Sketching User Experiences - Getting the Design Right and the Right Design. San Francisco: Morgan Kaufmann.

Cain, R., 2005. *Involving Users in the Design Process: The Role of Product Representations in Co-Designing.* PhD Thesis. Department of Design and Technology, Loughborough University: Loughborough.

Chiu, M.-L., 2002. An Organizational View of Design Communication in Design Collaboration. *Design Studies*, Vol. 23 No. 2: pp.187-210.

Cross, N., 1999. Natural Intelligence in Design. *Design Studies*, Vol. 20 No. 1: pp. 25-39.

E. Do, L. Yi, M.D. Gross, B. Neiman and C. Zimring., 2000. Intentions In and Relations Among Design Drawings. *Design Studies*, Vol. 21 No. 5: pp. 483-503.

Edmondson, A. C. and I. M. Nembhard, 2009. Product Development and Learning in Project Teams: The Challenges Are the Benefits. *Journal of Product Innovation Management*, Vol. 26 No. 2: pp. 123 – 138.

Ehrlenspiel, K. and N. Dylla, 1993. Experimental Investigation of Designers' Thinking Methods and Design Procedures. *Journal of Engineering Design*, Vol. 4 No. 3. pp. 201-212.

Eissen, K. and R. Steur, 2008. *Sketching: Drawing Techniques for Product Designers*. Singapore: Bis Publishers / Page One Publishing.

Engelbrektsson, P. and M. Soderman, 2004. The Use and Perception of Methods and Product Representations in Product Development: A Survey of Swedish Industry. *Journal of Engineering Design*, Vol. 15 No. 2: pp. 141-154

Evans, M., 1992. Model or Prototype Which, When and Why? *IDATER 1992 Conference*, Loughborough University (Design and Technology).

Ferguson, E. S., 1992. *Engineering and the Mind's Eye.* Cambridge, Massachusetts: MIT Press.

Fielden, G. B. R., 1963. *Engineering Design*. Her Majesty's Stationery Office. Quoted in: Tovey, Michael, 1997. Styling and design: Intuition and Analysis in Industrial Design. *Design Studies*, Vol. 18 No. 1: pp. 5-31

Fish, J. C., 1996. *How Sketches Work-A Cognitive Theory for Improved System Design*, PhD dissertation: Loughborough University of Technology.

Fiske, J., 1998. Kommunikationsteorier: En Introduktion, Wahlström och Widstrand, Centraltryckeriet: Borås. Quoted in: Persson, Sara and Warell, Anders, 2003. Relational Modes between Industrial Design and Engineering Design - a Conceptual Model for Interdisciplinary Design Work. Proceedings of the 6th Asian Design International Conference, Tsukuba.

Flurscheim, C. H., 1983. *Industrial Design in Engineering*. London: The Design Council.

Gadsden, R., 2006. *Questionnaire Design*. Professional Development: Loughborough University.

Goel, V., 1995. Sketches of Thought. Cambridge, MA: MIT Press.

Goldschmidt, G., 1992. Serial Sketching: Visual Problem Solving in Designing. *Cybernetics and Systems,* Vol. 23: pp. 191-219. Quoted In: Verstijnen, I. M.; Hennessey, J. M., Van Leeuwen, C., Hamel, R., Goldschmidt, G., 1998. Sketching and Creative Discovery. *Design Studies,* Vol. 19 No. 4: pp. 519-546.

Goldschmidt, G., 1997. Capturing Indeterminism: Representation in the Design Problem Space. *Design Studies*, Vol. 18 No. 4: pp. 441-455.

Griffin, A. and J. R. Hauser, 1996. Integrating R&D and Marketing: A Review and Analysis of the Literature, *Journal of Product Innovation Management*, No. 13: pp. 191- 215.

Gutwin, C. and S. Greenberg, 1996. *Workspace Awareness for Groupware*, Proceedings of the Conference on Human Factors in Computing Systems, Vancouver. pp. 208-209. Quoted in: Gutwin, C., Greenberg, S., 2002. A Descriptive Framework of Workspace Awareness for Real-Time Groupware. *Computer Supported Cooperative Work*, No. 11: pp. 411-446.

Herbert, D. M., 1993. *Architectural Study Drawings*. New York: Van Nostrand Reinhold.

Hurst, K., 1999. Engineering Design Principles. New York: Arnold Publishers.

IDSA, 2006. Industrial Designers Society of America (IDSA): About Industrial Design.

Accessed on 2 Feb 2006">http://www.idsa.org/webmodules/articles/anmviewer.asp?a=89&z=23>Accessed on 2 Feb 2006.

Jassawalla, A. R. and H. C. Sashittal, 1998. An Examination of Collaboration in High-Technology New Product Development Processes. *Journal of Product Innovation Management*, Vol. 15 No.3: pp. 237 - 254.

Kahn, K. B., 1996. Interdepartmental Integration: A Definition with Implications for Product Development Performance. *Journal of product Innovation Management*, No. 13: pp. 137-151.

Kavakli, M., A. R. Stephen, Ball, L.J., 1998. Structure in Idea Sketching Behaviour. *Design Studies*, Vol. 19: pp. 485-517.

Kim, Y. S., M. Philpott, 2006. *Interdisciplinary Research: Integrated Engineering and Industrial Design*.

http://www.engr.uiuc.edu/communications/engineering_research/1996/gen1/gen1-9.html Accessed on 16 May 2006.

Larkin, J. H. and H. A. Simon, 1987. Why a Diagram is (sometimes) Worth Ten Thousand Words. *Cognitive Science Journal*, No. 11: pp. 65-99.

Leonard-Barton, D., 1991. Inanimate integrators: a block of wood speaks. *Design Management Journal,* Summer, 1991. pp. 61-67. Quoted in: Ulrich, Karl T. and Eppinger, Steven D., 2003. *Product Design and Development (3rd ed.).* Boston: McGraw Hill.

Mathew, B. S. J., 1997. Are Traditional Management Tools Sufficient for Diverse Teams? *Team Performance Management*, Vol. 3 No. 1: pp. 3-11.

McGown, A., G. Green, P.A Rodgers, 1998. Visible ideas: information patterns of conceptual sketch activity. *Design Studies*, Vol. 19 No. 4: pp. 431-453

Miles, M. B. and A. M. Huberman, 1994. *Qualitative Data Analysis (2nd Edition)*. Thousand Oaks, California: Sage Publications.

Olofsson, E. and K. Sjölén, 2005. *Design Sketching*. Sundsvall, Sweden: Keeos Design Books AB.

Otto, K. and K. Wood, 2001. *Product Design - Techniques in Reverse Engineering and New Product Development*. New Jersey: Prentice Hall.

Pahl, G. and W. Beitz, 1996. Engineering Design - A Systematic Approach (2nd ed.). New York: Springer-Verlag.

Palmer, S. E., 1987. Fundamental Aspects of Cognitive Representation. In: Roch, E. and Lloyds, B. B. (Eds.), 1987. Cognition and Categorization. Hillsdale, NJ: Lawrence Erlbaum Associates. Quoted in: Scott Johnson, 1998. What's In A Representation, Why Do We Care, And What Does It Mean? Examining Evidence from Psychology. Automation in Construction, Vol. 8 No. 1: pp. 15-24.

Pavel, N., 2005. *The Industrial Designer's Guide to Sketching.* Trondheim: Tapir Academic Press.

Pedgley, O., 2007. Capturing and Analysing own Design Activity. *Design Studies*, Vol. 28 No. 5: pp. 463-483.

Pei, E., R. I. Campbell, M. A. Evans, 2009. A Taxonomic Classification of Visual Design Representations used by Industrial Designers and Engineering Designers. (Submitted to *Design Journal*)

Persson, S., 2002. Industrial Design and Engineering Design Interaction: Studies of Influencing Factors in Swedish Product Developing Industry. Licentiate Thesis. Department of Product and Production Development, Göteborg: Chalmers University of Technology.

Persson, S., 2005. *Toward Enhanced Interaction between Engineering Design and Industrial Design*. Goteborg, Sweden: Chalmers University of Technology.

Persson, S. and A. Warell, 2003. *Relational Modes between Industrial Design and Engineering Design - A Conceptual Model for Interdisciplinary Design Work.* Proceedings of the 6th Asian Design International Conference (ADC'03) held in Tsukuba.

Pipes, A., 2007. *Drawing for Designers*. London: Laurence King Publishing.

Purcell, T. and J. S. Gero, 1996. Design and other types of fixation. *Design Studies* Vol. 17 No. 4: pp. 363-383.

Rodriguez, W., 1992. The Modelling of Design Ideas - Graphics and Visualization Techniques for Engineers. Singapore, McGraw-Hill Book Company.

Römer, A., Pache, M., Weisshahn, G., Lindemann, U., and Hacker, W., 2001. Effort-saving Product Representations in Design - Results of a Questionnaire Survey. *Design Studies*, Vol. 22 No. 6: pp. 473-491.

Rothwell, R., 1992. Successful industrial innovation: Critical factors for the 1990s, *R&D Management*, Vol. 22 No. 3 pp. 221-239. Quoted in: Song, X. Michael; Montoya-Weiss, Mitzi M. and Schmidt, Jeffrey B., 1997. Antecedents and Consequences of Cross-Functional Cooperation: A Comparison of R&D, Manufacturing and Marketing Perspectives. *Journal of Product Innovation Management*, Vol. 14 No. 1: pp. 35-47.

Saddler, H. J., 2001. Understanding Design Representations. *Interactions*, July - August.

Scrivner, S.A.R., Ball, L.J., Woodcock, A., 2000. *Collaborative Design - Proceedings of Co-Designing 2000*. London: Springer-Verlag.

Shaw, V. and Shaw, C. T., 1998. Conflict between Engineers and Marketers: The Engineer's Perspective. *Industrial Marketing Management*, Vol. 27 No. 4. pp. 279-91.

Sproull, L. and Kiesler, S., 1991. Supporting collaborative design groups as design communities. *Design Studies*, Vol. 21 No. 2: pp. 187-204.

- Stacey, M. and C. Eckert, 2003. Against Ambiguity. *Computer Supported Cooperative Work*, Vol. 12 No 2: pp. 153-183.
- Strauss, A. and J. Corbin, 1990. *Basics of Qualitative Research: Grounded Theory Procedures and Techniques*. London: Sage Publications.
- M. Suwa, T. Purcell and J.S. Gero, 1998. Macroscopic Analysis of Design Processes Based on a Scheme for Coding Designer's Cognitive Actions. *Design Studies*, Vol. 19 No. 4: pp. 455-483.
- Tang, J. C., 1991. Findings from observational studies of collaborative work. *International Journal of Man-Machine Studies*, Vol. 34 pp. 143-160. Quoted in: Scrivener, Stephen A. R.; Ball, Linden J. and Woodcock, Andre, 2000. *Collaborative Design Proceedings of Co-Designing 2000.* London: Springer-Verlag pp. 339.
- Tjalve, E., M. M. Andreasen, and F. Frackmann Schmidt, 1979. *Engineering Graphic Modelling A Workbook for Design Engineers*. London: Butterworth & Co.
- Tovey, M., 1989. Drawing and CAD in Industrial Design. *Design Studies*, Vol. 10 No. 1: pp. 24-39.
- Tovey, M., 1994. Form Creation Techniques for Automotive CAD. *Design Studies*, Vol. 15 No. 1: pp. 85-114.
- Toye, G. Mark R. Cutkosky, Larry J. Leifer, J. Marty Tenenbaum and Jay Glicksman, 1993. SHARE: A Methodology and Environment for Collaborative Product Development. *Post Proceedings of the IEEE Infrastructure for Collaborative Enterprises*, pp. 1-16
- Ullman, D. G., Dietterich, T. G., Stauffer, L.A., 1988. A Model of the Mechanical Design Process based on Empirical Data. *Artificial Intelligence for Engineering Design, Analysis and Manufacturing,* Vol. 2 No. 1: pp. 33-52.
- Ulrich, K. T. and S. D. Eppinger, 2000. *Product Design and Development*. Boston, MA: McGraw-Hill Inc. Quoted in: Persson, Sara and Warell, Anders, 2003. *Relational Modes between Industrial Design and Engineering Design a Conceptual Model for Interdisciplinary Design Work*. Proceedings of the 6th Asian Design International Conference, Tsukuba.
- Veveris, M., 1994. *The Importance of the Use of Physical Engineering Models in Design.* IDATER 1994 Conference: Loughborough University (Design and Technology).
- Yu I.K., Song Y.H., Purcell A.T. and Gero J.S., 1998. Drawings and the Design Process. *Design Studies*, Vol. 19 No. 4. pp. 389-430

8. List of Figure Captions

Figure 1: Matching appropriate representations to the stage of product

development

Figure 2: Matching the level of information present in a design

representation

Figure 3: Level of Design Information present in Design Representations

used by Industrial Designers (in percentage)

Figure 4: Level of Design Information present in Design Representations

used by Engineering Designers (in percentage)

Figure 5: Set 1 – Key stages of the NPD process

Figure 6: Set 2 – Key design and technical information

Figure 7: Set 3 – Design Representations

Figure 8: Form and detail card from the industrial design set

Figure 9: Improved version of the cards after pilot appraisal

Figure 10: The design diary used to record findings

9. List of Table Captions

Table 1: Background questions

Table 2: Research-specific questions

Table 3: Matrix of 61 problem categories tabulated from interviews

Table 4: Types of Representations and Design & Technical Information

Table 5: Results from respondents showing use of design

representations used during the 4 stages of the design process

in percentage

Table 6: Comparative results in a bar chart format

Table 7: Research-specific questions