

DEVELOPMENT OF THE PREMIXING INJECTOR IN BURNER SYSTEM

MOHAMAD FARID BIN SIES

A project report submitted in partial fulfilment of the requirement for the award of the
Master of Engineering (Mechanical)



Faculty of Mechanical and Manufacturing Engineering
Universiti Tun Hussein Onn Malaysia

JUN 2013

SPECIAL GRATITUDES TO:

MY BELOVED PARENT,

Hj.Sies Bin Hj.Tukimon with Hj.H.Jawiah Binti Hj.Sulaiman

For their supports in whole of my life

MY BELOVED WIFE AND SONS,

Noor Diyana Binti Salleh, Muhammd Darwisy Fitry Bin Mohamad Farid and

Muhammad Irsyad Bin Muhammad Farid

For their supports understanding and patience during the completion this project.

MY HONOURED SUPERVISOR,

Dr. Hamidon Bin Salleh

For her advices, support and patience.

MY RESPECTED CO-SUPERVISOR,

Dr. Amir Bin Khalid

For his guidance, advices and support

AND ALL MY COLLAGUE,

For their support, teamwork and effort in this study

Only Allah S.W.T can repay your kindly and hopes Allah S.W.T blesses our life

ACKNOWLEDGEMENT

In the Name of Allah, The most Beneficent and The Most Merciful, I was able to complete the project Master.

Appreciation for my supervisor, Dr Hamidon Bin Salleh and also co-supervisor, Dr Amir Bin Khalid for helping me with gives full support, guidance and their knowledge for the success of this project.

Special thanks especially to my family members that always give me moral support, motivation, encouragements, sacrifice and also love during the course of this project.

I would like to convey my deepest gratitude to all my friends who have been very helpful by offering comment, advices and constructive discussion sessions.

Finally, I would like to thank those who have contributed directly or indirectly towards to success of this research project.



ABSTRACT

The alternative fuel is good attention especially for renewable and prevention energy such as biodiesel. Biodiesel fuel (BDF) has a potential for external combustion. BDF is one of the hydrocarbon fuels. Palm oil Biodiesel is free from sulfur and produced by esterification and transesterification reaction of vegetable oil with low molecular weight alcohol, such as ethanol or methanol. The objectives of this research are design the mixing injector fuel and water-fuel emulsion with air for open burner and analyze the behavior of mixture spray formation between fuel (DF and BDF) and water-fuel emulsion. Premix injector use for external combustion especially open burner system. The disadvantages of BDF are high toxic emissions such as NO_x, CO and particular matter (PM) and but it can reduced the performance of burner system. High toxic emission can be solved by using a new concept injector with mixing fuel-water emulsion and air. The additional water for combustion process can reduce the NO_x emissions, soot, and the flame temperature. This research focuses the Spray angle, penetration, and flame length with secondary and without secondary air. CPO biodiesel has longer penetration length and spray area than diesel, but the spray angle is smaller than diesel. The different of flame Image between pure fuel and water mix with fuel is the flame color. Water mix with fuel has brightness color and shorter flame than pure fuel.

ABSTRAK

Bahan api alternatif merupakan satu isu yang penting bagi menggantikan bahanapi yang sedia ada dan diperbaharui seperti contoh bahan api biodiesel. Bahan api Biodiesel (BDF) mempunyai potensi bagi sistem pembakaran luar. BDF merupakan bahan api jenis hydrocarbon. Biodiesel daripada kelapa sawit bebas daripada belerang dan ia terhasil daripada proses kimia (esterification dan transesterification) bertindakbalas dengan alkohol bermolekul rendah seperti ethanol atau methanol. Objektif dalam kajian ini ialah merekabentuk penyuntik semburan untuk campuran bahan api dan air secara emulsi bagi 'Open burner' dan menganalisis bentuk semburan bagi bahan api (Diesel dan Biodiesel) dan campuran bahan api dengan air. Kelemahan bahan api biodiesel ialah pelepasan toksid yang tinggi seperti NO_x, CO dll dan ia juga boleh mengurangkan prestasi system pembakaran. Pelepasan toksid yang tinggi boleh dikurangkan menggunakan penyuntik semburan yang baru yang mempunyai konsep mencampurkan bahan api dengan air. Campuran air didalam bahan api boleh mengkurangkan kuantiti NO_x, jelaga dan suhu api pembakaran. Kajian ini tertumpu kepada sudut semburan, pemanjangan semburan dan panjang api nyalaan. Biodiesel daripada minyak mentah kelapa sawit (CPO) mempunyai bentuk semburan yang panjang dan sudut semburan yang kecil berbanding dengan diesel. Dari segi api nyalaan bahan api bercampur dengan air tidak terang jika dibandingkan dengan nyalaan bahan api yang asli.

TABLE OF CONTENT

	TITLE	i
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF FIGURES	x
	LIST OF TABLES	xi
	LIST OF APPENDICES	xii
1.0	INTRODUCTION	1
	1.1 Background of Study	1
	1.2 Problem Statement	2
	1.3 Objectives	2
	1.4 Scope	3
2.0	LITERATURE REVIEW	4
	2.1 Introduction	4
	2.2 Global Warming	5
	2.3 Biodiesel as a Renewable Energy	6
	2.3.1 Biodiesel	7
	2.3.2 Biodiesel Properties	7
	2.3.3 Biodiesel Blends	9
	2.4 Water-Fuel Emulsion	10
	2.4.1 Internal Mixing (Application for Burner)	11
	2.5 Spray Characteristics	14
	2.6 Combustion process	17
	2.6.1 Oil Burner System	18
	2.6.2 Fuel Nozzle for Oil Burner	19

2.6.3	Stoichiometric	19
2.7	Biodiesel Flame	21
2.7.1	Effect of Water Emulsions	24
2.8	Effect of Biodiesel in Combustion	26
2.8.1	Carbon Monoxide (CO) Emission	26
2.8.2	Hydrocarbons (HC) Emission	27
2.8.3	Carbon Dioxide (CO ₂) Emission	28
2.8.4	Nitrogen Oxides (NO _x) Emission	28
2.9	Effects of Water Biodiesel Emulsion to Combustion System	30
2.10	Image Analysis	32
3.0	METHODOLOGY	35
3.1	Introduction	35
3.2	Production of Palm Oil Biodiesel	36
3.3	Biodiesel Blend	37
3.4	Characteristics of premix Injector	37
3.5	Air-fuel Ratio (AFR)	39
3.6	Calculation of AFR for Diesel Fuel (DF2 or B0)	39
3.7	Calculation of AFR for Biodiesel Fuel (B5)	40
3.8	Calculation of mass flow rate for fuel and Water-fuel emulsions	41
3.9	Experiment Setup	43
3.9.1	Analysis for Spray Characteristics and Flame	43
4.0	RESULT AND DISCUSSION	46
4.1	Introduction	46
4.2	Spray Development	50
4.3	Flame Imaging	50
4.4	Summary	55
5.0	CONSLUSIONS AND RECOMMENDATIONS	57
5.1	Conclusions	57
5.2	The effect of water mixing with fuel on spray characteristics	58
5.3	The effects of water mixing in fuel on flame length	58
5.4	Recommendations	59

REFERENCES	60
APPENDIX	65



LIST OF TABLES

2.1	Global warming impacts of alternative technology vehicles	5
2.2	Different standards and specifications for palm biodiesel	8
2.3	Comparison of density and kinematic viscosity for various types of biodiesel	8
3.1	: Data for air flow rate	39
3.2	The result mass flow rate and (A/F) experiment for diesel fuel (DF2)	42
4.1	Spray Characteristic of diesel fuel and CPO biodiesel fuel	48
4.2	Flame length without secondary air of diesel and CPO biodiesel	53
4.3	Flame length with secondary air of diesel and CPO biodiesel	54
4.4	The percentage of the differences CPO biodiesel blend on spray behaviors relative to the diesel	55
4.5	The percentage of the different in CPO biodiesel blend on flame length relative to the diesel	56

LIST OF FIGURES

2.1	a) Torque and b) fuel consumption for diesel oil and different oil-biodiesel blends	6
2.2	Density, Kinematic viscosity vs Biodiesel ratio for RBDP, Soy metyl and Palm oil	9
2.3	Variation of blend density with temperature	10
2.4	Relation between density and fuel temperature of diesel, biodiesel, and blended fuels (B20–B80)	10
2.5	The isolated water phase has to envelop the inner oil phase completely	12
2.6	Microscopy of water-in-kerosene emulsion with 20% water prepared with 20% water and 1% SPAN 80 at magnitude 100	12
2.7	(a) Fuel-water internally rapid mixing type, (b) External mixing type, Configuration of injector	13
2.8	Cross-sectional view for water- oil emulsifier (Internally rapid mixing)	13
2.9	Spray Formation by hollow cone nozzle	14
2.10	Comparison of B99 and DF2 Sprays at Baseline Condition	15
2.11	Photographs of (a) B0, (b) B5, (c) B10, (d) B15, (e) B20, and (f) B25 sprays. The fuel flow rate was maintained at 0.60 l/min for diesel and RBDPO blends	16
2.12	Fuel spray development of Diesel (D2) and B100	16
2.13	Regular fuel oil combustion	17
2.14	Emulsified fuel combustion	18

2.15	Burner system	18
2.16	Types of spray pattern	19
2.17	(a) Biodiesel flame. (b) Diesel oil flame	21
2.18	Flame temperature	22
2.19	Flame streak images of mixtures of diesel and (castor oil) biodiesel:(a) diesel (b) D75B25, (c) D50B50, (d) D25B75, (e) biodiesel	22
2.20	Thermal image of flames (A. Flame arrangement; B. Soybean biodiesel; C. Ethanol; D. Methyl Acetate; E. Diesel; F. Methyl Palmitate; G. Methyl Stearate; H. Methyl Oleate; I. Methyl Linoleate; and J. Methyl Linolate)	23
2.21	Photographs of laminar flames of various fuels. (a) Diesel, (b) Canola Methyl Ester (CME), (c) Soy Methyl Ester (SME)	24
2.22	Comparison of flames	25
2.23	Before and after maintenance of boiler tube surfaces after continuous one-year usage of the water/oil emulsified fuel	25
2.24	Relative to fossil diesel and biodiesel (U.S. EPA, 2002)	26
2.25	CO emissions between biodiesel and diesel for external combustion (EC)	28
2.26	UHC emissions between biodiesel and diesel for external combustion (EC)	29
2.27	CO ₂ emissions between biodiesel and diesel for external combustion (EC)	29
2.28	NO _x emissions between biodiesel and diesel for internal combustion engine (ICE)	30
2.29	NO _x emissions between biodiesel and diesel for external combustion (EC)	30
2.30	Effect of water fuel, a) nanoemulsion, b) microemulsion for internal combustion engine (ICE)	31
2.31	Comparison of emissions between two types of injector	32

2.32	The isentropic lines of the scattering image	33
2.33	The experimental setup used to image the spray. A laser sheet illuminates the spray emerging from the hollow-cone nozzle. The spray image is through a filter onto the camera	33
2.34	Original image of spray by Serpenguzel	34
3.1	Block Flow Diagram of Biodiesel Production in UTHM	36
3.2	(a) Schematic of blending process, (b) Block diagram blending process	37
3.3	Assembly drawing for premix injector	38
3.4	Flows direction for water, fuel, and air in part B and part C	38
3.5	Schematic Diagram of experimental setup	44
3.6	Picture of experimental equipment	44
3.7	Model FM2500 flow meter	45
3.8	Mixture formation and flame image	45
4.1	Geometry parameter for Spray image analysis; (Spray angle and spray penetration)	48
4.2	Spray Characteristic of diesel and several type of CPO biodiesel fuel without secondary air (Air pressure at nozzle 0.1bar)	49
4.3	Geometry parameter for Flame image analysis; (a) Flame length without secondary air. (b) Flame length with secondary air.	51
4.4	Effect of water content on the equivalent ratio for diesel and CPO biodiesel (Misfire)	51
4.5	Comparison of flame image without secondary air with water content ($\Phi = 2$)	53
4.6	Comparison of flame image with secondary air with water content ($\Phi = 2$)	53
4.7	Flame length of diesel and several type of CPO biodiesel with secondary air (Air pressure at nozzle 0.1bar and Secondary air pressure 1 bar)	54

LIST OF SYMBOLS AND ABBREVIATIONS

%	Percentage
Φ	Equivalent Ratio
AFR	Air fuel Ratio
B0	Biodiesel 0 %
B5	Biodiesel 5 % & Diesel 95 %
BDF	Biodiesel Fuel
BFD	Block Flow Diagram
CME	Canola Methyl Ester
CO	Carbon Monoxide
CO ₂	Carbon Dioxide
CPO	Crude Palm Oil
DF	Diesel Fuel
DSLRL	Digital Single-lens Reflex
EC	External Combustion
FAME	Fatty Acid Methyl Ester
HC	Hydrocarbons
ICE	Internal Combustion Engine
NO _x	Nitrogen Oxide
OH	Oxygen Hydrogen
PM	Particulate Matter
PPM	Part Per million
RBPDO	Refine, Bleach and Deodorized Palm Oil

RPE	Rape seed Methyl Ester
SME	Soy Methyl Ester
SMEs	Small and Medium Sized Enterprises
W0	Water 0% & Fuel 100%
W10	Water 10% & Fuel 90%



LIST OF APPENDICES

A	Project scheduling	65
B	Spray formations of Diesel and Biodiesel	67
C	Flame images of Diesel and Biodiesel without Secondary Air	84
D	Flame Images of Diesel and Biodiesel with Secondary Air	94



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

CHAPTER 1

INTRODUCTION

1.1. Background of Study

Today, global warming is the biggest issues due the increasing of emissions from diesel fuel in transportation and manufacturing sectors. The solution for this issue is by using Biodiesel fuel as alternative fuel in both sectors. Malaysia government has introduced the Biodiesel (B5) in the diesel engine for transportations [1]. Biodiesel fuel (BDF) in alternative fuel and renewable energy but it has low quality of fuel and can reduce the performance compared to the diesel fuel (DF). BDF can be used in external combustion for burner and internal combustion for diesel engine. The main issue is BDF has high toxic emission such as Nitrogen Oxides (NO_x) but it decreases the other gases. This research studied a new concept for injector in burner system. This injector can combine the water-fuel emulsion and air by using suitable ratio in mixing chamber for combustion process.

The purpose of water-fuel emulsion in the combustion process is to reduce the gas emission especially NO_x, soot, flame temperature and flame phenomena. This research also studied the spray characteristic such as spray penetration and spray angle to compare fuel (DF and BDF) with water and without water. The spray characteristic can be analyzed by image processing technique.

1.2. Problems Statement

In combustion process could emitted into the atmosphere, Nitrogen oxide (NO_x) react with water and other compounds to form various acidic compounds, fine particles, and ozone. These pollutants can remain in the air for days or even years. Effects of NO_x are decreases in lung function, resulting in difficulty breathing, shortness of breath, and other symptoms.

Increase or decrease (NO_x) in biodiesel emission is depending on the testing procedures. But results from more researchers found that NO_x emission from biodiesel is increase. For examples, Mekhilef, Siga, and Saidur (2011) reported that Palm oil has more oxidation stability than Jatropha and other biodiesel feedstock. The palm biodiesel would increase NO_x emission [2]. Labeckas and Slavinskas (2011) analyzed the emission characteristics of four stroke, four-cylinder, direct injection, unmodified, naturally aspirated diesel engine when operating on neat rapeseed methyl ester (RPE) and its 5%, 10%, 20% and 35% blends with diesel fuel. They found that carbon monoxide, hydrocarbon and visible emissions had decreased while an oxide of nitrogen emissions increased for methyl ester compared to diesel [3].

1.3. Objectives

The objectives of this research are:

- I. to design the mixing injector fuel and water-fuel emulsion with air for open burner.
- II. to analyze the behavior of mixture spray formation between fuel (DF and BDF) and water-fuel emulsion.

1.4. Scope of the project

The scopes of this project are:

- I. the capacity of mixing chamber in injector between 5 to 8 cc and 8 holes with diameters of 1 mm.
- II. using direct image to analyze flame and spray characteristic such as spray angle and penetration by the operating parameters :
 - a. Diesel fuel.
 - b. Bio-diesel ratio (B5, B10, and B15).
 - c. Equivalent ratio (0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 1.8 and 2.0).
 - d. Water-fuel emulsion (W5, W10 and W15).
 - e. Air Pressure at nozzle (0.1bar- gauge pressure).
 - f. Secondary air pressure (1 bar- gauge pressure)
 - g. Ambient temperature.



CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

This study aimed to develop biodiesel fuel especially from palm oil to open burner. It is involves in the development injector for burner system. Kidoguchi, Yatsufusa, and Nakagawa (2011) was designed this premix injector. Premix injector mix the air, fuel and water in combustion process to reduce NOx emissions [4]. The role of SMEs in the development of the economic sector and intraregional trade and investment is attracting the policy makers throughout the Association of South East Asian Nations (ASEAN) country. According to Small and Medium Industries Development Corporation (SMIDEC), an enterprise is consider as an SME in each of the representative sectors based on the annual sales turnover or the numbers of full time employees. SMEs are divided into two sectors; manufacturing, manufacturing related services and agriculture industries; and services (including ICT) and primary agriculture [5].

SMEs sector is a key component of the economy, accounting for 99.2% of all total business establishments (SME Annual Report, 2006). In view of this staggering figure, SMEs expected to adopt “green technology” to improve global warming problem. Global warming problem, can seriously affect on the world’s sustainability or even humankind’s survival. Scientists, academic researchers, and influential world leaders from the world’s biggest economies such as United States, China, Germany, and Japan have called for concerted efforts to arrest global warming problem before it is too late [6]

2.2 Global Warming

Global warming is one of the environmental issues since 1958 (Mark Maslin, 2004). The definition of global warming is referring to the increased temperature of earth surface and it can give negative effect to the green house. Green house gasses are carbon dioxide (CO₂), carbon monoxide (CO), water vapor (H₂O), methane (CH₄), nitrous oxide (N₂O) and ozone (O₃). CO₂ is the main gas in green house and it is an unavoidable product of economic activities and human's life hoods [7].

The potentially of global warming are from burning of fossil fuel, deforestation, transportations, etc. Transportation emissions especially from diesel engine can contribute to direct warming impact (carbon dioxide) and indirect Impact (Nitrogen oxide, carbon monoxide etc). Table 2.1 is shown as global warming impact of alternative technology vehicles [8].

Table 2.1: Global warming impacts of alternative technology vehicles [8]

Vehicle	Mean emission (g/km)			
	CO ₂	CO	THC	NO _x
R15-04	151	6.1	1.27	2.7
Three-way catalyst	180	0.87	0.13	0.13
Lean burn	132	8.2	1.1	1.5
Oxidising catalyst	144	4.5	0.5	0.65
IDI diesel	131	0.43	0.23	0.46
DI diesel	126	0.53	0.73	1.1
LPG	192	37	0.86	1.4

Effects of global warming are rise in global temperature, rise in sea level, impact on weather, food production, and the economy. So, one of the solution is to reduce the use of fuel especially diesel change to biodiesel as a renewable energy.

2.3 Biodiesel as a Renewable Energy

Palm oil Biodiesel is free from sulfur and produced by esterification and transesterification reaction of vegetable oil with low molecular weight alcohol, such as ethanol or methanol. It is also biodegradable and non-toxic fuel. This fuel is obtained from vegetable oils (typically palm oil, soybean, rapeseed, or sunflower) with changes the properties of the oil significantly.

Malaysia is a country of palm oil producers in the world and the main raw stock for biodiesel. Palm oil biodiesel give advantages for the economical and environmental issue in the Malaysia. Since 1982, Malaysia had developed palm oil as renewable fuel and use of palm oil biodiesel blend (B5) for the industrial and transportation sector [2]. Biodiesel fuel can be used for external and internal combustion because it less emission and pollutant. Biodiesel also be used in the transportation for reduction of pollutant emissions of automotive Diesel engines [9]. It can be proved by the research of “Biodiesel as alternative fuel: Experimental analysis and energetic evaluations” by Carraretto (2004). The test engine was a four-cylinder with direct injection diesel engine, which was model UNIC 8220.12.; 125 mm bore, 130 mm stroke, compression ratio of 17: 1 and a maximum output of 158 kW/2,600 rpm.

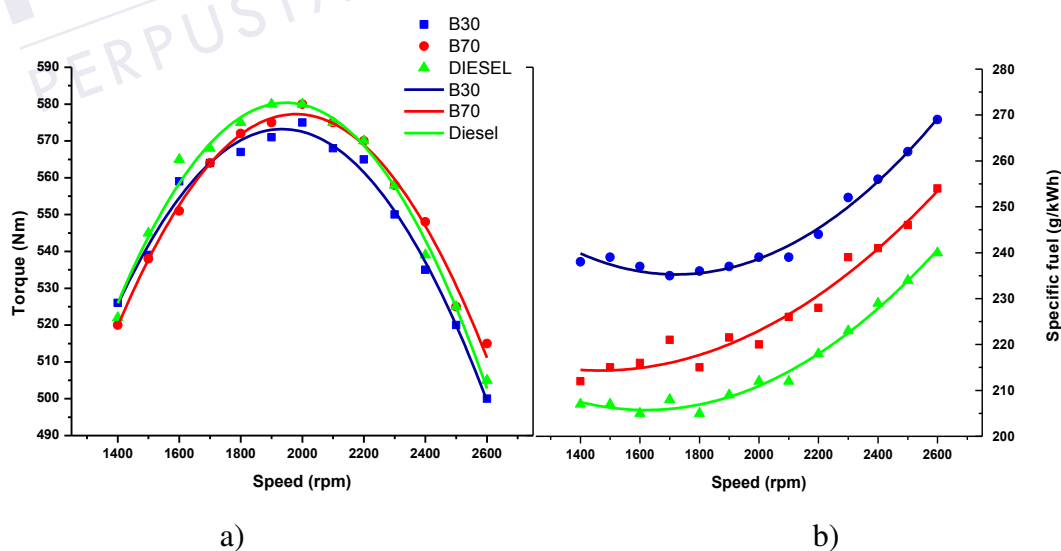


Figure 2.1 : a) Torque and b) fuel consumption for diesel oil and different oil-biodiesel blends [9]

Comparison between diesel oil with oil biodiesel blends start from speed 1400 to 2000 rpm diesel oil the torque higher than oil biodiesel blends (figure 2.1), but after speed 2000 rpm, the torques is similar with oil biodiesel blends. The increase of biodiesel percentage in the blend involves a slight decrease of both power and torque over the entire speed range [9].

2.3.1. Biodiesel

Biodiesel is defining by ASTM as “a fuel comprised of mono-alkyl esters of long-chain fatty acids derived from vegetable oils or animal fats, designated B100.” Another name for biodiesel is fatty acid methyl esters (FAME) [10].

The main advantages of using biodiesel are such as:(1)lower dependence on crude oil, (2) renewable fuel, (3) favorable energy balance,(4) reduction in green house gas emission,(5) lower harmful emission, (6) biodegradable and nontoxic,(7) the use of agricultural surplus and (8) safer handling (higher flashpoint than conventional diesel fuel) [11].

2.3.2. Biodiesel Properties

Chemical properties of biodiesel are carbon, hydrogen, and oxygen. Common chemical name of biodiesel is Fatty acid (m) ethyl ester and chemical formula range $C_{14}-C_{24}$ methyl esters or $C_{15-25} H_{28-48} O_2$. . The definition of Density is as mass per unit volume and kinematic viscosity is the ratio of absolute or dynamic viscosity to density. Kinematic viscosity can be obtained by dividing the absolute viscosity of a fluid with its mass density (Yunus A. Çengel, Michael A. Boles).

Kinematic viscosity range at 40°C and density range at 15°C are 3.3 to 5.0 mm^2/s and 860 to 900 kg/m^3 [12].Table 2.2 is besides the Malaysian palm diesel specifications and Malaysian petroleum diesel standards [11]. There are different types of biodiesel. Table 2.3 is comparison of density and kinematic viscosity for

various types of biodiesel.

Table 2.2: Different standards and specifications for palm biodiesel [11]

Property	Unit	Biodiesel standards		Palm biodiesel			
		EN14214	ASTM D6751	Normal point	Low pour point	PLPO/PD B5 ^a	MS123:1993 ^b
Ester content	% (m/m)	96.5 >	-	98.50	99.5	-	-
Density at 15 °C	Kg/m ³	860-900	-	878.3	870-890	841.9-845.9	-
Viscosity at 40 °C	mm ² /s	3.5-5.0	1.9-6.0	4.415	4-5	4.136-4.549	1.5-5.8
Flash point	°C	120 <	130.0 <	182	150-200	75-81	60 <
Cloud point	°C	-	Report ^c	15.2	-18 to 0	14-16	18
Pour point	°C	-	-	15	-21 to 0	-	15
Carbon residue (on 10% distillation residue)	% (m/m)	0.3 >	0.50 >	0.02	0.02-0.03	0.2	0.2 >
Acid value	mg KOH/g	0.5 >	0.80 >	0.08	0.3 >	-	-
Cetane index	-	51 <	47 <	58.3	53.0-59.0	51-57	47 <
Sulphur content	% (m/m)	0.001 >	0.0015 >	0.001 >	0.001 >	0.00017-0.00018	0.005 >
Sulphated ash content	% (m/m)	0.02 >	0.020 >	0.01 >	0.01 >	-	-
Water content	mg/kg	0.05 >	0.05 >	0.05 >	0.05 >	0.001 >	0.001 >
Copper strip corrosion (3 h at 50 °C)	Rating	1a	3a >	1a	1a	1a	1a
Iodine value	-	120 >	-	52	56-83	-	-
Linolenic acid methyl ester	% (m/m)	12 >	-	0.5 >	0.5 >	-	-
Polyunsaturated (≥ 4 double bonds) methyl esters	% (m/m)	1 >	-	0.1 >	0.1 >	-	-
Methanol content	% (m/m)	0.2 >	-	0.2 >	0.2 >	-	-
Monoglyceride content	% (m/m)	0.8 >	-	0.4 >	0.4 >	-	-
Diglyceride content	% (m/m)	0.2 >	-	0.2 >	0.2 >	-	-
Triglyceride content	% (m/m)	0.2 >	-	0.1 >	0.1 >	-	-
Free glycerol	% (m/m)	0.02 >	0.02 >	0.01 >	0.01 >	-	-
Total glycerol	% (m/m)	0.25 >	0.24 >	0.01 >	0.01 >	-	-
Phosphorous content	mg/kg	10 >	10 >	-	-	-	-
Distillation temperature (90% recovered)	°C	-	360 >	-	-	363.7-367.8	370

^a PLPO/PD B5: 5% processed liquid palm oil (PLPO)+95% petroleum diesel (PD).

^b MS123:1993: Malaysian Standard for Diesel Fuel (Malaysia Biodiesel Standard, 2007).

^c The cloud point of biodiesel is generally higher than that of petroleum based diesel and should be taken into consideration when blending.

Various types of biodiesel (B100) have different values of densities and kinematic viscosities depend on temperature. For example, maximum and minimum values of density are 897 kg/m³ for biodiesel from waste cooking oil and 882.1 kg/m³ for biodiesels from Grapeseed oil methyl ester (GOME) and soybean.

Table 2.3: Comparison of density and kinematic viscosity for various types of biodiesel [9],[13]-[20]

Types of biodiesel	Chemical formula	Test method	Kinematic viscosity at 40°C (mm ² /s)	Test method	Density (kg/m ³)	Test method	References
Sunflower oil methyl ester (SOME2)	CH _{1.82} O _{0.11}	calculation	5.8	ASTM D445	893.4 @60°C	ASTM D1298	(Carraretto et al., 2004)
Corn oil methyl ester (COME)	CH _{1.84} O _{0.11}	calculation	5.5	ASTM D445	884 @60 °C	ASTM D1298	(Carraretto et al., 2004)
Ricebran oil methyl ester (ROME)	CH _{1.85} O _{0.11}	calculation	6	ASTM D445	889.5 @60 °C	ASTM D1298	(Carraretto et al., 2004)
Olive oil methyl ester (OOME)	CH _{1.87} O _{0.11}	calculation	5.3	ASTM D445	887.6 @60 °C	ASTM D1298	(Carraretto et al., 2004)
Grapeseed oil methyl ester (GOME)	CH _{1.87} O _{0.11}	calculation	5.2	ASTM D445	882.1 @60 °C	ASTM D1298	(Carraretto et al., 2004)
Rapeseed Methyl Ester (RME)	-	-	4.478	ASTM D445	883.7 @ 15C	ASTM D4052	(L. K. S. Teo. 2002)
Soybean	-	-	5.8	ASTM D445	882.1 @60 C	ASTM D1298	(Afshin Ghorbani, 2011)
Fatty acid (m)ethyl ester (FAME)	C14-C24 methyl esters C ₁₅₋₂₃ H ₃₂₋₄₈ O ₂	-	3.3-5.2	EN 14214	860-894 @15	EN 14214	(Demirbas A.,2009)
Palm oil bio diesel (PBO)	-	-	4.71	ASTM D445	864.42@25C	ASTM D1298	(Pedro Benjumea., 2007)
Palm biodiesel (palm methyl ester)	-	-	4.5	-	855 @ 40C	-	(Jawad Nagi., 2008)
Biodiesel from waste cooking oil	-	-	5.3	-	897 @ 15C	-	(Ayhan Demirbas., 2009)
Soybean crude oil	-	-	5.2	-	870@20C	-	(D.H. Qi et al., 2009)
Waste cooking oil	-	-	4.56	ASTM D445	866 @60 C	ASTM D1298	(G.R. Kannan et al., 2011)
Animals' fats	C ₃₃ H ₁₀₂ O ₆	-	6	-	870 @60 C	-	(Imdat TAYMAZ., 2010)

2.3.3. Biodiesel Blends

Biodiesel blends such as B5, B10, B15, and B20 have different values of density and kinematic viscosity as shown in Figure 2.2. B0 stands for diesel fuel and B100 for pure biodiesel. B5 is 5% biodiesel and 95% diesel fuel, B20 is 20% biodiesel and 80% diesel. Refined, Bleached and Deodorized Palm Oil (RBDPO) has high value of density at 40°C compare with soy methyl and palm oil, but lower value of kinematic velocity.

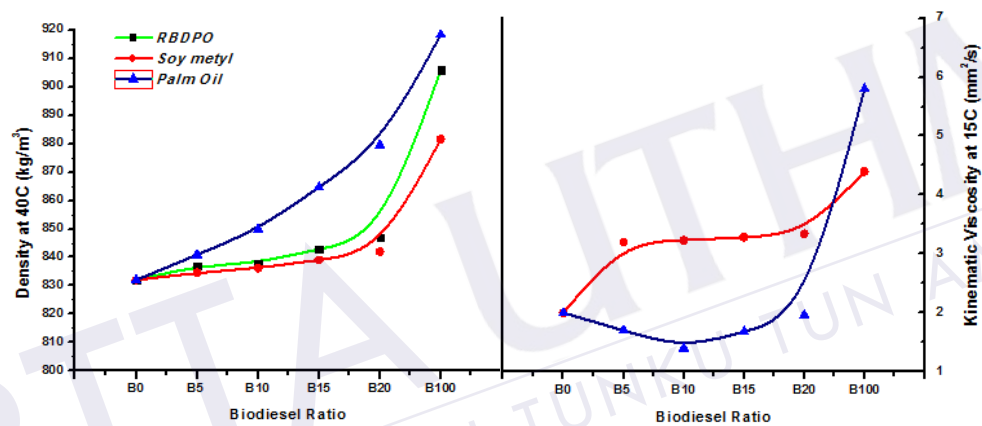


Figure 2.2: Density, Kinematic viscosity vs Biodiesel ratio for RBDPO [15], Soy methyl [16] and Palm oil [17]

P. Benjumea (2007) was studied the basic properties of several palm oil biodiesel–diesel fuel blends according to the corresponding ASTM standards. Fig. 2.3 shows the effect of temperature on density (ρ) for pure fuels and B5 and B20 blends [18]. If the temperature increases, the density of fuel will decrease. S. H. Yoon (2008) was investigated the fuel density of diesel and biodiesel fuel in the temperature range from 0 to 200 °C. Test fuels used were a conventional diesel, neat biodiesel (100% methyl ester of soybean oil), and their blends with blending ratios of 20%, 40%, 60%, and 80% [19]. Figure 2.4 as showed the Relation between density and fuel temperature of diesel, biodiesel, and blended fuels (B20–B80).

REFERENCES

- [1] M. Hanafi and A. P. Raj, "Socio-economic and Feasibility Study of Utilising Palm Oil Derived Biofuel in Malaysia," *Oil Palm Industry Economic Journal* (Vol. 11(1)/2011).
- [2] S. Mekhilef, S. Siga, and R. Saidur, "A review on palm oil biodiesel as a source of renewable fuel," *Renewable and Sustainable Energy Reviews*, vol. 15, no. 4, pp. 1937–1949, 2011.
- [3] J. Xue, T. E. Grift, and A. C. Hansen, "Effect of biodiesel on engine performances and emissions," *Renewable and Sustainable Energy Reviews*, vol. 15, no. 2, pp. 1098–1116, Feb. 2011.
- [4] Y. Kidoguchi, T. Yatsufusa, and D. Nakagawa, "Improvement of Emissions and Burning Limits in Burner Combustion using an Injector on the Concept of Fuel-water Internally Rapid Mixing," *Proceedings of the European Combustion Meeting 2011*.
- [5] S. Karikomi, "The Development Strategy for SMEs in Malaysia," no. 4, pp. 1–33, 1998.
- [6] N. Afiza and B. Abdul, "A Preliminary Study of Top SMEs in MALaysia Keys Succes Factor," *Journal of Global Business and Economic*. January 2011. vol. 2, no. 1, pp. 2006–2010, 2011.
- [7] K. Honjo, "Technology R & D for technology to solve global warming," *Journal of Materials Processing Technology* vol. 59, pp. 218–220, 1996.
- [8] L. Michaelis, "Global warming impacts of transport," *Science of The Total Environment*, vol. 134, no. 1–3, pp. 117–124, Jun. 1993.
- [9] C. Carraretto, A. Macor, A. Ñ. Mirandola, A. Stoppato, and S. Tonon, "Biodiesel as alternative fuel: Experimental analysis and energetic evaluations," *Energy* vol. 29, pp. 2195–2211, 2004.

- [10] S. K. Hoekman and C. Robbins, "Review of the effects of biodiesel on NOx emissions," *Fuel Processing Technology*, vol. 96, pp. 237–249, 2012.
- [11] A. Z. A. Abdullah, B. Salamatinia, H. Mootabadi, and S. Bhatia, "Current status and policies on biodiesel industry in Malaysia as the world's leading producer of palm oil," *Energy Policy*, vol. 37, no. 12, pp. 5440–5448, 2009.
- [12] N. N. a. N. Yusuf, S. K. Kamarudin, and Z. Yaakub, "Overview on the current trends in biodiesel production," *Energy Conversion and Management*, vol. 52, no. 7, pp. 2741–2751, Jul. 2011.
- [13] L. K. S. Teo, A. Tsolakis, A. Megaritis, and M. L. Wyszynski, "Hydrogen and Biodiesel Mixtures as Fuels for the Compression Ignition Engine," *THIESEL Conference on Thermo- and Fluid Dynamic Processes in Diesel Engines* 2002.
- [14] M. C. Imdat TAYMAZ, "Performance and Emissions of Engine Fueled with Biodiesel," 2010.
- [15] M. N. M. Ja'afar and S. Sawarimuthu, "Performance of Various Biofuel Blends on Burner," *Fuel Processing Technology* no. 27, pp. 69–77, 2008.
- [16] G. Karavalakis, S. Stournas, and E. Bakeas, "Effects of diesel/biodiesel blends on regulated and unregulated pollutants from a passenger vehicle operated over the European and the Athens driving cycles," *Atmospheric Environment*, vol. 43, no. 10, pp. 1745–1752, Mar. 2009.
- [17] V. O. A. and C. M. A. O. M. V.I.E. Ajiwe*, "Biodiesel Fuels from Palm Oil Methyl ester and Ester-Diesel Blends," vol. 17, no. 1, pp. 19–26, 2003.
- [18] P. Benjumea and J. Agudelo, "Basic properties of palm oil biodiesel – diesel blends," *Fuel* 2007.
- [19] S. H. Yoon, S. H. Park, and C. S. Lee, "Experimental Investigation on the Fuel Properties of Biodiesel and Its Blends at Various Temperatures," *Energy & Fuels*, vol. 22, no. 1, pp. 652–656, Jan. 2008.
- [20] S.-A. L. Cherng-Yuan Lin, "Effects of emulsification variables on fuel properties of two and 3 phase biodiesel emulsion." *Fuel Processing Technology* pp. 210–217, 2007.

- [21] D. Toncu, S. Virgil, and G. Toncu, "Combustion Study of Water-in-Kerosene Emulsions," *International journal of advanced scientific and technical research* vol. 5, no. 2, pp. 169–178, 2012.
- [22] J. Gallagher, "Pattern Oil Fuel Burner." *United states Patent*, 1983.
- [23] C. Baumgarten, "Mixture Formation in Internal Combustion Engines." *Springer-Verlag Berlin Heidelberg* 2006
- [24] V. G. M. * C.D. Bolszo, "Emissions optimization of a biodiesel fired gas turbine.pdf." *Proceedings of the Combustion Institute* 32 pp. 2949–2956, 2009.
- [25] M. Nazri, M. Jaafar, Y. A. Eldrainy, and M. H. Asril, "Experimental investigation of spray characteristics of refined bleached and deodorized palm oil and diesel blends using phase Doppler particle analyzer," *International Journal of the Physical Sciences* vol. 6, no. 29, pp. 6674–6680, 2011.
- [26] B. Kegl, M. Kegl, and S. Pehan, "Optimization of a Fuel Injection System for Diesel and Biodiesel Usage," *Energy & Fuels*, no. 11, pp. 1046–1054, 2008.
- [27] T. Houlihan, "Emulsified fuel technology can lower NOx and greenhouse gases and increase fuel efficiency," 2009.
- [28] B. E. O. Olson, C. Engineer, and S. Carolina, "Fuel Nozzles for Oil Burners Technical Aspects."
- [29] E. Blanchard, "Flame Characteristics and Behavior of Limits of Inflammability Concerning the Combustion of a Propane-Air Fuel Mixture," 2012.
- [30] S. K. Jha, S. Fernando, and S. D. F. To, "Flame temperature analysis of biodiesel blends and components," *Fuel*, vol. 87, no. 10–11, pp. 1982–1988, Aug. 2008.
- [31] G. R. de S. M. dos Santos, "Evaluation of the performance of biodiesel from waste vegetable oil in a flame tube furnace." *Applied Thermal Engineering* pp. 2562–2566, 2009.
- [32] M. L. Botero, Y. Huang, D. L. Zhu, A. Molina, and C. K. Law, "Droplet Combustion of Ethanol, Diesel, Castor Oil Biodiesel, and Their Mixtures," *7th US National Combustion Meeting of the Combustion Institute* 2011.

- [33] S. R. Gollahalli, R. N. Parthasarathy, and J. Quiroga, "Laminar flame speed of soy and canola biofuels," *Ciencia, Tecnología y Futuro* - vol. 4, pp. 75–84, 2012.
- [34] T. Namioka, K. Yoshikawa, M. Takeshita, and K. Fujiwara, "Commercial-scale demonstration of pollutant emission reduction and energy saving for industrial boilers by employing water/oil emulsified fuel," *Applied Energy*, vol. 93, pp. 517–522, May 2012.
- [35] M. C. Dr. Ronald K. Hanson, Dr. David Davidson, "Ignition Delay and Pyrolysis in Methyl Esters," *International Journal of Engine Research*, pp. 2007–2009, 2009.
- [36] A. Ghorbani, B. Bazooyar, A. Shariati, S. M. Jokar, H. Ajami, and A. Naderi, "A comparative study of combustion performance and emission of biodiesel blends and diesel in an experimental boiler," *Applied Energy*, vol. 88, no. 12, pp. 4725–4732, Dec. 2011.
- [37] H. An, W. M. Yang, S. K. Chou, and K. J. Chua, "Combustion and emissions characteristics of diesel engine fueled by biodiesel at partial load conditions," *Applied Energy*, vol. 99, pp. 363–371, Nov. 2012.
- [38] a. B. Koc and M. Abdullah, "Performance and NOx emissions of a diesel engine fueled with biodiesel-diesel-water nanoemulsions," *Fuel Processing Technology*, Oct. 2012.
- [39] R. Awang and C. Y. May, "Water-In-Oil Emulsion of Palm Oil Biodiesel," *Journal of Oil Palm Research* vol. 20, December, pp. 571–576, 2008.
- [40] K. H. Lee, C. H. Lee, and C. S. Lee, "An experimental study on the spray behavior and fuel distribution of GDI injectors using the entropy analysis and PIV method," *Fuel*, vol. 83, no. 7–8, pp. 971–980, May 2004.
- [41] A. Serpenguzel, S. Kucuksenel, and R. Chang, "Microdroplet identification and size measurement in sprays with lasing images," *Optics express*, vol. 10, no. 20, pp. 1118–32, Oct. 2002.
- [42] A. Khalid, S. A. Osman, N. M. Jaat, N. Mustaffa, S. M. Basharie, and B. Manshoor, "Performance and Emissions Characteristics of Diesel Engine Fueled by Biodiesel Derived from Palm Oil," pp. 1–5.

- [43] E. Blanchard, “*Flame Characteristics and Behavior of Limits of Inflammability Concerning the Combustion of a Propane-Air Fuel Mixture,*” 2012.
- [44] Agency for Toxic Substances and Disease Registry (ATSDR). 1995. Toxicological profile for fuel oils. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.
- [45] (Mark Maslin, 2004): GLOBAL WARMING, A Very Short Introduction: Oxford University press.
- [46] Visual Dictionary (2011). *Oil burner*. Retrieved on November, 15, 2012 from <http://visual.merriam-webster.com/house/heating/forced-hot-water-system/oil-burner.php>.
- [47] *Delavan Spray Technologies (2004) Oil burner nozzle*. Retrieved on November, 15, 2012 from <http://www.delavaninc.com/oilburner.htm>.
- [48] Charles W. Lipp, *Practical Spray Technology: Fundamentals and Practice-* 2012.
- [49] (Yunus A. Çengel, Michael A. Boles): McGraw-Hill Higher Education, 2006 - 988 pages.

