

DOT/FAA/AM-97/13

Office of Aviation Medicine  
Washington, D.C. 20591


# **Distribution of Attention, Situation Awareness, and Workload in a Passive Air Traffic Control Task: Implications for Operational Errors and Automation**

Mica R. Endsley  
Texas Tech University  
Lubbock, Texas 79409

Mark D. Rodgers  
Civil Aeromedical Institute  
Federal Aviation Administration  
Oklahoma City, Oklahoma 73125

July 1997

Final Report



This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161.



U.S. Department  
of Transportation  
**Federal Aviation  
Administration**

19970912 018

DTIC QUALITY INSPECTED 6

## NOTICE

This document is disseminated under the sponsorship of the U.S. Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

1. Report No. DOT/FAA/AM-97/13		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Distribution of Attention, Situation Awareness, and Workload in a Passive Air Traffic Control Task: Implications for Operational Errors and Automation				5. Report Date July 1997	
				6. Performing Organization Code	
7. Author(s) Endsley M.R., Department of Industrial Engineering, Texas Tech University, Lubbock, TX 79409		Rogers, M.D.* FAA Civil Aeromedical Institute		8. Performing Organization Report No.	
9. Performing Organization Name and Address FAA Civil Aeromedical Institute P.O. Box 25082 Oklahoma City, OK 73125		*Now at: Office of System Architecture and Investment Analysis FAA Headquarters, ASD-130 Washington, DC 20591		10. Work Unit No. (TRIS)	
				11. Contract or Grant No.	
12. Sponsoring Agency name and Address Office of Aviation Medicine Federal Aviation Administration 800 Independence Ave., S.W. Washington, DC 20591				13. Type of Report and Period Covered Final Report	
				14. Sponsoring Agency Code	
15. Supplemental Notes This work was performed under Contract DTFA-02-95P35476.					
16. Abstract A study was conducted to investigate factors underlying operational errors (OEs) in en route air traffic control. Twenty active duty controllers watched re-creations of OEs and were asked to report on their situation awareness and workload on two occasions during the re-creations. A total of 14 OEs were examined. Responses were analyzed to determine how subjects allocated their attention while viewing the scenarios. While observed patterns probably reflect necessary prioritization schemes, attention strategies identified in this study can be linked to data on factors underlying OEs. Both objective taskload, as indicated by the number of aircraft being controlled, and subjective workload were found to be related to controllers' ability to report situation awareness information. Workload was found to be higher at the time of the OE than at the other stop during the re-creation. During high workload, controllers appeared to reduce attention paid to certain aircraft and variables to maintain awareness of more important information. Implications of this research are drawn for potential problems in situation awareness under passive monitoring conditions that may be present if certain forms of automation are introduced in the future air traffic control system.					
7. Key Words Attention, Situation Awareness, Workload Operational Error, Air Traffic Control, Human Error			18. Distribution Statement Document is available to the public through the National Technical Information Service Springfield, Virginia 22161		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages .25	22. Price

## **ACKNOWLEDGMENTS**

The authors thank the controllers and management at the Atlanta Air Route Traffic Control Center for their participation and support of this study, in particular Al Guice for his coordination efforts. In addition, our appreciation is extended to Dennis Rester, of the Civil Aeromedical Institute, for his programming efforts, and to Cindy Fox, also of the Civil Aeromedical Institute, and Ashok Sundaram at Texas Tech University, for their assistance in data analysis.

---

# DISTRIBUTION OF ATTENTION, SITUATION AWARENESS, AND WORKLOAD IN A PASSIVE AIR TRAFFIC CONTROL TASK: IMPLICATIONS FOR OPERATIONAL ERRORS AND AUTOMATION

## INTRODUCTION

In the history of the Federal Aviation Administration (FAA), no aircraft have collided while under positive control in en route airspace. However, aircraft have violated prescribed separation minima and approached in close proximity. This event can occur as a result of either a pilot deviation from clearances or an operational error (OE) by an air traffic controller. An OE takes place when the controller allows less than applicable minimum separation between an aircraft, another aircraft, or an obstruction. Standards for separation minima are described in the Air Traffic Control (ATC) Handbook (FAA Order 7110.65J) and supplemental instructions. While there is considerable complexity in those standards, the criteria are established as 2,000 feet of vertical separation or 5 miles of horizontal separation between aircraft operating at altitudes between 29,000 feet and 45,000 feet. For aircraft operating under instrument flight rules (IFR) at flight levels below 29,000 feet, a minimum of 1,000 feet of vertical separation, or 5 miles of horizontal separation are required. These separation standards provide tolerance zones ensuring that aircraft pass well clear of one another.

A relatively small number of OEs occur nationwide each year. In 1993, 430 OEs were recorded at en route air traffic control centers in the US, with 37,170,000 aircraft handled. In an effort to ensure flight safety, there is a desire to reduce the number of OEs that occur. Doing so requires an understanding of why these errors occur and the factors that are likely to increase the probability of an operational error.

Rodgers and Nye (1993) investigated causal factors associated with (minor and moderate) OEs occurring at en route ATC facilities over a three and one-half year period, based on the FAA's Operational Error Data Base. This data base records circumstances associated with OEs, as identified by quality assurance

(QA) investigators following the OEs' occurrence. They found that 36% of OEs involved problems with communications (including 20% that were specifically readback errors), 15% involved coordination problems, 3% involved deficiencies in position relief briefings, 13% were associated with problems in data posting, and 59% were related to the radar display (including 14% that involved misidentification of information and 47% that involved inappropriate use of displayed data). Some errors are attributed to multiple causal factors.

A number of research studies have sought to investigate the relationship between estimates of controller workload and the incidence of OEs. Operational errors have been found to occur under both high and low workload conditions, with more errors occurring under low and moderate levels of workload than under high levels of workload (Kinney, Spahn, & Amato, 1977; Schroeder, 1982; Stager & Hameluck, 1990). It is unclear from these data, however, whether this reflects a decreased tendency to make errors under high workload conditions or a lower frequency of high workload conditions occurring overall.

A recent study by Schroeder and Nye (1993) found a positive correlation between the number of aircraft under the Air Traffic Control Specialist's (ATCS's) control (normalized for the average number of aircraft per ATCS in that center) and the occurrence of OEs involving data posting, position relief briefings, and misuse of displayed radar data. They also found an association between OEs involving coordination problems and both a lower than average number of aircraft and a higher than average number of aircraft. There was no association found between number of aircraft and OEs involving communications problems.

It should be noted that these studies rely on estimates of controller workload that were made following the OE by FAA QA investigators who used a simple workload scale (1 to 5, non-anchored) that is

not clearly defined. The investigators typically receive little or no training on what factors to include in their workload estimates. Thus, non-standardization, as well as potential inaccuracy of estimates made after the fact are limitations affecting the workload measures used in these studies.

There has also been an interest in determining to what degree OEs involve a problem with controller situation awareness (SA) — their mental picture of the constantly changing air traffic situation. Formally defined, SA is the “perception of the elements in the environment within a volume of time and space, the comprehension of their meaning, and the projection of their status in the near future” (Endsley, 1988). It encompasses not only an awareness of specific key elements in the situation (Level 1 SA), but also an integration and comprehension of that information in light of operational goals (Level 2 SA), along with an ability to project future states of the system (Level 3 SA). These higher levels of SA (Levels 2 and 3) are felt to be particularly critical for effective functioning in complex environments, such as air traffic control. In air traffic control, SA involves the continuous awareness of the location of each aircraft, along with pertinent aircraft parameters (speed, heading, communications, etc.) and their projected future locations relative to each other, among many other pieces of information,

to provide minimum separation and efficient aircraft movement. A complete delineation of SA information requirements for en route ATC is provided in Endsley and Rodgers (1994).

Endsley (1995a) developed a taxonomy of SA errors, describing causal factors associated with the occurrence of SA errors (shown in Table 1). This study found that 88% of major air carrier accidents associated with pilot error involved a problem with situation awareness. Of these, 72% involved problems with Level 1 SA, 22% involved problems with Level 2 SA, and 6% involved problems with Level 3 SA.

Table 1 lists general causal factors in the SA error taxonomy associated with a lack of situation awareness at each of its three levels. Problems with SA at Level 1 (perception of the elements in the environment) can occur when needed information (1) is not available through a failure of the system design or communications process, (2) is available but is difficult to detect or perceive, (3) is not observed or monitored, often due to distractions, attentional narrowing, high taskload, or failures in the scanning process, (4) is misperceived, frequently due to erroneous expectations, or (5) is initially perceived, but is forgotten due to failures in working memory, and thus is not taken into account.

---

Table 1. SA Error Taxonomy (modified from Endsley, 1995a)

LEVEL 1: FAILURE TO CORRECTLY PERCEIVE INFORMATION

- Data not available
- Data difficult to detect or perceive
- Failure to monitor or observe data
- Misperception of data
- Memory failure

LEVEL 2: FAILURE TO COMPREHEND SITUATION

- Lack of or poor mental model
- Use of incorrect mental model
- Over-reliance on default values in mental model
- Other

LEVEL 3: FAILURE TO PROJECT SITUATION INTO THE FUTURE

- Lack of or poor mental model
- Overprojection of current trends
- Other

Problems with SA at Level 2 (comprehension of the situation) can occur when information is correctly perceived, but its significance or meaning is not comprehended. This may be because (1) a good mental model for combining and processing perceived information is not available, (2) an incorrect mental model is selected, leading the person to improperly interpret perceived information, (3) there is an overreliance on default values (general expectations about how parts of the system will function) in the mental model, or (4) other factors, such as limited working memory with which to process information or lapses in usual cognitive processes.

Problems with SA at Level 3 (projection of future behavior of elements in the environment) may occur if a person understands what is going on in the current situation but has trouble projecting what that means for the future. This may occur because (1) a good mental model that provides for predictions of system dynamics and behavior is not available, (2) there is a tendency to project future behavior as a linear function of current systems dynamics when the dynamics may change in non-linear ways, or (3) other lapses in cognitive processing.

The SA error taxonomy was applied in a recent study of 146 incidents involving reported problems in SA among both pilots and controllers in NASA's voluntary Aviation Safety Reporting System (ASRS) (Jones & Endsley, 1996). (Only incidents involving air traffic control are discussed here.) Of the 33 incidents involving air traffic controllers, 69% involved problems with Level 1 SA, 19% involved problems with Level 2 SA, and 12% involved problems with Level 3 SA. Of the Level 1 SA errors, the most common problem was a failure to monitor or observe data (51.5%). This was most frequently due to task distraction (53% of these cases), followed by problems with high workload (17.6%), vigilance (11.8%), and other miscellaneous causes (17.7%), such as a failure to scan the runway, failure to notice an aircraft overshoot, and failure to notice traffic on the runway. Other causal factors were also related to Level 1 SA errors: 18.2% involved cases where needed data were not available, 18.2% involved cases where controllers forgot important information (frequently under high workload), 6.1% involved data that were

hard to discriminate or detect, and 6.1% involved the misperception of information.

Level 2 SA errors were attributed to an incomplete or inaccurate mental model (22.2%), the use of an incorrect mental model (22.2%), over-reliance on default values (22.2%), and other miscellaneous factors (33.3%). Level 3 SA errors were attributed to over-projection of current trends (33.3%) and other miscellaneous factors (66.7%). There were no obvious cases of Level 3 errors due to poor mental models.

It should be noted that the errors by air traffic controllers examined in the Jones and Endsley study involved voluntarily reported information from a variety of ATC facilities including air route traffic control centers (ARTCC), TRACONs, and towers (both local and ground control). As such, while the data do provide some information about the types of errors that may occur across different types of ATC, this cannot be viewed as a truly representative, or completely unbiased, sample of controller errors. In addition, it is often difficult to ascertain exactly why some of the errors occurred from the limited information available in such reports.

Most information about errors is based on the analysis of available historical reports. These reports are often not developed with the objective of examining detailed causal factors, are usually based on after-the-fact interviews that may be incomplete or biased, and frequently suffer from problems of inconsistency, as different people usually conduct each investigation. The objective of the present study was to collect more detailed data about OEs than what is available in such accounts, providing for a better understanding of factors that may contribute to their occurrence. This study focused on data gathered on OEs from the Atlanta ARTCC.

To gain more insight into the nature of OEs, the Systematic Air Traffic Operations Research Initiative (SATORI) system was developed (Rodgers & Duke, 1993). SATORI graphically recreates a visual display of the radar data recorded during actual air traffic control (based on computer tapes routinely recorded at each air traffic control facility), synchronized with the recorded audio tapes of communications between controllers and between controllers and pilots. Prior to the development of the SATORI system, it was not

possible for the FAA QA team investigating errors to review the control situation in a format like the one presented to the controller when the OE occurred. That is, the dynamics of the situation (the interaction between control actions and displayed data) were unavailable for review, not only by the QA team investigating the irregularity, but also by the controller who committed the error. This limited not only the extent to which reliable and accurate determinations of causal factors could be made for an error, but also the extent to which the effects of the dynamic situation on controller SA could be determined. The SATORI system allows QA specialists and controllers to view an accurate, dynamic representation of the ATC data associated with an OE.

In the present study, the re-creation of OEs using SATORI was combined with a modification of the Situation Awareness Global Assessment Technique (SAGAT) (Endsley, 1988). SAGAT is a technique used during simulations in which the simulation is frozen at random, unexpected intervals with all display screens blanked and the operator of the simulation is queried about the state of the current situation. The operator's perceptions are then compared to the actual state of the environment to provide an objective assessment of the operator's situation awareness. The use of SAGAT to measure situation awareness in aircraft simulations has been extensively validated (Endsley, 1990a; 1990b).

In this study, SAGAT was modified to include queries that pertain to major factors associated with SA in en route ATC, based on an analysis by Endsley and Rodgers (1994). As a second modification, the technique was employed in conjunction with SATORI, which involves the passive viewing of a situation, as opposed to an interactive simulation in which the subject is involved. While it is not clear how the SA of a passive observer differs from that of an active participant, this measure should still provide an indication of the way in which controllers distribute their attention to various factors involved in the scenarios. As this study involves currently certified controllers viewing re-creations of real OEs, the combined use of SATORI and SAGAT may provide unique insight into factors affecting OEs in operational settings. Due to their rare occurrence and the limited conditions

usually involved in simulations, observing OEs in simulations can prove to be quite difficult.

In addition, it may be considered that SA under passive viewing conditions may be analogous to actual controller tasks if the ATC system ever becomes highly automated. While many of the tasks a controller currently performs support the acquisition and maintenance of SA, the task environment under conditions of high automation may change such that the requirement to perform many routine tasks is eliminated. In this case, the controller would become a monitor of the air traffic situation, which would be controlled by an automated system. Since the scenarios recreated for subjects using SATORI similarly involve the passive monitoring of a situation that is actually controlled by another, this study may provide some insights into SA with a hypothetical highly automated system. This is a concern, as there is some indication that SA may be compromised under highly automated systems (Endsley & Kiris, 1995).

## METHOD

### Subjects

Twenty volunteer subjects participated in the study. All were experienced, full performance level (FPL) air traffic control specialists at Atlanta ARTCC. The 20 subjects included 4 subjects viewing OEs in each of 5 areas of specialization in the facility, as shown in Figure 1. All subjects were certified in the area of specialization for the re-created errors that they observed during the study. Subjects were relieved from their duties on the air traffic control room floor to participate in the study. Once subjects completed their participation, they returned to their assigned duties.

### Procedure

Fifteen OEs that occurred in the Atlanta Air Route Traffic Control Center (ARTCC) in 1993 and 1994 were recreated using SATORI. These errors were selected from errors involving a single ATC sector, based on the availability of complete and legible computer data tapes and audio recordings. Three errors in each of five areas of specialization of the center were selected. (One error was eliminated during



		Area of Specialization				
		1	2	3	4	5
Subjects	S1	error 1 error 2 error 3	S5 error 4 error 5 error 6	S9 error 7 error 8 error 9	S13 error 10 error 11 error 12	S17 error 13 error 14 error 15
	S2	error 1 error 3 error 2	S6 error 4 error 6 error 5	S10 error 7 error 9 error 8	S14 error 10 error 12 error 11	S18 error 13 error 15 error 14
	S3	error 2 error 1 error 3	S7 error 5 error 4 error 6	S11 error 8 error 7 error 9	S15 error 11 error 10 error 12	S19 error 14 error 13 error 15
	S4	error 3 error 2 error 1	S8 error 6 error 5 error 4	S12 error 9 error 8 error 7	S16 error 12 error 11 error 10	S20 error 15 error 14 error 13

Figure 1. Experimental Design

testing due to problems with the data tapes, leaving 14 errors to be included in the analysis.)

Subjects were provided with a set of instructions and signed a voluntary subject consent form. They were then shown scenarios involving three errors from sectors in the area of specialization on which they were certified. Each scenario consisted of a re-creation of the 10 minutes immediately prior to the occurrence of the OE. Twice during each scenario, the re-creation was halted and the screen blanked. The first freeze occurred two minutes prior to the occurrence of the error and the second freeze occurred at the time of the OE in each scenario. Although subjects were informed that freezes would occur, they were not informed of the timing of the freezes or the occurrence of the error.

During each freeze, subjects were provided with a map of the sector. Sector boundaries, navigation aids, airways and intersection markings were shown on the map; however, no aircraft were included. Subjects were asked to indicate the location of all known

aircraft on the map, and, for each aircraft, to indicate or make a judgment of:

- (1) if the aircraft were:
  - (a) in the displayed sector's control,
  - (b) other aircraft in the sector not under sector control, or
  - (c) would be in the sector's control in the next two minutes,
- (2) aircraft call sign,
- (3) aircraft altitude,
- (4) aircraft groundspeed,
- (5) aircraft heading,
- (6) the next sector the aircraft would transition to,
- (7) whether the aircraft was climbing, descending or level,
- (8) whether the aircraft was in a right turn, left turn or straight,
- (9) which pairs of aircraft had lost, or would lose separation if they stayed on their current (assigned) courses,
- (10) which aircraft would be leaving the sector in the next two minutes,

- (11) which aircraft had received clearances that had not been completed and, for those, whether the aircraft received its clearance correctly and whether the aircraft was conforming to its clearance, and
- (12) which aircraft were currently being impacted by weather or would be impacted in the next five minutes.

Of these, queries 1, 2, 3, 4, 5, 7, and 8 can be regarded as pertaining to Level 1 SA, and queries 6, 9, 10, 11, and 12 can be regarded as pertaining to Levels 2 and 3 SA.

Following the completion of the questionnaire, each subject completed a NASA-TLX subjective workload rating (Hart & Staveland, 1988), indicating the amount of workload they felt they would be under if they were controlling the traffic in the scenario presented. Following completion of the NASA-TLX questionnaire, the scenario was resumed until the second freeze. Then, the SA queries and NASA-TLX questionnaire were again presented in the same order, following which the scenario was terminated and the next scenario presented. After all three scenarios had been presented, subjects completed a NASA-TLX workload paired comparison ranking form, allowing each subject's ratings on each NASA-TLX subdimension to be weighted based on the subjective importance of the subdimension to each subject.

### **Apparatus**

SATORI re-creations were presented on a DEC 3000-300 Alpha computer system using dual Sony 19-inch high-resolution (1280 x 1024) color monitors. NASA-TLX ratings were obtained using Hypercard on a Macintosh Powerbook.

## **RESULTS AND DISCUSSION**

### **SA Questionnaire**

Subjects' responses to each question were scored for accuracy based on computer data for each aircraft at the time of each freeze. Subjects' indications of each aircraft's location on the map were matched to the closest aircraft actually present in the sector at the time of the freeze and the distance error recorded. The percentage of aircraft present that were reported by

the subject was calculated. Following that, scoring for each subsequent question was calculated as the number of correct responses compared to the number of aircraft that the subject reported knowing about (e.g., percent correct for altitude was calculated as the number of correct aircraft altitudes reported, divided by the total number of aircraft reported.) Subjects' responses for each question were scored as either correct or incorrect, based on operationally determined tolerance intervals (as listed in Table 2). Missing responses were scored as incorrect. It should be noted that the selected sample of errors had a higher number of aircraft (Mean = 12.9, S.D. = 5.6) than typically occur at ZTL (Mean = 8.43, S.D. = 1.86); however, given the focus of the study on controller situation awareness in a future automated ATC system, it was deemed appropriate. Automation and higher traffic levels have been associated with the future operations of NAS. The study employed a passive ATC task involving situation monitoring, although this task is quite different than the current ATC task, which involves active control, it generally represents the cognitive task environment that might be associated with excessive automation.

Means and standard deviations for subject response accuracy are shown in Table 2. On average, 12.8 aircraft were present at the time of the freezes (range 4 to 23) across scenarios. Of these, subjects on average reported 8.0 aircraft or 67.1% of the aircraft present. Mean distance error was 9.6 miles (.68 inches) from the aircrafts' reported location to their actual location. This may reflect aircraft movement occurring during the visual scan (while the controller was viewing other aircraft) or may also be an artifact of the passive viewing procedure used in this study.

For the aircraft reported, the correctness of subject responses on the remaining questions was calculated. Subjects correctly identified the control level of the aircraft (in sector control, other aircraft in sector, will be in sector control in the next 2 minutes) for 73.8% of the aircraft reported. Aircraft callsigns were often incomplete. The initial alphabetical part of the callsign (indicating airline company, military, or civil aircraft designation) was reported correctly 73.8% of the time. The numerical part of the callsign (the aircraft identification number) was reported correctly for only

Table 2. Awareness of Situation Across all Subjects and Scenarios

VARIABLE	MEAN	STD. DEV.
Actual aircraft present (number)	12.9	5.6
Aircraft reported (%)	67.1	18.0
Distance error (miles)	9.6	4.5
Control level (% correct)	73.8	17.3
Call sign: alphabetic (% correct)	79.9	23.4
Call sign: numeric (% correct)	38.4	32.0
Altitude (+/- 300 feet) (% correct)	59.7	22.1
Change in altitude (% correct)	66.4	25.6
Speed (+/- 10 knots) (% correct)	28.0	25.6
Heading (+/- 15 degrees) (% correct)	48.4	30.6
Turn (% correct)	35.1	40.2
Separation problems (% correct)	86.2	32.3
Transition to next sector (% correct)	63.5	45.1
Assigned clearances complete (% correct)	23.2	22.9
Assigned clearance correct (% correct)	74.4	43.9
Assigned clearance conformance (% correct)	82.9	37.9
Weather impact (% correct)	60.7	49.1

38.4% of the aircraft. It should be noted that other studies have found that, in general, 4% of OEs involve readback errors associated with aircraft identification (Rodgers & Nye, 1993). The low level of accuracy in recall knowledge of aircraft callsigns is probably highly indicative of these readback errors, as it indicates that controllers may not attend to or retain much information on aircraft callsign in working memory, particularly the identification number.

Aircraft altitude was correctly reported ( $\pm 300$  ft) for 59.7% of the aircraft (mean error of 655 ft). The aircraft were correctly identified as ascending, descending, or level 66.4% of the time. Correct ground-speed ( $\pm 10$  knots) was reported for only 28.0% of the aircraft (mean error 21.8 knots). Correct aircraft heading ( $\pm 15$  degrees) was reported for 48.4% of the aircraft (mean error 15.6 degrees). Only 35.1% of the aircraft were correctly identified as being in a left turn, right turn, or proceeding straight ahead. These results indicate that subjects were fairly poor at keeping up with the dynamics of the aircraft in the scenario, at least for many of the aircraft.

An argument can be made that perhaps subjects simply did not retain this type of detailed information about each aircraft (Level 1 SA) and instead, maintained awareness of higher level situation comprehen-

sion and projection issues (e.g., aircraft separation and future projections of actions). Previous research, however, indicates that people do maintain task relevant information about Level 1 SA elements that can be recalled reliably under SAGAT testing when actively performing in a simulation (Endsley, 1990a). There is also evidence that this measurement technique is reflective of subject attention allocation across sources of information (Fracker, 1990). It is more likely, therefore, that these measures do provide some indication of the ways in which subjects in this study were deploying their attention across displayed information, at least on a relative basis.

The subjects' higher level of understanding of the scenarios was also evaluated. The aircraft pairs they identified as having "lost or will lose separation if they stay on their current (assigned) courses" was compared to those aircraft that actually had lost or would lose separation (in the following two minutes) at the time of the freeze. Subjects correctly identified 86.2% of these aircraft pairs. (Aircraft pairs that the subject identified as having potential separation problems, but did not, were not scored.) Subjects correctly identified 63.5% of aircraft that would be leaving the sector in the next two minutes. Thus, they did not appear to be fully aware of upcoming sector transitions.

Subjects correctly identified only 23.2% of aircraft that had not yet completed control assignments. Of those that they identified as not having completed an assignment, subjects correctly determined in 74.4% of the cases if the aircraft had correctly received its assignment and correct in 82.9% of the cases if the aircraft was conforming to its assignment. Overall, subjects did not attend well to an aircraft after a clearance was given, in terms of monitoring for compliance or progress in completing the control action, most likely because they may have been concentrating on other traffic present.

Subjects were incorrect in identifying weather as a current impact (or impact in the next 5 minutes) in 39.3% of the scenarios. This is perplexing, in that even though light and heavy weather symbols were displayed in some scenarios, poor weather did not impact traffic in any of the scenarios presented. This finding most likely indicates that controllers have difficulty estimating the impact of weather on air traffic based on available data, an issue which has previously been raised by controllers.

The frequency of correct responses on each variable provides some insight into the trade-offs that controllers make in allocating their limited attention across multiple aircraft and pieces of information that compete for that attention. This analysis is not meant to be critical regarding the information controllers did not attend to or retain in working memory. Attention allocation strategies, such as those indicated here, are needed and are effective most of the time in dealing with the demands of controlling air traffic, as can be demonstrated by the effective daily performance of controllers and relatively low nationwide error rates. A point that can be made, however, is that these strategies may lead to a lack of situation awareness that occasionally (due to a probabilistic link between SA and performance [Endsley, 1995b]) results in errors. This point is reinforced in that the patterns of attention demonstrated here can be correlated with certain systematic characteristics of OEs.

It should also be noted that a fairly high degree of variability was present on many of the variables, across aircraft, subjects, freezes, and scenarios. Possible sources of these variations will be examined more closely.

### **Analysis of Freeze Number**

An analysis was conducted to ascertain if there was a difference between the first and second freezes in the subjects' ability to correctly identify what was happening in the scenarios. The first freeze always occurred two minutes before the OE and the second freeze always occurred at the time of the error. A multivariate test was performed on the accuracy of subjects' responses across the queries to examine differences between these two freeze times. (All measures, expressed as percent correct, were subjected to an arcsine transformation prior to analysis to meet the conditions of ANOVA.) The MANOVA was not significant,  $F(13,98) = 1.554$ ,  $p > .05$ . Therefore, subjects' recall of the situation was not significantly different as a function of the presence of an OE.

An analysis was also conducted to determine whether subjects reported a different level of subjective workload between the two freezes, as there is a concern that higher workload may be associated with the occurrence of OEs. The NASA-TLX ratings were weighted based on each subject's rankings and a combined workload score was calculated. An ANOVA was conducted on the combined workload ratings to test for differences between the two freezes. The overall NASA-TLX workload rating was significantly higher at the time of the second freeze (during the OE),  $F(1,109) = 24.08$ ,  $p < .001$ , as shown in Figure 2.

To investigate further, ANOVAs were performed on each of the subscale ratings (performance, temporal demand, frustration, mental demand, effort, and physical demand), revealing that ratings were significantly higher at the second freeze for all of the subscales (see Table 3) except for physical demand, which is as would be expected. This supports the contention that higher workload is associated with OEs; however, it is unclear whether higher workload caused the error, or whether the higher workload ratings were the result of the error (i.e., higher ratings on the subscales of stress, frustration, demand, effort, and performance could have been an outcome of the fact that an error occurred).

### **Analysis of Workload Impact**

**Subjective workload.** Since subjective workload was higher at the time of the OE, further analysis was conducted to determine if there was a direct relationship

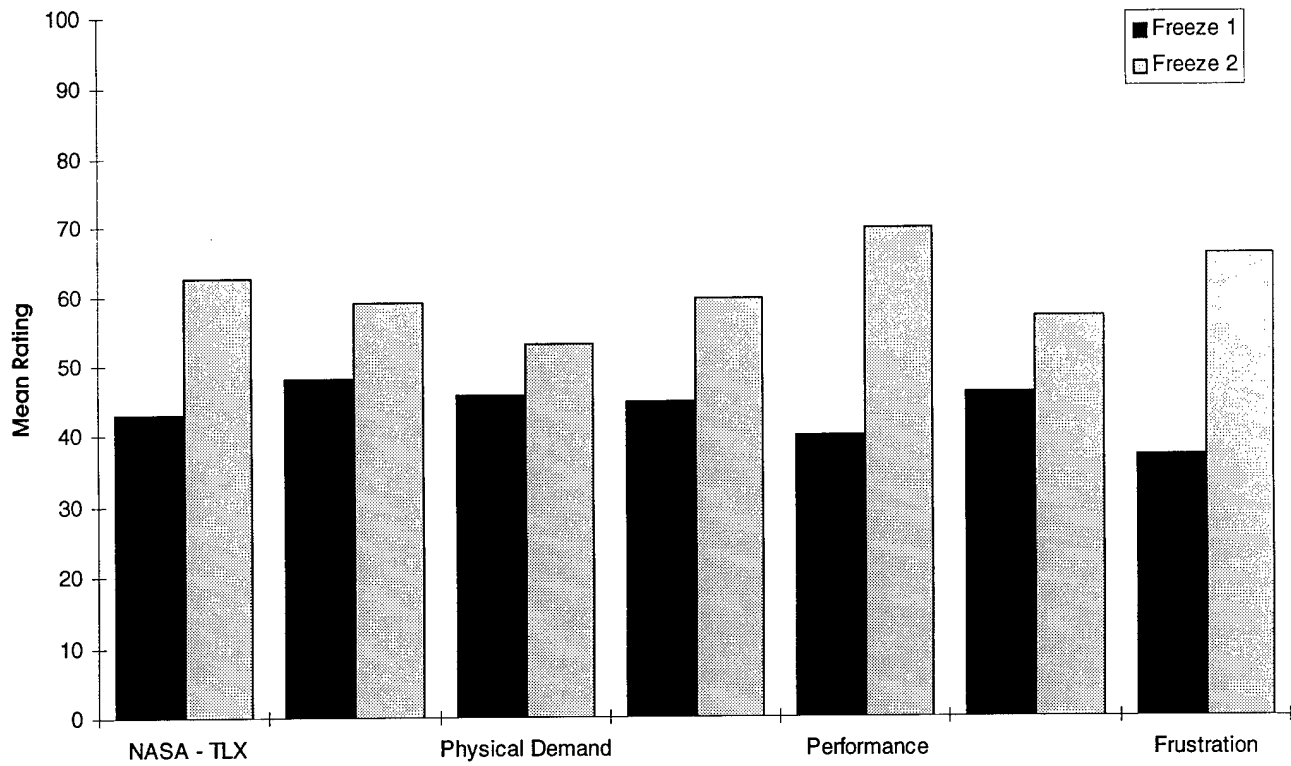


Figure 2. Mean Workload Ratings at Each Freeze

Table 3. ANOVAs: Impact of Freeze Number on NASA- TLX Rating and Subscale Scores

VARIABLE	df	F	p	
NASA-TLX (overall)	1, 109	24.079	.001	**
- Performance	1, 109	41.705	.001	**
- Temporal	1, 109	9.580	.002	**
- Frustration	1, 109	30.094	.001	**
- Mental	1, 109	5.722	.018	*
- Effort	1, 109	5.231	.024	*
- Physical	1, 109	2.193	.142	

\* significant at  $\alpha = .05$  level

\*\* significant at  $\alpha = .01$  level

Table 4. Regressions: Relationship between NASA- TLX Rating and Awareness of the Situation

VARIABLE	r <sup>2</sup>	df	F	p
Distance error (miles)	.004	1, 109	.475	.492
Aircraft reported (% correct)	.064	1, 109	7.418	.008 **
Control level (% correct)	.006	1, 109	.674	.413
Call sign: alphabetic (% correct)	.017	1, 109	1.882	.173
Call sign: numeric (% correct)	.000	1, 109	.039	.843
Altitude (% correct)	.001	1, 109	.120	.730
Change in altitude (% correct)	.015	1, 109	1.715	.193
Speed (% correct)	.018	1, 109	2.049	.155
Heading (% correct)	.048	1, 109	5.484	.021 *
Turn (% correct)	.018	1, 109	1.956	.165
Separation problems (% correct)	.023	1, 109	2.618	.109
Transition to next sector (% correct)	.022	1, 109	2.495	.117
<u>Assigned clearances complete (% correct)</u>	<u>.065</u>	<u>1, 109</u>	<u>7.573</u>	<u>.007 **</u>

- all measures expressed in percentages were subjected to an arcsine transformation prior to analysis

\* significant at  $\alpha = .05$  level

\*\* significant at  $\alpha = .01$  level

Table 5. ANOVAs: Relationship between NASA- TLX Rating and Awareness of the Situation

VARIABLE	df	F	p
Assigned clearance correct (y/n)	1, 79	5.705	.019 *
Assigned clearance conformance (y/n)	1, 79	.388	.535
<u>Weather impact (y/n)</u>	<u>1, 109</u>	<u>2.807</u>	<u>.097</u>

\* significant at  $\alpha = .05$  level

between the NASA-TLX combined rating and subjects' accuracy in their awareness of the situation. Regressions were performed on the subjects' scores (in terms of percentage correct) in comparison to their workload ratings at the time, shown in Table 4. Those variables scored as correct or incorrect were subjected to an analysis of variance to determine whether workload ratings were associated with accuracy of recall, shown in Table 5. A MANOVA showed a significant relationship between these variables and the NASA-TLX score,  $F(14,96) = 1.93, p < .05$ . (Assignment correct and assignment conformance were not included in the multivariate analysis as they would significantly reduce the degrees of freedom in the test. These two questions had a lower sample size because they were only asked for aircraft that had not yet completed their assigned clearances.)

The regressions revealed that subjects reported significantly fewer aircraft present (Figure 3) and identified aircraft heading correctly significantly less often

for those aircraft (Figure 4) as subjective workload level increased. In addition, with increasing levels of workload, subjects were significantly less likely to correctly identify whether aircraft had completed their assigned clearances (Figure 5) and were significantly less likely to identify whether an aircraft had received its assigned clearance correctly (Figure 6).

**Number of aircraft.** An objective measure of taskload was also examined to determine its impact on subject awareness and perceived workload. The number of aircraft present at the time of each freeze was calculated and regressions performed to examine its relationship to accuracy on each question (in terms of percentage correct), shown in Table 6. Those variables scored as correct or incorrect were subjected to an analysis of variance to determine whether number of aircraft was related to accuracy, shown in Table 7. A MANOVA showed a significant relationship between these variables and the number of aircraft present,  $F(14,97) = 9.50, p < .001$ .

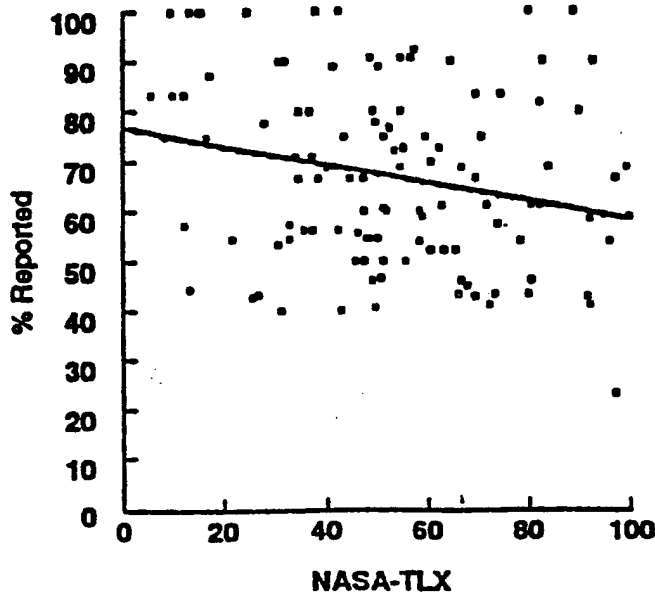


Figure 3. Impact of Subjective Workload on Aircraft Reported

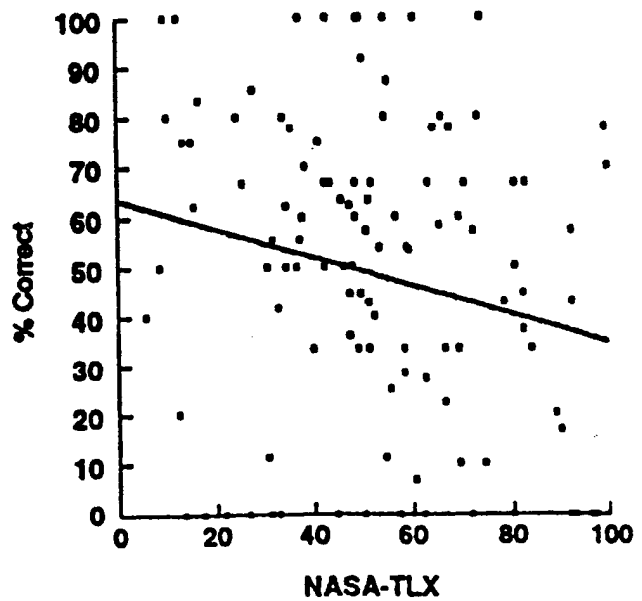


Figure 4. Impact of Subjective Workload on Awareness of Aircraft Heading

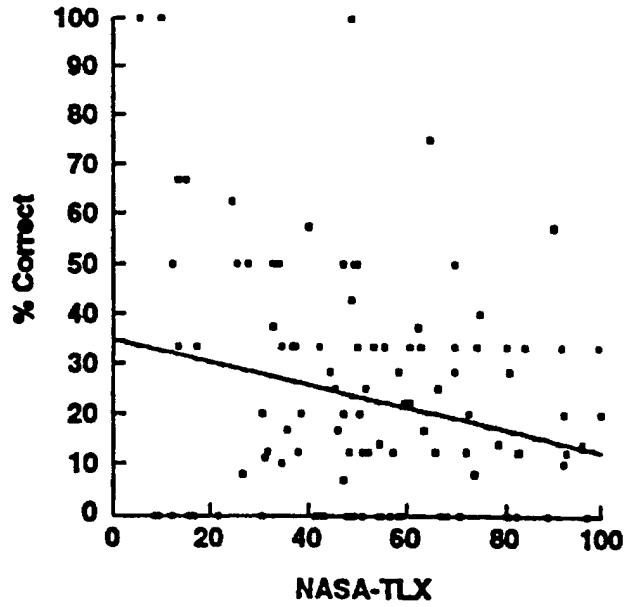


Figure 5. Impact of Subjective Workload on Awareness of Aircraft with Clearances Not Completed

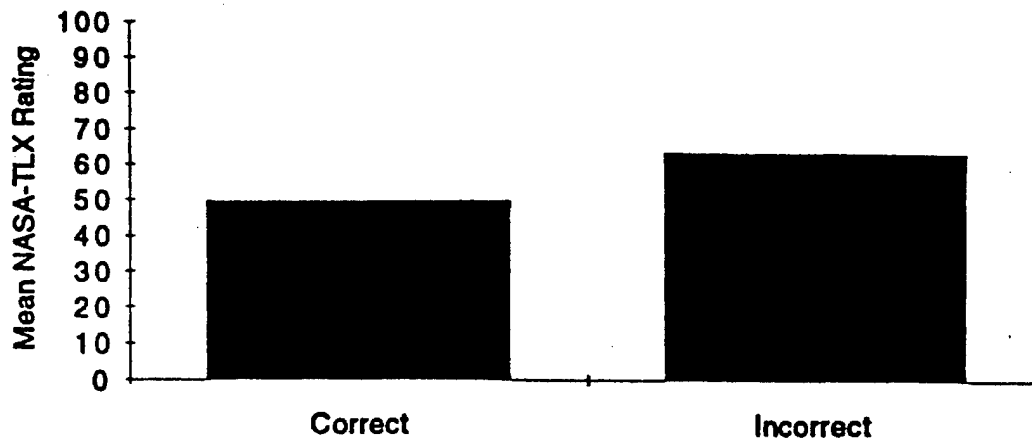


Figure 6. Relationship Between Subjective Workload Rating and Awareness of Correct Receipt of Assigned Clearance



As the number of aircraft increased, the percentage of aircraft that subjects reported as present significantly decreased (Figure 7). For those aircraft that subjects did report, subjects were also significantly less accurate on most of the other factors about those aircraft as the number of aircraft present increased. They were significantly more erroneous in their awareness of the location of the aircraft (Figure 8), and correct less frequently regarding the aircrafts' control level (Figure 9), both the alphabetic portion and numeric portion of the call sign (Figures 10 and 11),

altitude (Figure 12), change in altitude (Figure 13), airspeed (Figure 14), and heading (Figure 15) as the number of aircraft increased. They were also correct significantly less frequently in their awareness of which aircraft would transition out of the sector in the next two minutes (Figure 16), which aircraft had completed their assigned clearances (Figure 17), and if weather would be a factor (Figure 18) as the number of aircraft increased. Interestingly, the number of aircraft present did not affect subjects' accuracy in reporting which aircraft had a potential or current separation problem.

Table 6. Regressions: Relationship between Number of Aircraft and Awareness of Situation

VARIABLE	r <sup>2</sup>	df	F	p
Distance error (miles)	.052	1, 110	6.091	.015 *
Aircraft reported (% correct)	.331	1, 110	54.409	.001 **
Control level (% correct)	.108	1, 110	13.324	.001 **
Call sign: alphabetic (% correct)	.075	1, 110	8.945	.003 **
Call sign: numeric (% correct)	.103	1, 110	12.619	.001 **
Altitude (% correct)	.080	1, 110	9.556	.003 **
Change in altitude (% correct)	.057	1, 110	6.660	.011 *
Speed (% correct)	.150	1, 110	19.400	.001 **
Heading (% correct)	.037	1, 110	4.187	.043 *
Turn (% correct)	.006	1, 110	.695	.406
Separation problems (% correct)	.003	1, 110	.386	.536
Transition to next sector (% correct)	.128	1, 110	16.200	.001 **
Assigned clearances complete (% correct)	.072	1, 110	8.479	.004 **

- all measures expressed in percentages were subjected to an arcsine transformation prior to analysis

\* significant at  $\alpha = .05$  level

\*\* significant at  $\alpha = .01$  level

Table 7. ANOVAs: Relationship between Number of Aircraft and Awareness of Situation

VARIABLE	df	F	p
Assigned clearance correct (y/n)	1, 80	.003	.960
Assigned clearance conformance (y/n)	1, 80	2.789	.099
Weather impact (y/n)	1, 110	8.898	.004 **

\* significant at  $\alpha = .05$  level

\*\* significant at  $\alpha = .01$  level

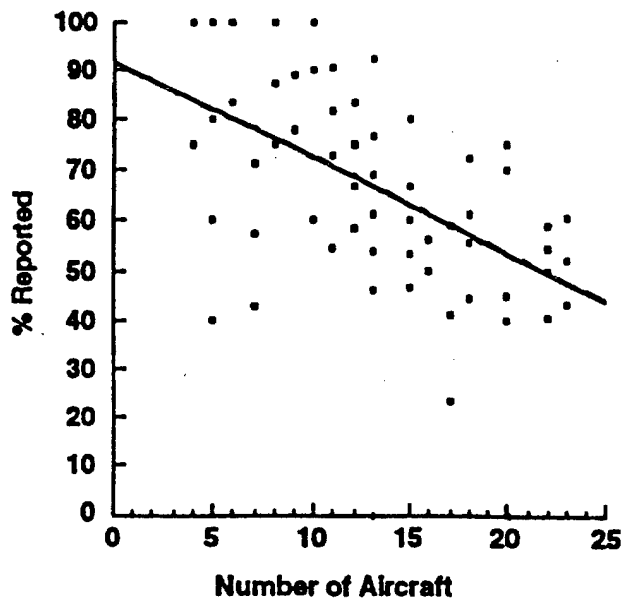


Figure 7. Impact of Number of Aircraft on Aircraft Reported

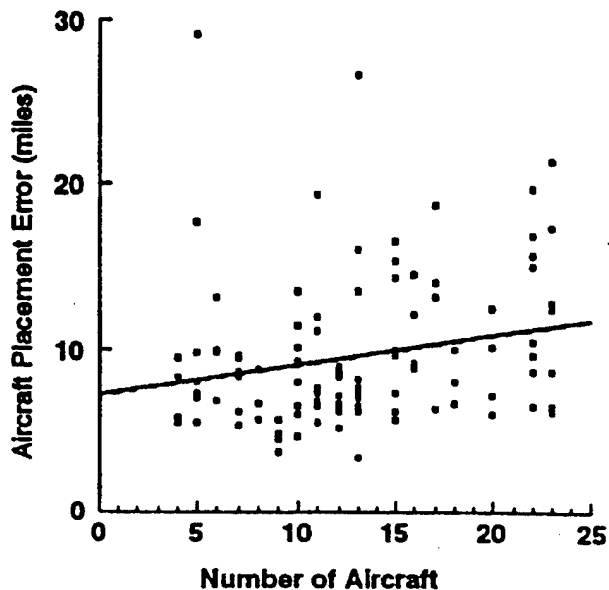


Figure 8. Impact of Number of Aircraft on Aircraft Placement Accuracy

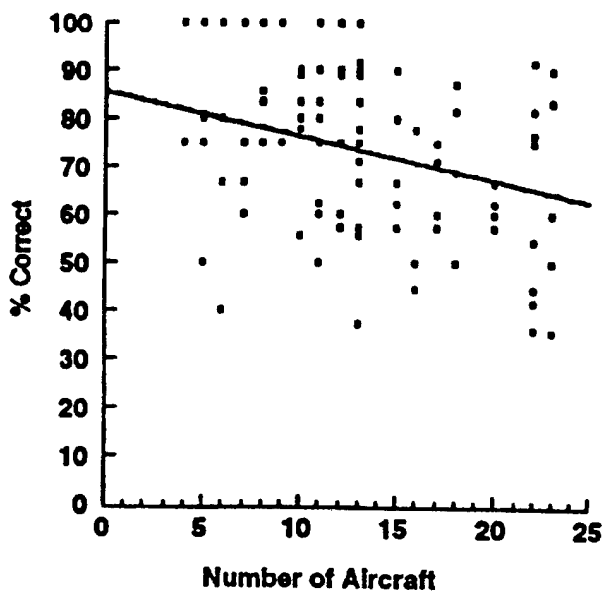


Figure 9. Impact of Number of Aircraft on Awareness of Aircraft Control Level

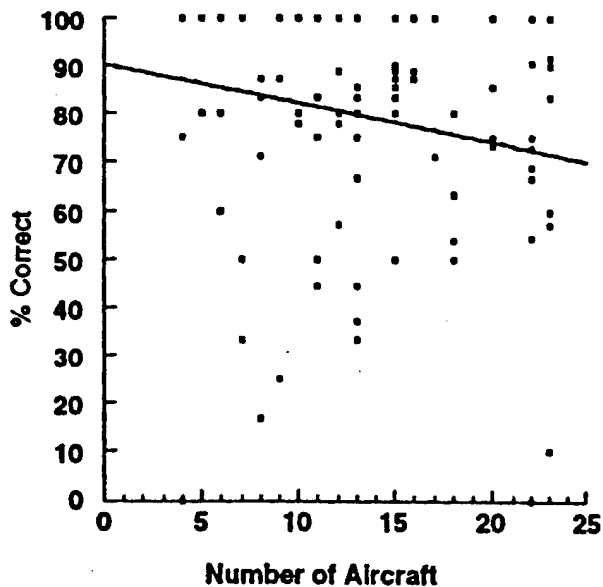


Figure 10. Impact of Number of Aircraft on Awareness of Aircraft Callsign (Alphabetic)

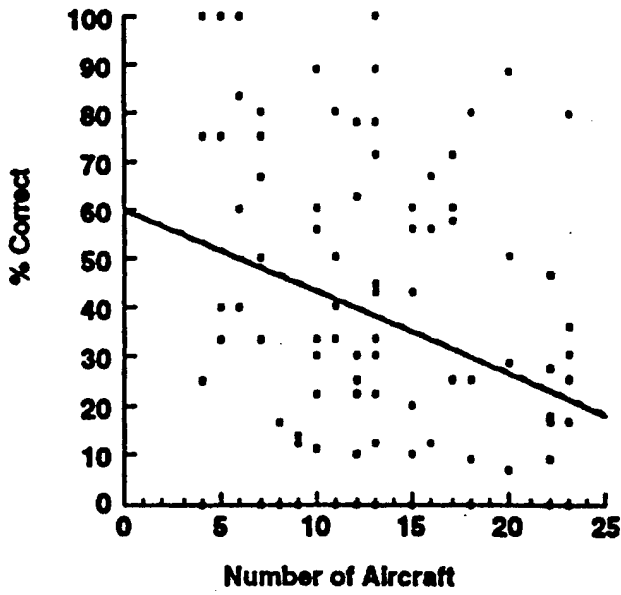


Figure 11. Impact of Number of Aircraft on Awareness of Aircraft Callsign (Numeric)

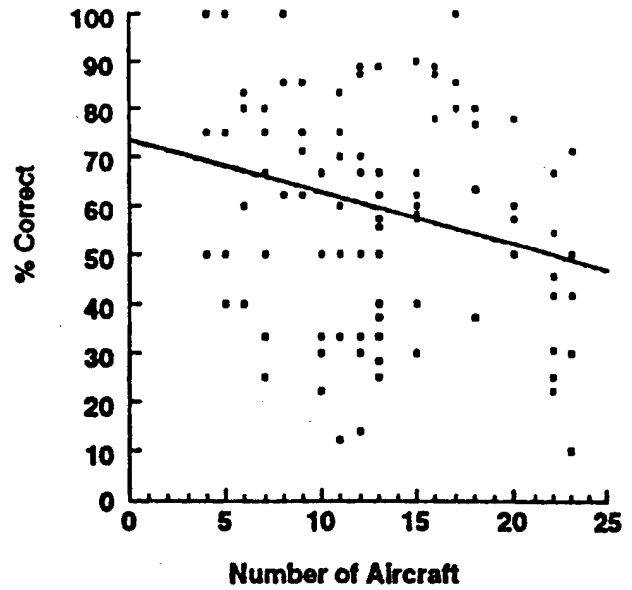


Figure 12. Impact of Number of Aircraft on Awareness of Aircraft Altitude

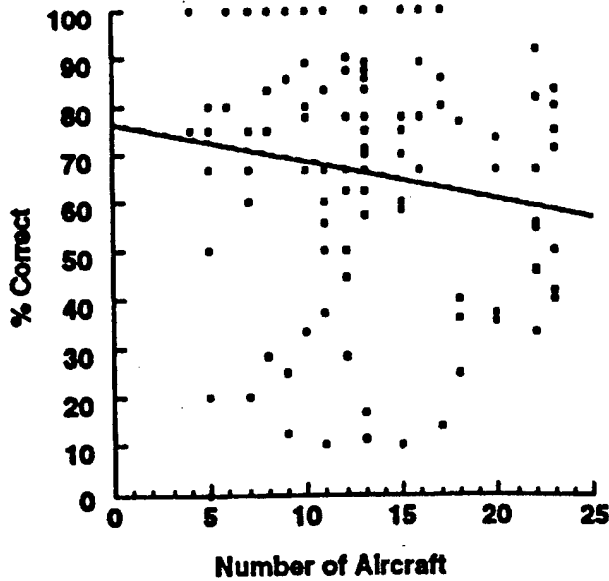


Figure 13. Impact of Number of Aircraft on Awareness of Aircraft Change in Altitude

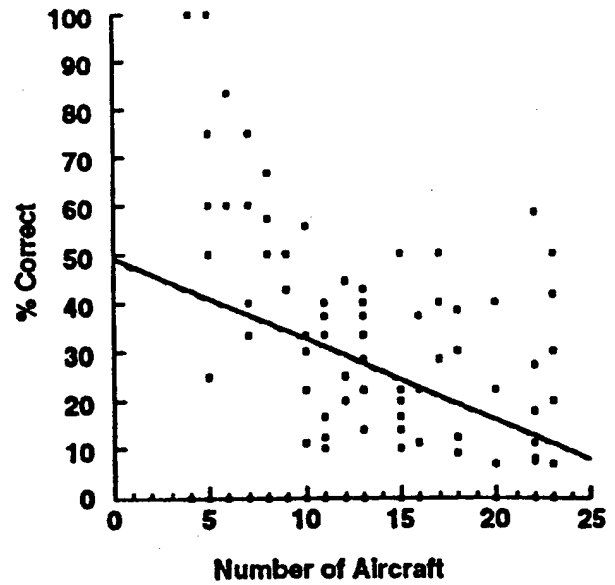


Figure 14. Impact of Number of Aircraft on Awareness of Aircraft Speed

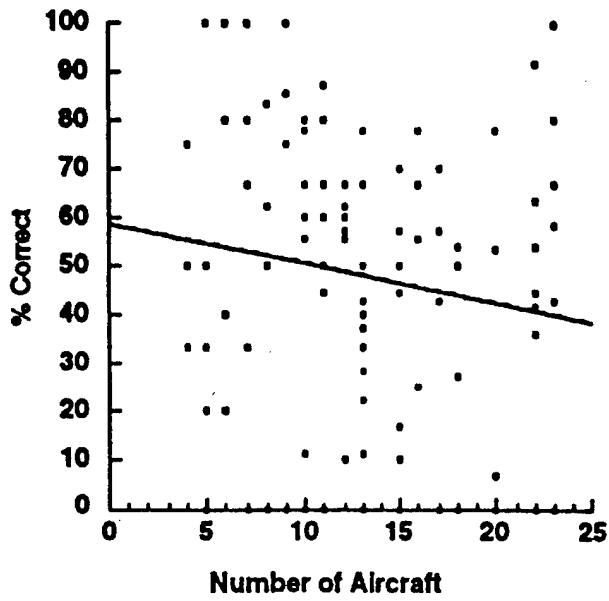


Figure 15. Impact of Number of Aircraft on Awareness of Aircraft Heading

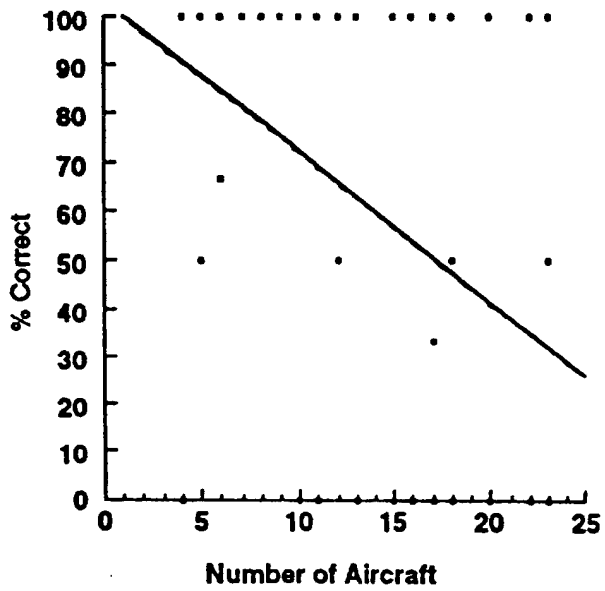


Figure 16. Impact of Number of Aircraft on Awareness of Aircraft Transitioning Out of Sector

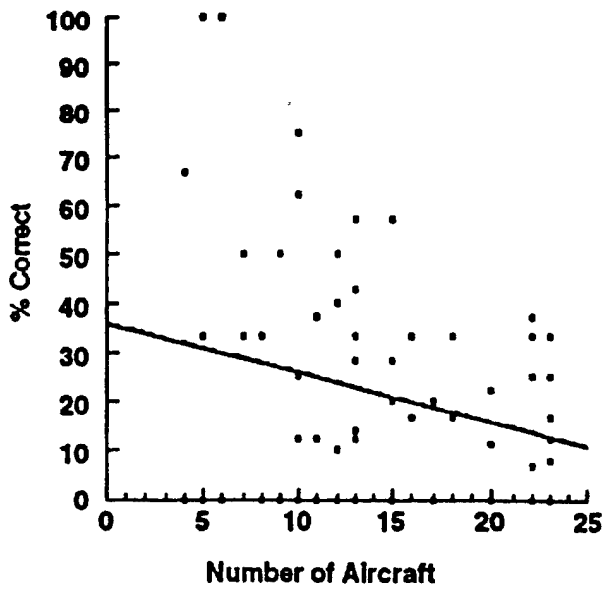


Figure 17. Impact of Number of Aircraft on Awareness of Aircraft Assignment Completion

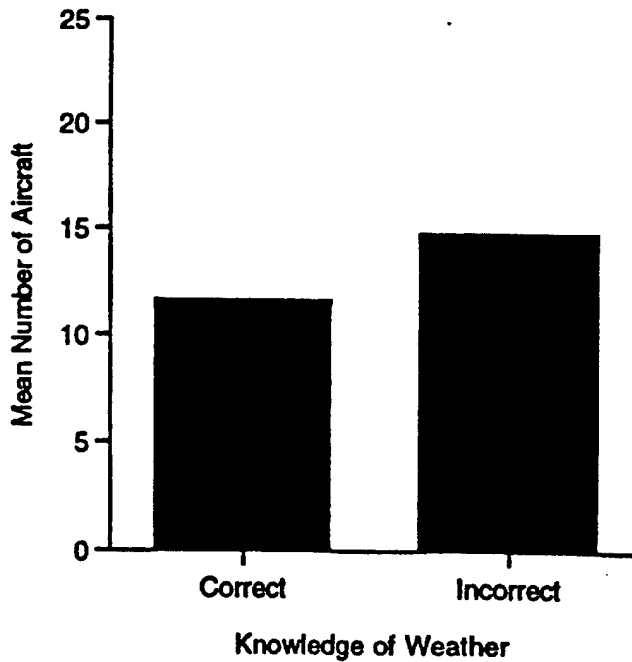


Figure 18. Impact of Number of Aircraft on Awareness of Weather

**Correlation between measures.** An analysis was also conducted to determine the relationship between the number of aircraft present, as an objective measure of taskload, and subject's reported subjective workload. A regression showed a significant relationship between these two measures of load,  $F(1,109) = 6.45$ ,  $p = .013$ , as shown in Figure 19. It appears that the number of aircraft present in a scenario is a significant driver of perceived workload that negatively impacts subjects' ability to keep an accurate mental picture of the situation, independent of any other factors that might also drive subjective workload. An increase in the number of aircraft present not only was related to a tendency to attend to fewer aircraft, but also to the tendency to know significantly less about these aircraft. This load-related shedding of information attended to appears to reflect some prioritization of tasks, as awareness of those aircraft with current or potential separation problems was not significantly impacted by workload.

#### Analysis of Operational Errors

A closer examination of the nature of the OEs included in this study was made. Table 8 provides a summary of each error. Each error was classified in terms of the SA Error Taxonomy (Endsley, 1995a). Classifications were made by two independent raters based on a description of each OE contained in the Final Operational Error/Deviation Report completed by internal FAA quality assurance investigators after the OE, an analysis of each OE from the SATORI recreation, and verbal comments made by the subjects in this study.

Of the 14 errors investigated, 5 clearly involved task distractions in which the controller was distracted by the need to attend to other aircraft in the sector. Three involved the misperception of some information (due to expectations, workload, or task distraction). Two OEs involved memory loss (associated with task distraction and high workload) in which the controller forgot about an aircraft or a previous action. Two OEs involved an over-reliance on defaults, expecting aircraft to behave as they usually do. Four involved problems with inadequate projection of the dynamics of the aircraft to anticipate separation problems. High workload was specifically cited as a problem in one OE.

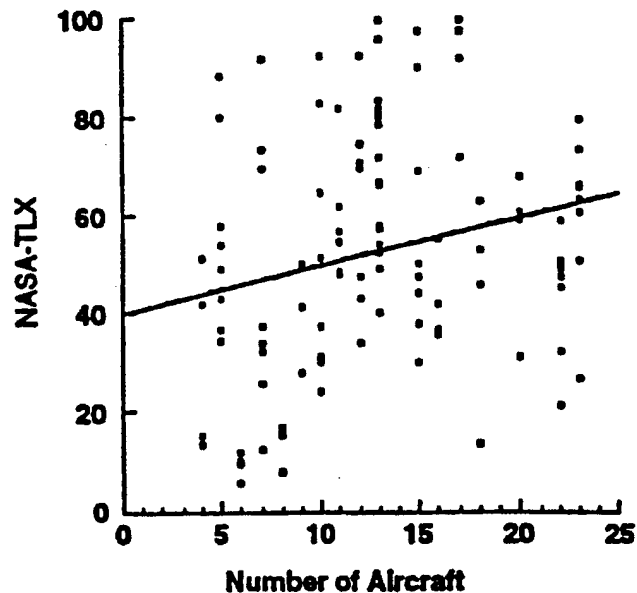


Figure 19. Relationship Between Number of Aircraft and Subjective Workload Ratings

Because controllers routinely must cope with competing task demands and high workload situations, an analysis was made to determine whether the situations in which these OEs occurred were intrinsically likely to induce errors. Each of the investigated errors is listed in Table 9, along with a listing of the number of aircraft in the sector at the time of the OE and a rating of the complexity of the scenario (as reported in the Final Operational Error/Deviation Report). (This information was not included in the reports for Scenarios 6, 12 and 13.) Scenarios 1, 2, and 14 had the highest level of complexity and highest number of aircraft in the sector at the time of the error, followed by scenarios 9 and 11. Scenarios 3, 4, 7, and 10 had lower than average complexity and number of aircraft at the time of the error. This agrees with previous findings that many OEs occur during low workload situations.

Table 9 also lists whether the controller making the OE was aware that the OE was occurring at the time. (This information was not available for two of the errors.) In 4 out of the remaining 12 OEs, the controller was aware that an error was building but was not able to avoid it. In the remaining eight, the controller was not aware that an OE had occurred.

Table 8. Summary of Operational Errors Investigated

Scenario	Description of Error	SA Error Type	
1	Clearance to wrong aircraft	Level 1 - misperception Level 1 - failure to monitor (task distraction)	Confused two aircraft Attending to other aircraft
2	Descended aircraft into other aircraft	Level 2 - inadequate mental model Level 3 - lack of projection	
3	difference in climb/closure rates of two aircraft	Level 3 - lack of projection	
4	difference in climb/closure rates of two aircraft	Level 3 - lack of projection	
5	Expected aircraft to descend faster than it did	Level 2 - over-reliance on defaults	
6	Readback error	Level 1 - misperception (expectations)	
7	Delay in turning aircraft to accomodate slow descent of other aircraft	Level 3 - lack of projection	Didn't turn soon enough
8	Forgot aircraft - provided inadequate clearance	Level 1 - memory loss task distraction	
9	Did not separate aircraft	Level 1 - failure to monitor task distraction	Other radio calls
10	Readback error - aircraft at different altitude	Level 1 - misperception task distraction	
11	Gave wrong heading command Didn't monitor compliance	Level 1 - failure to monitor	
12	Descended aircraft into other aircraft	Level 1 - failure to monitor Level 2 - over-reliance on defaults	
13	Climbed aircraft into other aircraft didn't judge separation	Level 1 - task distraction	
14	Issued clearance to aircraft off frequency Lost track of slow aircraft climb rate	Level 1 - memory loss - workload Level 1 - failure to monitor- workload	

Table 9. Subject Awareness of Error

Scenario	Complexity Rating	Number of Aircraft in Sector	Controller Aware of Error at Occurance	Subjects Aware of Involved Aircraft at Stop 1 (%)	Subjects Aware of Involved Aircraft at Stop 2 (%)	Subjects Aware of Error at Stop 1 (%)	Subjects Aware of Error at Stop 2 (%)
1	5	14	no	75	87	-	75
2	5	12	no	87	87	-	75
3	2	7	no	87	100	25	75
4	1	2	yes	100	100	-	100
5	3	5	yes	100	87	-	75
6	-	-	no	100	100	-	100
7	1	3	no	100	100	50	100
8	3	-	no	75	87	-	75
9	4	10	yes	87	100	50	100
10	2	5	no	100	100	-	100
11	4	8	no	100	87	-	75
12	-	-	-	87	100	-	75
13	-	-	-	67	100	-	50
14	5	12	yes	75	100	25	100

As a comparison, the responses of the subjects in this study were examined to determine whether they were aware that separation errors were developing. The percentage of the four subjects viewing each scenario who reported the existence of the two aircraft involved in the OE at each of the two freezes is listed in Table 9. While for many of the scenarios both aircraft were reported by all four subjects, at least one of the involved aircraft was not reported at all by at least one subject in approximately one-half of the scenarios at the first freeze and approximately one-third of the scenarios at the second freeze.

In their response to the question regarding which aircraft had lost, or would lose separation in the next two minutes, in only four of the scenarios did even one of the four subjects list the two aircraft involved in the OE at the freeze, which occurred two minutes before the OE. At the time of the second freeze, when the OE occurred, at least one of the four subjects did not identify the separation error in eight of the fourteen scenarios. In three of these cases, they reported both aircraft but did not indicate a separation problem. In the remaining five scenarios, they also failed to report at least one of the involved aircraft, indicating it was outside of their focus.

Based on this analysis, it would appear that the factors causing the controller to make an error in many of these OEs were significant enough to have been a problem for other trained controllers. This result should be viewed with caution, however, as the method employed in this study involved passive viewing of the scenarios, instead of being under actual operational control.

## CONCLUSIONS

This study reveals many interesting findings on the role of situation awareness and workload in operational errors. Significant deficiencies in the ongoing situation awareness of the subjects were present in this study. They had a fairly low ability to report on the existence of many aircraft, or accurately recall their location or many of their parameters. Their accuracy was significantly impacted by the number of aircraft present in the scenario and, to a lesser degree, by perceived workload. After the number of aircraft

present exceeded approximately eight to ten, the ability of subjects to report on each aircraft declined quite rapidly. Even for those aircraft they did report on, their awareness of the relevant parameters for these aircraft also declined when there were more than approximately ten aircraft present. In the face of a high number of aircraft, subjects tended to attempt to maintain their awareness of aircraft separation; however, this was still less than perfect (86.2% correct on average). Other tasks, such as follow through on clearances given to aircraft, also appeared to suffer under increases in the number of aircraft and perceived workload.

While it is difficult to say that controllers need to be able to remember aircraft parameters as long as they know about aircraft separation, the pattern of attention represented by the accuracy scores in this study are indicative of many of the OEs that occur. Readback errors, for instance, may be directly related to the tendency for subjects in this study to have a fairly low awareness of whether aircraft given clearances had received the clearance correctly. (Subjects were only correct in 23.2% of the cases in knowing if an aircraft had completed its assigned clearance, and of these, in only 74.4% of the cases did they know if the aircraft had received its assigned clearance correctly.) Problems in reporting the numeric portion of callsigns is also reflective of OE error patterns. Many of the OEs included in this study involved over-reliance on expectations about how fast aircraft would travel or should ascend or descend. Low accuracy in reporting on the speed and heading of aircraft and being able to report whether aircraft were turning, ascending, or descending are most likely indicative of this type of error.

An important issue is why these SA problems occur. It is a mistake to infer that these subjects (or the controllers involved in the errors) were simply inattentive. Everyone has a limited amount of attention to distribute in any situation (Wickens, 1992). In complex activities, such as air traffic control, there is a great deal of information to process. The pattern of errors in this study suggests that, even if subjects made as much use of their attention as possible in keeping up with the scenarios, they may have had to limit attention to some information in order to keep up with the need to ensure that all aircraft were separated.

Probabilistically, this strategy is effective much of the time, but is likely to produce occasional errors of the type described here.

Information regarding the role of workload in the occurrence of OEs is also present here. Subjective workload, as measured by NASA-TLX, was significantly higher at the time of the operational error than it was two minutes prior in the scenarios. (The number of aircraft was not higher, however.) While the NASA-TLX score was correlated with the number of aircraft present, the number of aircraft present was more closely related to decreases in subjects' awareness of the situation (beyond a certain number of aircraft). (What other factors are included by subjects in their subjective workload ratings is unknown.)

It is important to note, however, that low and moderate levels of SA were also present on many variables even when the number of aircraft was relatively low. This finding concurs with other studies that have found that SA and workload can operate independently for various reasons (Endsley, 1993). OEs were also found to occur under high-, moderate-, and low-load conditions (as indicated by the number of aircraft present). Thus, while workload and in many of these cases, momentary task distraction, can be associated with loss of SA and OEs, errors can also occur for other reasons at lower levels of workload.

One limitation of this study is that it involved subjects who, although current, experienced controllers, passively viewed the ATC scenario re-creations. While this procedure provided a great deal of insight into factors affecting actual OEs (which can be difficult to produce under simulated conditions), one can speculate as to whether their situation recall accuracy and subjective workload ratings are the same as they would be for controllers actively working the same scenarios. While it is probably difficult to stipulate that the absolute levels of SA and workload reported would be the same, the general *patterns* presented here are probably valid as reflections of subjects' attention distribution.

It is somewhat likely, however, that *levels* of SA may be lower under passive viewing conditions, rather

than active decision making, such as has been demonstrated under higher levels of automation in recent research (Endsley & Kiris, 1995). In this light, difficulties in accurately identifying aircraft separation problems shown by subjects in this study may be at least partially reflective of the difficulties associated with passive monitoring. This possibility needs to be seriously investigated with regard to systems being developed for automating future air traffic control.

As a basis of comparison, Mogford and Tansley (1991), using a procedure similar to SAGAT during actual simulations of air traffic control with controller trainees, found that subjects were able to report aircraft position with 86% accuracy, heading 82%, altitude 73%, callsign 55% and speed 53%. In comparison with the data we obtained during passive viewing, the attention devoted to each type of information is similarly distributed; however, the Mogford and Tansley study showed much higher levels of SA, even though they studied controller trainees who would be theorized to have lower SA than Full Performance Level controllers. This supports the contention that SA may be compromised under passive viewing, which should be a significant concern for automation systems designed to place the controller in the role of passive monitor.

In conclusion, this study may indicate several sources leading to operational errors. The degree to which these results are generalizable to controllers involved in actively controlling air traffic needs to be investigated, since the method employed in this study involved passive viewing of the scenario, instead of actual operational control of the aircraft. Comparable data need to be examined during simulations of air traffic control to verify similar attention allocation to situation variables and responses to workload. At the very least, issues regarding SA demonstrated in this study may be indicative of problems that can be expected if air traffic control ever becomes highly automated, relegating the controller to a monitor. Alternate automation designs that keep the controller in the active decision making loop need to be explored to prevent such an outcome.



## REFERENCES

- Endsley, M.R. (1988). Design and evaluation for situation awareness enhancement. In *Proceedings of the Human Factors Society 32nd Annual Meeting* (pp. 97-101). Santa Monica, CA: Human Factors Society.
- Endsley, M.R. (1990a). A methodology for the objective measurement of situation awareness. In *Situational Awareness in Aerospace Operations (AGARD-CP-478)* (pp. 1/1 - 1/9). Neuilly Sur Seine, France: NATO - AGARD.
- Endsley, M.R. (1990b). Predictive utility of an objective measure of situation awareness. In *Proceedings of the Human Factors Society 34th Annual Meeting* (pp. 41-45). Santa Monica, CA: Human Factors Society.
- Endsley, M.R. (1993). Situation awareness and workload: Flip sides of the same coin. In R.S. Jensen & D. Neumeister (Eds.), *Proceedings of the Seventh International Symposium on Aviation Psychology* (pp. 906-911). Columbus, OH: Department of Aviation, The Ohio State University.
- Endsley, M.R. (1995a). A taxonomy of situation awareness errors. In R. Fuller, N. Johnston, & N. McDonald (Eds.), *Human Factors in Aviation Operations* (pp. 287-292). Aldershot, England: Avebury Aviation, Ashgate Publishing Ltd.
- Endsley, M.R. (1995b). Toward a theory of situation awareness. *Human Factors*, *37*(1), 32-64.
- Endsley, M.R., & Kiris, E.O. (1995). The out-of-the-loop performance problem and level of control in automation. *Human Factors*, *37*(2), 381-394.
- Endsley, M.R., & Rodgers, M.D. (1994). *Situation awareness information requirements for en route air traffic control* (DOT/FAA/AM-94/27). Washington, DC: Federal Aviation Administration Office of Aviation Medicine. Available from: National Technical Information Service, Springfield, VA 22161; ordering no. ADA289649.
- Fracker, M.L. (1990). Attention gradients in situation awareness. In *Situational Awareness in Aerospace Operations (AGARD-CP-478)* (Conference Proceedings #478) (pp. 6/1-6/10). Neuilly Sur Seine, France: NATO - AGARD.
- Hart, S.G., & Staveland, L.E. (1988). Development of NASA-TLX (Task Load Index): Results of empirical and theoretical research. In P.A. Hancock & N. Meshkati (Eds.), *Human mental workload* (pp. 139-183). Amsterdam: North-Holland.
- Jones, D.G., & Endsley, M.R. (1996). Sources of situation awareness errors in aviation. *Aviation, Space and Environmental Medicine*, *67*(6), 507-512.
- Kinney, G.C., Spahn, M.J., & Amato, R.A. (1977). *The human element in air traffic control: Observations and analyses of the performance of controllers and supervisors in providing ATC separation services* (MTR-7655). McLean, VA: METREK Division, MITRE Corporation.
- Mogford, R.H., & Tansley, B.W. (1991). *The importance of the air traffic controller's mental model*. Paper presented at the Human Factors Society of Canada Annual Meeting, Canada.
- Rodgers, M.D., & Duke, D.A. (1993). SATORI: Situation assessment through the re-creation of incidents. *Journal of Air Traffic Control*, *35*(4), 10-14.
- Rodgers, M.D., & Nye, L.G. (1993). Factors associated with the severity of operational errors at Air Route Traffic Control Centers. In M.D. Rodgers (Ed.) *An analysis of the operational error database for Air Route Traffic Control Centers (DOT/FAA/AM-93/22)*. Washington, DC: Federal Aviation Administration Office of Aviation Medicine. Available from: National Technical Information Service, Springfield, VA 22161; ordering no. ADA275986.
- Schroeder, D.J. (1982). The loss of prescribed separation between aircraft: How does it occur? In *Proceedings of the Behavioral Objectives in Aviation Automated Systems* (pp. 257-269). Anaheim, CA: Society of Automotive Engineers (SAE).
- Schroeder, D.J., & Nye, L.G. (1993). An examination of the workload conditions associated with operational errors/deviations at air route traffic control centers. In M.D. Rodgers (Ed.) *An analysis of the operational error database for Air Route Traffic Control Centers (DOT/FAA/AM-93/22)*. Washington, DC: Federal Aviation Administration Office of Aviation Medicine. Available from: National Technical Information Service, Springfield, VA 22161; ordering no. ADA275986.
- Stager, P., & Hameluck, D. (1990). Ergonomics in air traffic control. *Ergonomics*, *33*(4), 493-499.
- Wickens, C.D. (1992). *Engineering Psychology and Human Performance* (2nd ed.). New York: Harper Collins.