



<http://www.diva-portal.org>

Preprint

This is the submitted version of a paper published in *Plasma Physics and Controlled Fusion*.

Citation for the original published paper (version of record):

Passoni, M., Zani, A., Sgattoni, A., Dellasega, D., Macchi, A. et al. (2014)
Energetic ions at moderate laser intensities using foam-based multi-layered targets.
Plasma Physics and Controlled Fusion, 56(4): 045001
<http://dx.doi.org/10.1088/0741-3335/56/4/045001>

Access to the published version may require subscription.

N.B. When citing this work, cite the original published paper.

Permanent link to this version:

<http://urn.kb.se/resolve?urn=urn:nbn:se:uu:diva-232870>

Energetic ions at moderate laser intensities using foam based multi-layered targets

M. Passoni¹, A. Zani¹, A. Sgattoni^{1,2}, D. Dellasega¹, A. Macchi², I. Prencipe¹, V. Floquet³, P. Martin³, T. V. Liseykina⁴, T. Ceccotti³,

¹ *Dipartimento di Energia, Politecnico di Milano, and Sezione di Milano INFN, Milan, Italy*

² *CNR/INO sezione "Adriano Gozzini", Pisa, Italy*

³ *CEA/DSM/IRAMIS/SPAM, Gif sur Yvette, France*

⁴ *Institut für Physik, Universität Rostock, D-18051 Rostock, Germany*

Experimental feasibility of the laser driven ion acceleration concept with multi-layered, foam-based targets has been investigated. Targets with the required features have been produced and characterized, exploiting the potential of the Pulsed Laser Deposition technique. In the intensity range 10^{16} - 10^{17} W/cm² they allow to obtain maximum proton energies 2-3 times higher if compared to the bare solid target case, allowing to reach and overcome the MeV range with both low and ultrahigh contrast pulses. Two dimensional particle in cell data, supporting the interpretation of the experimental results, and directions to exploit the concept also at ultrahigh intensities, are presented.

Superintense laser-driven ion acceleration represents today a research topic of unique interest, both for fundamental reasons and for its potential towards future applications [1, 2]. A possible improvement in the acceleration performances mainly relies on three major, interrelated issues: i) detailed theoretical understanding of the laser-ion acceleration physics, possibly leading to the identification of new and/or optimized acceleration schemes; ii) further developments in laser technology, to provide laser pulses with further improved parameters; iii) availability of targets with novel properties, mainly to better exploit and control the laser-matter interaction phase. The scientific and technical communities devoted great efforts to all of these areas in the last years. An attractive direction to be followed is the research of methods to increase the efficiency of the ion acceleration mechanism through a major enhancement of the laser energy absorption by the target. This would allow to achieve an optimization of the acceleration for given laser properties, which is of great importance both to soften the request for continuous improvements of laser parameters and to meet conversion efficiency levels required for specific applications.

In this context, a key role is played by the identification and production of novel, smart target designs [1, 2]. Several kinds of micro and nano structured targets have been investigated in the last years, showing promising results [3–6]. Recently, few numerical studies investigated multi-layered target configurations, in which a near-critical film is superimposed on the surface of a thin solid foil directly illuminated by the laser [7–9]. The basic idea is to exploit the near-critical layer (called *foam* in the following) to increase the efficiency in the generation of relativistic electrons, to drive an enhanced Target Normal Sheath Acceleration (TNSA)-like process. These studies suggest that the maximum proton energy can be significantly increased using this target configuration if the foam parameters (density and thickness) values are adequately matched for given laser pulse properties. Successful development of this scheme would be very interesting for several reasons. First, ion energies in the MeV range

could be obtained using laser pulses with moderate intensity. Second, the gained amplification of the maximum ion energy could be exploited in combination with the highest available laser intensities to reach and overcome the 10^2 MeV/nucleon level, as required for several applications. Moreover, this scheme would allow to achieve this enhancement while maintaining all the appealing features of TNSA, like the high degree of collimation and laminarity, high brilliance and low emittance of the accelerated ion beam. From an experimental point of view, such multi-layered target configuration poses significant challenges because, to properly mimic the idealized conceptual system, it is required to produce a film having a mean density orders of magnitude lower than the usual solid density, with enough flexibility in properly tailoring its parameters while guaranteeing at the same time satisfactory adhesion onto the solid foil. These aspects make the target preparation itself an advanced fundamental research topic in the area of material science and engineering, and the experimental activity of target preparation must rely on techniques typical of nanoscience and technology.

In this Letter we show the experimental feasibility of the multi-layered, foam-based, TNSA-like acceleration concept. Targets with the required features have been produced and characterized, fully exploiting the potential of the Pulsed Laser Deposition (PLD) technique. The produced targets were tested in acceleration experiments involving laser pulses covering a wide range of intensities, both at high and low laser contrast. Due to the characteristics of the targets that we have been able to produce so far, the most significant results were observed at relatively moderate intensities, in the 10^{16} - 10^{17} W/cm² range. For these pulses we have been successful in demonstrating a systematic 2-3 fold enhancement in the maximum proton energy, thanks to a significant increase of the laser-target coupling with respect to the use of a plain solid foil, allowing to reach and overcome the MeV range. Two dimensional particle-in-cell (2D-PIC) simulations have been exploited to support the interpre-

tation of the experimental results.

The multi-layered targets were prepared at the Micro and Nanostructured laboratory of Politecnico di Milano. Foam layers were obtained by depositing very open and porous nanostructured carbon films with PLD, tuning the deposition parameters so to reach mean mass densities as low as few mg/cm^3 [10]. The adopted deposition process allows to directly grow the C foam layers on top of thin solid foils (Al in this case), thus solving the problem of achieving complete adhesion between the two layers. Representative SEM images, showing the morphology at the mesoscale of a foam layer attached on a solid substrate, are given in Fig. 1. As a general remark, this method allows to obtain foam layers with variable density and thickness, which we are presently able to control within defined ranges (further details can be found in Ref. [10]). For the present proof-of-principle experiments, two different Al-foil thicknesses, 1.5 and 10 μm , were used, while the C foams were produced with mass densities equal to $\sim 5\text{-}10 \text{ mg}/\text{cm}^3$ and thicknesses of about 12 μm (on the 1.5 μm -thick Al) and 23 μm (on the 10 μm -thick Au) respectively. These mass-density values, assuming total or partial ionization of the foam layer after interaction with the laser (depending on the interaction conditions, see below), should correspond to nearly critical or slightly sub-critical foam-electron density n_f (with C^{6+} and $\lambda=0.8 \mu\text{m}$, $1 n_c$ corresponds to $5.7 \text{ mg}/\text{cm}^3$).

The ion acceleration experiments were performed at the Saclay Laser Interaction Center Facility, using the UHI100 laser, which delivers intense pulses at a central wavelength of 790 nm. Different laser conditions were explored. In particular, intensities in the range 5×10^{16} - $5 \times 10^{19} \text{ W}/\text{cm}^2$ were adopted, by properly changing the focal spot size (3.5-150 μm , FWHM) at fixed pulse energy E_p (2 J) and duration τ_p (25 fs). Both low (LC) and high (HC) contrast of the beam were adopted, equal to 10^6 and

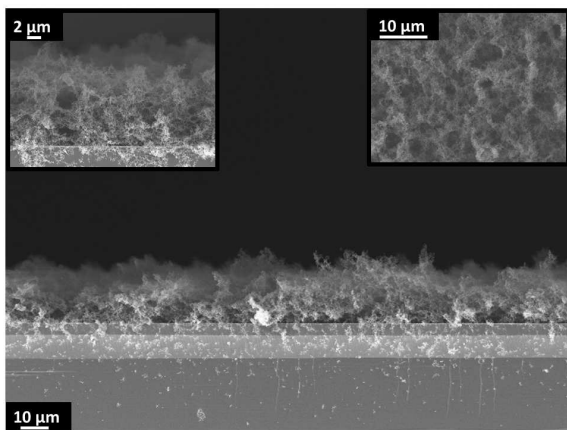


FIG. 1. Representative cross-section SEM image of a typical carbon foam layer attached onto a solid foil. The left inset shows the same area at higher magnification, while the right inset reports the foam top-view morphology at the mesoscale.

10^{12} , respectively. The angle of incidence was 10° . Proton spectra have been recorded with a Thomson parabola (TP) spectrometer, placed normally to the target surface at a distance of 600 mm and with an 200 μm diameter entrance pinhole, this allowing for a $E/\Delta E$ about 50. Once dispersed by the magnetic and electric fields of the spectrometer, protons and ions were detected by a two stage 40 mm diameter micro channel plate (MCP) coupled to a phosphor screen. The image was recorded by a 12 bit CCD camera. **The MCP efficiency for proton energies in our range of interest was assumed to be linear [11, 12]**

Fig. 2 shows the maximum proton energy, $E_{p(max)}$, as a function of laser intensity for two different sets of system parameters. Here the change of laser intensity was achieved by means of a focal spot variation in the range 3.5 and 150 μm (FWHM), either in LC (top graph) or in HC (bottom graph) configuration. As a common feature among the different explored experimental configurations using foam-attached target, we measured proton maximum energies in excess of 1 MeV even well below $10^{18} \text{ W}/\text{cm}^2$ and above 300 keV (detection limit) down to $10^{16} \text{ W}/\text{cm}^2$. More in detail, from the highest intensity down to $\sim 10^{18} \text{ W}/\text{cm}^2$, E_{max} obtained with the foam attached targets are comparable with the case without foam. On the other hand, below $10^{18} \text{ W}/\text{cm}^2$, an increase of $E_{p(max)}$ is systematically observed with foam attached targets, while the values obtained with bare solid targets soon fall below the detection limit. These results prove that, differently from what is widely reported about “ordinary” TNSA using bare solid foils [1, 2], by exploiting this target configuration MeV protons become accessible already with 10^{16} - $10^{17} \text{ W}/\text{cm}^2$ laser intensities. TP data (not shown) reveal that the number of highest-energy protons with multi-layer targets is always comparable or even higher with respect to the case of the bare solid foil. In addition, these measurements demonstrated the production of well collimated, TNSA-like proton beams, differently from what recently obtained in schemes involving other kinds of nanostructured targets [6]. A further remarkable aspect, compared to other examples of target structuring [3, 13, 14], is that the enhancement of maximum proton energy is observed independently from the laser pre-pulse intensity, i.e. both at low and high-contrast, which can constitute a simplification of the experimental setup for specific purposes.

Based on these experimental data and on previous theoretical-numerical investigation [8], a relatively simple, qualitative, interpretative picture can be drawn. At the highest available intensities in this experiment, around $4 \times 10^{19} \text{ W}/\text{cm}^2$, we expect an almost complete ionization within the volume of the foam illuminated by the laser pulse, which implies the formation of a relatively thick ($\gtrsim 10 \mu\text{m}$) slightly over-critical layer. At this intensity, the interaction between the laser pulse and either the solid or such foam-attached layer will produce comparable accelerating fields, thus leading to a similar TNSA-like scenario (see also below). On the other

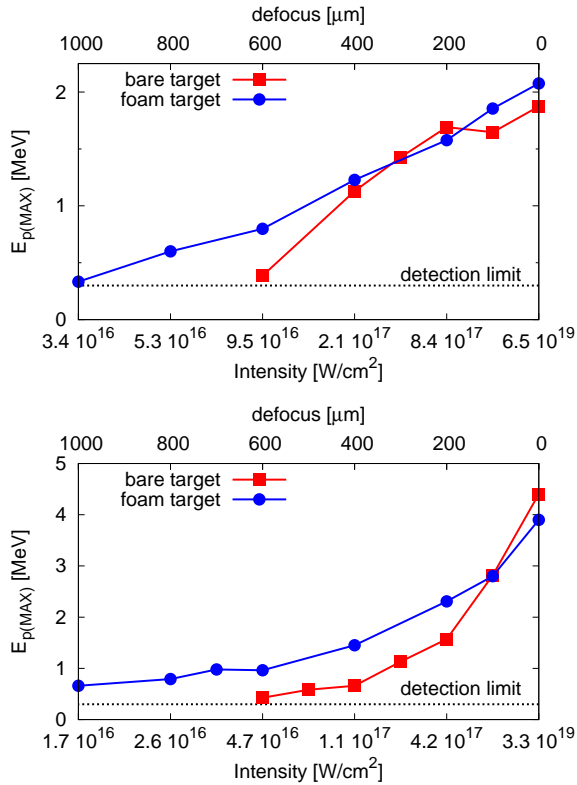


FIG. 2. Comparison between ordinary (red squares) and foam-attached targets (blue circles). Maximum proton energy as a function of laser intensity, varied by changing the focal spot size on target, both in LC configuration (top graph) and HC configuration (bottom graph). The detection limit of the TP is 300 keV.

hand, at lower intensities (10^{16-17} W/cm^2), only partial ionization of the C nanoparticles in the foam is to be expected, leading to the generation of a slightly sub-critical plasma. To quantitatively address this point, using the 2D-PIC code with ionization UMKA [ref?](#), we tested the case of a laser pulse with $I = 2 \times 10^{18} \text{W}/\text{cm}^2$ irradiating a low density carbon layer. For this configuration, an average C^{4+} ionization has been observed. Also looking at the ionization energies of C, we can therefore estimate that $\text{C}^{2+}/\text{C}^{4+}$ are more likely to be formed by field ionization below $10^{18} \text{W}/\text{cm}^2$, corresponding to $n_f = 0.4 - 0.5 n_{cr}$. In these conditions, the propagation of the laser pulse in the foam is possible even at sub relativistic intensities and allow a volume interaction, leading to the efficient production of relativistically hot electrons [8]. On the contrary, in the case of interaction with a solid-density foil, the generation of hot electrons is strongly quenched below $10^{18} \text{W}/\text{cm}^2$.

This physical scenario was checked with the help of numerical simulations. The relevant numerical studies available in the literature [7–9] cannot be directly compared with the experimentally investigated conditions, since the former mostly considered higher pulse intensities (above $10^{20} \text{W}/\text{cm}^2$) and targets having idealized,

near-critical/slightly overdense, thinner plasma layers. As a consequence, the experimental results here presented correspond to so far numerically unexplored parameters. For this reason, dedicated 2D-PIC simulations were performed, using the code ALaDyn [15]. The laser pulse has $\lambda=0.8 \mu\text{m}$, 25 fs FWHM duration and gaussian intensity space profile. The normalized vector potential a_0 has been varied between 0.5 and 4, corresponding to an intensity range of $5 \times 10^{17} - 3.5 \times 10^{19} \text{W}/\text{cm}^2$. The foam-attached targets consist of 3 layers: foam, solid and contaminants (the target without foam having 2 layers). The foam layers have thickness 8-12 μm and densities $2n_{cr}$ (for laser pulses having $2 \leq a_0 \leq 4$) and $0.66n_{cr}$ (for $0.5 \leq a_0 \leq 2$, to take into account the partial ionization) and are initialized with 25 macro-ions ($Z/A=1/2$ for $2n_{cr}$ and $Z/A=1/6$ for $0.66n_{cr}$) and 25 macro-electrons per cell. The solid foil is simulated with 25 macro-ions ($Z/A=1/3$) and 49 macro-electron per cell, thickness 0.5 μm and density $40n_{cr}$. The contaminant (proton) layer

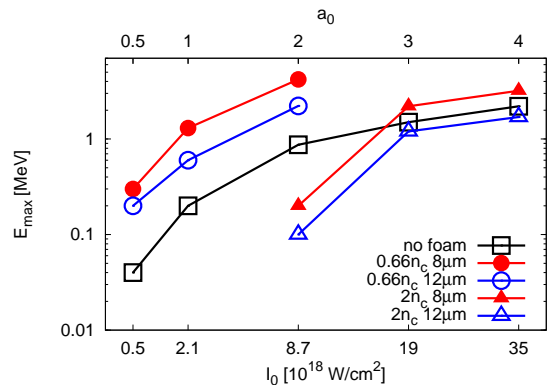


FIG. 3. 2D-PIC results of maximum proton energy as a function of intensity comparing target with and without foam layer (black squares). Foams have density $n_f = 2n_{cr}$ (triangles) and $n_f = 0.66n_{cr}$ (circles) for two different thicknesses: 8 μm (red full symbols) and 12 μm (blue empty symbols).

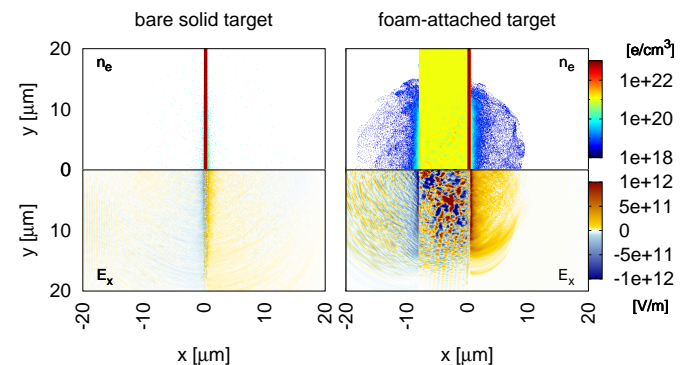


FIG. 4. Comparison of the electron density and longitudinal electric field obtained in PIC simulation considering a bare solid target or a foam-attached target ($n_f = 0.66n_c$ $l_f = 8 \mu\text{m}$) for $a_0 = 1$.

has 25 macro-protons and 9 macro-electrons per cell, 50 nm thickness and density $10n_{cr}$. In the simulations, time $t = 0$ corresponds to the moment when the laser starts interacting with the plasma, while the maximum proton energy has been evaluated at $t = 200$ fs. In Fig. 3 the numerical E_{max} are shown as a function of laser intensity. For the highest intensities the maximum proton energy is similar for both cases with and without foam. As soon as the laser normalized intensity $a_0 \leq n_f/n_{cr}$ (for over-critical plasma), the laser cannot propagate through the foam implying very low energy protons. If a lower foam density is considered ($0.66n_{cr}$, circles in figure), even at moderate intensities (5×10^{17} - 2×10^{18} Wcm $^{-2}$, $a_0=0.5$ -1) the laser propagates through the foam and effectively couples with the plasma, leading to the generation of a more intense sheath field, resulting in an enhanced proton acceleration with respect to bare targets. As an example, in Fig. 4 the electron density and longitudinal electric field show how in presence of a foam layer the laser ($a_0 = 1$) accelerates a large number of electrons building up a stronger accelerating field. We can consequently identify two regimes, depending on both laser intensity and foam parameters, relevant for the performed experiments. Above 10^{18} Wcm $^{-2}$, up to 4×10^{19} , no clear distinction between targets with and without foams is observed, as far as the maximum proton energy is concerned. In this regime, numerical results suggest that either a lower foam density or a thinner foam layer should be used, in order to obtain a better laser-target coupling and higher proton energies. While in principle detailed control of the relevant foam parameters should be possible with suitable optimization of the adopted deposition technique [10], in the present experiments the foam layers were too thick, in connection with the specific values of electron foam density and available laser intensity. On

the other hand, below 10^{18} Wcm $^{-2}$ the foam-attached targets always lead to a significantly enhanced proton acceleration regime: numerical data confirm this picture, according to which a not complete ionization of the foam leads to an effective slightly under-dense plasma and, ultimately, to a much larger absorption of the laser energy, resulting in a more intense accelerating field [8] and in proton energies up to three times higher with respect to the bare target case.

In conclusion, we have shown the feasibility of a novel and robust laser-ion acceleration scheme, based on the use of a multi-layer target, able to provide MeV proton energies using moderate pulse intensities, well below the relativistic threshold of 10^{18} W/cm 2 . The role of the produced foam layers, obtained depositing suitable nanostructured C films with PLD, on the increase of the laser energy absorption by the target, has been clarified, thanks to 2D-PIC analysis. These achievements also pave the way for further improvements, by exploiting the developed techniques to produce the novel foam layers and related multi-layered targets with parameters optimized for superintense pulses (above 10^{19} W/cm 2), to explore the possibility to reach in this way values of maximum ion energies and laser-to-ion conversion efficiency of concrete interest for specific future applications.

The research leading to these results has received funding from LASERLAB-EUROPE (grant agreement no. 228334, EC's Seventh Framework Programme), proposal n.SLIC001689. We also acknowledge the support of the Italian Ministry for Education, Universities and Research (FIRB Futuro in Ricerca, SULDIS Project) and, for the simulations, PRACE for awarding us access to resource FERMI based in Italy at CINECA, via the project LSAIL.

-
- [1] H. Daido *et al.*, Rep. Prog. Phys. **75**, 056401 (2012).
 - [2] A. Macchi *et al.*, Rev. Mod. Phys. **85**, 751-793 (2013).
 - [3] D. Margarone *et al.*, Phys. Rev. Lett. **109**, 234801 (2012).
 - [4] V. Floquet *et al.*, J. Appl. Phys. **114**, 083305 (2013).
 - [5] S. A. Gaillard *et al.*, Phys. Plasmas **18**, 056710 (2011).
 - [6] A. Zigler *et al.*, Phys. Rev. Lett. **106**, 134801 (2011); A. Zigler *et al.*, Phys. Rev. Lett. **110**, 215004 (2013).
 - [7] T. Nakamura *et al.*, Phys. Plasmas **17**, 113107 (2010).
 - [8] A. Sgattoni *et al.*, Phys. Rev. E **85**, 036405 (2012).
 - [9] H. Y. Wang *et al.*, Phys. Plasmas **20**, 013101(2013).
 - [10] A. Zani *et al.*, Carbon **56**, 358 (2013).
 - [11] H. Schwoerer *et al.*, Nature **439**, 445 (2006).
 - [12] S. Ter-Avetisyan *et al.*, J. Phys. D **38**, 863 (2005).
 - [13] T. Ceccotti *et al.*, Phys. Rev. Lett. **99**, 185002 (2007).
 - [14] S. Bouffechoux *et al.*, Phys. Rev. Lett. **105**, 015005 (2010).
 - [15] C. Benedetti *et al.*, IEEE Trans. Plasma Sci. **36**, 1790 (2008).