

CERIAS

the center for education and research in information assurance and security

Energy-Efficient Provenance Transmission in Large-Scale Wireless Sensor Networks



S. M. Iftexharul Alam
Electrical and Computer Engineering, Purdue University

Sonia Fahmy
Computer Science, Purdue University



Emergence of Large Scale Sensor Networks

- Global Sensor Network to fight climate change.
- Sensor based *decision support systems* to monitor power grid and critical infrastructures:
 - Smart Grid
 - Smart Building
 - Smart Bridge
 - Smart Tunnel

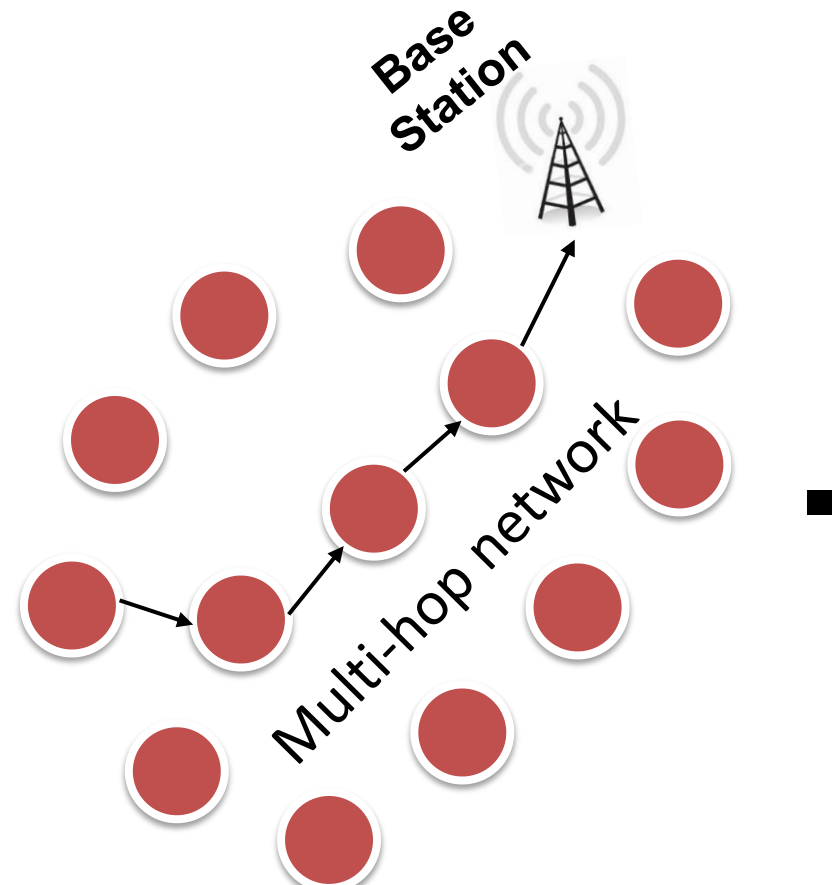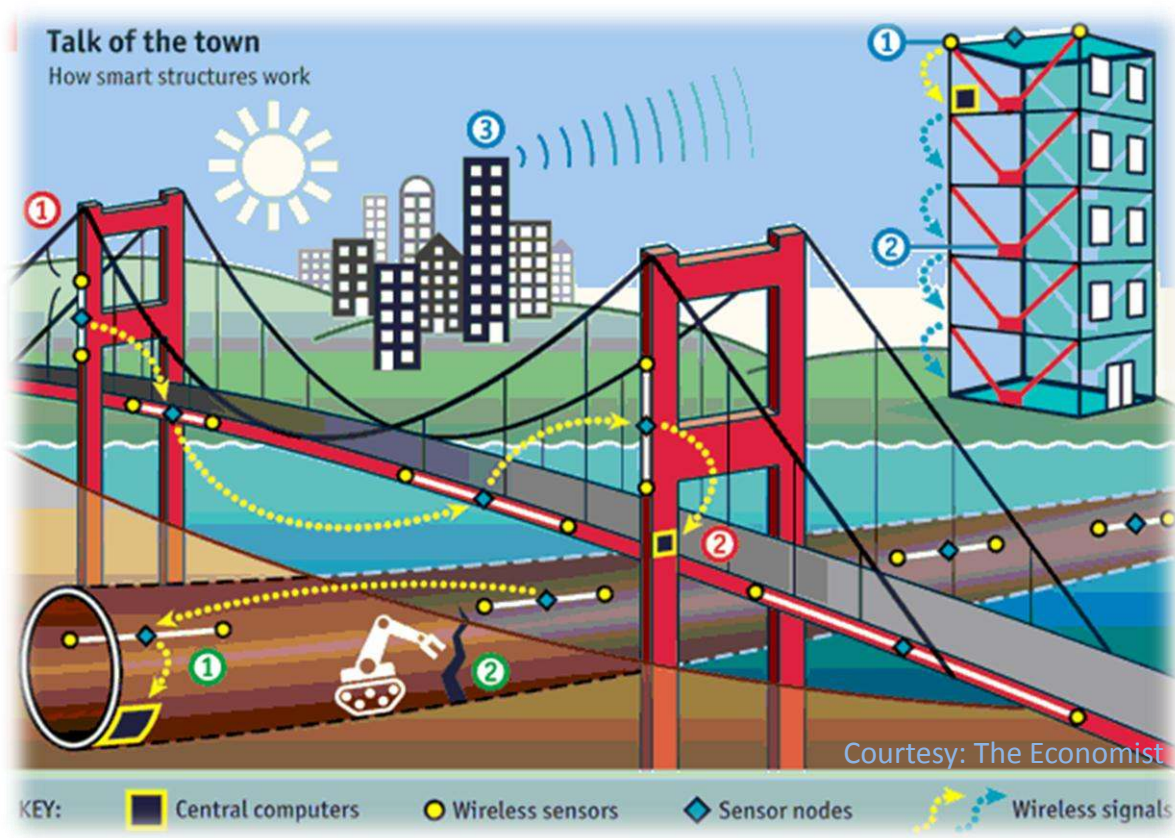


Data item is collected from sensors at the base station and made available to decision makers for further analysis.

Trustworthiness of data affects the quality of decision making

Provenance and Trust Framework

- Trust models assess trustworthiness of data based on provenance similarity and value similarity.
- Provenance of a data item is a tree of nodes that manipulate or forward that item.

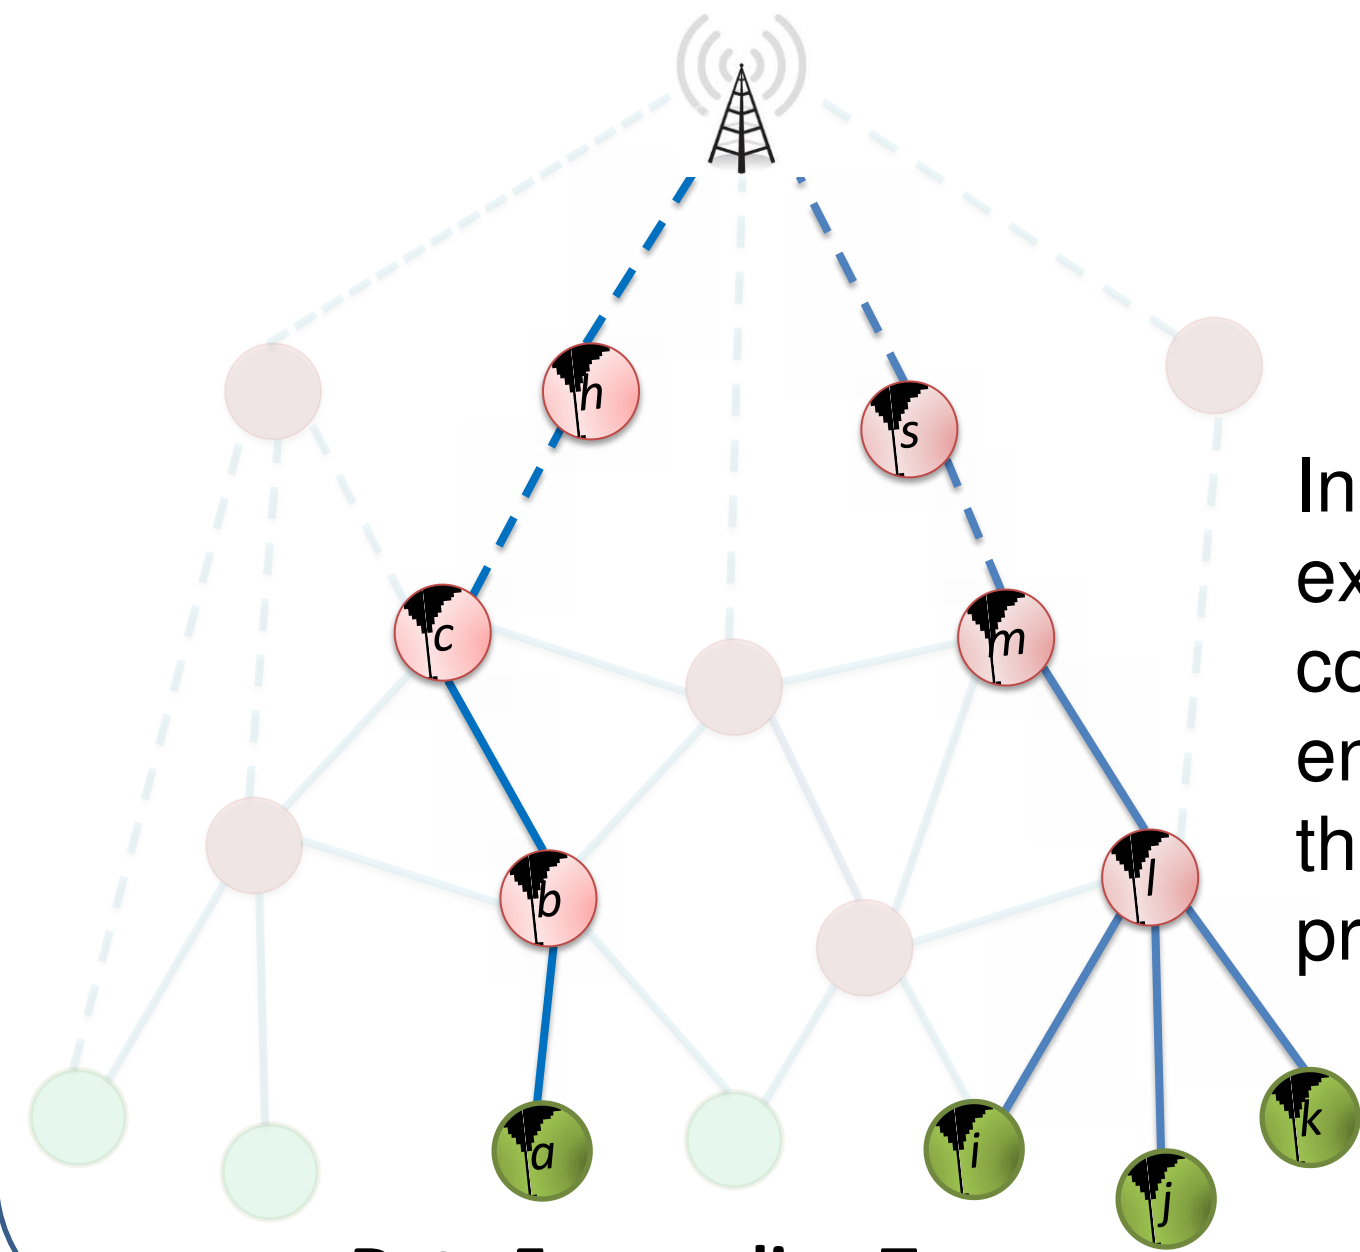


In large scale networks, extended period of radio communication and energy dissipation due to the increasing height of provenance tree.

Data Forwarding Tree

Goals and Challenges

Probabilistic incorporation of node ID to reduce the expected length of the provenance.



Number of bits required to represent provenance should be fixed.



Fast convergence of provenance construction is critical.



Topological changes should be rapidly reflected in provenance.

Probabilistic Provenance Flow (PPF)

Adaptation of probabilistic packet marking (PPM) of IP traceback


Embedding a connected sub-graph of full provenance into a single packet

Two complementary encoding schemes : (a) **Juxtaposition of ranks** and (b) **Prime multiplication**

Faster decoding and construction of provenance

Provenance Encoding

- $prime(n)$ = The greatest prime number less than or equal to n .
- $offset(n) = n - prime(n)$.
- Difference between node ID and $prime(ID)$ is less than or equal to 7.
- $rank(ID)$ = Position of ID in an increasing sequence of IDs of all member nodes.

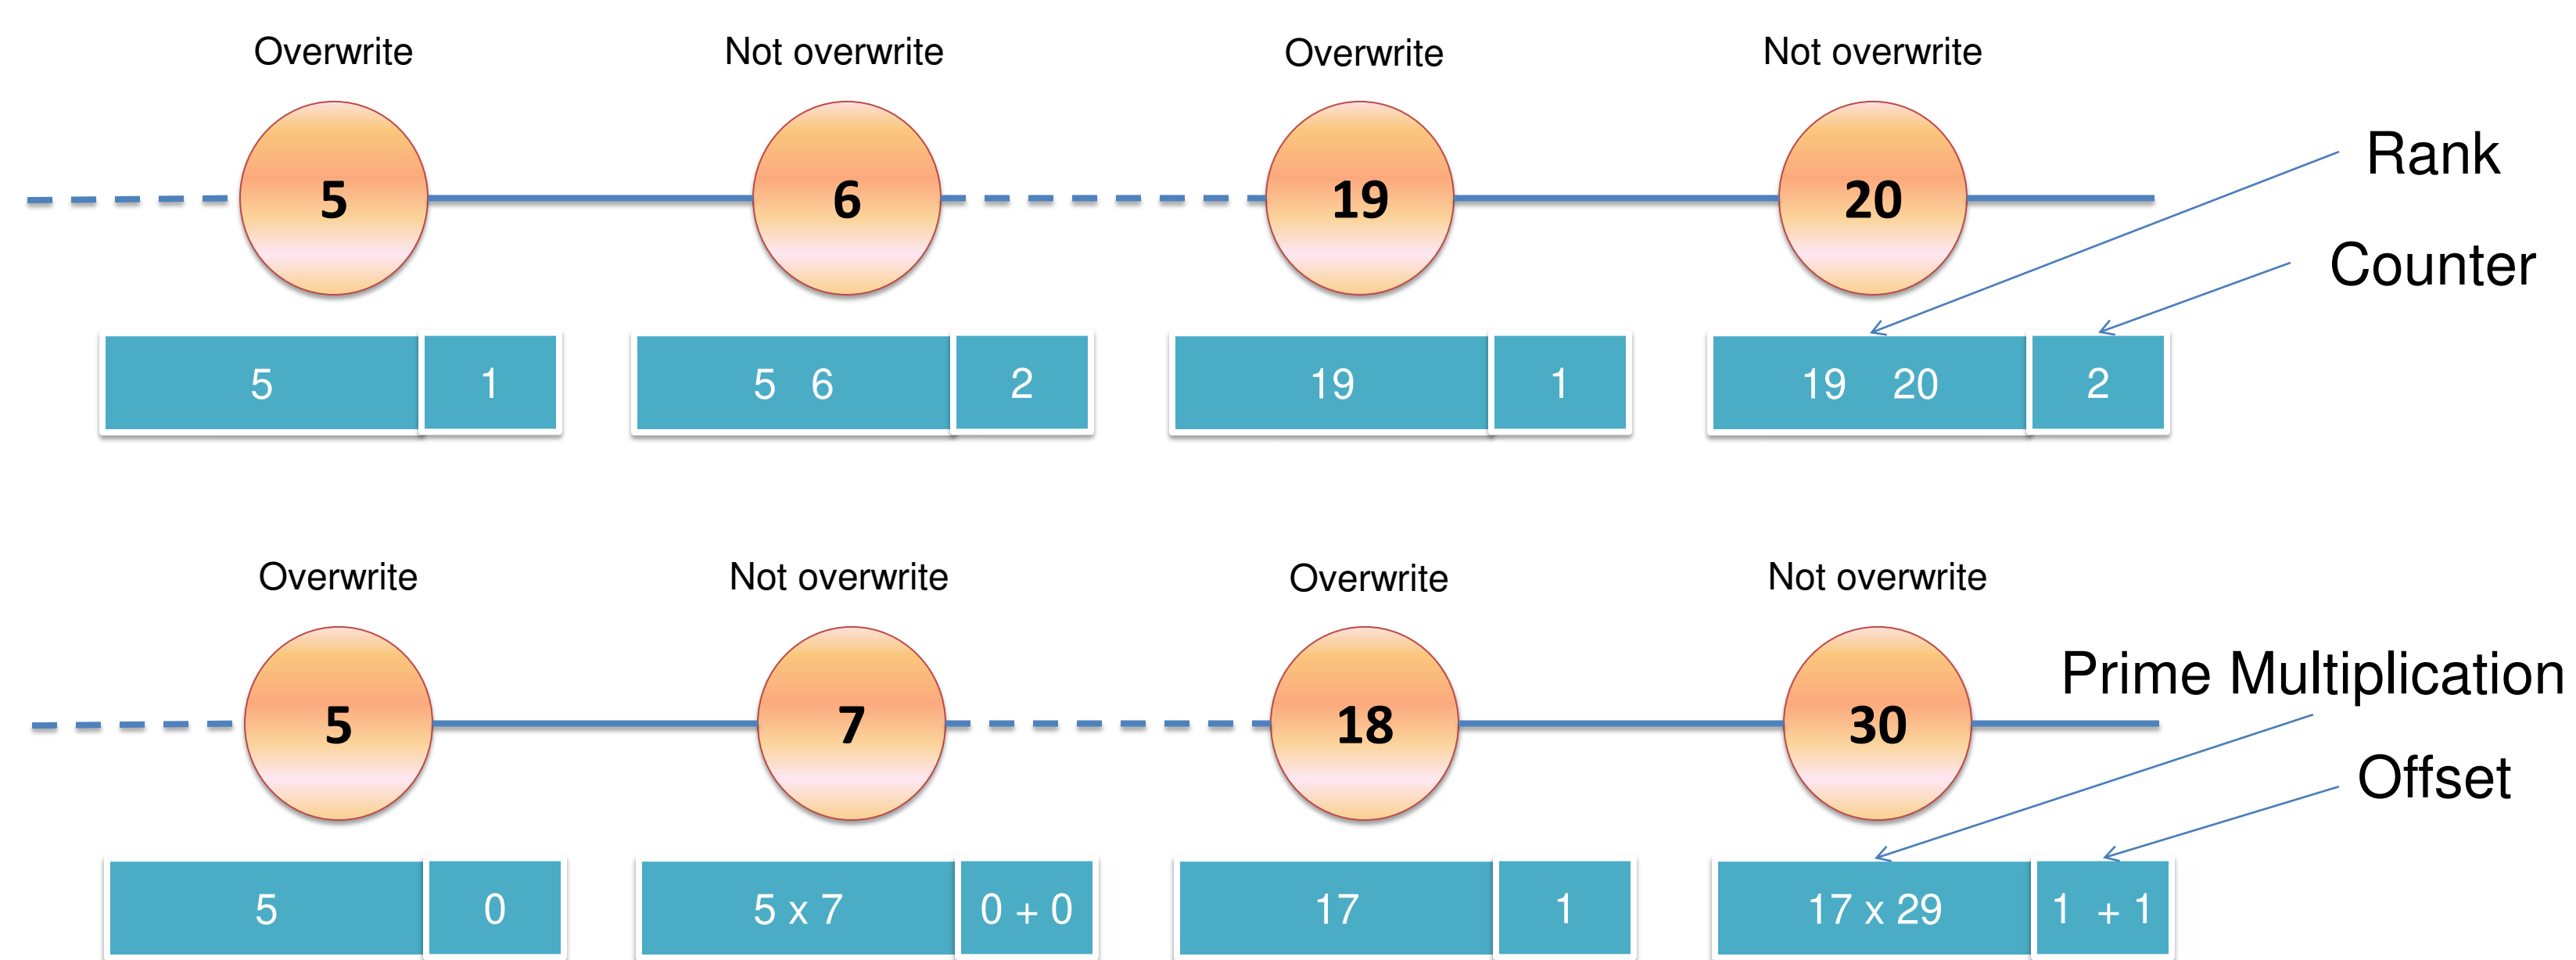

Provenance Decoding and Construction

Rank method: Use the counter to extract partial provenance.




Use **Prime Factorization** to extract data from prime multiplication field.

Use solution to **Subset Sum** problem to extract data from offset field.

Exploit ordering information extracted by **rank** method.

Full provenance: at least one ID for every node is received.

TOSSIM Simulation

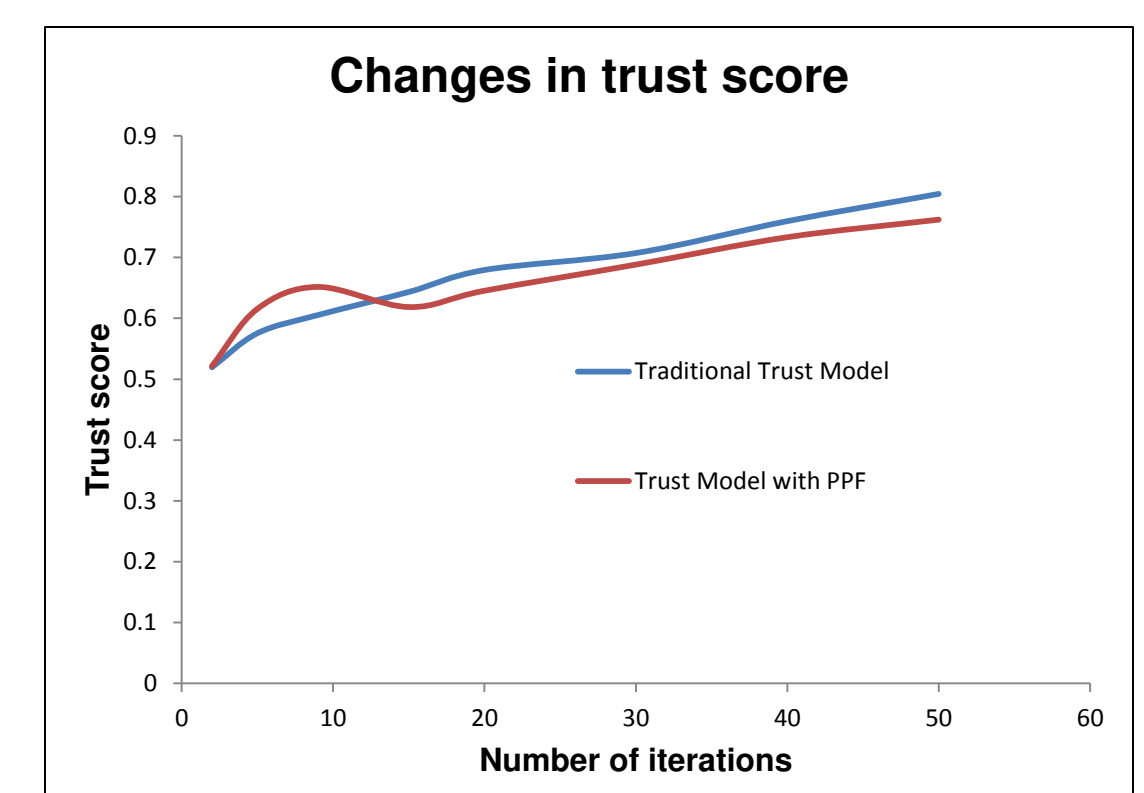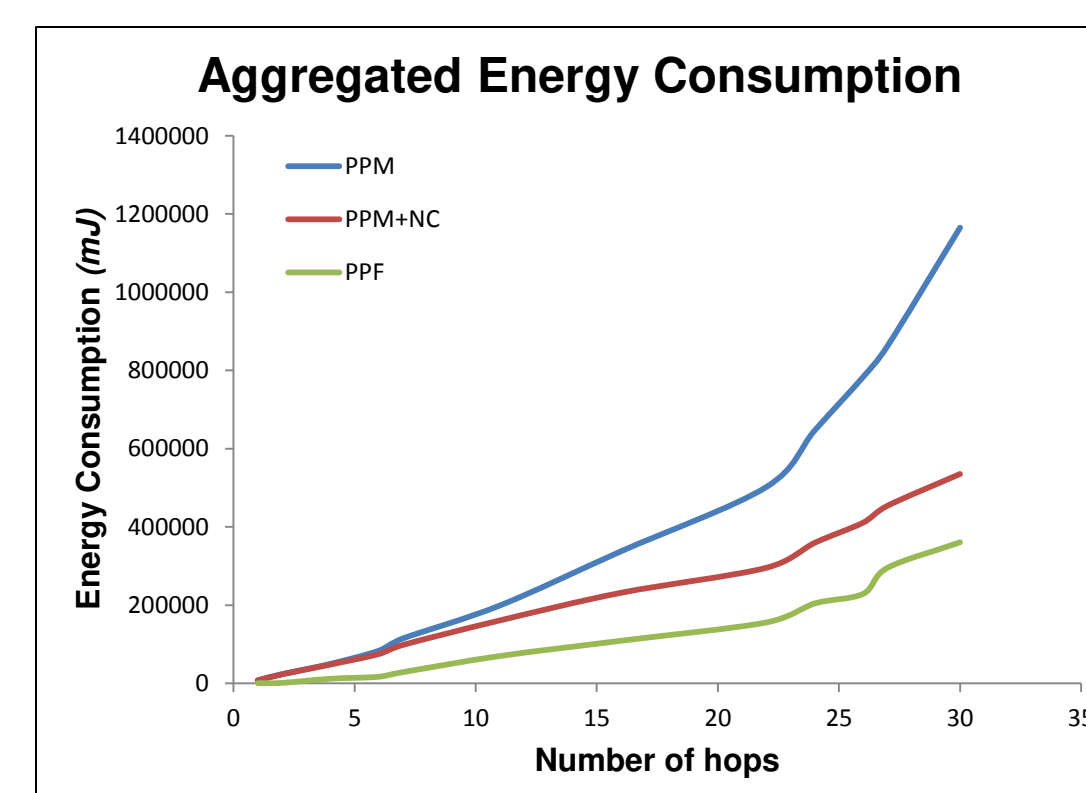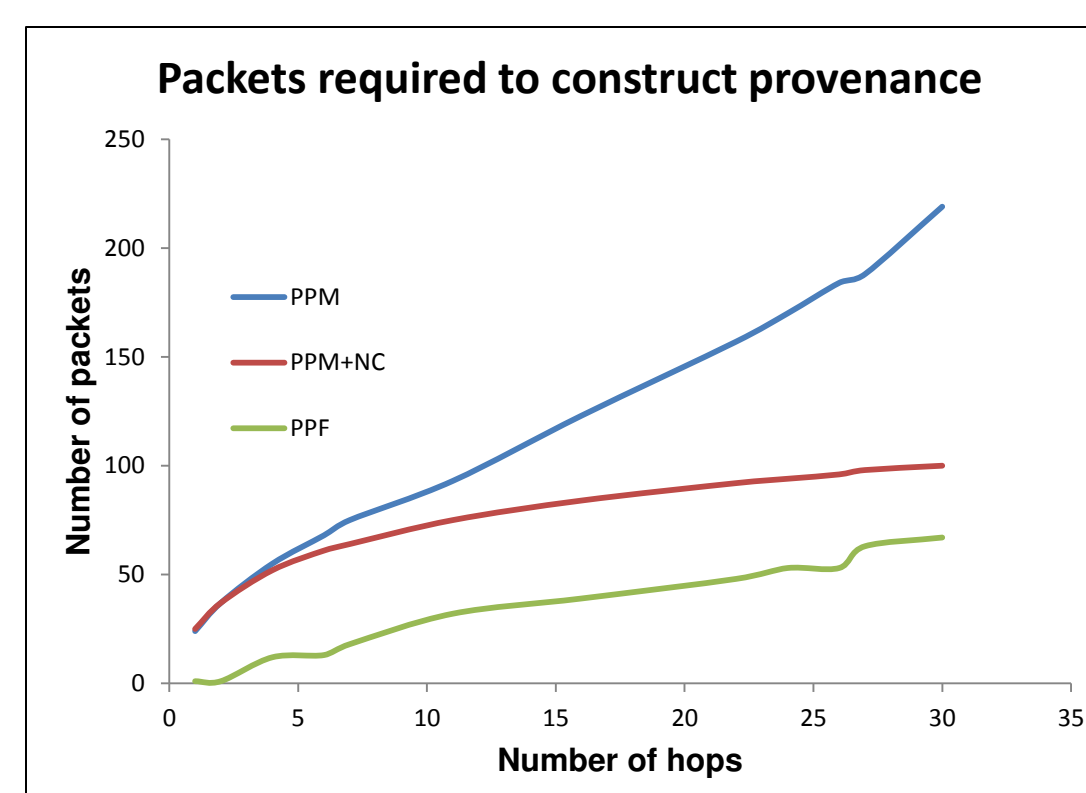

- PPF requires 33% fewer packets than PPM based approaches of IP traceback.
- PPF consumes 30% less energy than PPM with network coding.
- Trust model integrated with PPF provides high level of accuracy for trust score calculation.