

1 **Abstract**

2 Vertical jump performance tests can give considerably different
3 results, even when different methods are used to analyze a single jump
4 trial. To evaluate and compare four different methods commonly used to
5 measure vertical jump performance, 52 physically active males each
6 performed five maximal vertical jumps. Kinetic and kinematic data were
7 used to analyze each trial using the four methods: a criterion test based on
8 body center of mass displacement (VJPT); two methods based on vertical
9 take-off velocity as calculated from the force platform (JUMP2 and
10 JUMP3); and one method based on time in the air (JUMPAIR). All four
11 methods showed excellent reliability ($R>0.97$). Using VJPT as the
12 criterion, the other three methods showed excellent coefficients of validity
13 ($R>0.95$) but poor accuracy: the vertical jump results were statistically
14 different among all methods ($p<0.01$). From the discussion, JUMPAIR is
15 considered a relatively simple and inexpensive method to obtain valid and
16 reliable measures of vertical jump performance without an arm swing,
17 provided the appropriate adjustments are made to the jump results.

18

19 **Key words:**

20 Reliability Validity Vertical jump

21

1

2 Vertical jumping is regarded as an important and attractive element
3 of many sports such as basketball and volleyball. Papers are regularly
4 published in exercise science publications, both lay and scientific, about
5 training methods for vertical jump performance improvement. A key step
6 in any jump training study is vertical jump measurement. Vertical jump
7 tests are also common in Physical Education, Fitness or Sports programs,
8 as a means to assess lower limb "power". However, vertical jump
9 performance results may be considerably different depending on the test
10 used, even when different methods are used to analyze the same jump (H.
11 Hatze, personal communication, November 11, 1992).

12 Traditionally, the most commonly used method is Sargent's test
13 (Sargent's study from 1924, as cited in Johnson & Nelson, 1974), also
14 known as the jump and reach test (e.g., Blattner & Noble, 1979; Clutch,
15 Wilton, McGown & Bryce, 1983; Davies, Greenwood & Jones, 1988;
16 Genuario & Dolgener, 1980). This method is simple to use, requiring only
17 a wall or board and chalk powder to make marks with your fingers.
18 Johnson & Nelson (1974) report a reliability of 0.93 and an objectivity
19 also of 0.93 for this test. Many scientists, however, have resorted to other
20 methods using video systems, landing mats, or force platforms, in order to
21 be able to measure jump height during jumps without an arm swing or
22 under more natural settings, or as an attempt to obtain a higher accuracy or
23 better credibility. The most precise method, the standard hereby called
24 Vertical Jump Performance Test (VJPT), involves calculating the exact
25 position of the body center of mass (BCOM) over time, using
26 cinematography or video techniques. Jump height is obtained by
27 subtracting the position of BCOM when the subject is standing from the

1 peak BCOM position during flight (Aragón-Vargas, 1997; Bobbert,
2 Huijing & van Ingen Schenau, 1987; Pandy & Zajac, 1991). Alternatives
3 include applying particle dynamics equations to calculate take-off velocity
4 of the body and jump height from force plate data (Dowling & Vamos,
5 1993), or using basic particle kinematics equations to calculate jump
6 height from flight time, as measured by different timing devices
7 (Asmussen & Bonde-Petersen, 1974; Bosco & Komi, 1979; Bosco,
8 Luhtanen, & Komi, 1983; Komi & Bosco, 1978). Since the necessary
9 equipment is often costly and difficult to use, and given that some of the
10 calculations involve assumptions that are not always acceptable, it is
11 important to know the differences among jump height values obtained
12 using each method.

13 Therefore, the purpose of this paper is to study the reliability of
14 four different methods commonly used to measure vertical jump
15 performance, to calculate the actual test result differences among methods,
16 and to evaluate the ability of each test to predict "true" vertical jump
17 performance, according to the VJPT standard. These are useful
18 quantitative tools for the exercise scientist who wants to compare studies
19 that have used different methodologies, or for the coach, trainer, or
20 physical educator who needs to find out how much more accuracy is
21 obtained by using more costly and sophisticated methods.

22

23 **Methods**

24 **Data collection**

25 Fifty-two physically active male college students each performed
26 five maximal vertical jumps, starting from the position of their choice,
27 with their hands on their hips (arms akimbo). All participants gave their

1 informed consent in accordance with the policy statement of the University
2 of Michigan. They completed three practice jumps before data collection,
3 and were required to wait for one minute after each trial. Participants
4 performed the jumps barefooted, wearing only a swimsuit or pair of shorts.
5 Five reflective markers were placed on the right side of the body, on the
6 glenohumeral joint (shoulder), the greater trochanter (hip), the lateral
7 condyle of the femur (knee), the lateral malleolus (ankle), and the fifth
8 metatarsal (toe). All five trials of all the subjects were used for calculating
9 reliability, but only the best jump (as assessed using equation 1 below) was
10 used for the other comparisons.

11 Ground reaction forces and moments of force were collected with a
12 Bertec force plate (model 4060A), and were sampled at 300 Hz. A video-
13 based (60 Hz), real-time, 3-D motion analysis system (Motion Analysis
14 Corp.) was used to collect and process kinematic data. Kinematic data
15 were filtered with a low-pass, fourth-order Butterworth filter with an
16 effective cutoff frequency of 8 Hz.

17 Basic anthropometric data were obtained using standard sliding
18 calipers, tape measures, and the force platform. Body mass and body
19 height were measured according to Lohman, Roche, & Martorell (1988).
20 Thigh length, midthigh circumference, shank length, calf circumference,
21 malleolus width, malleolus height, and foot length were obtained
22 according to Vaughan, Davis, & O'Connor (1992). These data were used
23 for the calculation of segmental centers of mass (see below).

24 **Data analysis**

25 The biomechanical model used and all analytic procedures have
26 been described in detail elsewhere (Aragón-Vargas, 1994). Briefly, the
27 human body was modeled as a planar, rigid-body system comprised of

1 four segments linked by frictionless, hinge joints (figure 1). Kinetic and
2 kinematic data were used to obtain the four different measures of jump
3 height.

4 *(Insert figure 1 about here)*

5 The most accurate method for calculating vertical jump height
6 (VJPT) requires a precise calculation of the body center of mass position
7 throughout the movement from video data. Calculation of the body center
8 of mass position was performed using the method of summation of
9 torques, which in turn requires the calculation of the center of mass
10 position of each segment over time. Segmental centers of mass were
11 calculated according to the procedure of Vaughan et al. (1992), with the
12 exception of HAT, which was calculated according to Aragón-Vargas
13 (1994), based on Clauser, McConville, & Young (1969), and Hinrichs
14 (1990).

15 VJPT was obtained directly from the body center of mass (BCOM)
16 position data, by subtracting the vertical position of BCOM while standing
17 from the peak vertical position of BCOM during flight:

$$18 \quad VJPT = zBCOM_{peak} - zBCOM_{standing} \quad (1)$$

19

20 VJPT is used in this study as the criterion or standard for
21 comparison. Two alternate methods used in biomechanics for the
22 calculation of jump height require calculating vertical take-off velocity
23 (TOVEL). Take-off velocity was obtained from the instantaneous vertical
24 velocity vs. time curve, which in turn was calculated according to:

$$1 \quad \dot{z}BCOM = \frac{\int_{t_0}^{t_{to}} F_{zp} dt}{m} \quad (2)$$

2 Where F_{zp} is propulsive force, obtained from subtracting body
3 weight from the vertical ground reaction force; t_0 is the beginning of data
4 collection, and t_{to} is the instant of take-off.

5 Theoretically, jump height depends on both vertical take-off
6 velocity and body center of mass position at take-off (Bobbert & van Ingen
7 Schenau, 1988), according to the equation:

$$8 \quad JUMP2 = \left[(TOVEL)^2 * (2g)^{-1} \right] + zBCOM_{t_{to}} - zBCOM_{standing} \quad (3)$$

9 Equation (3) uses information from both the force platform and the
10 video equipment. Ignoring BCOM elevation before take-off, vertical jump
11 height may be obtained from vertical take-off velocity alone, requiring
12 only force plate data:

$$13 \quad JUMP3 = (TOVEL)^2 * (2g)^{-1} \quad (4)$$

14 Lastly, time in the air may be calculated as the difference between
15 the instant of take-off and the instant of landing. For the sake of this paper,
16 take-off and landing times were obtained from ground reaction force data,
17 when $Fz < 3.0$ N and $Fz > 3.0$ N, respectively. Jump height is then
18 obtained using the equation:

$$19 \quad JUMPAIR = g * \left(\frac{t_{air}}{2} \right)^2 * 2^{-1} \quad (5)$$

20 Statistical analysis

21 The first step in assessing the usefulness of a test is to determine its
22 reliability, that is, the ability of the test to give consistent results.

1 According to Kerlinger (1988), a correlation coefficient for reliability may
 2 be obtained by partitioning the variance obtained from m measurements
 3 applied to n subjects, into three components (variance among subjects,
 4 variance within subjects, and variance due to error), and obtaining the
 5 ratio:

$$6 \quad r_{tt} = \frac{MSS - MSE}{MSS} \quad (6)$$

7 where MSS is the Subjects Sum of Squares divided by $(n-1)$ and MSE is
 8 the Residual (Error) Sum of Squares divided by $[(m-1)(n-1)]$. (See
 9 Kerlinger, 1988; Table 26.2; and equation 26.5).

10 It is possible then to obtain the standard error of measurement
 11 (SEM) using the group standard deviation (SD) and the reliability of the
 12 test (R_{tt}) (Baumgartner, 1989):

$$13 \quad SEM = SD\sqrt{1 - R_{tt}} \quad (7)$$

14 which is equal to MSE if calculated according to Kerlinger above.

15 Validity coefficients, regression coefficients, and prediction errors
 16 were calculated using simple linear regression techniques, with VJPT as
 17 the dependent variable and each of the other methods as the independent
 18 variable, according to the general linear model:

$$19 \quad y = \beta_0 + \beta x + E_j \quad (8)$$

20 This evaluation of validity is in agreement with common
 21 procedures to assess criterion-related evidence of validity (Kerlinger,
 22 1988; Wood, 1989). Usually, when such procedures are used, the criterion
 23 test and the "new" test have different units of measurement and have been

1 administered on separate occasions. In this case, however, all results are in
2 meters, and it is possible to evaluate not only the correlation of the
3 measurements (concurrent validity) and the regression coefficients
4 (predictive validity), but also whether all tests provide the same results, a
5 reasonable expectation given that they are all measures of the same
6 performance of the same subjects. This agreement between tests is called
7 *accuracy* in this paper.

8 To evaluate the accuracy, average jump heights obtained using
9 each of the four methods were compared using Student's t-test for paired
10 samples, making Bonferroni's adjustment for multiple comparisons, at a
11 significance level of $p < 0.01$. The 95% family confidence intervals for the
12 difference between VJPT and each of the other three methods were also
13 calculated, using Bonferroni's adjustment for family confidence
14 coefficients.

15

16 **Results**

17 Table 1 shows basic descriptive statistics for the subjects. Average
18 body weight (74.3 kg) was slightly above the U.S. population average for a
19 body height of 1.79 m (71.8 kg) (Metropolitan Life Insurance Company,
20 1959). Best trial jump heights (VJP) ranged from 0.372 m to 0.663 m
21 (mean = 0.520 m), and had a coefficient of variation of 13.4%. There were
22 16 subjects, or 31% of the sample, outside $\pm 1 SD$ of the average VJP.

23 *(Insert table 1 about here)*

24 Reliability data are presented in Table 2. The standard or criterion
25 method (VJPT) shows a correlation coefficient of 0.9936, for a standard
26 error of measurement of 12.7 mm.

27 *(Insert tables 2 and 3 about here)*

1 Table 3 shows descriptive statistics for the jump height results
2 according to each of the four methods used. The highest values were
3 obtained for the standard method, VJPT. The other three methods
4 (JUMP2, JUMP3 and JUMPAIR) resulted in jump height averages that
5 were 15 mm, 159 mm, and 118 mm lower than VJPT, respectively. These
6 three differences were statistically significant ($p < 0.01$); furthermore, all
7 the differences between any two methods were statistically significant.
8 Figure 2 presents the 95% confidence intervals for each difference
9 between VJPT and one of the other three methods. This figure graphically
10 shows the underestimation of jump height normally obtained from using
11 each of those methods.

12
13 *(Insert figure 2 about here)*

14 Table 4 shows the simple regression analysis results.. Coefficients
15 of correlation (R) represent the validity of each method, using VJPT as the
16 criterion or previously validated test. All methods were able to explain
17 more than 90% of the vertical jump height variability (see column for R^2).
18 The estimated prediction error of all three methods is close to 20 mm.
19 Lastly, it must be pointed out that the β coefficients for models 2 and 3 are
20 very close to 1.0, and therefore the β_0 constant is similar to the jump
21 height average differences indicated above.

22 *(Insert table 4 about here)*

23 **Discussion**

24 **Reliability**

25 Before making any meaningful comparisons among jump test
26 methods, it is necessary to have a good standard or criterion. In this
27 particular case, VJPT had been chosen as the standard based on theoretical
28 arguments. This test shows an excellent reliability and a small SEM (see

1 Table 2). VJPT was compared with three other methods for testing vertical
2 jump height, but not with the one most commonly used, Sargent's jump-
3 and-reach test. Sargent's test involves an arm swing during the propulsion
4 phase, and this additional variable precludes any meaningful comparisons
5 from being made¹.

6 Under normal testing circumstances, variability in the results
7 comes from two major sources: "true" variability, showing differences in
8 performance both between and within subjects, and the error introduced by
9 the measuring method. The four variables presented in tables 2 and 3 are
10 measures of the same vertical jump performance. Therefore, "true"
11 variability (in this case only from differences between subjects, as only the
12 best trial was used for the analysis) must be the same for all methods, and
13 it is then possible to use VJPT as the standard to compare both the
14 absolute (*SD*) and relative (Coefficient of Variance, *CV*) variability (Table
15 3) introduced by the other methods. Relative variability is higher for all
16 three methods compared to VJPT.

17 Additional absolute variability is only introduced by JUMP2 (ΔSD
18 = 7 cm), while JUMP3 and JUMPAIR show smaller values than VJPT. An
19 instrument or method may show less variability because it is less sensitive
20 and does not discriminate so clearly among different performances, or
21 because it really has a smaller error of measurement. Using this
22 information together with the reliability coefficients and *SEM* values
23 (Table 2), it is clear that VJPT and JUMPAIR are the most stable,
24 consistent measures of the true vertical jump, while JUMP2 is the least
25 consistent.

26 **Validity and accuracy**

1 While validity coefficients and prediction errors obtained are
2 excellent, it is clear that all four vertical jump test methods give different
3 results, i.e., the three alternative methods are not accurate. JUMP2 is
4 theoretically correct, but it requires a perfect synchronization between the
5 force plate and video signals. A synchronization error will cause the test
6 administrator to use a take-off position (obtained from video data) which
7 does not correspond to the same instant of the take-off velocity (obtained
8 from the force platform). An error of only 16.7 ms (one frame at a
9 sampling rate of 60 Hz) would result in under- or over-estimating the
10 relative position of take-off (and therefore jump height) by 44 mm
11 (Aragón Vargas, 1994).

12 The calculation of JUMP3 involves only force-plate data, and
13 therefore has no signal synchronization problems. On the other hand, it
14 does not take into account the relative take-off height of the subject. This
15 should not pose any problem, since previous studies have shown that the
16 major contribution to vertical jump height differences among subjects
17 comes from take-off velocity (TOVEL), while the relative take-off height
18 is very similar from one subject to another (Aragón-Vargas, 1997). The
19 95% confidence interval for relative take-off height in the present study
20 was 14.4 ± 0.73 cm which, according to equations (1), (3), and (4), should
21 agree with the difference between JUMP3 and VJPT. The 95% confidence
22 interval for the difference was 15.9 ± 0.7 cm, showing a discrepancy
23 between VJPT and "corrected" JUMP3 of 15 mm that we are unable to
24 account for.

25 Lastly, the calculation of jump height using the method JUMPAIR
26 has been criticized in the literature because some of the assumptions
27 involved are not correct (Dowling & Vamos, 1993; H. Hatze, personal

1 communication, November 11, 1992). One clear limitation is that equation
2 (5) assumes that the time the center of mass of the body is falling is equal
3 to one-half of the time in the air. In other words, the time that BCOM
4 travels upwards should be equal to the time it travels downwards, which is
5 only true if the subject takes off and lands with his body in the same
6 position. In the present study, the time down was significantly longer than
7 time up (average difference = 0.016 s, $p < 0.0001$), suggesting the subjects
8 landed with their bodies partially crouched². This results in an
9 overestimation of the distance from take-off to peak, as may be seen
10 comparing JUMPAIR with JUMP3, a method that does not consider
11 relative take-off height either (see Table 3). The final result, however, is
12 lower than VJPT.

13 **Practical recommendations.**

14 Results from Tables 2 to 4, and figure 2, provide the necessary
15 information for choosing from the three alternative methods for predicting
16 true jump height, as measured by VJPT. All three methods have excellent
17 reliability, an essential first step. Validity coefficients are also excellent for
18 all three tests. JUMP2 gives the smallest average difference in jump
19 height, but regression analysis (cf. Table 4) shows that the estimation error
20 is larger for this method. Furthermore, since its slope (β coefficient) is
21 significantly different from 1.0, the estimation error will vary with the
22 level of the results, underestimating true jump height for some subjects,
23 and overestimating it for others. JUMP3 and JUMPAIR show larger
24 average differences with the criterion test, but the differences are more
25 stable, independent of the level of the results, and the prediction error is
26 smaller.

1 Most vertical jump performance studies seek to compare jump
2 height before and after a particular treatment (a training program). For this
3 type of comparison, it is not really important if different methods give
4 different results, provided the same method is used for the pre- and post-
5 tests, and provided the method used shows good reliability and validity
6 coefficients, as is the case for all the three methods evaluated in this
7 study³. If the investigator or coach is more interested in being able to
8 compare results obtained with different methods, it is clear that
9 comparisons will be meaningless unless the differences inherent to each
10 method are considered. The parameters presented in this study will allow
11 making the necessary adjustments to achieve a reasonable degree of
12 accuracy.

13 Considering all the criteria above, and taking into account the
14 equipment necessary for testing according to each method, the most simple
15 and less expensive method is the one that calculates jump height from time
16 in the air, using a landing mat and a timer. Time in the air may also be
17 obtained from force plate data, as in the present study. According to the
18 present data, very little reliability and validity is compromised, and the
19 results may be used to calculate true jump height with confidence.

20

21

1 **Acknowledgments:**

2 This research project was made possible by a Rackham
3 Dissertation Grant and a Rackham Predoctoral Fellowship from the
4 University of Michigan, and Grant VI-245-95-276, School of Physical
5 Education, University of Costa Rica.

6 I appreciate the valuable support from our School Director,
7 Wilfridio Mathieu, M.Sc. and the assistance of Cinthya Campos, M.Sc.
8 during the completion of the project. Special thanks to Dr. Walter Salazar
9 for his input on the manuscript. Data collection was possible thanks to Dr.
10 M. Melissa Gross, Human Movement Research Center, Division of
11 Kinesiology, The University of Michigan.
12

1

References

- 2 Aragón-Vargas, L. F. (1994). Kinesiological limits of vertical jump
3 performance. Unpublished doctoral dissertation, The University of
4 Michigan, Ann Arbor.
- 5 Aragón-Vargas, L. F. (1996). Comparación de cuatro métodos para la
6 medición del salto vertical [Comparison of four methods for
7 measurement of the vertical jump]. Revista Educación 20(1), 33-
8 40.
- 9 Aragón-Vargas, L. F. (1997). Kinesiological factors in vertical jump
10 performance: differences among individuals. Journal of Applied
11 Biomechanics 13(1), 24-44.
- 12 Asmussen, E., & Bonde-Petersen, F. (1974). Storage of elastic energy in
13 skeletal muscles in man. Acta Physiologica Scandinavica, 91(3),
14 385-92.
- 15 Baumgartner, T. A. (1989). Norm-referenced measurement: reliability. In
16 Safrit, M. J., & Wood, T. M. (Eds.), Measurement Concepts in
17 Physical Education and Exercise Science (pp. 45-71). Champaign,
18 IL: Human Kinetics.
- 19 Blattner, S., & Noble, L. (1979). Relative effects of isokinetic and
20 plyometric training on vertical jumping performance. Research
21 Quarterly, 50(4), 583-588.

- 1 Bobbert, M. F., Huijing, P. A., & van Ingen Schenau, G. J. (1987). Drop
2 jumping I. The influence of jumping technique on the
3 biomechanics of jumping. Medicine and Science in Sports and
4 Exercise, 19(4), 332-338.
- 5 Bobbert, M. F., & van Ingen Schenau, G. J. (1988). Coordination in
6 vertical jumping. Journal of Biomechanics, 21(3), 249-262.
- 7 Bosco, C., & Komi, P. V. (1979). Mechanical characteristics and fiber
8 composition of human leg extensor muscles. European Journal of
9 Applied Physiology, 41, 275-284.
- 10 Bosco, C., Luhtanen, P., & Komi, P. V. (1983). A simple method for
11 measurement of mechanical power in jumping. European Journal
12 of Applied Physiology, 50(2), 273-82.
- 13 Clauser, C. E., McConville, J. T., & Young, J. W. (1969). Weight,
14 volume, and center of mass of segments of the human body.
15 Wright-Patterson Air Force Base, Ohio.
- 16 Clutch, D., Wilton, M., McGown, C., & Bryce, G. R. (1983). The effect of
17 depth jumps and weight training on leg strength and vertical jump.
18 Research Quarterly for Exercise and Sport, 54, 5-10.
- 19 Davies, B. N., Greenwood, E. J., & Jones, S. R. (1988). Gender difference
20 in the relationship of performance in the handgrip and standing
21 long jump tests to lean limb volume in young adults. European
22 Journal of Applied Physiology, 58(3), 315-320.

- 1 Dowling, J. J., & Vamos, L. (1993). Identification of kinetic and temporal
2 factors related to vertical jump performance. Journal of Applied
3 Biomechanics, 9, 95-110.
- 4 Genuario, S. E., & Dolgener, F. A. (1980). The relationship of isokinetic
5 torque at two speeds to the vertical jump. Research Quarterly for
6 Exercise and Sport, 51(4), 593-598.
- 7 Hinrichs, R. N. (1990). Adjustments to the segment center of mass
8 proportions of Clauser et al. (1969). Journal of Biomechanics,
9 23(9), 949-951.
- 10 Johnson, B. L. & Nelson, J. K. (1974). Practical measurements for
11 evaluation in physical education (2nd ed.). Minneapolis, MN:
12 Burgess Publishing Co.
- 13 Kerlinger, F. N. (1988). Investigación del comportamiento [Foundations of
14 behavioral research] (2nd ed.). Mexico: McGraw-Hill.
- 15 Komi, P. V., & Bosco, C. (1978). Utilization of stored elastic energy in leg
16 extensor muscles by men and women. Medicine and Science in
17 Sports, 10(4), 261-265.
- 18 Lohman, T. G., Roche A. F., & Martorell, R. (1988). Anthropometric
19 standardization reference manual. Champaign, IL: Human
20 Kinetics.
- 21 Metropolitan Life Insurance Company (1959). Actuarial tables. New York:
22 Metropolitan Life Insurance Company.

- 1 Pandy, M. G., & Zajac, F. E. (1991). Optimal muscular coordination
2 strategies for jumping. Journal of Biomechanics, 24(1), 1-10.
- 3 Vaughan, C. L., Davis, B. L., & O'Connor, J. C. (1992). Dynamics of
4 human gait. Champaign, IL: Human Kinetics.
- 5 Wood, T.M. (1989). The Changing Nature of Norm-Referenced Validity.
6 In Safrit, M. J., & Wood, T. M. (Eds.), Measurement Concepts in
7 Physical Education and Exercise Science (pp. 23-44). Champaign,
8 IL: Human Kinetics.
- 9
10

Notes

¹A separate study using the Sargent jump test with 56 subjects performing five jumps each, showed a reliability correlation coefficient of 0.9859, which is still very good. (Unpublished data).

²Apparently, this situation is worsened when using an arm swing. A separate study (mentioned in footnote #1) has shown the reliability of JUMPAIR to decrease under these circumstances, to 0.9558, which may be partially accounted for by the variation in the position of the arms at takeoff and landing (Unpublished data).

³ This practical application assumes that the reliability obtained in this study when trials are separated by only a few minutes can be extrapolated to a study when trials are separated by several weeks or months.

1
2
3
4
5**Table 1.**Subject characteristics (N = 52).

Variable (units)	Mean	SD	CV (%)
Age (years)	20.20	2.10	10.4
Weight (kg)	74.27	8.65	11.6
Height (m)	1.79	0.06	03.4
VJPT (m)	0.506	0.07	14.2

6
7
8
9Note. VJPT statistics include all five trials. CV: coefficient of variance.

CV = 100 SD / Mean.

1
2
3
4
5
6**Table 2.**Reliability calculations for four jump tests. ($N=49$, $i=5$).

	VJPT	JUMP2	JUMP3	JUMPAIR
R_{tt}	0.9936	0.9704	0.9859	0.9936
$(R_{tt})^2$	0.9873	0.9417	0.9719	0.9872
<i>SEM</i> (mm)	12.7	27.8	18.0	12.1

7 Note. R_{tt} is the reliability correlation coefficient; $(R_{tt})^2$ is the reliability
8 coefficient of determination.
9

1
2
3
4
5
6
7
8
9
10
11
12
13
14

Table 3.

Descriptive statistics for each jump height method (N = 52).

	VJPT	JUMP2	JUMP3	JUMPAIR
Average (m)	.520 ^a	.505 ^a	.361 ^a	.402 ^a
Minimum (m)	.372	.365	.240	.263
Maximum (m)	.663	.667	.503	.550
<i>SD</i> (m)	.070	.077	.066	.067
<i>CV</i> (%)	13.4	15.3	18.3	16.6

Note. The best trial from each subject was used in the calculations. From

"Comparación de cuatro métodos para la medición del salto vertical", by L.F.

Aragón-Vargas, 1996, Revista Educación, 20(1), p. 37. Copyright 1996 by the

Editorial de la Universidad de Costa Rica. Reprinted with permission.

a) All mean differences are statistically significant, $p < 0.01$.

1
2
3
4
5
6**Table 4.**Simple regression analysis (N = 52).

Model	R	R²	MSE	Error
1) VJPT = 0.087 + 0.857^a JUMP2	.952	.906	.464E-03	.0215
2) VJPT = 0.154 + 1.014^b JUMP3	.961	.924	.376E-03	.0194
3) VJPT = 0.117 + 1.002^b JUMPAIR	.962	.926	.369E-03	.0192

7 Note. Only the best trial was used in the analysis. All statistical models are
8 significant ($p < 0.0001$). From "Comparación de cuatro métodos para la
9 medición del salto vertical", by L.F. Aragón-Vargas, 1996, Revista Educación,
10 20(1), p. 38. Copyright 1996 by the Editorial de la Universidad de Costa Rica.
11 Reprinted with permission.


12 **a)** This coefficient is significantly different from 1.0, ($p < 0.01$).

13 **b)** These coefficients are NOT significantly different from 1.0, ($p > 0.01$).

14
15
16

1

2

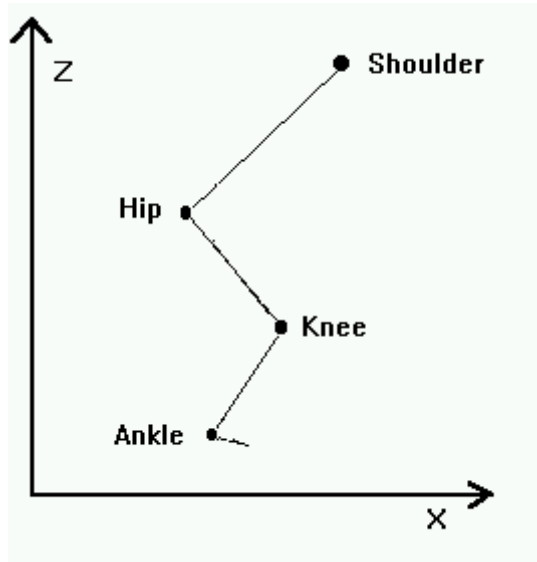

3

4

5

Figure 1. Biomechanical model. Segments ($i = 1$ to 4) are defined by the markers: segment 1, head, arms and trunk (HAT), from shoulder to hip; segment 2, thighs (THI), from hip to knee; segment 3, shanks (SHA), from knee to ankle, and segment 4, feet (FET), from ankle to toe.

6

7

8

9


10

11

12

13

1

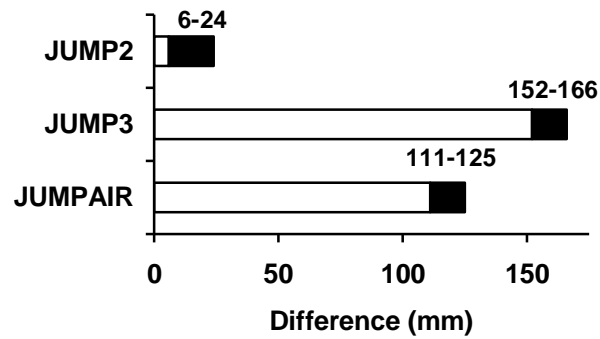

2

3

4

Figure 2: 95% confidence intervals for the

5

difference between the standard method and each

6

one of the other methods (best trial only, $N = 52$).

7

From "Comparación de cuatro métodos para la

8

medición del salto vertical", by L.F. Aragón-

9

Vargas, 1996, Revista Educación, 20(1), p. 37.

10

Copyright 1996 by the Editorial de la Universidad

11

de Costa Rica. Reprinted with permission.