

EVALUATION OF WATER REQUIREMENTS FOR A GREENHOUSE TOMATO CROP USING THE PRIESTLEY-TAYLOR METHOD

Héctor Valdés-Gómez^{1,2*}, Samuel Ortega-Farías², Mauricio Argote²

ABSTRACT

The Priestley-Taylor (PT) model was evaluated for estimating the real evapotranspiration (ET_{real}) of a drip-irrigated greenhouse tomato (*Lycopersicon esculentum* Mill.) crop. The net radiation incorporated in the PT model was estimated using meteorological variables. For this experiment, an automatic weather station (AWS) was installed inside the greenhouse to measure solar radiation (R_{gi}), net radiation (R_n), air temperature (T_a) and relative humidity (RH). Another AWS was installed over a grass cover to measure atmospheric conditions outside the greenhouse. The experiment was carried out at the Panguilemo experimental station (35°23' S, 71°40' W, 110 m.a.s.l.) from August to December 2000. The PT model was evaluated using the ET_{real} obtained from the water balance (WB) method. In this case, values of ET_{real} by PT model were calculated using: a) R_{gi} and soil heat flux (G) = 0; b) R_{gi} and G ≠ 0; c) solar radiation measured outside the greenhouse (R_{ge}) and G = 0; and d) R_{ge} and G ≠ 0. For these cases, results indicated that PT model was able to compute ET_{real} with errors less than 5%. Also, R_n was calculated with a relative absolute error and a mean deviation lower than 6% and 0.07 mm d⁻¹, respectively, using R_{gi} or R_{ge}. Daily soil heat flux values equal to zero did not affect the calculation of ET_{real} values. Thus, the PT model evaluated in this study could be used for scheduling irrigation for a greenhouse tomato crop, using internal measurements of air temperature and relative humidity, and external measurements of solar radiation. In this case, PT model predicted the ET_{real} with an error of 6.1%.

Key words: irrigation, *Lycopersicon esculentum*, model, crop coefficients, net radiation, soil heat flux.

INTRODUCTION

A correct determination of irrigation scheduling (irrigation timing and frequency) is one of the main factors in achieving high yields and avoiding loss of quality in greenhouse tomato (Yuan *et al.*, 2001). To do this, it is fundamental to know the crop water requirements or real evapotranspiration (ET_{real}), which depends on specific interactions among soil, tomato crop and atmospheric conditions. For greenhouses, ET_{real} have been estimated by measuring water evaporation with a Piche evaporimeter

or modified evaporation pan (Kirda *et al.*, 1988, Yuan *et al.*, 2001). Also, the Penman-Monteith and Priestley-Taylor (PT) models, which have solid physical principles, could be used to estimate the tomato water requirements for greenhouses (Zhang and Lemeur, 1992; Ortega-Farías *et al.*, 2004b). These models require as input atmospheric condition measurements inside the greenhouse. The main limitations of Penman-Monteith model to compute tomato evapotranspiration is that it requires the parameterization of surface canopy resistance (r_c) and aerodynamic resistance (r_a), which are difficult to measure or estimate in greenhouse conditions. On the other hand, the PT model avoids this problem by integrating r_a and r_{ev} in a constant factor (α) within the formula. In this regard, Viscovich (2001) indicated that PT model simulated ET_{real} for a greenhouse tomato crop with a root mean square error and relative root mean squared error less than 1 mm d⁻¹ and 18%, respectively.

¹ Universidad de Talca, Facultad de Ingeniería, Escuela de Ingeniería en Bioinformática, Casilla 747, Talca, Chile.

* Corresponding author (hevaldes@utalca.cl).

² Universidad de Talca, Facultad de Ciencias Agrarias, Centro de Investigación y Transferencia en Riego y Agroclimatología (CITRA), Casilla 747, Talca, Chile.

Received: 20 August 2007.

Accepted: 27 November 2007.

Theoretical framework

Priestley and Taylor Method (PT). Priestley and Taylor (1972) proposed that potential evapotranspiration (ET_p, mm d⁻¹) of different types of vegetation can be estimated as:

$$ET_p = \alpha \frac{\Delta}{\Delta + \gamma} (R_n - G) \quad [1]$$

where α is an empirical coefficient, Δ is the slope of the saturation vapor pressure curve (kPa °C⁻¹), γ is the psychrometric constant (kPa °C⁻¹), R_n is the net radiation (mm d⁻¹), G is the soil heat flux (mm d⁻¹). The value of α depends on vegetation type and could be related to sensible heat flux of the surface (Pereira and Villa Nova, 1992), and vapor pressure deficit (Vuscovich, 2001). Considering that the PT equation predicts the potential evapotranspiration rate (ET_p), and consequently does not consider the crop development stage, the real evapotranspiration rate (ET_{real}) of the greenhouse tomato crop should be calculated according to Equation [1] multiplied by a crop coefficient (K_c) (Allen *et al.*, 1998). The K_c is an empirical coefficient that integrates the non-linear interaction among soil, crop and climatic conditions.

Net radiation and soil heat flux. Equation [1] requires R_n and G as input parameters, which are expensive to measure inside the greenhouse. To solve this problem, daily values of R_n could be calculated using the following expression (Antonioletti *et al.*, 1999):

$$R_n = [(1 - \xi)R_{gi} + \varepsilon_a \sigma T_a^4 - \varepsilon_{cv} \sigma T_{cv}^4] FC^{-1} \quad [2]$$

where R_n is expressed in mm d⁻¹, R_{gi} is the incoming shortwave solar radiation inside the greenhouse (MJ m⁻² d⁻¹), ξ is surface albedo, ε_a is atmospheric emissivity, ε_{cv} is the crop emissivity, T_a is the air temperature (°K), T_{cv} is the canopy temperature (°K), σ is the Stefan-Boltzman constant (4.903 10⁻⁹ MJ K⁻⁴ m⁻² d⁻¹) and FC is a conversion factor (2.45 MJ m⁻² d⁻¹ mm⁻¹). The atmospheric emissivity can be estimated using the following equation (Idso, 1981):

$$\varepsilon_a = 0.179 (e_w)^{1/7} \exp (350/T_a) \quad [3]$$

where e_w is the vapor pressure (kPa).

In general G is negligible in the daily calculation of reference or ET_{real} because G is small on daily basis (Allen *et al.*, 1998; Ortega-Farías *et al.* 2004b). Thus, Stanghellini (1987) and Vuscovich (2001) suggested a G value equals to zero to compute ET_{real} for a greenhouse tomato using the Penman-Monteith and PT models, respectively.

Since there not enough information in Chile about the modeling of greenhouse tomato evapotranspiration, the objective of this research was to evaluate the Priestley-Taylor method for estimating real evapotranspiration for greenhouse tomato.

MATERIALS AND METHODS

The experiment was carried out in a greenhouse located at the Universidad de Talca Panguilemo Experimental Station (35°23' S, 71°40' W, 110 m.a.s.l.) from August to December, 2000. For this study, a detailed description of the type of greenhouse structure, soil and crop management was presented by Ortega-Farías *et al.* (2003). The four replicates (7.2 m² each), corresponding to 100% of ET_{real} were used in the present study. The climatic conditions inside and outside the greenhouse for the study period are presented in Figure 1.

The tomato plants (cv. Presto) distributed in single rows were conducted vertically following a V system, where one plant was guided to the left and the other to the right along the row, resulting in two rows per crop table. The values of the leaf area index (LAI) were estimated with the STICS model (Brisson *et al.*, 2003), which was calibrated for greenhouse tomato.

Irrigation was carried out using two irrigation tapes (T-Tape, TSX 310) separated by 30 cm on the crop table, discharging a volume of 5 L h⁻¹ m⁻¹. Irrigation tapes were placed 15 cm to the left and right of the tomato rows allowing the homogeneous watering of the greater part of the crop table. Soil water content (θ) was measured every 3 to 5 d using the reflectometry technique (TDR, Trase System, Soil Moisture Equipment Corp, Santa Barbara, California, USA) (Figure 2a). These measurements were taken just before irrigation to check if soil water content was above the management allowed depletion (MAD). Four pairs of stainless steel rods were installed in the soil to measure θ from the tomato transplanting to 50% of harvest. In this case, the maximum soil water extraction (or critical soil moisture, H_{cr}) was 23%, which was calculated using a MAD value of 50%.

An automatic weather station (AWS) was installed in the central part of the greenhouse, to measure net radiation (R_n), soil temperature (T_s), air temperature (T_a), relative humidity (RH) and solar radiation (R_{gi}). The height of the R_n sensor (Campbell Sci., REBS-Q7, Logan, Utah, USA) was moved from 0.5 m above the soil surface at the beginning of the season up to 2 m above the soil when tomato crop reached a maximum height of 1.70 m. In this case the sensor was maintained at 0.3 m above the crop throughout growing season, which ensured that most of the R_n measurements came from the tomato canopy (Domingo *et al.*, 2000). To measure the soil heat flux two

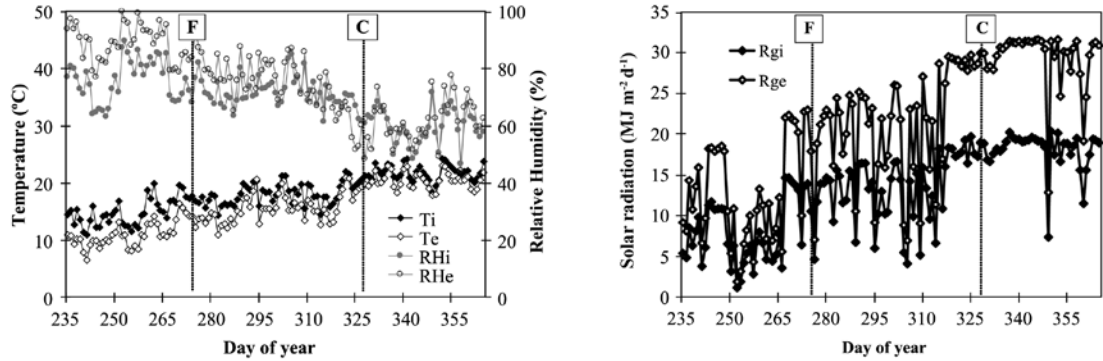


Figure 1. Average temperature (T°), relative humidity (RH) and global radiation (Rg) measured inside (i) and outside (e) of a tomato greenhouse (2000-2001 season). F: start of flowering; C: start of harvest.

thermocouple probes (Campbell Sci., TCAV, Logan, Utah, USA) located at 0.02 and 0.06 m below the soil, were used, together with two soil heat flux plates (Campbell Sci., HFT3-L, Logan, Utah, USA) placed 0.08 m below the soil surface. The temperature and relative humidity sensors (Campbell Sci., HMP 35C, Logan, Utah, USA) were installed at a height of 1.2 m, while the solar radiation sensor (Adcon Telemetry, A730, Klosterneuburg, Austria) was located at a height of 2 m. A second AWS, similar to that used in the greenhouse, was installed above a grass cover to measure atmospheric conditions outside the greenhouse. The temperature, relative humidity and solar radiation sensors were placed at heights of 2 m.

Due to the high cost of solar radiation sensors, it was proposed to estimate solar radiation inside the greenhouse as follow:

$$R_{gi} = \tau R_{ge} \quad [4]$$

where τ is the coefficient of solar radiation transmission of the plastic (dimensionless) and R_{ge} is solar radiation measured outside the greenhouse. R_{ge} and R_{gi} are in $\text{MJ m}^{-2} \text{d}^{-1}$.

The following assumptions were considered to compute net radiation: i) $T_{cv} = T_a$, since T_{cv} is difficult to obtain from a simple and low cost sensor (Antonioletti *et al.*, 1999); ii) $\epsilon_{cv} = 0.92$. This value is the result of the weighting of the three main components of the crop system that emit longwave radiation on the surface, such as the tomato crop ($\epsilon = 0.95$, Pieters and Deltour, 1997), the plastic mulch ($\epsilon = 0.53$, Zhu *et al.*, 1998) and the bare soil of the inter-rows ($\epsilon = 0.95$); iv) $\xi = 0.21$. Thus, the R_n model becomes:

$$R_n = (0.79 \tau R_{ge} + \sigma T^4 (\epsilon_a - 0.92)) FC^{-1} \quad [5]$$

To corroborate that the use of a single net radiation sensor located over a replicate was sufficient to represent the net radiation of all replicates, leaf temperature

measurements were made at noon with a porometer (Delta-T Devices Ltd., modelo AP4, Cambridge, UK) at different phenological stages of the crop (data not shown). These measurements showed that leaf temperature did not differ among replicates (no more than 1°C), which would indicate that plant water status, sensible heat emission, and energy balance were very similar in the replicates.

The following assumptions were considered to compute ET_{real} : i) $G = 0$ since G is very small on daily basis; ii) $\alpha = 1.12$. The selection of this value was based on the studies of Pereira and Villa Nova (1992); iii) K_c values were selected from Castilla and Fereres (1990) (Table 1). Replacing Equation [5] in [1] and incorporating all the assumptions described above, daily values of ET_{real} can be calculated as follows:

$$ET_{real} = 1.12 \frac{\Delta}{\Delta + \gamma} \left[\frac{(0.79 \tau R_{ge} + \sigma T^4 (\epsilon_a - 0.92))}{2.45} \right] K_c \quad [6]$$

Using Equation [6] it is possible to compute the tomato water requirements using only T_a and RH measured inside the greenhouse. Also, external measurements of solar radiation are required to simulate R_n .

ET_{real} values obtained from the water balance (WB) method were used to validate the ET_{real} estimated by PT model. The WB method is described as follows (Yuan *et al.*, 2001):

$$ET_{real} = R + \Delta\theta_s - E_s - P_p \quad [7]$$

where ET_{real} is the real evapotranspiration of the crop (mm d^{-1}); R is the amount of irrigation water supporting the system (mm d^{-1}); $\Delta\theta_s$ is the variation of soil water content (mm d^{-1}); E_s is the surface runoff (mm d^{-1}); P_p is the water flow toward the deepest horizons (mm d^{-1}). This balance did not consider surface runoff given that a drip irrigation system was used and there was a plastic cover over the soil that impeded lateral runoff of the water. Deep percolation below root level and upward

Table 1. Crop coefficients (Kc) of greenhouse tomato crop.

Phenological period	Date	Day of the year	Kc ¹
Transplant - beginning flowering	August 07-October 02	220-276	0.4-0.75
Start of flowering - start of set of 3rd bunch	October 03-October 28	277-302	0.75-1.06
Start of set of 3rd bunch - start of harvest	October 29-November 22	303-327	1.06-1.25
Start of harvest - 50% of harvest	November 23-Dec. 31	328-366	1.25-1.0
50% of harvest - 100% of harvest	January 01-January 31	1-31	1.0

¹ Values proposed by Castilla and Fereres (1990).

flow from the water table were also considered negligible, given that below 40 cm there is a layer with low hydraulic conductivity that limited the normal water flow and root growth. The construction of two rhizotrons, which two walls were glass plates and the upper part was covered with mulch, allowed for seeing the wetting bulb and also observing that there was no hanging water table. Likewise, the rhizotrons showed that the greater part of the roots was distributed in the first 30 cm of the soil. On the other hand, soil water measurements at 40 and 60 cm depths using the TDR indicated that soil water content between 40 and 60 cm depths remained relatively constant and close to field capacity, indicating that there were not crop water consumption below 40 cm and upward flow (Figure 2b). In this respect, the variation of the soil moisture values below 40 cm was between 28 and 31%, which is within the precision range of the TDR. Due to this small variation in soil water measurements below 40 cm depth, deep percolation was equal to 0. Thus, Equation [7] becomes:

$$ET_{\text{Treal}} = R + \Delta\theta_s \quad [8]$$

To evaluate the behavior of the Rn model, the estimated net radiation fluxes (Rne) were compared to observed net radiation fluxes (Rno) using the net radiometer located inside the greenhouse. The ET_{Treal} estimated by the PT model was compared to the ET_{Treal} obtained from the

water balance. In this case, values of ET_{Treal} by PT model were calculated using: (A) R_{gi} and $G \neq 0$; (B) R_{gi} and $G = 0$, (C) R_{ge} and $G \neq 0$ (D) R_{ge} and $G = 0$.

The comparison between the observed and estimated values included the mean deviation (MD), the root mean square error (RMSE) and the absolute relative error (ARE) as statistical parameters. As well, a regression analysis was made between observed and estimated values, in which the Z test was used to evaluate if the slope of this regression was equal to 1 and the intercept was equal to 0. A sensitivity analysis was made to evaluate the effect of considering $T_a = T_{cv}$ ($\Delta T = 0$) on the estimation of net radiation. For this analysis, data of air temperature measured in AWS were compared with leaf temperature measured with porometer to determine ΔT variation range.

RESULTS

Climatic measurements inside the greenhouse showed that the conditions until the beginning of flowering were unfavorable to rapid growth and high transpiration rates (Figure 1). More than 50% of the days in this first period were completely or partially cloudy and mean temperatures fluctuated between 10 and 20 °C, relative humidity was between 70 and 90% and global radiation did not exceed 15 MJ m⁻² d⁻¹. Under these climatic conditions the tomato

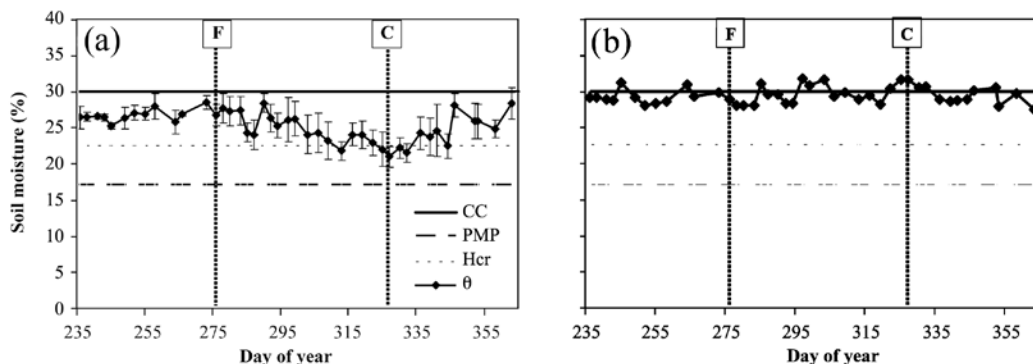


Figure 2. Evolution of volumetric soil water content (θ) in the 0-40 cm (a) and 40-60 cm profiles (b). CC: field capacity; PMP: wilting point; Hcr: critical moisture; F: start of flowering; C: start of harvest. Vertical bars indicate standard deviation.

water consumption ($ET_{real} < 1.6 \text{ mm d}^{-1}$) was only a fifth of the total water requirement from transplanting to the end of harvest. Also, Figure 1 indicates that temperatures inside the greenhouse were higher than exterior temperatures throughout the season, but this was not the case with relative humidity, which was lower inside of the structure until the middle of the season (third bunch set). From this point (Day of Year [DOY] 308), the greenhouse ventilation produced a greater gas exchange that balanced interior and exterior relative humidity.

In general, soil moisture fluctuated between field capacity and critical value (Figure 2a) indicating that the irrigation was adequate. The values of θ were below the critical value ($\theta = 22.5\%$) only between DOY 325 and 332, nevertheless this did not significantly affect crop growth. On those days, soil moisture content varied between 20.9 and 22.1%. The high tomato yield (152 t ha^{-1}) obtained in this study indicates that the crop yield was not restricted by water stress.

Interior solar radiation

The daily solar radiation values measured inside the greenhouse were on average 62% of the observed exterior solar radiation values (Figure 3a). In this case, the ratio of R_{gi} to R_{ge} was quite constant throughout the season (Figure 3b). The statistical analysis indicated a linear regression through the origin because the intercept was not significantly different from 0 (Z test with $p < 0.01$). Thus it was established that the parameter τ presented in Equation [4] has an average value of 0.62 for the plastic cover used in this experiment, which is lower than the value ($\tau = 0.68$) observed by Vuscovich (2001) for a polycarbonate cover.

Net radiation and heat soil flux

Table 2 indicates a good performance of the net radiation model using R_{gi} or R_{ge} . In both cases R^2 was greater than 0.97 with ARE value of 6%. Also, MD and RMSE values were less than 0.08 and 0.28 mm d^{-1} , respectively. These results are similar to those reported by Ortega-Farías *et al.* (2004a) for a field tomato crop (RMSE = 0.24 mm d^{-1} and ARE = 4.1%). Figure 4a indicates most of the points were close to 1:1 line indicating that estimated and observed values were similar. The statistical test indicated that the slope and the intercept of the lineal regression between R_{ne} and R_{no} were not statistically different from 1 and 0, respectively, both for R_n estimated with R_{gi} or R_{ge} (Table 2). This result suggests that it is possible to compute R_n using measurements of R_{ge} .

The sensitivity analysis indicated that the model could underestimate R_n by about 26% when temperature gradient (ΔT) between T_{cv} and T_a was equal to 3 °C (Table 2). Also, RMSE was 0.65 mm d^{-1} and DM was 0.61 mm d^{-1} .

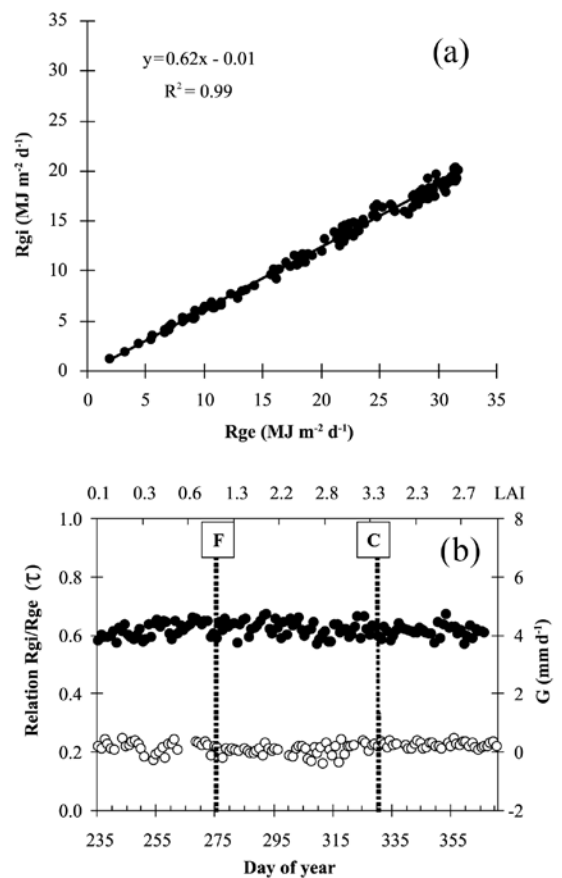


Figure 3. (a) Relation between solar radiation measured outside (R_{ge}) and inside (R_{gi}) the tomato greenhouse; (b) solar radiation transmission coefficient of polyethylene, τ (dimensionless, solid circles), evolution of soil heat flux (G , open circles) and leaf area index (LAI). F: start of flowering; C: start of harvest.

d^{-1} . In this study, cumulated ET_{real} from August to December was 333.5 and 290.2 mm for $\Delta T = 0$ and $\Delta T = 3 \text{ }^\circ\text{C}$, respectively. In this regard, Ortega-Farías *et al.* (2004a) indicated errors less than 4.1% on the estimation of R_n over a well-irrigated tomato crop when assuming $\Delta T = 0$. In this study, more than 60% of the data showed ΔT values less than 3 °C for field tomato crop. For our experiment, comparison between T_{cv} and T_a indicated that in over 98% of data ΔT variation was less than 3 °C.

The Figure 3b indicates that daily values of G presented small variations from transplanting (LAI = 0.1 $\text{m}^2 \text{ m}^{-2}$) to the beginning of harvest (LAI = 2.7 $\text{m}^2 \text{ m}^{-2}$). Maximum and minimum values of G were 0.5 mm d^{-1} (1.2 $\text{MJ m}^{-2} \text{ d}^{-1}$) and -0.4 mm d^{-1} (-0.9 $\text{MJ m}^{-2} \text{ d}^{-1}$), respectively. This data analysis support the assumption of using $G = 0$ in the PT model to estimate the ET_{real} for a greenhouse tomato crop.

Table 2. Statistical comparison between observed and simulated daily values of net radiation (Rn) using solar radiation measured inside (Rgi) or outside (Rge) tomato greenhouse. A sensitivity analysis was included by varying temperature gradient between air (T_a) and canopy (T_{cv}) temperatures.

	MD	RMSE	ARE (%)	Lineal regression			Z Test	
	(mm d ⁻¹)			R ²	β (Rne/Rno)	a (intercept)	β	a
Estimated Rn								
Rgi	0.06	0.22	6	0.98	1.01	-0.08	T	T
Rge	0.07	0.27	6	0.97	0.99	-0.02	T	T
Rgi, T _{cv} - T _a = 1	0.24	0.32	11	0.98	1.00	-0.26	T	F
Rgi, T _{cv} - T _a = 2	0.43	0.48	18	0.98	1.00	-0.43	T	F
Rgi, T _{cv} - T _a = 3	0.61	0.65	26	0.98	1.00	-0.61	T	F

MD: mean deviation; RMSE: root mean square error; ARE: absolute relative error; R², β and a are the determination coefficient, the slope and the intercept of the lineal regression, respectively. T: true hypothesis (β = 1, a = 0); F: false hypothesis (β ≠ 1, a ≠ 0).

Evapotranspiration

The Figure 4b indicates the comparison between ET_{real} estimated by WB method and PT model. For the PT model, values of ET_{real} were calculated using (A) Rgi and G ≠ 0; (B) Rgi and G = 0; (C) Rge and G ≠ 0, and (D) Rge and G = 0. For all these cases, points were close to the 1:1 line indicating a good comparison between ET_{real} estimated by WB method and PT model. For cases A, B, C and D the Table 3 shows that PT model tended to overestimate cumulative value of ET_{real} with errors between 1.6 and 6.2% from transplanting (DOY = 220) to 50% of harvest (DOY=365). PT model overestimated the total ET_{real} by about 20 mm when G was assumed negligible (cases B and D).

In general, PT model was able to reproduce tomato evapotranspiration during the study period (135 d), with maximum values of ET_{real} observed from DOY 320 to 355 (Figure 5). These maximum mean values of ET_{real} were around 5 mm d⁻¹, which are lower than the 6 mm d⁻¹ measured by Vuscovich (2001) in the area of Chillán. This difference could be due, on one hand, to the tomato cultivar used in the experiment of Vuscovich (2001), or the higher transmissivity of the polycarbonate than compared to the polyethylene, allowing more radiation inside the greenhouse. Finally, Figure 5 also shows that the PT method over-estimates the values of ET_{real} obtained by WB after leaf removal (DOY = 332). Likewise, a slight under-estimation of ET_{real} was observed in the first stage of the crop (until DOY = 270).

DISCUSSION

The assumptions proposed for calculating net radiation did not produce major errors from the point of view of the use of this model for irrigation scheduling using the PT equation. When ΔT was equal to 3 °C, errors in the estimation of net radiation (RMSE < 0.7 mm d⁻¹) was not

significant. Concerning crop emissivity, a short calculation indicates that a change of 0.01 in the emissivity value is equivalent to ΔT of 1 °C. Also, increasing the value of emissivity used in this study (0.92) by 0.03, the errors would not go beyond 0.7 mm d⁻¹ in the calculation of Rn. The good performance of the Rn estimations using solar radiation measured outside the greenhouse opens the possibility of using a solar radiation sensor located outside in order to characterize the internal shortwave radiation. For this purpose, the transmission properties of the covering material should be considered.

Various relevant points for discussion emerge from the ET_{real} estimation with the PT method calculated using the Rn model and with measured G values or G values equal to 0:

i) The use of an α value equal to 1.12, different from the value of 1.26 commonly described in the literature, seems correct for the conditions of this experiment. McAneney and Itier (1996) pointed out that under stable weather conditions (with little wind, as is the case of a greenhouse) the value of α can be different from 1.26. In this respect, research, such as that of Vuscovich (2001), indicates that the α value can vary with changes in the vapor pressure deficit, even reaching values close to 2 for periods with a high deficit of humidity in the air.

ii) Overestimation at the beginning of harvest probably was originated from leaf removal and from small irrigation problems that arose in this period. In the first case, leaf removal management removed a large amount of foliage (eight lower leaves), notably changing the LAI of the crop (reduced from 3.5 to 2) and consequently the tomato transpiratory surface, a situation that is not considered by the model nor by the crop coefficients used. In the second case, the reduction of available soil water, precisely at the beginning of harvest, probably reduced ET_{real} for some days, which was not considered by the PT model. This model does not consider a physiological regulation by

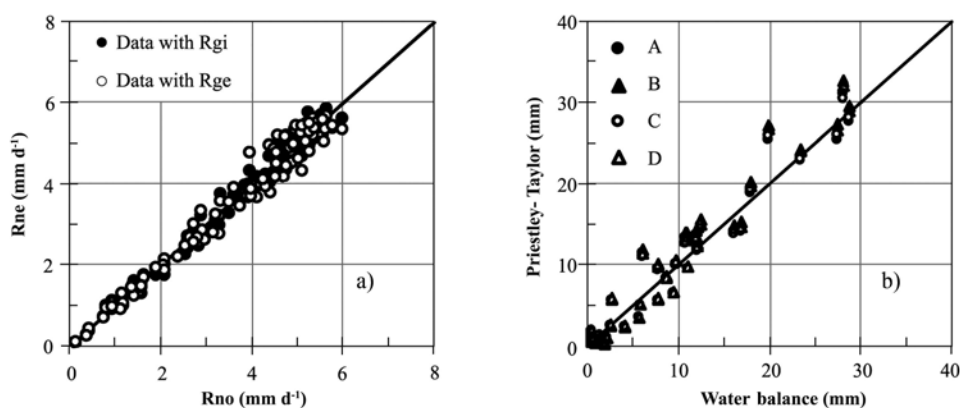


Figure 4. a) Comparison between estimated (R_{ne}) and measured (R_{no}) values of net radiation when solar radiation was measured inside (R_{gi}) or outside (R_{ge}) the greenhouse. **b)** Comparison between real evapotranspiration (E_{Treal}) estimated by the water balance and Priestley-Taylor (PT) methods. Values of E_{Treal} by PT model were calculated according to the following cases: (A) R_{gi} and $G \neq 0$; (B) R_{gi} and $G = 0$; (C) R_{ge} and $G \neq 0$; (D) R_{ge} and $G = 0$.

Table 3. Cumulative evapotranspiration (E_{Treal}) for different phenological stages of a tomato crop calculated with water balance (WB) and estimated by Priestley-Taylor (PT) method.

Method	Phenological state				Total of period
	Transplanting to flowering of 1 st bunch	Flowering of 1 st bunch to start of set of 3 rd bunch	Start of set of 3 rd bunch to start of harvest	Start to 50% of harvest	
	mm				
WB	27.7	65.2	70.3	165.1	328.3
A ¹	26.8 (-3.3) ²	68.1 (4.3)	70.6 (0.4)	168.0 (1.7)	333.5 (1.6)
B	27.3 (-1.3)	71.0 (8.8)	73.8 (5.0)	176.6 (6.9)	348.7 (6.2)
C	26.6 (-3.7)	66.4 (1.7)	70.8 (0.8)	169.2 (2.5)	333.0 (1.4)
D	27.2 (-1.7)	69.2 (6.1)	74.1 (5.4)	177.9 (7.8)	348.4 (6.1)

¹ Values of E_{Treal} by PT model were calculated according to the following cases: (A) R_{gi} and $G \neq 0$; (B) R_{gi} and $G = 0$; (C) R_{ge} and $G \neq 0$; (D) R_{ge} and $G = 0$.

² Values between parentheses correspond to the percentage of deficit (negative) or excess (positive) of E_{Treal} in relation to (WB).

the plant under water stress conditions, as the Penman-Monteith model does.

iii) The use of measured G or its omission in the calculation of E_{Treal} produces similar results (Figure 4b, Table 3). This indicates that application of the PT equation for irrigation scheduling, excluding G , does not produce major errors in the estimation of tomato water requirements.

iv) The use of the crop coefficient proposed by Castilla and Fereres (1990) allowed an acceptable estimation of E_{Treal} . Nevertheless, it is necessary to note that the small under-estimation observed at the beginning of the season could be associated with the value of K_c used (0.4), which was probably a little low. As well, the problems of over-estimation observed after leaf removal indicate that it is necessary to correct the K_c values to capture the effect

that major leaf removal can have. Thus, new research should propose specific K_c for the variety and above all for the type of crop management carried out in the Talca area.

CONCLUSIONS

Results indicated that net radiation could be calculated with an absolute relative error and a mean deviation less than 6% and 0.07 mm d⁻¹, respectively, whether solar radiation measured internally or externally was used. This result suggest that only one radiation sensor located outside the greenhouse, together with measurements of temperature and relative humidity inside of the greenhouse would be sufficient to characterize the net radiation of the tomato crop. In this context, shortwave radiation inside

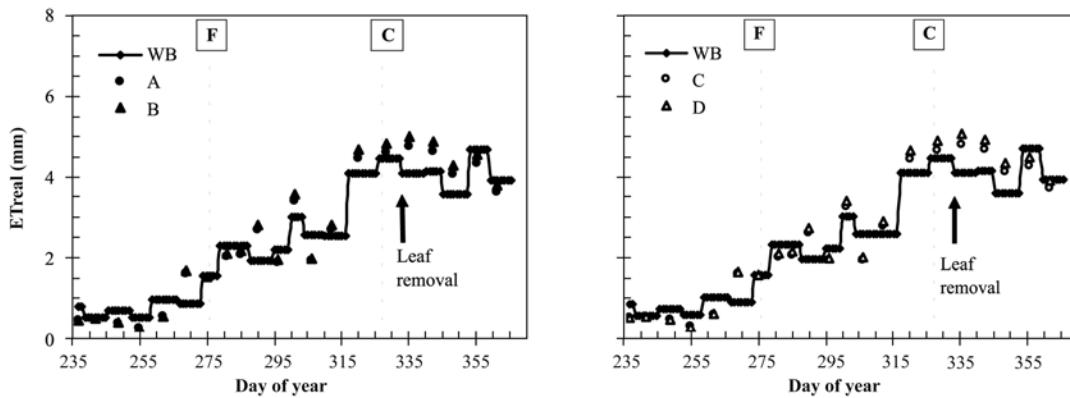


Figure 5. Evolution of average real evapotranspiration (E_{Treal}) for periods between 5 to 8 days obtained by the water balance (WB) and Priestley-Taylor (PT) methods. Values of E_{Treal} by PT model were calculated according to the following cases: (A) R_{gi} and $G \neq 0$; (B) R_{gi} and $G = 0$; (C) R_{ge} and $G \neq 0$; (D) R_{ge} and $G = 0$. F: start of flowering; C: start of harvest.

of the greenhouse can be calculated by knowing external solar radiation and the transmission properties of the greenhouse cover. Also, the study indicates that Priestley-Taylor model could estimate tomato evapotranspiration assuming $G = 0$.

The evaluated method could be used for scheduling irrigation of greenhouse tomatoes using internal measurements of temperature and relative humidity and external measurements of solar radiation. In this case, PT model predicted the E_{Treal} with an error of 6.1%.

ACKNOWLEDGEMENTS

This study was funded by the FONDECYT Project N° 1970309 and the CONICYT Bicentennial Project PSD-86/2006. The authors are grateful to former students of the Universidad de Talca, colleagues Ben-Hur Leyton, Gonzalo Enríquez and Jenny Pino for their participation in gathering data. We also thank Dr. Hernán Paillán for providing the infrastructure and materials used in conducting this experiment.

RESUMEN

Evaluación del consumo de agua de un cultivo de tomate en invernadero usando el método de Priestley-Taylor.

Se evaluó el comportamiento del modelo de Priestley-Taylor (PT) para la estimación de la evapotranspiración real (E_{Treal}) de un cultivo de tomates (*Lycopersicon esculentum* Mill.) en condiciones de invernadero. La radiación neta incorporada en el modelo de PT fue calculada usando variables meteorológicas clásicas. Para este experimento, una estación meteorológica automática (AWS) fue instalada dentro del invernadero para medir

radiación solar (R_{gi}), radiación neta (R_n), temperatura del aire (T_a) y humedad relativa (RH). Una segunda AWS fue establecida sobre una cubierta herbácea para medir las condiciones atmosféricas al exterior del invernadero. El experimento se condujo en la Estación Experimental Panguilemo ($35^{\circ}23'$ S, $71^{\circ}40'$ O, 110 m.s.n.m.) durante los meses de agosto a diciembre del 2000. Las estimaciones de E_{Treal} obtenidas por el modelo PT fueron comparadas con los valores calculados por el método del balance hídrico (WB). En este estudio los valores de E_{Treal} obtenidos por PT fueron calculados usando: a) R_{gi} y flujo de calor del suelo (G) = 0; b) R_{gi} y $G \neq 0$; c) radiación solar medida al exterior del invernadero (R_{ge}) y $G = 0$; y d) R_{ge} y $G \neq 0$. Para estos casos los resultados indicaron que el modelo de PT fue capaz de estimar la E_{Treal} del tomate con errores menores que un 5%. Asimismo, la R_n fue calculada con un error absoluto relativo y una desviación media de no más del 6% y $0,07 \text{ mm d}^{-1}$, respectivamente, ya sea utilizando R_{gi} o R_{ge} . La utilización de un valor igual a cero para valores diarios de flujo de calor del suelo no afectó el cálculo de los valores de E_{Treal} . Así, el modelo de PT evaluado en esta investigación podría ser usado para programar el riego de un cultivo de tomates bajo invernadero usando mediciones internas de temperatura y humedad relativa, y mediciones externas de radiación solar. En este caso, el modelo de PT predijo la E_{Treal} con un error de un 6,1%.

Palabras clave: riego, modelo, *Lycopersicon esculentum*, coeficientes de cultivo, radiación neta, calor del suelo.

LITERATURE CITED

- Allen, R.G., L.S. Pereira, D. Raes, and M. Smith. 1998. Crop evapotranspiration: guidelines for computing crop water requirements. Irrigation and Drainage Paper 56. 300 p. FAO, Rome, Italy.
- Antonioletti, R., S. Ortega, et A. Oliosio. 1999. Modélisation du rayonnement net pour des applications climatiques et agroclimatiques en milieu méditerranéen et tropical maritime. Publications de l'Association Internationale de Climatologie 12:335-341.
- Brisson, N., C. Gary, E. Justes, R. Roche, B. Mary, D. Ripoche, *et al.* 2003. An overview of the crop model STICS. *Eur. J. Agron.* 18:309-332.
- Castilla, N., and E. Fereres. 1990. The climate and water requirements of tomatoes in unheated plastic greenhouses. *Agricultura Mediterranea* 120:268-274.
- Domingo, F., L. Villagarcía, A.J. Brenner, and J. Puigdefabregas. 2000. Measuring and modelling the radiation balance of a heterogeneous shrubland. *Plant Cell Environ.* 23:27-38.
- Idso, S. 1981. A set of equations for full spectrum and 8 to 14 μm and 10.5 to 12.5 μm thermal radiation from cloudless skies. *Water Resour. Res.* 19:295-304.
- Kirda, C., B. Cevik, and K. Tulucu. 1988. A simple method to estimate the irrigation water requirement of greenhouse grown tomato. *Acta Hort. (ISHS)* 366:371-380.
- McAneney, K., and B. Itier. 1996. Operational limits to the Priestley-Taylor formula. *Irrig. Sci.* 17:37-43.
- Ortega-Farías, S., R. Calderón, N. Martelli, y R. Antonioletti. 2004a. Evaluación de un modelo para estimar la radiación neta sobre un cultivo de tomate industrial. *Agric. Téc. (Chile)* 64:41-49.
- Ortega-Farías, S., B. Leyton, H. Valdés, y H. Paillán. 2003. Efecto de cuatro láminas de agua sobre el rendimiento y calidad de tomates (*Lycopersicon esculentum* Mill., cv. Presto) de invernadero producido en primavera-verano. *Agric. Téc. (Chile)* 63:394-402.
- Ortega-Farías, S.O., V. Rojas, H. Valdés, and P. González. 2004b. Estimation of reference evapotranspiration in the Maule Region of Chile: A comparison between the FAO Penman-Monteith and Bowen Ratio methods. *Acta Hort. (ISHS)* 664:469-475.
- Pereira, A., and N. Villa Nova. 1992. Analysis of the Priestley-Taylor parameter. *Agric. For. Meteorol.* 61:1-9.
- Pieters, J., and J. Deltour. 1997. Performances of greenhouses with the presence of condensation on cladding materials. *J. Agric. Eng. Res.* 68:125-137.
- Priestley, C., and R. Taylor. 1972. On the assessment of surface heat flux and evaporation using large-scale parameters. *Mon. Weather Rev.* 100:81-92.
- Stanghellini, C. 1987. Transpiration of greenhouse crops: and aid to climate management, Ph.D. Dissertation. Wageningen Agricultural University, Wageningen, The Netherlands.
- Vuscovich, M. 2001. Desarrollo de un modelo para determinar evapotranspiración en invernaderos. Tesis Magíster Scientiae. 64 p. Universidad de Concepción, Facultad de Ingeniería Agrícola, Chillán, Chile.
- Yuan, B., Y. Kang, and S. Nishiyama. 2001. Drip irrigation scheduling for tomatoes in unheated greenhouses. *Irrig. Sci.* 20:149-154.
- Zhang, L., and R. Lemeur. 1992. Effect of aerodynamic resistance on energy balance and Penman-Monteith estimates of evapotranspiration in greenhouse conditions. *Agric. For. Meteorol.* 58:209-228.
- Zhu, S., J. Deltour, and S. Wang. 1998. Modelling the thermal characteristics of greenhouse pond systems. *Aquacult. Eng.* 18:201-217.