

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

5,900

Open access books available

145,000

International authors and editors

180M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Explicit and Approximated Solutions for Heat and Mass Transfer Problems with a Moving Interface

Domingo Alberto Tarzia
*CONICET and Universidad Austral
Argentina*

1. Introduction

The goal of this chapter is firstly to give a survey of some explicit and approximated solutions for heat and mass transfer problems in which a free or moving interface is involved. Secondly, we show simultaneously some new recent problems for heat and mass transfer, in which a free or moving interface is also involved. We will consider the following problems:

1. Phase-change process (Lamé-Clapeyron-Stefan problem) for a semi-infinite material:
 - i. The Lamé-Clapeyron solution for the one-phase solidification problem (modeling the solidification of the Earth with a square root law of time);
 - ii. The pseudo-steady-state approximation for the one-phase problem;
 - iii. The heat balance integral method (Goodman method) and the approximate solution for the one-phase problem;
 - iv. The Stefan solution for the planar phase-change surface moving with constant speed;
 - v. The Solomon-Wilson-Alexiades model for the phase-change process with a mushy region and its similarity solution for the one-phase case;
 - vi. The Cho-Sunderland solution for the one-phase problem with temperature-dependent thermal conductivity;
 - vii. The Neumann solution for the two-phase problem for prescribed surface temperature at the fixed face;
 - viii. The Neumann-type solution for the two-phase problem for a particular prescribed heat flux at the fixed face, and the necessary and sufficient condition to have an instantaneous phase-change process;
 - ix. The Neumann-type solution for the two-phase problem for a particular prescribed convective condition (Newton law) at the fixed face, and the necessary and sufficient condition to have an instantaneous phase-change process;
 - x. The similarity solution for the two-phase Lamé-Clapeyron-Stefan problem with a mushy region.
 - xi. The similarity solution for the phase-change problem by considering a density jump;
 - xii. The determination of one or two unknown thermal coefficients through an over-specified condition at the fixed face for one or two-phase cases.
 - xiii. A similarity solution for the thawing in a saturated porous medium by considering a density jump and the influence of the pressure on the melting temperature.

2. Free boundary problems for the diffusion equation:
 - i. The oxygen diffusion-consumption problem and its relationship with the phase-change problem;
 - ii. The Rubinstein solution for the binary alloy solidification problem;
 - iii. The Zel'dovich-Kompaneets-Barenblatt solution for the gas flow through a porous medium;
 - iv. Luikov coupled heat and mass transfer for a phase-change process;
 - v. A mixed saturated-unsaturated flow problem representing absorption of water by a soil with a constant pond depth at the surface and an explicit solution for a particular diffusivity;
 - vi. Estimation of the diffusion coefficient in a gas-solid system;
 - vii. The coupled heat and mass transfer during the freezing of the high-water content materials with two free boundaries: the freezing and sublimation fronts.

2. Explicit solutions for phase-change process (Lamé-Clapeyron-Stefan problem) for a semi-infinite material

Heat transfer problems with a phase-change such as melting and freezing have been studied in the last century due to their wide scientific and technological applications. A review of a long bibliography on moving and free boundary problems for phase-change materials (PCM) for the heat equation is shown in (Tarzia, 2000a). Some previous reviews on explicit or approximated solutions were presented in (Garguichevich & Sanziel, 1984; Howison, 1988; Tarzia, 1991b & 1993). Some reviews, books or booklets in the subject are (Alexiades & Solomon, 1993; Bankoff, 1964; Brillouin, 1930; Cannon, 1984; Carslaw & Jaeger, 1959; Crank, 1984; Duvaut, 1976; Elliott & Ockendon, 1982; Fasano, 1987 & 2005; Friedman, 1964; Gupta, 2003; Hill, 1987; Luikov, 1968; Lunardini, 1981 & 1991; Muehlbauer & Sunderland, 1965; Primicerio, 1981; Rubinstein, 1971; Tarzia, 1984b & 2000b; Tayler, 1986).

2.1 The Lamé-Clapeyron solution for the one-phase solidification problem (modeling the solidification of the Earth with a square root law of time)

We consider the solidification of semi-infinite material, represented by $x > 0$. We will find the interface solid-liquid $x = s(t)$ and the temperature $T = T(x, t)$ of the solid phase defined by

$$T(x, t) = \begin{cases} T(x, t) & \text{if } 0 < x < s(t), \quad t > 0 \\ T_f & \text{if } s(t) \leq x, \quad t > 0 \end{cases} \quad (1)$$

which satisfy the following free boundary problem:

$$\rho c T_t - k T_{xx} = 0, \quad 0 < x < s(t), \quad t > 0 \quad (2)$$

$$T(0, t) = T_0 < T_f, \quad t > 0 \quad (3)$$

$$T(s(t), t) = T_f, \quad t > 0 \quad (4)$$

$$k T_x(s(t), t) = \rho \ell \dot{s}(t), \quad t > 0 \quad (5)$$

$$s(0) = 0 \tag{6}$$

Eq. (2) represents the heat equation for the solid phase, k is the thermal conductivity, ρ is the mass density, c is the heat capacity, ℓ is the latent heat of fusion by unit of mass, T_0 is the imposed temperature at the fixed face $x = 0$, and the material is initially at the melting temperature T_f . The problem (2)-(6) is known in literature as the one-phase Stefan problem (Lamé-Clapeyron-Stefan problem) and the condition (5) as the Stefan condition. Free boundary problems of this type were presented by the first time in (Lamé & Clapeyron, 1831) in order to study the solidification of the Earth and was continued independently by (Stefan, 1891a, b & 1990) in order to study the thickness of polar ice. We remark here that Lamé & Clapeyron found the important law for the phase-change interface with a square root of time.

Theorem 1. (Lamé-Clapeyron solution).

The explicit solution to the free boundary problem (2)-(6) is given by

$$T(x,t) = T_0 + \frac{T_f - T_0}{f(\xi)} \operatorname{erf}\left(\frac{x}{2a\sqrt{t}}\right), \quad s(t) = 2a\xi\sqrt{t} \tag{7}$$

where $a^2 = \alpha = \frac{k}{\rho c}$ is the diffusion coefficient and $\xi > 0$ is the unique solution to the equation

$$E(x) = \frac{Ste}{\sqrt{\pi}}, \quad x > 0 \tag{8}$$

with

$$\operatorname{erf}(x) = \frac{2}{\sqrt{\pi}} \int_0^x \exp(-u^2) du, \quad E(x) = x \operatorname{erf}(x) \exp(x^2), \tag{9}$$

$$Ste = \frac{c(T_f - T_0)}{\ell} : \text{Stefan number}, \tag{10}$$

and the total heat flux at the fixed face $x = 0$ is given by

$$Q(t) = \int_0^t kT_x(0,\tau) d\tau = \rho\ell s(t) \exp(\xi^2). \tag{11}$$

Proof.

We have the following properties:

$$E(0) = 0, \quad E(+\infty) = +\infty, \quad E'(x) > 0, \quad \forall x > 0. \tag{12}$$

Remark 1.

From (4) we have

$$T_x(s(t),t)\dot{s}(t) + T_t(s(t),t) = 0, \quad t > 0 \tag{13}$$

and therefore the Stefan condition (5) is transformed in

$$kT_x^2(s(t),t) = -\rho\ell T_t(s(t),t) = -\frac{\ell k}{c} T_{xx}(s(t),t), \quad t > 0 \quad (14)$$

which implies that the problem (2)-(6) is always a nonlinear problem (Pekeris & Slichter, 1939).

Remark 2.

A generalization of the Lamé-Clapeyron solution is given in (Menaldi & Tarzia, 2003) for a particular source in the heat equation. A study of the behaviour of the Lamé-Clapeyron solution when the latent heat goes to zero is given in (Guzman, 1982; Sherman, 1971).

2.2 The pseudo-steady-state approximation for the one-phase problem

An approximated solution to problem (2)-(6) is given by the pseudo-steady-state approximation which must satisfy the following conditions: (3)-(6) and the steady-state equation

$$T_{xx} = 0, \quad 0 < x < s(t), \quad t > 0. \quad (15)$$

Theorem 2 (Stefan, 1989a)

The solution to the problem (15), (3)-(6) is given by

$$T(x,t) = T_0 + \frac{T_f - T_0}{s(t)} x, \quad 0 < x < s(t), \quad t > 0 \quad (16)$$

$$s(t) = 2a\xi_{ap}\sqrt{t}, \quad \xi_{ap} = \sqrt{\frac{Ste}{2}} \quad (17)$$

Proof.

The solution to (15), (3) and (4) is given by (16). Therefore the condition (5) is transformed in the ordinary differential equation

$$k(T_f - T_0) / s(t) = \rho\lambda\dot{s}(t) \quad (18)$$

with the initial condition (6), whose solution is given by

$$s^2(t) = 2k(T_f - T_0)t / (\rho\ell) = 4a^2 \frac{Ste}{2} t \quad (19)$$

that is

$$s(t) = \sqrt{\frac{2k(T_f - T_0)}{\rho\ell} t} \quad (20)$$

Remark 3.

If the Stefan number is very small, i.e.

$$Ste = \frac{c(T_f - T_0)}{\ell} \ll 1 \quad (21)$$

then the solution ξ to the equation (8) for the Lamé-Clapeyron solution can be taken as ξ_{ap} , given in (17). This can be obtained by using the following first approximation:

$$\exp(x^2) \approx 1, \quad f(x) \approx \frac{2}{\sqrt{\pi}}x, \quad 0 < x \ll 1. \quad (22)$$

Remark 4.

A study of sufficient conditions on data to estimate the occurrence of a phase-change process is given in (Solomon et al., 1983; Tarzia & Turner, 1992 & 1999).

2.3 The heat balance integral method (Goodman method) and the approximate solution for the one-phase problem

An approximated solution for the following fusion problem (similar to the solidification problem (2)-(6))

$$\rho c T_t - k T_{xx} = 0, \quad 0 < x < s(t), \quad t > 0 \quad (23)$$

$$T(0,t) = T_0 > 0, \quad t > 0 \quad (24)$$

$$T(s(t),t) = 0, \quad t > 0 \quad (25)$$

$$k T_x(s(t),t) = -\rho l \dot{s}(t), \quad t > 0 \quad (26)$$

$$s(0) = 0 \quad (27)$$

is given by the heat balance integral method, known by the Goodman method (Goodman,1958). This method consists of replacing the Stefan condition (26) by

$$T_x^2(s(t),t) = \frac{\ell}{c} T_{xx}(s(t),t), \quad t > 0 \quad (28)$$

and the heat equation (23) by its integral on the domain $(0,s(t))$ given by

$$\begin{aligned} \frac{d}{dt} \int_0^{s(t)} T(x,t) dx &= \int_0^{s(t)} T_t(x,t) dx + T(s(t),t) \dot{s}(t) = \int_0^{s(t)} T_t(x,t) dx = \frac{k}{\rho c} \int_0^{s(t)} T_{xx}(x,t) dx \\ &= \frac{k}{\rho c} [T_x(s(t),t) - T_x(0,t)] = -\frac{k}{\rho c} \left[\frac{\rho l}{k} \dot{s}(t) + T_x(0,t) \right] \end{aligned} \quad (29)$$

that is

$$\frac{d}{dt} \int_0^{s(t)} T(x,t) dx = -\frac{k}{\rho c} \left[\frac{\rho l}{k} \dot{s}(t) + T_x(0,t) \right]. \quad (30)$$

In order to solve (30), (28), (24), (25) and (27), we propose an approximated temperature profile

$$T(x,t) = \alpha(t)(s(t) - x) + \beta(t)(s(t) - x)^2, \quad 0 < x < s(t), \quad t > 0 \quad (31)$$

where $\alpha = \alpha(t)$, $\beta = \beta(t)$, and $s = s(t)$ are real functions to be determined. Firstly, we can obtain α and β as a function of s and, therefore, we solve the corresponding ordinary differential equation for $s = s(t)$.

Theorem 3.

The Goodman approximated solution is given by:

$$\alpha(t) = \frac{\ell}{c} \frac{\sqrt{1+2Ste} - 1}{s(t)}, \quad \beta(t) = \frac{\alpha(t)s(t) + T_0}{s^2(t)} \quad (32)$$

$$s(t) = 2a\xi_g \sqrt{t}, \quad \xi_g = \sqrt{3} \frac{1+2Ste - \sqrt{1+2Ste}}{5+Ste + \sqrt{1+2Ste}}, \quad Ste = \frac{cT_0}{\ell} \quad (33)$$

Remark 5.

Other refinements of the Goodman method are given in (Bell, 1978; Lunardini, 1981; Lunardini 1991). In (Reginato & Tarzia, 1993; Reginato et al, 1993; Reginato et al., 2000) the heat balance method was applied to root growth of crops and the modelling nutrient uptake. In (Tarzia, 1990a) the heat balance method was applied to obtain the exponentially fast asymptotic behaviour of the solutions in heat conduction problems with absorption.

2.4 The Stefan solution for the planar phase-change surface moving with constant speed

When the phase-change interface is moving with constant speed we can consider the following inverse Stefan problem: find the temperature $T = T(x, t)$ and $f(t) = T(0, t)$ such that:

$$\alpha T_{xx} = T_t, \quad 0 < x < s(t), \quad t > 0 \quad (\alpha = k/\rho c) \quad (34)$$

$$T(s(t), t) = 0, \quad t > 0 \quad (35)$$

$$kT_x(s(t), t) = \rho l \dot{s}(t), \quad t > 0 \quad (36)$$

$$\dot{s}(t) = m > 0, \quad s(0) = 0 \quad (s(t) = mt) \quad (37)$$

Theorem 4. (Stefan, 1989b & 1991)

The solution to (34)-(37) is given by

$$T(x, t) = \frac{\ell}{c} [1 - \exp(\frac{m}{\alpha}(mt - x))] \quad (38)$$

and the temperature at the fixed face is variable in time given by the expression:

$$f(t) = T(0, t) = -\frac{\ell}{c} [\exp(\frac{m^2 t}{\alpha}) - 1] < 0 = T_f, \quad t > 0. \quad (39)$$

Remark 6.

More details with respect to the inverse Stefan problem can be found in (Quilghini, 1967).

2.5 The Solomon-Wilson-Alexiades model for the phase-change process with a mushy region and its similarity solution for the one-phase case

We consider a semi-infinite material in the liquid phase at the melting temperature T_f . We impose a temperature $T_0 < T_f$ at the fixed face $x = 0$, and the solidification process begins, and three regions can be distinguished, as follows (Solomon et al., 1982):

- i. the liquid phase, at temperature $T = T_f$, occupying the region $x > r(t)$, $t > 0$;
- ii. the solid phase, at temperature $T(x, t) < T_f$, occupying the region $0 < x < s(t)$, $t > 0$;
- iii. the mushy zone, at temperature T_f , occupying the region $s(t) < x < r(t)$, $t > 0$. We make the following two assumptions on its structure:
 - a. the material in the mushy zone contains a fixed fraction $\varepsilon \ell$ (with constant $0 < \varepsilon < 1$) of the total latent heat ℓ .
 - b. the width of the mushy zone is inversely proportional (with constant $\gamma > 0$) to the temperature gradient at $s(t)$.

Therefore the problem consists of finding the free boundaries $x = s(t)$ and $x = r(t)$, and the temperature $T = T(x, t)$ such that the following conditions are satisfied:

$$\rho c T_t - k T_{xx} = 0, \quad 0 < x < s(t), \quad t > 0 \quad (40)$$

$$T(0, t) = T_0 < T_f, \quad t > 0; \quad s(0) = r(0) = 0 \quad (41)$$

$$T(s(t), t) = T_f, \quad t > 0 \quad (42)$$

$$k T_x(s(t), t) = \rho \ell [\varepsilon \dot{s}(t) + (1 - \varepsilon) \dot{r}(t)], \quad t > 0 \quad (43)$$

$$T_x(s(t), t)(r(t) - s(t)) = \gamma, \quad t > 0. \quad (44)$$

Theorem 5. (Solomon et al., 1982):

The explicit solution to problem (40)-(44) is given by:

$$T(x, t) = T_0 + \frac{(T_f - T_0)}{\text{erf}(\xi)} \text{erf}\left(\frac{x}{2a\sqrt{t}}\right), \quad s(t) = 2\xi a\sqrt{t}, \quad r(t) = 2\mu a\sqrt{t} \quad (45)$$

where

$$\mu = \xi + \frac{\gamma\sqrt{\pi}}{2(T_f - T_0)} \text{erf}(\xi) \exp(\xi^2), \quad a = \sqrt{k/\rho c} \quad (46)$$

and $\xi > 0$ is the unique solution to the equation

$$D(x) = \frac{Ste}{\sqrt{\pi}}, \quad x > 0 \quad \left(Ste = \frac{c(T_f - T_0)}{\ell} \right) \quad (47)$$

with

$$D(x) = x \text{erf}(x) \exp(x^2) + \frac{\gamma(1 - \varepsilon)\sqrt{\pi}}{2(T_f - T_0)} [\exp(x^2) \text{erf}(x)]^2. \quad (48)$$

Remark 7.

The classical Lamé-Clapeyron solution can be obtained for the particular case $\varepsilon = 1$, $\gamma = 0$. If the Stefan number is small, then an approximated solution for ξ and μ is given by:

$$\xi = \left[\frac{Ste}{2[1 + \gamma(1 - \varepsilon) / (T_f - T_0)]} \right]^{\frac{1}{2}}, \quad \mu = \xi [1 + \gamma / (T_f - T_0)] \quad (49)$$

2.6 The Cho-Sunderland solution for the one-phase problem with temperature-dependent thermal conductivity

We consider the following solidification problem for a semi-infinite material

$$\rho c T_t(x, t) = (k(T) T_x(x, t))_x, \quad 0 < x < s(t), t > 0 \quad (50)$$

$$T(0, t) = T_0 < T_f, \quad t > 0 \quad (51)$$

$$T(s(t), t) = T_f, \quad t > 0 \quad (52)$$

$$k(T_f) T_x(s(t), t) = \rho \ell \dot{s}(t), \quad t > 0 \quad (53)$$

where $T(x, t)$ is the temperature of the solid phase, $\rho > 0$ is the density of mass, $\ell > 0$ is the latent heat of fusion by unity of mass, $c > 0$ is the specific heat, $x = s(t)$ is the phase-change interface, T_f is the phase-change temperature, T_0 is the temperature at the fixed face $x = 0$. We suppose that the thermal conductivity has the following expression:

$$k = k(T) = k_0 [1 + \beta(T - T_0) / (T_f - T_0)] \quad , \quad \beta \in \mathbb{R} \quad (54)$$

Let $a_0 = k_0 / \rho c$ be the diffusion coefficient at the temperature T_0 . We observe that if $\beta = 0$, the problem (50)-(53) becomes the classical one-phase Lamé-Clapeyron-Stefan problem.

Theorem 6. (Cho & Sunderland, 1974)

The solution to problem (50)-(54) is given by:

$$T(x, t) = T_0 + \frac{(T_f - T_0)}{\Phi(\lambda)} \Phi(\eta) \quad , \quad \eta = \frac{x}{2\sqrt{\alpha_0 t}} \quad , \quad 0 < \eta < \lambda \quad (55)$$

$$s(t) = 2\lambda\sqrt{\alpha_0 t} \quad (56)$$

where $\Phi = \Phi(x) = \Phi_\delta(x)$ is the modified error function, for $\delta > -1$, the unique solution to the following boundary value problem in variable x , i.e:

$$\begin{cases} i) [(1 + \delta \Phi'(x))\Phi'(x)]' + 2x\Phi'(x) = 0, & x > 0, \\ ii) \Phi(0^+) = 0 \quad , \quad \Phi(+\infty) = 1 \end{cases} \quad (57)$$

and the unknown thermal coefficients λ and δ must satisfy the following system of equations:

$$\beta - \delta \Phi(\lambda) = 0 \tag{58}$$

$$[1 + \delta \Phi(\lambda)] \frac{\Phi'(\lambda)}{\lambda \Phi(\lambda)} - \frac{2\ell}{c(T_f - T_o)} = 0 \tag{59}$$

Remark 8.

Explicit solutions are given in (Briozzo et al., 2007 & 2010; Briozzo & Tarzia, 2002; Natale & Tarzia, 2006; Rogers & Broadbridge, 1988; Tirskaa, 1959; Tritscher & Broadbridge, 1994) where nonlinear thermal coefficients are considered and in (Natale & Tarzia, 2000; Rogers, 1986) for Storm’s materials.

2.7 The Neumann solution for the two-phase problem for prescribed surface temperature at the fixed face

We consider a semi-infinite material with null melting temperature $T_f = 0$, with an initial temperature $-C < 0$ and having a temperature boundary condition $B > 0$ at the fixed face $x = 0$. The model for the two-phase Lamé-Clapeyron-Stefan problem is given by: find the free boundary $x = s(t)$, defined for $t > 0$, and the temperature $T = T(x, t)$ defined by

$$T(x, t) = \begin{cases} T_2(x, t) > T_f & \text{if } 0 < x < s(t), \quad t > 0 \\ T_f & \text{if } x = s(t), \quad t > 0 \\ T_1(x, t) < T_f & \text{if } s(t) < x, \quad t > 0 \end{cases} \tag{60}$$

for $x > 0$ and $t > 0$, such that (i=1: solid phase; i=2: liquid phase):

$$\rho c_2 T_{2t} - k_2 T_{2xx} = 0, \quad 0 < x < s(t), \quad t > 0, \tag{61}$$

$$\rho c_1 T_{1t} - k_1 T_{1xx} = 0, \quad x > s(t), \quad t > 0, \tag{62}$$

$$T_1(x, 0) = -C < 0, \quad x > 0, \tag{63}$$

$$T_2(0, t) = B > 0, \quad t > 0, \tag{64}$$

$$T_1(s(t), t) = T_f = 0, \quad t > 0, \tag{65}$$

$$T_2(s(t), t) = T_f = 0, \quad t > 0, \tag{66}$$

$$k_1 T_{1x}(s(t), t) - k_2 T_{2x}(s(t), t) = \rho \ell \dot{s}(t), \quad t > 0, \tag{67}$$

$$s(0) = 0. \tag{68}$$

Theorem 7. (Neumann solution (Webber, 1901))

The explicit solution to problem (61)-(68) is given by:

$$T_2(x, t) = B - \frac{B}{\operatorname{erf}(\sigma / a_2)} \operatorname{erf}\left(\frac{x}{2a_2\sqrt{t}}\right), \quad 0 \leq x \leq s(t), t > 0 \quad (69)$$

$$T_1(x, t) = -C + \frac{B}{\operatorname{erfc}(\sigma / a_1)} \operatorname{erfc}\left(\frac{x}{2a_1\sqrt{t}}\right), \quad s(t) \leq x, \quad t > 0 \quad (70)$$

$$s(t) = 2\sigma\sqrt{t} \quad \left(a_2^2 = \frac{k_2}{\rho c_2}, \quad a_1^2 = \frac{k_1}{\rho c_1}\right) \quad (71)$$

where $\sigma > 0$ is the unique solution to the following equation:

$$F(x) = x, \quad x > 0 \quad (72)$$

where

$$F(x) = \frac{Bk_2}{\rho l a_2 \sqrt{\pi}} F_2\left(\frac{x}{a_2}\right) - \frac{Ck_1}{\rho l a_1 \sqrt{\pi}} F_1\left(\frac{x}{a_1}\right) \quad (73)$$

$$F_1(x) = \frac{\exp(-x^2)}{\operatorname{erfc}(x)}, \quad F_2(x) = \frac{\exp(-x^2)}{\operatorname{erf}(x)}, \quad \operatorname{erfc}(x) = 1 - \operatorname{erf}(x). \quad (74)$$

Remark 9.

It is very interesting to answer the following question: When is the Neumann solution for a semi-infinite material applicable to a finite material $(0, x_0)$? (Solomon, 1979).

Taking into account that $\operatorname{erf}(x) \cong 1$ for $2 \leq x$, we have an affirmative answer for a short period of time because $T_1(x_0, t) \cong -C$ is equivalent to

$$\operatorname{erf}\left(\frac{x_0}{2a_1\sqrt{t}}\right) \approx 1 \quad (75)$$

that is

$$t \leq \frac{x_0^2}{16a_1^2}. \quad (76)$$

Remark 10.

A generalization of Neumann solution is given in (Briozzo et al, 2004 & 2007b) for particular sources in the heat equations for both phases. A study of the behaviour of the Neumann solution when the latent heat goes to zero is given in (Tarzia & Villa, 1991). A generalization of Neumann solution in multi-phase media is given in (Sanziel & Tarzia, 1989; Weiner, 1955; Wilson, 1978 & 1982), and when we have shrinkage or expansion (Fi & Han, 2007; Natale et al., 2010; Wilson & Solomon, 1986).

2.8 The Neumann-type solution for the two-phase problem for a particular prescribed heat flux at the fixed face, and the necessary and sufficient condition to have an instantaneous phase-change process

If we consider the problem (61)-(68) by changing the boundary condition (64) at $x = 0$ by a heat flux condition of the type

$$k_2 T_{2_x}(0, t) = -\frac{q_0}{\sqrt{t}} \tag{77}$$

then we can obtain the following result:

Theorem 8. (Tarzia, 1981)

i. If q_0 verifies the inequality

$$q_0 > \frac{Ck_1}{a_1\sqrt{\pi}} \tag{78}$$

then we have an instantaneous change of phase and the corresponding explicit solution is given by:

$$T_2(x, t) = A_2 + B_2 \operatorname{erf}\left(\frac{x}{2a_2\sqrt{t}}\right), \quad 0 \leq x \leq s(t), \quad t > 0 \tag{79}$$

$$T_1(x, t) = A_1 + B_1 \operatorname{erf}\left(\frac{x}{2a_1\sqrt{t}}\right), \quad s(t) \leq x, \quad t > 0 \tag{80}$$

$$s(t) = 2w\sqrt{t} \quad \left(a_2^2 = \frac{k_2}{\rho c_2}, a_1^2 = \frac{k_1}{\rho c_1} \right) \tag{81}$$

where

$$A_1(w) = C \frac{\operatorname{erf}(w/a_1)}{\operatorname{erfc}(w/a_1)}, \quad B_1(w) = \frac{-C}{\operatorname{erfc}(w/a_1)} \tag{82}$$

$$A_2(w) = \frac{a_2 q_0 \sqrt{\pi}}{k_2} \operatorname{erf}(w/a_2), \quad B_2(w) = -\frac{a_2 q_0 \sqrt{\pi}}{k_2} \tag{83}$$

and $w > 0$ is the unique solution to the equation

$$F_0(x) = x, \quad x > 0, \tag{84}$$

where

$$F_0(x) = \frac{q_0}{\rho\lambda} \exp(-x^2/a_2^2) - \frac{Ck_1}{\rho\lambda a_1 \sqrt{\pi}} F_1(x/a_1). \tag{85}$$

ii. If $q_0 \leq Ck_1/a_1\sqrt{\pi}$ the corresponding problem represents only a heat conduction problem for the initial solid phase, and the temperature is given by

$$T(x,t) = T_1(x,t) = -C + \frac{q_0 a_1 \sqrt{\alpha \pi}}{k_1} \operatorname{erfc}\left(\frac{x}{2a_1 \sqrt{\alpha t}}\right), \quad x > 0, t > 0. \quad (86)$$

Corollary 9 (Tarzia, 1981)

The coefficient σ that characterizes the free boundary $s(t) = 2\sigma\sqrt{t}$ of Neumann solution (69)-(74) must satisfy the following inequality:

$$\operatorname{erf}\left(\frac{\sigma}{a_2}\right) < \frac{B}{C} \sqrt{\frac{k_2 c_2}{k_1 c_1}}. \quad (87)$$

2.9 The Neumann-type solution for the two-phase problem for a particular prescribed convective condition (Newton law) at the fixed face, and the necessary and sufficient condition to have an instantaneous phase-change process

We consider the following free boundary problem: find the solid-liquid interface $x = s(t)$ and the temperature $T(x,t)$ defined by

$$T(x,t) = \begin{cases} T_s(x,t) & \text{if } 0 < x < s(t), \quad t > 0, \\ T_f & \text{if } x = s(t), \quad t > 0, \\ T_l(x,t) & \text{if } x > s(t), \quad t > 0, \end{cases} \quad (88)$$

which satisfy the following equations and boundary conditions

$$T_{st} = \alpha_s T_{sxx}, \quad 0 < x < s(t), \quad t > 0 \quad (89)$$

$$T_{lt} = \alpha_l T_{lxx}, \quad x > s(t), \quad t > 0 \quad (90)$$

$$T_s(s(t),t) = T_l(s(t),t) = T_f, \quad x = s(t), \quad t > 0 \quad (91)$$

$$T_l(x,0) = T_l(+\infty,t) = T_i, \quad x > 0, \quad t > 0 \quad (92)$$

$$k_s T_{s_x}(0,t) = \frac{h_0}{\sqrt{t}} (T_s(0,t) - T_\infty), \quad t > 0 \quad (93)$$

$$k_s T_{s_x}(s(t),t) - k_l T_{l_x}(s(t),t) = \rho \ell \dot{s}(t), \quad t > 0 \quad (94)$$

$$s(0) = 0 \quad (95)$$

where the subscripts s and l represent the solid and liquid phases respectively, ρ is the common density of mass and ℓ is the latent heat of fusion, and $T_\infty < T_f < T_i$. We have the following results:

Theorem 10. (Tarzia, 2004)

If the coefficient h_0 verifies the inequality

$$h_0 > \frac{k_l}{\sqrt{\pi \alpha_l}} \frac{T_i - T_f}{T_i - T_\infty} \quad (96)$$

there exists an instantaneous solidification process and then the free boundary problem (89)-(95) has the explicit solution to a similarity type given by

$$s(t) = 2\lambda\sqrt{\alpha_1 t} \tag{97}$$

$$T_s(x,t) = T_\infty + \frac{(T_f - T_\infty)\left[1 + \frac{h_0\sqrt{\pi\alpha_s}}{k_s} \operatorname{erf}\left(\frac{x}{2\sqrt{\alpha_s t}}\right)\right]}{1 + \frac{h_0\sqrt{\pi\alpha_s}}{k_s} \operatorname{erf}\left(\lambda\sqrt{\frac{\alpha_1}{\alpha_s}}\right)} \tag{98}$$

$$T_l(x,t) = T_i - (T_i - T_f) \frac{\operatorname{erfc}\left(\frac{x}{2\sqrt{\alpha_1 t}}\right)}{\operatorname{erfc}(\lambda)} \tag{99}$$

and the dimensionless parameter $\lambda > 0$ satisfies the following equation

$$F(x) = x, \quad x > 0 \tag{100}$$

where function F and the b 's coefficients are given by

$$F(x) = b_1 \frac{\exp(-bx^2)}{1 + b_2 \operatorname{erf}(x\sqrt{b})} - b_3 \frac{\exp(-x^2)}{\operatorname{erfc}(x)} \tag{101}$$

$$b = \frac{\alpha_l}{\alpha_s} > 0; \quad b_1 = \frac{h_0(T_f - T_\infty)}{\rho\ell\sqrt{\alpha_1}} > 0 \tag{102}$$

$$b_2 = \frac{h_0}{h_s} \sqrt{\pi\alpha_s} > 0; \quad b_3 = \frac{c_l(T_i - T_f)}{\ell\sqrt{\pi}} > 0 \tag{103}$$

Proof.

Function F has the following properties:

$$F(0^+) = b_1 - b_3 = \frac{h_0(T_f - T_\infty)}{\rho\ell\sqrt{\alpha_1}} - \frac{c_l(T_i - T_f)}{\ell\sqrt{\pi}} \tag{104}$$

$$F(+\infty) = -\infty, \quad F'(x) < 0, \quad \forall x > 0 \tag{105}$$

Therefore, there exists a unique solution $\lambda > 0$ of the Eq. (100) if and only if $F(0^+) > 0$, that is inequality (96) holds.

2.10 The similarity solution for the two-phase Lamé-Clapeyron-Stefan problem with a mushy region

We consider a semi-infinite material initially in the solid phase at the temperature $-C < T_f = 0$. We impose a temperature $B > T_f = 0$ at the fixed face $x = 0$, and the fusion process begins, and three regions can be distinguished, as follows: (Tarzia, 1990b):

- i. the liquid phase, at temperature $T_2 = T_2(x, t) > 0$, occupying the region $0 < x \leq s(t)$, $t > 0$;
- ii. the solid phase, at temperature $T_1 = T_1(x, t) < 0$, occupying the region $x > r(t)$, $t > 0$;
- iii. the mushy zone, at temperature $T_f = 0$, occupying the region $s(t) < x < r(t)$, $t > 0$. We make the following two assumptions on its structure:
 - a. the material in the mushy zone contains a fixed fraction $\varepsilon \ell$ (with constant $0 < \varepsilon < 1$) of the total latent heat ℓ ;
 - b. the width of the mushy zone is inversely proportional (with constant $\gamma > 0$) to the temperature gradient at $s(t)$.

Therefore, the problem consists of finding the free boundaries $x = s(t)$, $x = r(t)$, and the temperature:

$$T(x, t) = \begin{cases} T_2(x, t) > 0 & \text{if } 0 < x < s(t), t > 0 \\ 0 & \text{if } s(t) \leq x \leq r(t), t > 0 \\ T_1(x, t) < 0 & \text{if } r(t) < x, t > 0 \end{cases} \quad (106)$$

defined for $x > 0$ and $t > 0$, such that the following conditions are satisfied:

$$\alpha_2 T_{2_{xx}} = T_{2_t}, \quad 0 < x < s(t), t > 0 \quad (107)$$

$$\alpha_1 T_{1_{xx}} = T_{1_t}, \quad r(t) < x, t > 0 \quad (108)$$

$$s(0) = r(0) = 0, \quad (109)$$

$$T_2(s(t), t) = T_1(r(t), t) = 0, \quad t > 0 \quad (110)$$

$$k_1 T_{1_x}(r(t), t) - k_2 T_{2_x}(s(t), t) = \rho \ell [(1 - \varepsilon) \dot{s}(t) + \varepsilon \dot{r}(t)], \quad (111)$$

$$-T_{2_x}(s(t), t) (r(t) - s(t)) = \gamma, \quad t > 0 \quad (112)$$

$$T_1(x, 0) = T_1(+\infty, t) = -C, \quad x > 0, t > 0 \quad (113)$$

$$T_2(0, t) = B > 0, \quad t > 0 \quad (114)$$

Theorem 11. (Tarzia, 1990b)

- i. The explicit solution to the problem (107)-(114) is given by

$$T_1(x, t) = A_1 + B_1 \operatorname{erf}\left(\frac{x}{2a_1\sqrt{t}}\right), \quad T_2(x, t) = A_2 + B_2 \operatorname{erf}\left(\frac{x}{2a_2\sqrt{t}}\right) \quad (115)$$

$$s(t) = 2\sigma\sqrt{t}, \quad r(t) = 2\omega\sqrt{t} \quad (a_2^2 = \frac{k_2}{\rho c_2}, \quad a_1^2 = \frac{k_1}{\rho c_1}) \quad (116)$$

where

$$A_2 = B, \quad B_2 = -\frac{B}{\operatorname{erf}\left(\frac{\sigma}{a_2}\right)}, \quad A_1 = \frac{\operatorname{Cerf}\left(\frac{\omega}{a_1}\right)}{\operatorname{erfc}\left(\frac{\omega}{a_1}\right)}, \quad B_1 = -\frac{C}{\operatorname{erfc}\left(\frac{\omega}{a_1}\right)} \quad (117)$$

$$\omega = \omega(\sigma) = \sigma + \frac{\gamma a_2 \sqrt{\pi}}{2B} \exp\left(\frac{\sigma^2}{a_2^2}\right) \operatorname{erf}\left(\frac{\sigma}{a_2}\right) \quad (118)$$

where $\sigma > 0$ is the unique solution to the equation

$$K_1(x) = K_2(x), \quad x > 0 \quad (119)$$

with

$$K_1(x) = \frac{k_2 B}{a_2 \sqrt{\pi}} F_2\left(\frac{x}{a_2}\right) - \frac{k_1 B}{a_1 \sqrt{\pi}} E_1\left(\frac{\omega(x)}{a_1}\right), \quad E_1(x) = \frac{\exp(-x^2)}{\operatorname{erfc}(x)} \quad (120)$$

$$K_2(x) = \rho \ell \left[x + \frac{\varepsilon \gamma a_2 \sqrt{\pi}}{2B} \exp\left(\frac{x^2}{a_2^2}\right) \operatorname{erf}\left(\frac{x}{a_2}\right) \right], \quad F_2(x) = \frac{\exp(-x^2)}{\operatorname{erf}(x)}$$

Proof.

We have the following properties

$$K_1(0^+) = +\infty, \quad K_1(+\infty) = -\infty, \quad K_1' < 0, \quad \forall x > 0, \quad (121)$$

$$K_2(0^+) = 0, \quad K_2(+\infty) = +\infty, \quad K_2' < 0, \quad \forall x > 0, \quad (122)$$

and the thesis holds.

Remark 11

If the boundary condition (114) is replaced by a heat flux condition of the type (77) then we will have an instantaneous change of phase if and only if the coefficient q_0 that characterizes the heat flux (77) verifies an inequality (Tarzia, 1990b).

2.11 The similarity solution for the phase-change problem by considering a density jump

We will consider the two-phase Lamé-Clapeyron-Stefan problem for a semi-infinite material taking into account the density jump under the change of phase. We will find the interface $s = s(t) > 0$ (free boundary), defined for $t > 0$, and the temperature

$$\theta(x, t) = \begin{cases} \theta_1(x, t) < 0 & \text{if } 0 < x < s(t), \quad t > 0, \\ 0 & \text{if } x = s(t), \quad t > 0, \\ \theta_2(x, t) > 0 & \text{if } x > s(t), \quad t > 0, \end{cases} \quad (123)$$

defined for $x > 0$ and $t > 0$, such that they satisfy the following conditions:

$$\alpha_1 \theta_{1,xx} = \theta_{1,t}, \quad 0 < x < s(t), \quad t > 0 \quad (124)$$

$$\alpha_2 \theta_{2_{xx}} + \frac{\rho_1 - \rho_2}{\rho_2} \dot{s}(t) \theta_{2_x} = \theta_{2_t}, \quad x > s(t), \quad t > 0 \quad (125)$$

$$\begin{aligned} \theta_1(s(t), t) &= 0, \quad t > 0 \\ \theta_2(s(t), t) &= 0, \quad t > 0 \end{aligned} \quad (126)$$

$$k_1 \theta_{1_x}(s(t), t) - k_2 \theta_{2_x}(s(t), t) = \rho_1 \ell \dot{s}(t), \quad t > 0 \quad (127)$$

$$\theta_2(x, 0) = \theta_0 > 0, \quad x > 0 \quad (128)$$

$$s(0) = 0 \quad (129)$$

$$\theta_1(0, t) = -d < 0, \quad t > 0. \quad (130)$$

Theorem 12 (Carslaw & Jaeger, 1959; Rubinstein, 1971)

The explicit solution to the free boundary problem (124)-(130) is given by

$$\begin{cases} \theta_1(x, t) = A_1 + B_1 \operatorname{erf}\left(\frac{x}{2a_1\sqrt{t}}\right) \\ \theta_2(x, t) = A_2 + B_2 \operatorname{erf}\left(\delta_1 + \frac{x}{2a_2\sqrt{t}}\right) \\ s(t) = 2\gamma\sqrt{t}, \quad \gamma > 0 \end{cases} \quad (131)$$

where

$$A_1(\gamma) = -d, \quad B_1(\gamma) = \frac{d}{\operatorname{erf}(\gamma/a_1)}, \quad (132)$$

$$A_2(\gamma) = \frac{-\theta_0 \operatorname{erf}(\gamma/a_0)}{\operatorname{erfc}(\gamma/a_0)}, \quad B_2(\gamma) = \frac{\theta_0}{\operatorname{erfc}(\gamma/a_0)}, \quad (133)$$

$$\varepsilon = \frac{\rho_1 - \rho_2}{\rho_2}, \quad \delta_1 = \frac{\gamma}{a_2} |\varepsilon|, \quad a_0 = \frac{a_2}{1 + |\varepsilon|}, \quad (134)$$

and γ is the unique solution to the following equation:

$$F(x) = x, \quad x > 0, \quad (135)$$

with

$$F(x) = \frac{k_1}{\ell \rho_1 a_1 \sqrt{\pi}} B_1(x) \exp\left(\frac{-x^2}{a_1^2}\right) - \frac{k_2}{\ell \rho_1 a_2 \sqrt{\pi}} B_2(x) \exp\left(\frac{-x^2}{a_0^2}\right). \quad (136)$$

Proof.

We have the following properties:

$$F(0^+) = +\infty, \quad F(+\infty) = -\infty, \quad F'(x) < 0, \quad \forall x > 0. \quad (137)$$

Theorem 13 (Bancora & Tarzia, 1985)

i. If we replace the boundary condition (130) by the following one given by:

$$k_1 \theta_{1_x}(0, t) = \frac{q_0}{\sqrt{t}}, \quad t > 0, \quad (138)$$

then there exists an explicit solution corresponding to the free boundary problem (124)-(130) and (138) if and only if the coefficient q_0 satisfies the inequality

$$q_0 > \theta_0 \sqrt{\frac{k_2 \rho_2 c_2}{\pi}}. \quad (139)$$

In this case the explicit solution is given by:

$$\begin{cases} \theta_1(x, t) = C_1 + D_1 \operatorname{erf}\left(\frac{x}{2a_1 \sqrt{t}}\right) \\ \theta_2(x, t) = C_2 + D_2 \operatorname{erf}\left(\delta_2 + \frac{x}{2a_2 \sqrt{t}}\right) \\ s(t) = 2w\sqrt{t}, \quad w > 0 \end{cases} \quad (140)$$

where

$$C_1(w) = -\frac{a_1 q_0 \sqrt{\pi}}{k_1} \operatorname{erf}\left(\frac{w}{a_1}\right), \quad D_1(w) = \frac{a_1 q_0 \sqrt{\pi}}{k_1}, \quad (141)$$

$$C_2(w) = \frac{-\theta_0 \operatorname{erf}(w/a_0)}{\operatorname{erfc}(w/a_0)}, \quad D_2(\gamma) = \frac{\theta_0}{\operatorname{erfc}(w/a_0)}, \quad (142)$$

$$\varepsilon = \frac{\rho_1 - \rho_2}{\rho_2}, \quad \delta_2 = \frac{\gamma}{a_2} |\varepsilon|, \quad a_0 = \frac{a_2}{1 + |\varepsilon|}, \quad (143)$$

and w is the unique solution to the following equation:

$$F_0(x) = x, \quad x > 0, \quad (144)$$

with

$$F_0(x) = \frac{q_0}{\ell \rho_1} \exp\left(\frac{-x^2}{a_1^2}\right) - \frac{k_2}{\ell \rho_1 a_2 \sqrt{\pi}} B_2(x) \exp\left(\frac{-x^2}{a_0^2}\right). \quad (145)$$

Proof.

We have the following properties:

$$F_0(0^+) = \frac{1}{\ell \rho_1} \left(q_0 - \frac{k_2 \theta_0}{a_2 \sqrt{\pi}} \right), \quad F(+\infty) = -\infty, \quad F'_0(x) < 0, \quad \forall x > 0. \quad (146)$$

Remark 12 .

When the boundary condition at the fixed face $x=0$ is given by (93) the explicit solution was given in (Tarzia, 2007).

2.12 The determination of one or two unknown thermal coefficient through an over-specified condition at the fixed face for one or two-phase cases

We consider the one-phase Lamé-Clapeyron-Stefan problem with unknown thermal coefficients. If we give an overspecified boundary condition at the fixed face $x=0$ we can determine one or two unknown coefficients following (Arderius et al., 1996; Cannon, 1963 & 1964; Garguichevich et al., 1985; Jones, 1962 & 1963; Tarzia, 1982, 1983 & 1984).

2.12.1 Determination of one unknown thermal coefficient through a one-phase case

The problem consists of finding the free boundary $x=s(t)$, the temperature $T=T(x,t)$, and one unknown thermal coefficient chosen among $\{k, \rho, c, \ell\}$ such that they must satisfy the following conditions (we have a free boundary problem):

$$T_t = \alpha T_{xx}, \quad 0 < x < s(t), \quad t > 0 \quad (a^2 = \alpha = k/\rho c) \quad (147)$$

$$T(s(t), t) = 0, \quad t > 0 \quad (148)$$

$$kT_x(s(t), t) = \rho \ell \dot{s}(t), \quad t > 0, \quad (149)$$

$$T(0, t) = T_0 > 0 \quad (150)$$

$$kT_x(0, t) = -\frac{q_0}{\sqrt{t}}, \quad t > 0, \quad (151)$$

$$s(0) = 0, \quad (152)$$

where q_0 is the coefficient that characterizes the heat flux at the fixed face $x=0$ and it must be obtained experimentally.

Theorem 14 (Tarzia, 1982)

Let T_0 and q_0 be determined experimentally. The solution for the determination of one thermal coefficient is given by:

$$T(x, t) = T_0 - \frac{T_0}{\operatorname{erf}\left(\frac{\sigma}{a}\right)} \operatorname{erf}\left(\frac{x}{2a\sqrt{t}}\right), \quad 0 < x < s(t), \quad t > 0, \quad (153)$$

$$s(t) = 2\sigma\sqrt{t}, \quad t > 0, \quad (154)$$

where σ and the unknown thermal coefficient are computed in the summarized way in the following Table 1:

| Case # | Formulae for unknown coefficients | Parameter ξ is the unique solution to the equation | Restrictions on data |
|--------|--|--|---|
| 1 | $\sigma = \xi \sqrt{\frac{k}{\rho c}}$ $\ell = \frac{q_0}{\rho} \sqrt{\frac{\rho c}{k}} \frac{\exp(-\xi^2)}{\xi}$ | $\operatorname{erf}(x) = \frac{T_0}{q_0} \sqrt{\frac{k \rho c}{\pi}}$ $x > 0$ | $\frac{T_0}{q_0} \sqrt{\frac{k \rho c}{\pi}} < 1$ |
| 2 | $\sigma = \frac{k T_0}{q_0 \sqrt{\pi}} \frac{\xi}{\operatorname{erf}(\xi)}$ $\rho = \frac{\pi q_0^2}{k c T_0^2} \operatorname{erf}^2(\xi)$ | $E(x) = \frac{c T_0}{\ell \sqrt{\pi}}$ $x > 0$ | ----- |
| 3 | $\sigma = \frac{q_0}{\rho \ell} \exp(-\xi^2)$ $k = \frac{\pi q_0^2}{\rho c T_0^2} \operatorname{erf}^2(\xi)$ | As in Case 2 | ----- |
| 4 | $\sigma = \frac{q_0}{\rho \ell} \exp(-\xi^2)$ $c = \frac{\pi q_0^2}{\rho k T_0^2} \operatorname{erf}^2(\xi)$ | $\frac{\operatorname{erf}(x)}{x} = \frac{k \rho \ell T_0}{q_0^2 \sqrt{\pi}} \exp(x^2)$ $x > 0$ | $\frac{k \rho \ell T_0}{2 q_0^2} < 1$ |

Table 1. Summary of the determination of one thermal coefficient through a one-phase Lamé-Clapeyron-Stefan problem (4 cases)

Remark 13.

The determination of one unknown thermal coefficient for phase-change problems with temperature-dependent thermal conductivity of the type (54) was given in (Tarzia, 1998).

2.12.2 Determination of two unknown thermal coefficients for the one-phase case

If the interface solid-liquid is given by the law:

$$s(t) = 2\sigma\sqrt{t}, \quad t > 0 \tag{155}$$

where the coefficient $\sigma > 0$ was determined experimentally then the problem consists of finding the temperature $T = T(x, t)$ and two unknown thermal coefficients chosen among $\{k, \rho, c, \ell\}$ such that they satisfy the conditions (147)-(152) (we have a moving boundary problem).

Theorem 15 (Tarzia, 1983)

Let T_0, σ and q_0 be determined experimentally. The solution for the determination of two thermal coefficients is given by

$$T(x, t) = T_0 - \frac{T_0}{\operatorname{erf}\left(\frac{\sigma}{a}\right)} \operatorname{erf}\left(\frac{x}{2a\sqrt{t}}\right), \quad 0 < x < s(t), \quad t > 0, \tag{156}$$

and the two coefficients are computed in the summarized way in the following Table 2.

| Case # | Formulae for unknown coefficients | Parameter ξ is the unique solution to the equation | Restrictions on data |
|--------|--|---|------------------------------------|
| 1 | $c = \frac{q_0 \sqrt{\pi}}{\rho \sigma T_0} \xi \operatorname{erf}(\xi)$ $k = \frac{\sigma q_0 \sqrt{\pi}}{T_0} \frac{\operatorname{erf}(\xi)}{\xi}$ | $\xi = \sqrt{\log\left(\frac{q_0}{\rho \ell \sigma}\right)}$ | $\frac{q_0}{\rho \ell \sigma} > 1$ |
| 2 | $\ell = \frac{q_0}{\rho \sigma} \exp(-\xi^2)$ $k = \frac{\rho c \sigma^2}{\xi^2}$ | $x \operatorname{erf}(x) = \frac{\rho c \sigma T_0}{q_0 \sqrt{\pi}}$ $x > 0$ | ----- |
| 3 | $\rho = \frac{q_0}{\ell \sigma} \exp(-\xi^2)$ $k = \frac{q_0 c \sigma}{\ell} \frac{\exp(-\xi^2)}{\xi^2}$ | $E(x) = \frac{c T_0}{\ell \sqrt{\pi}}$ $x > 0$ | ----- |
| 4 | $c = \frac{k}{\rho \sigma^2} \xi^2$ $\ell = \frac{q_0}{\rho \sigma} \exp(-\xi^2)$ | $\frac{\operatorname{erf}(x)}{x} = \frac{k T_0}{\sigma q_0 \sqrt{\pi}}$ $x > 0$ | $\frac{k T_0}{2 \sigma q_0} < 1$ |
| 5 | $\rho = \frac{k}{c \sigma^2} \xi^2$ $\ell = \frac{c \sigma q_0}{k} \frac{\exp(-\xi^2)}{\xi^2}$ | As in case 4 | As in case 4 |
| 6 | $\rho = \frac{q_0}{\ell \sigma} \exp(-\xi^2)$ $c = \frac{k \ell}{\sigma q_0} \xi^2 \exp(\xi^2)$ | As in case 4 | As in case 4 |

Table 2. Summary of the simultaneous determination of two thermal coefficients through a one-phase Lamé-Clapeyron-Stefan problem (6 cases)

Remark 14.

The determination of thermal coefficients for the Solomon-Wilson-Alexiades mushy region was obtained in (Tarzia, 1987). The simultaneous determination of two unknown thermal coefficients for phase-change problems with temperature-dependent thermal conductivity of the type (54) was given in (Salva & Tarzia, 2010) with a sensitivity analysis.

2.12.3 Determination of one or two unknown thermal coefficients through a two-phase Lamé-Clapeyron-Stefan problem

The determination of one or two unknown thermal coefficients for a two-phase solidification or fusion problem was obtained in (Stampella & Tarzia, 1989). The

determination of one or two unknown thermal coefficients for a mushy region was obtained in (González & Tarzia, 1996). Another variant for the simultaneous determination of the thermal coefficients is given in (Tarzia, 1991a).

Remark 15.

Explicit solutions for the determination of unknown coefficients are given in (Briozzo et al., 1999) for Storm’s type materials.

2.13 A similarity solution for the thawing in a saturated porous medium by considering a density jump and the influence of the pressure on the melting temperature

We consider the problem of thawing of a partially frozen porous medium, saturated with an incompressible liquid. For a detailed exposition of the physical background we refer to (Charach & Rubinstein, 1992; Fasano et al. 1993; Fasano & Primicerio, 1984; Nakano, 1990; O’Neill & Miller, 1985; Talamucci, 1997 & 1998). More specifically, we deal with the following situations:

- i. a sharp interface between the frozen part and the unfrozen part of the domain exists (sharp, in the macroscopic sense);
- ii. the frozen phase is at rest with respect to the porous skeleton, which will be considered to be undeformable;
- iii. due to the density jump between the liquid and solid phases, thawing can induce either desaturation or water movement in the melting region. We will consider the latter situation, assuming that liquid is continuously supplied to keep the medium saturated.

The unknowns of the problem are the function $x=s(t)$, representing the free boundary, and the two functions $u(x, t)$ and $v(x, t)$ representing the temperature of the unfrozen and of the frozen zone respectively which must satisfy the following conditions:

$$u_t = a_1 u_{xx} - b \rho \dot{s}(t) u_x, \quad 0 < x < s(t), \quad t > 0 \tag{157}$$

$$v_t = a_2 v_{xx}, \quad x > s(t), \quad t > 0 \tag{158}$$

$$u(s(t), t) = v(s(t), t) = d \rho s(t) \dot{s}(t), \quad t > 0 \tag{159}$$

$$k_F v_x(s(t), t) - k_U u_x(s(t), t) = \alpha \dot{s}(t) + \beta \rho s(t) (\dot{s}(t))^2, \quad t > 0 \tag{160}$$

$$u(0, t) = B > 0, \quad t > 0. \tag{161}$$

$$v(x, 0) = v(+\infty, t) = -A < 0, \quad x > 0, t > 0 \tag{162}$$

$$s(0) = 0 \tag{163}$$

with

$$a_1 = \alpha_1^2 = \frac{k_U}{\rho_U c_U}, \quad a_2 = \alpha_2^2 = \frac{k_F}{\rho_F c_F}, \quad b = \frac{\varepsilon \rho_W c_W}{\rho_U c_U}, \quad d = \frac{\varepsilon \gamma \mu}{K} \tag{164}$$

$$\rho = \frac{\rho_W - \rho_I}{\rho_W}, \quad \alpha = \varepsilon \rho_I \ell, \quad \beta = \frac{\varepsilon^2 \rho_I \gamma \mu (c_W - c_I)}{K} = \varepsilon d \rho_I (c_W - c_I)$$

where

ε : porosity,

ρ_w and ρ_l : density of water and ice,

c : specific heat at constant density,

k_u and k_f : conductivity of the unfrozen and frozen zones,

$u=v=0$: the melting point at atmospheric pressure,

ℓ : latent heat at $u=0$,

γ : coefficient in the Clausius-Clapeyron law,

$\mu > 0$: viscosity of liquid,

$K > 0$: hydraulic permeability,

$B > 0$: boundary temperature at the fixed face $x=0$,

$-A < 0$: initial temperature.

Theorem 16 (Fasano et al., 1999)

The free boundary problem (157) – (163) has the similarity solution

$$s(t) = 2\xi\alpha_1\sqrt{t}, \quad (165)$$

$$u(x,t) = B + \frac{m\xi^2 - B}{g(p,\xi)} \int_0^{x/(2\alpha_1\sqrt{t})} \exp(-r^2 + pr\xi) dr \quad (166)$$

$$v(x,t) = \frac{m\xi^2 \operatorname{erfc}\left(\frac{x}{2\alpha_2\sqrt{t}}\right) + A \left(\operatorname{erf}(\gamma_0\xi) - \operatorname{erf}\left(\frac{x}{2\alpha_2\sqrt{t}}\right) \right)}{\operatorname{erfc}(\gamma_0\xi)} \quad (167)$$

if and only if the coefficient $\xi > 0$ satisfies the following equation:

$$K_1(B - my^2)H(p,y) - K_2F(m,y) = \delta y + \nu y^3, \quad y > 0, \quad (168)$$

where

$$g(p,y) = \int_0^y \exp(-r^2 + pyr) dr, \quad H(p,y) = \frac{\exp((p-1)y^2)}{2\sqrt{\pi}g(p,y)} \quad (169)$$

$$F(m,y) = (A + my^2) \frac{\exp(-\gamma_0^2 y^2)}{\operatorname{erfc}(\gamma_0 y)} \quad (170)$$

and the constants $K_1, K_2, \gamma_0, \delta, p, m$ and ν are defined as follows:

$$K_1 = \frac{k_u}{\alpha_1\sqrt{\pi}} > 0, \quad K_2 = \frac{k_f}{\alpha_2\sqrt{\pi}} > 0, \quad \gamma_0 = \frac{\alpha_1}{\alpha_2} > 0, \quad \delta = \alpha\alpha_1 > 0 \quad (171)$$

$$p = 2b\rho, \quad m = 2d\rho\alpha_1^2 > 0, \quad \nu = 2\beta\rho\alpha_1^3 \quad (172)$$

Moreover, the existence and uniqueness of the unknown coefficient $\xi > 0$ depends on the sign of the three parameters p, m and ν of the problem.

If we replace the boundary condition (161) by the following one:

$$k_U u_x(0, t) = -\frac{q_0}{\sqrt{t}}, \quad t > 0, \quad (173)$$

then we can consider the free boundary problem (157) - (160), (173), (162)-(163) and we can obtain the following result.

Theorem 17 (Lombardi & Tarzia, 2001)

The free boundary problem (157) - (160), (173), (162)-(163) has the following similarity solution:

$$s(t) = 2\xi^* \alpha_1 \sqrt{t}, \quad (174)$$

$$u(x, t) = m(\xi^*)^2 + \frac{2q_0 \alpha_1}{K_U} g(p, \xi^*) - \frac{2q_0 \alpha_1}{K_U} \int_0^{x/(2\alpha_1 \sqrt{t})} \exp(-r^2 + pr\xi^*) dr \quad (175)$$

$$v(x, t) = \frac{m(\xi^*)^2 + \text{Aerf}(\gamma_0 \xi^*)}{\text{erfc}(\gamma_0 \xi^*)} - \frac{m(\xi^*)^2}{\text{erfc}(\gamma_0 \xi^*)} \text{erf}\left(\frac{x}{2\alpha_1 \sqrt{t}}\right) \quad (176)$$

if and only if the coefficient $\xi^* > 0$ satisfies the following equation:

$$q_0 \exp((p-1)y^2) - K_2 F(m, y) = \delta y + \nu y^3, \quad y > 0, \quad (177)$$

or its equivalent

$$Q_0(y) = q_0, \quad y > 0, \quad (178)$$

where

$$Q_0(y) = \frac{K_2 F(m, y) + \delta y + \nu y^3}{\exp((p-1)y^2)}, \quad y > 0. \quad (179)$$

Moreover, the existence and uniqueness of the unknown coefficient $\xi^* > 0$ depends on the sign of the three parameters p, m and ν of the problem.

3. Explicit solutions for free boundary problems for the diffusion equation

Heat and mass transfer with phase change problems, taking place in a porous medium, such as evaporation, condensation, freezing, melting, sublimation and desublimation, have wide application in separation processes, food technology, heat and mixture migration in soils and grounds, etc. Due to the non-linearity of the problem, solutions usually involve mathematical difficulties and only a few exact solutions have been found. Mathematical formulation of the heat and mass transfer in capillary porous bodies has been established by (Luikov, 1964, 1966, 1975 & 1978). Some books or booklets on the subject for the diffusion equation are (Crank, 1975; Duvaut, 1976; Fasano, 2005; Fasano & Primicerio, 1986; Froment & Bischoff, 1979; Levenspiel, 1962; Primicerio & Gianni, 1989; Szekely et al., 1976).

3.1 The oxygen diffusion-consumption problem and its relationship with the phase-change problem

The diffusion-consumption of oxygen in absorbing tissue consists in finding the free boundary $x=s(t)$ and the concentration $C(x,t)$ such that they satisfy the following conditions (Crank & Gupta, 1972; Crank, 1984; Liapis et al., 1982):

$$C_t - C_{xx} = -1, \quad 0 < x < s(t), \quad 0 < t < T_0 \quad (180)$$

$$C(x,0) = H(x), \quad 0 \leq x \leq 1, \quad (181)$$

$$C_x(0,t) = -G(t) \quad (C(0,t) = F(t)), \quad 0 < t < T_0, \quad (182)$$

$$C(s(t),t) = 0, \quad 0 < t < T_0, \quad (183)$$

$$C_x(s(t),t) = 0, \quad 0 < t < T_0, \quad (184)$$

$$s(0) = 1, \quad 0 < t < T_0. \quad (185)$$

Remark 16.

We remark that $\dot{s}(t)$ does not appear in both conditions (183) and (184) on the free boundary $x=s(t)$ and for this reason the free boundary problem is of an implicit type; the Lamé-Clapeyron-Stefan problem is one of an explicit type.

Theorem 18. (Fasano, 1974; Schatz, 1966)

The free boundary problem of the diffusion-consumption of oxygen in absorbing tissue is equivalent to the following Lamé-Clapeyron-Stefan problem:

$$z_t - z_{xx} = 0, \quad 0 < x < s(t), \quad 0 < t < T_0 \quad (186)$$

$$z(x,0) = h(x), \quad 0 \leq x \leq 1 \quad (187)$$

$$z_x(0,t) = -g(t) \quad (z(0,t) = f(t)), \quad 0 < t < T_0 \quad (188)$$

$$z(s(t),t) = 0, \quad 0 < t < T_0 \quad (189)$$

$$z_x(s(t),t) = -\dot{s}(t), \quad 0 < t < T_0 \quad (190)$$

$$s(0) = 1, \quad 0 < t < T_0. \quad (191)$$

- i. If (s,z,T_0) is a solution to the problem (186) - (191) then (s,C,T_0) is solution to the problem (180) - (185) where we define:

$$C(x,t) = \int_x^{s(t)} d\xi \int_{\xi}^{s(t)} [1 + z(y,t)] dy, \quad (192)$$

$$H(x) = \int_x^1 d\xi \int_{\xi}^1 [1 + h(y)] dy, \quad F(t) = H(0) + \int_0^t f(\tau) d\tau \quad (193)$$

$$G(t) = 1 + \int_0^1 h(x)dx + \int_0^t g(\tau)d\tau, \tag{194}$$

ii. If (s, C, T_0) is a solution to the problem (180) - (185) then (s, z, T_0) is solution to the problem (186) - (191) where we define:

$$z(x, t) = C_t(x, t) \tag{195}$$

$$h(x) = H''(x) - 1, \quad g(t) = G'(t), \quad f(t) = F'(t) \tag{196}$$

Remark 17.

The oxygen diffusion-consumption free boundary problem was applied to the anaerobiosis in saturated soil aggregates in (González et al., 2008).

3.2 The Rubinstein solution for the binary alloy solidification problem

We consider a semi-infinite slab of a binary alloy consisting of two components A, B . Let C be the concentration of "A". We suppose that solidification of the alloy is governed by an equilibrium phase diagram consisting of liquidus curve $T = f_L(C)$, and a solidus curve $T = f_S(C)$, $0 < C < 1$ and we assume f_L, f_S to be monotonically increasing, $f_L(C) > f_S(C)$ and $f_L(0) = f_S(0) = T_{cr}^A$, $f_L(1) = f_S(1) = T_{cr}^B$. Material is in its solid state if $T \leq f_S(C)$ and liquid if $f_L(C) \leq T$. If $f_S(C) < T < f_L(C)$ then the material state is not well defined (it is known as mushy region).

We consider that the semi-infinite alloy is initially liquid at constant temperature T_{in} and concentration C_{in} , for which $f_L(C_{in}) \leq T_{in}$. Beginning at time $t = 0$, a cold temperature $T_B < T_{cr}^A$ is imposed at $x = 0$. Freezing occurs with, in principle, a sharp phase change front $s = s(t)$ separating solid alloy ($x < s(t)$) from liquid alloy ($x > s(t)$). The mathematical formulation of the solidification process is given in (Rubinstein, 1971) as follows:

Find temperature $T(x, t)$, concentration $C(x, t)$ and phase-change front $x = s(t)$, such that the following conditions must be satisfied:

$$C_{s_t} = D_s C_{s_{xx}}, \quad 0 < x < s(t), \quad t > 0 \tag{197}$$

$$C_{\ell_t} = D_\ell C_{\ell_{xx}}, \quad x > s(t), \quad t > 0 \tag{198}$$

$$T_{s_t} = \alpha_s T_{s_{xx}}, \quad 0 < x < s(t), \quad t > 0 \tag{199}$$

$$T_{\ell_t} = \alpha_\ell T_{\ell_{xx}}, \quad x > s(t), \quad t > 0 \tag{200}$$

$$T_{cr} = T_s(s(t), t) = f_s[C_s(s(t), t)], \quad t > 0 \tag{201}$$

$$T_{cr} = T_\ell(s(t), t) = f_\ell[C_\ell(s(t), t)], \quad t > 0 \tag{202}$$

$$D_\ell C_{\ell_x}(s(t), t) - D_s C_{s_x}(s(t), t) = [C_s(s(t), t) - C_\ell(s(t), t)]\dot{s}(t), \quad t > 0 \tag{203}$$

$$k_S T_{S_x}(s(t), t) - k_\ell T_{\ell_x}(s(t), t) = \rho \ell \dot{s}(t), \quad t > 0 \quad (204)$$

$$T_S(0, t) = T_B < T_{cr}^A, \quad t > 0 \quad (205)$$

$$T_\ell(x, 0) = T_{in} > f_L(C_{in}), \quad t > 0 \quad (206)$$

$$C_\ell(x, 0) = C_{in}, \quad x > 0 \quad (207)$$

$$C_{S_x}(0, t) = 0, \quad t > 0 \quad (208)$$

$$s(0) = 0 \quad (209)$$

where ρ, k, α, D, ℓ represent the mass density, the thermal conductivity, the thermal diffusivity, the mass diffusion and the latent heat of fusion, being S and ℓ the subscripts that denote the solid and liquid phase respectively.

Theorem 19 (Rubinstein, 1971; Solomon et al., 1983)

There exists a unique solution to the coupled free boundary problem (197)-(209), moreover, the solidus $C_1(s(t), t)$ and liquidus $C_2(s(t), t)$ concentrations as well as the phase-change temperature $T_{cr} = T_1(s(t), t) = T_2(s(t), t)$ are constants in time. The explicit solution is given by the following expressions:

$$s(t) = 2\lambda\sqrt{\alpha_1 t} \quad (210)$$

$$C_S(x, t) = C_S, \quad T_{cr} = f_S(C_S) = f_L(C_L), \quad (211)$$

$$C_\ell(x, t) = C_{in} + (C_L - C_{in}) \frac{\operatorname{erfc}(x/2\sqrt{D_\ell t})}{\operatorname{erfc}(\lambda\sqrt{\alpha_S/D_\ell})} \quad (212)$$

$$T_S(x, t) = T_B + (T_{cr} - T_B) \frac{\operatorname{erf}(x/2\sqrt{\alpha_S t})}{\operatorname{erf}(\lambda)} \quad (213)$$

$$T_\ell(x, t) = T_{in} + (T_{cr} - T_{in}) \frac{\operatorname{erf}(x/2\sqrt{\alpha_\ell t})}{\operatorname{erf}(\lambda\sqrt{\alpha_S/\alpha_\ell})} \quad (214)$$

where λ and T_{cr} (or equivalently C_S and C_L) must satisfy the following conditions:

$$\frac{C_{in} - C_L}{C_S - C_L} = Q(\lambda\sqrt{\alpha_S/D_\ell}), \quad T_{cr} = W_1(\lambda) \quad (215)$$

where

$$Q(x) = \sqrt{\pi} x \exp(x^2) \operatorname{erfc}(x), \quad A = \rho \ell \alpha_\ell / k_\ell \quad (216)$$

$$W_1(x) = T_B + [(T_{in} - T_B) + AQ(x\sqrt{\alpha_s / \alpha_\ell})] \frac{\Psi(x)}{1 + \Psi(x)} \quad (217)$$

$$\Psi(x) = \frac{k_\ell \alpha_s \sqrt{\pi}}{k_s \alpha_\ell} \frac{E(x)}{Q(x\sqrt{\alpha_s / \alpha_\ell})} \quad (218)$$

Proof.

The system of equations (215) has a unique solution because of the following properties

$$Q(0^+) = 0, \quad Q(+\infty) = 1, \quad Q' > 0 \quad (219)$$

$$W_1(0^+) = T_B, \quad W_1(+\infty) = T_{in} + \frac{\ell}{c_\ell}, \quad W_1' > 0. \quad (220)$$

Remark 18.

Some other references on the binary alloy solidification problems are (Alexandrov & Malygin, 2006; Gupta et al., 1997; Tien & Geigen, 1967; Tien & Koump, 1970; Tsubaki & Boley, 1977; Voller, 2006, 2008 a&b; White, 1985; Wilson et al., 1982). In (Cirelli & Tarzia, 2010) the binary alloy solidification problem (197)-(209) is solved by changing the boundary condition (205) at the fixed face by a heat flux boundary condition of the type (77) or a convective boundary condition of the type (93).

3.3 The Zel'dovich-Kompaneets-Barenblatt solution for the gas flow through a porous medium

The porous medium equation for a unidimensional material is given by

$$u_t = (u^m)_{xx}, \quad m > 1 \quad (221)$$

which appears in a natural way, mainly to describe processes involving fluid flow, heat transfer or diffusion, the flow of a gas through a porous medium and groundwater infiltration (Vázquez, 2007). The diffusion coefficient of the equation (221) is

$$D(u) = mu^{m-1} \quad (222)$$

assuming $0 \leq u$. Equation (221) is parabolic only at those points where $u \neq 0$ and it is in general a degenerate parabolic equation because degenerates wherever $u = 0$.

Its main qualitative property with respect to the classical heat or diffusion equation is the finite propagation which implies the appearance of a free boundary that separates the regions where the solution $u > 0$ (where there is gas, according to the standard interpretation of u as a gas density), from the empty region where $u = 0$.

There exists an explicit solution to the Eq. (221) with a free boundary given by:

Theorem 20 (Zel'dovich & Kompaneets, 1950; Barenblatt, 1952; Pattle, 1959)

The function

$$u(x,t) = \begin{cases} \frac{1}{s(t)} \left[1 - \left(\frac{x}{s(t)} \right)^2 \right]^{\frac{1}{m-1}} & \text{for } |x| \leq s(t), 0 \leq t \\ 0 & \text{for } |x| > s(t), 0 \leq t \end{cases} \quad (223)$$

with

$$s(t) = \left[\frac{2m(m+1)}{m-1} (t+1) \right]^{\frac{1}{m+1}} \quad (224)$$

is a solution to the Cauchy problem for the equation (221) with initial data $u(x,0) = u_0(x)$, $x \in \mathbb{R}$ given by

$$u_0(x) = \begin{cases} \frac{1}{s(0)} \left[1 - \left(\frac{x}{s(0)} \right)^2 \right]^{\frac{1}{m-1}} & \text{for } |x| \leq s(0) \\ 0 & \text{for } |x| > s(0) \end{cases} \quad (225)$$

3.4 The Luikov solution for the coupled heat and mass transfer for a phase-change process

3.4.1 Drying with coupled phase-change in a porous medium

A semi-infinite porous medium is dried by maintaining a heat flux condition at $x=0$ of the type $-q_0/\sqrt{t}$, with $q_0 > 0$. Initially, the whole body is at uniform temperature t_0 and uniform moisture potential u_0 . The moisture is assumed to evaporate completely at a constant temperature, evaporation point t_v . It is also assumed that the moisture potential in the first region $0 < x < s(\tau)$, is constant at u_v , where $x = s(\tau)$ locates the evaporation front at time $\tau > 0$. It is further assumed that the moisture in vapour form does not take away any appreciable amount of heat from the system. Neglecting mass diffusion due to temperature variation, the problem can be expressed as (Cho, 1975; Gupta, 1974; Luikov, 1978; Santillan Marcus & Tarzia, 2003):

$$\frac{\partial t_1}{\partial \tau}(x, \tau) = \alpha_1 \frac{\partial^2 t_1}{\partial x^2}(x, \tau), \quad 0 < x < s(\tau), \tau > 0 \quad (226)$$

$$u_1 = u_v, \quad 0 < x < s(\tau), \tau > 0 \quad (227)$$

$$\frac{\partial t_2}{\partial \tau}(x, \tau) = \alpha_2 \frac{\partial^2 t_2}{\partial x^2} + \frac{\varepsilon L c_m}{c_2} \frac{\partial u_2}{\partial \tau}, \quad x > s(\tau), \tau > 0 \quad (228)$$

$$\frac{\partial u_2}{\partial \tau}(x, \tau) = \alpha_m \frac{\partial^2 u_2}{\partial x^2}(x, \tau), \quad x > s(\tau), \tau > 0 \quad (229)$$

$$k_1 \frac{\partial t_1}{\partial x} = -\frac{q_0}{\sqrt{\tau}}, \quad \text{at } x = 0, \tau > 0 \quad (230)$$

$$t_2 = t_0 \quad \text{in } x > 0, \tau = 0 \quad (231)$$

$$u_2 = u_0 \quad \text{in } x > 0, \tau = 0 \quad (232)$$

$$t_1(s(\tau), \tau) = t_2(s(\tau), \tau) = t_v > t_0 \quad \text{on } x = s(\tau) \quad (233)$$

$$u_1(s(\tau), \tau) = u_2(s(\tau), \tau) = u_v < u_0 \quad \text{on } x = s(\tau) \quad (234)$$

$$-k_1 \frac{\partial t_1}{\partial x}(s(\tau), \tau) + k_2 \frac{\partial t_2}{\partial x}(s(\tau), \tau) = (1 - \varepsilon) \rho_m L \frac{ds}{dt} \quad \text{on } x = s(\tau) \quad (235)$$

where t_1 : temperature of the dried porous medium; t_2 : temperature of the humid porous medium; u_2 : mass-transfer potential of the humid porous medium; α_i ($i = 1, 2$): thermal diffusivity of the phase i ; α_{12} : ratio of thermal diffusivities from phase 1 to phase 2; α_m : moisture diffusivity; c_m : specific mass capacity; c_2 : specific heat capacity; k_i ($i = 1, 2$): thermal conductivity of the phase i ; $k_{21} = \frac{k_2}{k_1}$; $K_0 = Lc_m \frac{(u_0 - u_v)}{c_2(t_v - t_0)}$: Kossovitch number; L : latent heat evaporation of liquid per unit mass-transfer potential; ε : coefficient of internal evaporation; ρ_m : density of moisture; $L_u = \alpha_m / \alpha_1$: Luikov number, and $\nu = (1 - \varepsilon)L\rho_m \alpha_1 / k_1(t_v - t_0) > 0$.

Theorem 21 (Santillan Marcus & Tarzia, 2003)

i. If the Luikov number is equal to one, and the coefficient q_0 verifies the condition

$$q_0 > \frac{k_2(t_v - t_0)}{2\sqrt{\pi\alpha_1}}(\varepsilon K_0 + 2) \quad , \quad (236)$$

then there exists one and only one solution $\lambda > 0$ to the following equation:

$$\frac{k_{21}}{\sqrt{\pi}} F_1(x) \left[-\frac{2\varepsilon K_0}{\sqrt{\pi}} x F_1(x) + 2\varepsilon K_0 x^2 - \varepsilon K_0 - 2 \right] + \frac{2\sqrt{\alpha_1} q_0}{k_1(t_v - t_0)} \exp(-x^2) = 2\nu x, \quad x > 0 \quad (237)$$

Furthermore, the solution to the problem (226)-(235) is given by:

$$u_1(x, \tau) = u_v, \quad 0 < x < s(\tau), \tau > 0, \quad \eta = \frac{x}{2\sqrt{\alpha_1\tau}} \quad (238)$$

$$t_1(x, \tau) = 1 + \frac{q_0 \sqrt{\pi\alpha_1}}{k_1(t_v - t_0)} (\operatorname{erf}(\lambda) - \operatorname{erf}(\eta)), \quad 0 < x < s(\tau), \tau > 0 \quad (239)$$

$$u_2(x, \tau) = \frac{\operatorname{erfc}\left(\frac{\eta}{\sqrt{L_u}}\right)}{\operatorname{erfc}(\lambda)}, \quad x > s(\tau), \quad \tau > 0 \quad (240)$$

$$t_2(\eta) = \frac{\varepsilon K_0}{\sqrt{\pi} \operatorname{erfc}(\lambda)} \left[\lambda \exp(-\lambda^2) \frac{\operatorname{erfc}(\eta)}{\operatorname{erfc}(\lambda)} - \eta \exp(-\eta^2) \right] + \frac{\operatorname{erfc}(\eta)}{\operatorname{erfc}(\lambda)}, \quad x > s(\tau), \quad \tau > 0 \quad (241)$$

$$s(\tau) = 2\lambda\sqrt{\alpha_1\tau}. \quad (242)$$

- ii. If the Luikov number is different than one, (that is $\alpha_m \neq \alpha_1$) and the coefficient q_0 verifies the condition

$$q_0 > k_2 \left(1 + \frac{\sqrt{L_u \varepsilon K_0}}{1 + \sqrt{L_u}} \right) \frac{t_v - t_0}{\sqrt{\pi \alpha_1}} \quad (243)$$

then there exist one and only one solution $\lambda > 0$ to the equation:

$$\phi(x) = \varphi(x), \quad x > 0, \quad (244)$$

where

$$\phi(x) = \frac{\sqrt{\pi \alpha_1} q_0}{(t_v - t_0)} \exp(-x^2) + P(x) \quad (245)$$

$$\varphi(x) = k_2 F_1(x) + \sqrt{\pi} k_1 \nu x \quad (246)$$

$$P(x) = \frac{L_u \varepsilon K_0}{L_u - 1} k_2 \left(\frac{1}{\sqrt{L_u}} F_1\left(\frac{x}{\sqrt{L_u}}\right) - F_1(x) \right). \quad (247)$$

Furthermore, the solution to the problem (226)-(235) is given by (238)-(240), (242) and

$$\left(\eta = \frac{x}{2\sqrt{\alpha_1\tau}} \right)$$

$$t_2(\eta) = \frac{\varepsilon K_0 L_u}{L_u - 1} \left[\frac{\operatorname{erfc}\left(\frac{x}{\sqrt{L_u}}\right)}{\operatorname{erfc}\left(\frac{\lambda}{\sqrt{L_u}}\right)} + \frac{\operatorname{erfc}(\eta)}{\operatorname{erfc}(\lambda)} \right] + \frac{\operatorname{erfc}(\eta)}{\operatorname{erfc}(\lambda)}, \quad x > s(\tau), \quad \tau > 0. \quad (248)$$

- iii. If the Luikov number L_u verifies the condition

$$L_u > \frac{1}{\varepsilon K_0 + 1} \quad (249)$$

then the temperature distribution t_2 reaches to a minimum value which is smaller than the initial temperature or its limit value at $+\infty$. The minimum value is attained when the dimensionless variable $\eta = \frac{x}{2\sqrt{\alpha_1\tau}}$ takes the value

$$\eta = \sqrt{\left(\frac{L_u}{L_u - 1}\right) \log \left(\frac{((\varepsilon K_0 + 1)L_u - 1) \operatorname{erfc}\left(\frac{\lambda}{\sqrt{L_u}}\right)}{\varepsilon K_0 \sqrt{L_u} \operatorname{erfc}(\lambda)} \right)}. \quad (250)$$

3.4.2 Other free boundary problem in a porous medium

There are some explicit solutions for the following free boundary problems for the diffusion equation corresponding to evaporation, freezing, sublimation or desublimation processes in (Lin, 1981, 1982a & 1982b; Mikhailov, 1975 & 1976; Santillan Marcus & Tarzia, 2000a & b). The simultaneous determination of one or two unknown thermal coefficients of a semi-infinite material through a desublimation process with coupled heat and moisture flows is given in (Santillan Marcus & Tarzia, 2007; Santillan Marcus, et al., 2008).

3.5 A mixed saturated-unsaturated flow problem representing absorption of water by a soil with a constant pond depth at the surface and an explicit solution for a particular diffusivity

In wet soils, zones of saturation develop naturally in the vicinity of impermeable strata, surface ponds and subterranean cavities. Hydrology must be concerned with transient flow through coexisting unsaturated and saturated zones. Models of advancing saturated zones necessarily involve a nonlinear free boundary problem (Broadbridge & White, 1990; Knight & Philip, 1974; Philip, 1957 & 1958; Warrick & Broadbridge, 1992).

We consider a homogeneous soil which initially has some uniform volumetric water content θ_n . At times $t > 0$, water is supplied at the surface $x = 0$ under pressure head ψ_0 . Then, a mixed saturated-unsaturated flow problem representing absorption of water by a soil with constant pond depth at the surface is presented. At any time t the zone of saturation extends from $x = 0$ to $x = s(t)$. Assuming Darcy's law and neglecting gravity, the water flux is given by

$$v = -K(\psi) \frac{\partial \psi}{\partial x} \quad (251)$$

where ψ is the soil water matric potential and K is the hydraulic conductivity.

In the saturated zone we have

$$\psi(x, t) = \psi_0 - \frac{\psi_0 - \psi_s}{s(t)}, \quad 0 < x < s(t) \quad (252)$$

and we obtain a free boundary problem for the unsaturated zone:

$$\theta(s(t)^+, t) = \theta_s, \quad t > 0 \quad (253)$$

$$\frac{\partial \theta}{\partial t} = \frac{\partial}{\partial x} \left[D(\theta) \frac{\partial \theta}{\partial x} \right], \quad x > s(t), \quad t > 0 \quad (254)$$

$$-D(\theta) \frac{\partial \theta}{\partial x}(s(t)^+, t) = K_s \frac{\psi_0 - \psi_s}{s(t)}, \quad t > 0 \quad (255)$$

$$\theta(x, 0) = \theta(+\infty, t) = \theta_n, \quad x > s(t), \quad t > 0 \quad (256)$$

$$s(0) = 0 \quad (257)$$

where

x : spatial coordinate,

t : time,

θ : volumetric water content,

θ_n : initial volumetric water content,

θ_s : volumetric water content at saturation,

ψ : soil water matric potential,

ψ_0 : pond depth,

ψ_s : soil water potential at $x = s(t)$, $\psi_s < \psi < \psi_0$

K : hydraulic conductivity,

K_s : hydraulic conductivity at saturation,

D : soil water diffusivity ($D = K \frac{d\psi}{d\theta}$).

We consider the free boundary (253)-(257) where the position $s(t)$ of the free boundary and the water content field $\theta(x, t)$ must be determined; and we restrict our attention to the special functional form of the soil water diffusivity

$$D(\theta) = \frac{a}{(b - \theta)^2} \quad (258)$$

where a , and b are positive constants. With this form of diffusivity the nonlinear diffusion equation (254) may be transformed to a linear diffusion equation. We consider the following parameter:

$$C = \frac{b - \theta_n}{\theta_s - \theta_n} > 1. \quad (259)$$

Remark 19.

In (Briozzo & Tarzia, 1998) a closed-form analytic solution can be obtained for a nonlinear diffusion model under conditions of ponding surface. The explicit solution depends on a parameter C (determined by the data of the problem), according to two cases: $1 < C < C_1$ or $C_1 \leq C$, where C_1 is a constant which is obtained as the unique solution to an equation. This results complements the study given in (Broadbridge, 1990) in order to established when the explicit solution is available. The behaviour of the bifurcation parameter C_1 as a function of the driving potential is studied with the corresponding limits for small and large

values. We also prove that the sorptivity is continuously differentiable as a function of variable C .

3.6 Estimation of the diffusion coefficient in a gas-solid system

Looking for a competitive separation process like as the permeation, the development and optimal choice of membrane materials become necessary. On this subject, equations modelling the permeation process are required. The parameters contained in such a model must be obtained from simple experiments. The knowledge of solubility and diffusivity are very important to solve the separation problem.

We consider a polymeric membrane swelling for a hydrocarbon solution. The following assumptions are considered: Once the gaseous component reaches a threshold concentration on the gas-polymer interface, it diffuses through the membrane in the x direction being immobilized by a quickly and irreversible transformation. Then a swelling front is generated whose position is given by the free boundary $x = s(t)$, $t > 0$ with the initial condition $s(0) = 0$. Moreover, the hydrocarbon diffusion coefficient D in the saturated or swollen region of the polymer is considered a constant for each experimental condition. A free boundary model (Castro et al., 1987; Crank, 1975; Villa, 1987) with an overspecified condition for the one-dimensional diffusion equation under the preceding assumptions is given:

$$c_t = Dc_{xx}, \quad 0 < x < s(t), \quad t > 0 \tag{260}$$

$$c(s(t), t) = 0, \quad t > 0 \tag{261}$$

$$Dc_x(s(t), t) = -\beta\dot{s}(t), \quad t > 0, \tag{262}$$

$$c(0, t) = C_0 > 0, \quad t > 0 \tag{263}$$

$$A \int_0^t Dc_x(0, \tau) d\tau = -\alpha\sqrt{t}, \quad t > 0, \tag{264}$$

$$s(0) = 0, \tag{265}$$

where $c=c(x,t)$ denotes the concentration profile of the hydrocarbon in the swollen area, $s(t)$ gives the position at time t of the free interface and separates the two regions in the membrane, the saturated and unsaturated, D is the unknown diffusion coefficient in the system, and C_0, α and β are positive parameters and A is a positive constant which must be obtained experimentally.

Theorem 22. (Destefanis et al., 1993)

The concentration profile and the free boundary position are given by:

$$c(x, t) = C_0 - \frac{C_0}{\operatorname{erf}\left(\frac{\sigma}{\sqrt{D}}\right)} \operatorname{erf}\left(\frac{x}{2\sqrt{Dt}}\right), \quad 0 < x < s(t), \quad t > 0, \tag{266}$$

$$s(t) = 2\sigma\sqrt{t}, \quad t > 0, \tag{267}$$

and the unknown coefficients D and σ are obtained by the following expressions:

$$D = \frac{\pi\alpha^2}{4A^2C_0} \operatorname{erf}(\xi) = \frac{\alpha^2}{4A^2\beta^2} \frac{\exp(-2\xi^2)}{\xi^2} \quad (268)$$

$$\sigma = \frac{\alpha\sqrt{\pi}}{2AC_0} \xi \operatorname{erf}(\xi) = \frac{\alpha}{2A\beta} \exp(-\xi^2)$$

where ξ is the unique solution to the equation:

$$E(x) = \frac{C_0}{\beta\sqrt{\pi}}, \quad x > 0. \quad (269)$$

Remark 20.

The methodology used in this determination of the unknown diffusion coefficient is a variant of those developed in (Tarzia, 1982 & 1983) for the determination of thermal coefficients for a semi-infinite material through a phase-change process.

3.7 The coupled heat and mass transfer during the freezing of high-water content materials with two free boundaries: the freezing and sublimation fronts

Ice sublimation takes place from the surface of high water-content systems like moist soils, aqueous solutions, vegetable or animal tissues and foods that freeze uncovered or without an impervious and tight packaging material. The rate of both phenomena (solidification and sublimation) is determined both by material characteristics (mainly composition, structure, shape and size) and cooling conditions (temperature, humidity and rate of the media that surrounds the phase change material). The sublimation process, in spite of its magnitude being much less than that of freezing process, determines fundamental features of the final quality for foods and influences on the structure and utility of frozen tissues. Modelling of these simultaneous processes is very difficult owed to the coupling of the heat and mass transfer balances, the existence of two moving phase change fronts that advance with very different rates and to the involved physical properties which are, in most cases, variable with temperature and water content.

When high water-content materials like foods, tissues, gels, soils or water solutions of inorganic or organic substances, held in open, permeable or untightly-sealed containers are refrigerated to below their initial solidification temperature, two simultaneous physical phenomena take place:

- Liquid water solidifies (freeze), and
- Surface ice sublimates.

For the description of the freezing process, the material can be divided into three zones: unfrozen, frozen and dehydrated. Freezing begins from the refrigerated surface/s, at a temperature (T_{if}) lower than that of pure water, due to the presence of dissolved materials, and continues along an equilibrium line. Simultaneously, ice sublimation begins at the frozen surface and a dehydration front penetrates the material, whose rate of advance is again determined by all the abovementioned characteristics of the material and environmental conditions. Normally this rate is much lower than that of the freezing front. A complete mathematical model has to solve both, the heat transfer (freezing) and the mass transfer (weight loss) simultaneously (Campañone et al., 2005a & b).

Phase change is accounted for in the following way:

- Solidification (freezing) as a freezing front ($x = s_f(t)$) located in the point where material temperature reaches the initial freezing temperature (T_{if}), determined by material composition. For temperatures lower than T_{if} (the zone nearer to the refrigerated surface) the amount of ice formed is determined by an equilibrium line (ice content vs temperature and water content) specific to the material.
- On the dehydration front ($x = s_d(t)$) we impose Stefan-like conditions for temperature distribution and vapor concentration.

We consider a semi-infinite material with characteristics similar to a very dilute gel (whose properties can be supposed equal to those of pure water). The system has initial uniform temperature equal to T_{if} and uncovered flat surface which at time $t=0$ is exposed to the surrounding medium (with constant temperature T_s (lower than T_{if}) and heat and mass transfer coefficients h and K_m). We assume that $T_s < T_0(t) < T_{if}$, $t > 0$ where $T_0(t)$ is the unknown sublimation temperature.

To calculate the evolution of temperature and water content in time, we will consider the following free boundary problem: Find the temperatures $T_d = T_d(x, t)$ and $T_f = T_f(x, t)$, the concentrations $C_{va} = C_{va}(x, t)$, the free boundaries $s_d = s_d(t)$ and $s_f = s_f(t)$ and the temperature $T_0 = T_0(t)$ at the sublimation front $x = s_d(t)$ which must satisfy the following:

- Differential equations at the dehydrated region:

$$\rho_d C_{pd} \frac{\partial T_d}{\partial t} = k_d \frac{\partial^2 T_d}{\partial x^2}, \quad 0 < x < s_d(t), \quad t > 0 \quad (270)$$

$$\varepsilon \frac{\partial C_{va}}{\partial t} = D_{ef} \frac{\partial^2 C_{va}}{\partial x^2}, \quad 0 < x < s_d(t), \quad t > 0 \quad (271)$$

- Differential equations at the frozen region:

$$\rho_f C_{pf} \frac{\partial T_f}{\partial t} = k_f \frac{\partial^2 T_f}{\partial x^2}, \quad s_d(t) < x < s_f(t), \quad t > 0 \quad (272)$$

Free boundary conditions at the sublimation front $x = s_d(t)$:

$$T_d(s_d(t), t) = T_f(s_d(t), t) = T_0(t), \quad t > 0 \quad (273)$$

$$k_f \frac{\partial T_f(s_d(t), t)}{\partial x} - k_d \frac{\partial T_d(s_d(t), t)}{\partial x} = L_s m_s \dot{s}_d(t), \quad t > 0 \quad (274)$$

$$D_{ef} \frac{\partial C_{va}(s_d(t), t)}{\partial x} = m_s \dot{s}_d(t) \quad (275)$$

$$C_{va}(s_d(t), t) = \frac{MP_{sat}(T)}{R_g T_0(t)} = M a \frac{\exp\left(b - \frac{c}{T_0(t)}\right)}{R_g T_0(t)} \quad (276)$$

where $C_{va}(s_d(t), t)$ is the equilibrium vapor concentration at $T_0(t)$ and the saturation pressure $P_{sat}(T)$ is evaluated according to (Fennema & Berny, 1974).

Free boundary conditions at the freezing front $x = s_f(t)$:

$$T_f(s_f(t), t) = T_{if}, \quad t > 0 \quad (277)$$

$$k_f \frac{\partial T_f(s_f(t), t)}{\partial x} = m_f L_f \dot{s}_f(t), \quad t > 0 \quad (278)$$

- The convective boundary conditions at the fixed interphase $x = 0$:

$$k_d \frac{\partial T_d(0, t)}{\partial x} = h(T_d(0, t) - T_s), \quad t > 0 \quad (279)$$

$$D_{ef} \frac{\partial C_{va}(0, t)}{\partial x} = K_m(C_{va}(0, t) - C_a), \quad t > 0 \quad (280)$$

- The initial conditions at $t = 0$:

$$s_f(0) = s_d(0) = 0 \quad (281)$$

$$T = T_{if} \quad \text{for } x \geq 0. \quad (282)$$

We will solve the system (270) - (282) by using the quasi-steady method. In general, it is a good approximation when the Stefan number tends to zero, i.e. when the latent heat of the material is high with respect to the heat capacity of the solid material. This approximation has often been used when modelling the freezing of high-water content materials.

Theorem 23. (Olguin et al., 2008)

The temperatures T_f, T_d and the concentration C_{va} are given by the following expressions:

$$T_d(x, t) = A(t) + B(t)x, \quad 0 < x < s_d(t), \quad t > 0 \quad (283)$$

$$C_{va}(x, t) = D(t) + E(t)x, \quad 0 < x < s_d(t), \quad t > 0 \quad (284)$$

$$T_f(x, t) = F(t) + G(t)x, \quad s_d(t) < x < s_f(t), \quad t > 0 \quad (285)$$

where $A(t), B(t), D(t)$ and $E(t)$ as a function of $T_0(t)$ and $s_d(t)$, as well as $F(t)$ and $G(t)$ as a function of $T_0(t)$, $s_d(t)$ and $s_f(t)$, given by the following expressions:

$$A(t) = \frac{T_0(t) + T_s \frac{h}{k_d} s_d(t)}{1 + \frac{h}{k_d} s_d(t)}, \quad B(t) = \frac{h}{k_d} \frac{T_0(t) - T_s}{1 + \frac{h}{k_d} s_d(t)} \quad (286)$$

$$D(t) = \frac{\frac{K_m C_a s_d(t) + M a \frac{\exp\left(b - \frac{c}{T_0(t)}\right)}{R_g T_0(t)}}{D_{ef}}}{1 + \frac{K_m s_d(t)}{D_{ef}}}, \quad E(t) = \frac{M a \frac{\exp\left(b - \frac{c}{T_0(t)}\right)}{R_g T_0(t)} - C_a}{D_{ef} \left(1 + \frac{K_m s_d(t)}{D_{ef}}\right)} \quad (287)$$

$$F(t) = \frac{T_0(t) s_f(t) - T_{if} s_d(t)}{s_f(t) - s_d(t)}, \quad G(t) = \frac{T_{if} - T_0(t)}{s_f(t) - s_d(t)} \quad (288)$$

and we obtain the following system of two ordinary differential equations and one algebraic equation for $s_d(t)$, $s_f(t)$ and $T_0(t)$ given by:

$$\begin{aligned} & 1 + \frac{h}{k_f} \frac{T_s}{T_{if}} s_f(t) + h s_d(t) \left(\frac{1}{k_d} - \frac{T_s}{T_{if} k_f} \right) - \frac{T_0(t)}{T_{if}} \left[1 + \frac{h}{k_f} s_f(t) + h s_d(t) \left(\frac{1}{k_d} - \frac{1}{k_f} \right) \right] = \\ & = \frac{L_s K_m \left(1 + \frac{h}{k_f} s_f(t) \right) (s_f(t) - s_d(t))}{T_{if} k_f \left(1 + \frac{K_m s_d(t)}{D_{ef}} \right)} \left[M a \frac{\exp\left(b - \frac{c}{T_0(t)}\right)}{R_g T_0(t)} - C_a \right] \end{aligned} \quad (289)$$

$$\dot{s}_d(t) = \frac{k_f T_{if}}{m_s L_s} \frac{1 + \frac{h}{k_f} \frac{T_s}{T_{if}} s_f(t) + h s_d(t) \left(\frac{1}{k_d} - \frac{T_s}{k_f T_{if}} \right) - \frac{T_0(t)}{T_{if}} \left[1 + \frac{h}{k_f} s_f(t) + h s_d(t) \left(\frac{1}{k_d} - \frac{1}{k_f} \right) \right]}{\left(1 + \frac{h}{k_d} s_f(t) \right) (s_f(t) - s_d(t))} \quad (290)$$

$$\dot{s}_f(t) = \frac{k_f T_{if}}{m_f L_f} \frac{1 - \frac{T_0(t)}{T_{if}}}{s_f(t) - s_d(t)} \quad (291)$$

$$s_f(0) = s_d(0) = 0. \quad (292)$$

Remark 21.

There exist some approximate or explicit solutions for some other free boundary problems for the heat-diffusion equation, e.g.: model for a single nutrient uptake by a growing root system by using a moving boundary approach; explicit estimate for the asymptotic behavior of the solution of the porous media equation with absorption (reaction-diffusion processes of a gas inside a chemical reactor); penetration of solvents in polymers; filtration of water through oil in a porous medium; the Wen model for an isothermal mono-catalytic diffusion-reaction process of a gas with a solid. The solid is chemically attacked from its surface with a quick and irreversible reaction and, at the same time, a free boundary begins, etc.

4. Conclusion

We have given a review on explicit and approximated solutions for heat and mass transfer problems in which a free or moving interface is involved. We have also showed some new recent problems for heat and mass transfer in which a free or moving interface is also involved.

5. Acknowledgements

This paper was partially sponsored by the project PIP No. 0460 of CONICET - UA (Rosario, Argentina), and Grant FA9550-10-1-0023.

6. References

- Alexandrov, D.V. & Malygin, A.P. (2006). Self-similar solidification of an alloy from a cooled boundary. *Int. J. Heat Mass Transfer*, 49, 763-769.
- Alexiades, V. & Solomon, A. D. (1993). *Mathematical modelling of melting and freezing processes*, Hemisphere - Taylor & Francis, Washington.
- Arderius, J.C.; Lara, M. & Tarzia, D.A. (1996). Experimental-numerical determination of thermal coefficients through a phase-change process. *Int. Comm. Heat Mass Transfer*, 23, 745-754.
- Bancora, A.B. & Tarzia, D.A. (1985). On the Neumann solution for the two-phase Stefan problem including the density jump at the free boundary. *Latin Amer. J. Heat Mass Transfer*, 9, 215-222.
- Bankoff, S.G. (1964). Heat conduction of diffusion with change of phase. *Advances in Chemical Engineering*, 5, 75-150.
- Barenblatt, G.I. (1952). On some unsteady motions of a liquid or a gas in a porous medium. *Prink. Mat. Mekh*, 16, 67-78 (in Russian).
- Bell, G.E. (1978). A refinement of the heat balance integral method applied to a melting problem. *Int. J. Heat Mass Transfer*, 21, 1357-1361.
- Brillouin, M. (1930/31). Sur quelques problèmes non résolus de physique mathématique classique : Propagation de la fusion. *Annales de l'Inst. H. Poincaré*, 1, 285-308.
- Briozzo, A.C. & Tarzia, D.A. (1998). The explicit solution of a free boundary problem for a nonlinear absorption model of mixed saturated-unsaturated flow. *Advances in Water Resources*, 21, 713-721.
- Briozzo, A.C. ; Natale, M.F. & Tarzia, D.A. (1999). Determination of unknown thermal coefficients for Storm's type materials through a phase-change process. *International Journal of Non-Linear Mechanics*, 34, 329-340.
- Briozzo, A.C.; Natale, M.F. & Tarzia, D.A. (2004). An explicit solution for a two-phase Stefan problem with a similarity exponential heat sources. *MAT - Serie A*, 8, 11-19.
- Briozzo, A.C.; Natale, M.F. & Tarzia, D.A. (2007a). Explicit solutions for a two-phase unidimensional Lamé-Clapeyron-Stefan problem with source terms in both phases. *J. Math. Anal. Appl.*, 329, 145-162.
- Briozzo, A.C.; Natale, M.F. & Tarzia, D.A. (2007b). Existence of an exact solution for a one-phase Stefan problem with nonlinear thermal coefficients from Tirskaa's method. *Nonlinear Analysis*, 67, 1989-1998.

- Briozzo, A.C.; Natale, M.F. & Tarzia, D.A. (2010). The Stefan problem with temperature-dependent thermal conductivity and a convective term with a convective condition at the fixed face. *Comm. Pure and Applied Analysis*, 9, 1209-1220.
- Briozzo, A.C. & Tarzia, D.A. (2002). An explicit solution for the instantaneous two-phase Stefan problem with nonlinear thermal coefficients. *IMA J. Applied Math*, 67, 249-261.
- Broadbridge, P. (1990). Solution of a nonlinear absorption model of mixed saturated-unsaturated flow. *Water Resour. Research*, 26, 2435-2443.
- Broadbridge, P. & White, I. (1988). Constant rate rainfall infiltration: A versatile nonlinear model, 1, Analytic solutions. *Water Resources Research*, 24, 145-154.
- Campañone, L.A., Salvadori, V.O. & Mascheroni, R.H. (2005a). Food freezing with simultaneous surface dehydration. Approximate prediction of freezing time, *Int. J. Heat Mass Transfer*, 48 (6), 1205-1213.
- Campañone, L.A., Salvadori, V.O. & Mascheroni, R.H. (2005b). Food freezing with simultaneous surface dehydration. Approximate prediction of weight loss during freezing and storage, *Int. J. Heat Mass Transfer*, 48 (6), 1195-1204.
- Cannon, J.R. (1963). Determination of an unknown coefficient in a parabolic differential equation. *Duke Math. J.*, 30, 313-323.
- Cannon, J.R. (1964). Determination of certain parameters in heat conduction problems. *J. Math. Anal. Appl.*, 8, 188-201.
- Cannon, J.R. (1984). *The one-dimensional heat equation*, Addison-Wesley, Menlo Park, California.
- Charach, Ch. & Rubinstein, I. (1992). Pressure-temperature effects in planar Stefan problems with density change, *J. Appl. Phys.*, 71, 1128-1137.
- Carslaw, H.S. & Jaeger, J.C. (1959). *Conduction of heat in solids*, Clarendon Press, Oxford.
- Castro, E.F., Gonzo, E.E. & Gottifredi, J.C. Gottifredi (1987). Thermodynamic of the absorption of hydrocarbon vapor in polyethylene films, *J. Mem. Sci.*, 31, 235-248.
- Cho, S.H. (1975). An exact solution of the coupled phase change problem in a porous medium. *Int. J. Heat Mass Transfer*, 18, 1139-1142.
- Cho, S.H. & Sunderland, J.E. (1974). Phase change problems with temperature-dependent thermal conductivity. *J. Heat Transfer*, 96C, 214-217.
- Cirelli, M. B. & Tarzia, D.A. (2010), "Explicit solutions for the Rubinstein binary-alloy solidification problem with a heat flux or a convective condition at the fixed face", In preparation.
- Crank, J. (1975). *The mathematics of diffusion*, Clarendon Press, Oxford.
- Crank, J. (1984). *Free and moving boundary problems*, Clarendon Press, Oxford.
- Crank, J. & Gupta, R.S. (1972). A moving boundary problem arising from the diffusion of oxygen in absorbing tissue. *J. Inst. Math. Appl.*, 10, 19-33.
- Destefanis, H.A.; Erdmann, E.; Tarzia, D.A. & Villa, L.T. (1993). A free boundary model applied to the estimation of the diffusion coefficient in a gas-solid system. *International Communications Heat Mass Transfer*, 20, 103-110.
- Duvaut, G. (1976). *Problèmes à frontière libre en théorie des milieux continus*, Rapport de Recherche No. 185, LABORIA IRIA, Rocquencourt.
- Elliott, C.M. & Ockendon, J.R. (1982). *Weak and variational methods for moving boundary problems*, Research Notes in Math., No. 59, Pitman, London.

- Fasano, A. (1974). Alcune osservazioni su una classe di problemi a contorno libero per l'equazione del calore, *Le Matematiche*, 29, 397-411.
- Fasano, A. (1987). *Las zonas pastosas en el problema de Stefan*, Cuadern. Inst. Mat. Beppo Levi, 13, 1-60.
- Fasano, A. (2005). *Mathematical models of some diffusive processes with free boundaries*, MAT - Serie A, 11, 1-128.
- Fasano, A.; Guan, Y.; Primicerio, M. & Rubinstein, I. (1993). *Thawing in saturated porous media*, *Meccanica*, 28, 103-109.
- Fasano, A. & Primicerio, M. (1984). Freezing in porous media: a review of mathematical model, In: *Applications of Mathematics in Technology*, V. Boffi & H. Neunzert (Eds.), 288-311, Teubner.
- Fasano, A. & Primicerio, M. (1986). *Nonlinear diffusion problems*, *Lecture Notes in Mathematics* No. 1224, Springer Verlag, Berlin.
- Fasano, A.; Primicerio, M. & Tarzia, D.A. (1999). Similarity solutions in Stefan-like problems. *Math Models and Methods in Appl Sci*, 9, 1-10.
- Fennema, O, Berny, L.A. (1974). Equilibrium vapour pressure and water activity of food at subfreezing temperature. In *Proceedings of IV International Congress of Food Science and Technology*, 2, 27-35.
- Fi, F. & Han, X. (2007). An one -dimensional two-phase free boundary problem in an angular domain. *Nonlinear Anal. RWA*, 8, 959-979
- Friedman, A. (1964). *Partial differential equations of parabolic type*, Prentice Hall, Englewood Cliffs, N. J.
- Froment, G.F. & Bischoff, K.B. (1979). *Chemical reactor analysis and design*, J. Wiley, New York.
- Garguichevich, G.G. & Sanziel, M.C. (1984). Una introducción general a la resolución aproximada del problema de Stefan unidimensional. *Cuadern. Inst. Mat Beppo Levi*, 11, 167-177.
- Garguichevich, G.G.; Sanziel, M.C. & Tarzia, D.A. (1985). Comparison of approximate methods for the determination of thermal coefficients through a phase-change problems. *Int. Comm. Heat Mass Transfer*, 12, 451-464.
- González, A.M.; Reginato, J.C. & Tarzia, D.A. (2008). A free-boundary model for anaerobiosis in saturated soil aggregates. *Soil Science*, 173, 758-767.
- González, A.M. & Tarzia, D.A. (1996). Determination of unknown coefficient of a semi-infinite material through a simple mushy zone model for the two-phase Stefan problem. *International Journal of Engineering Science*, 34, 799-817.
- Goodman, T.R. (1958). The heat balance integral and its application to problems involving a change of phase. *Trans. of the ASME*, 80, 335-342.
- Gupta, L.N. (1974). *An approximate solution to the generalized Stefan's problem in a porous medium*, *Int. J. Heat Mass Transfer*, 17, 313-321.
- Gupta, S.C. (2003). *The classical Stefan problem. Basic concepts, modelling and analysis*, Elsevier, Amsterdam.
- Gupta, S.C.; Sanziel, M.C. & Tarzia, D.A. (1997). A similarity solution for the binary alloy solidification problem with a simple mushy zone model. *Anales de la Academia Nacional de Ciencias Exactas, Físicas y Naturales*, 49, 75-82.

- Guzman, J.A. (1982). Application of the heat transfer solution for the case of one-dimensional solidification with negligible latent heat. *Lat. Amer. J. Heat Mass Transfer*, 6, 41-51.
- Hill, J.M. (1987). *One-dimensional Stefan Problems : an introduction*, Longman, Essex .
- Howison, S.D. (1988). Similarity solutions to the Stefan problem and the binary alloy problem. *IMA J. Appl. Math.*, 40, 147-161.
- Jones, Jr. B. F. (1962). The determination of a coefficient in a parabolic differential equation, Part I : Existence and uniqueness. *J. Math. Mech.*, 11, 907-918.
- Jones, Jr. B. F. (1963). Various methods for finding unknown coefficients in parabolic differential equation. *Comm. Pure Appl. Math.*, 16, 33-44.
- Knight, J. & Philip, J.R. (1974). Exact solutions in nonlinear diffusion. *J. Eng. Math*, 8, 219-227.
- Lamé, G. & Clapeyron, B.P. (1831). Memoire sur la solidification par refroidissement dun globe liquide. *Annales Chimie Physique*, 47, 250-256.
- Levenspiel, O. (1962). *Chemical reaction engineering*, J. Wiley, New York.
- Liapis, A. I.; Lipscomb, G.G.; Crosser, O.K. & Liapis-Tsiroyianni, E. (1982). A model of oxygen diffusion in absorbing tissue. *Mathematical Modelling*, 3, 83-92.
- Lin, S. (1981). An exact solution of the sublimation problem in a porous medium. *J. Heat Transfer*, 103, 165-168.
- Lin, S. (1982a). An exact solution of the sublimation problem in a porous medium, Part II With an unknow temperature and vapor concentration at the moving sublimation front. *J. Heat Transfer*, 104, 808-811.
- Lin, S. (1982b). An exact solution of the desublimation problem in a porous medium. *Int. J. Heat Mass Transfer*, 25, 625-630.
- Lombardi, A. & Tarzia, D.A. (2001). Similarity solutions for thawing processes with a heat flux on the fixed boundary. *Meccanica*, 36, 251-264.
- Luikov, A.V. (1964), *Heat and mass transfer in capillary-porous bodies*, Adv. HeatTransfer, 1, 123-184.
- Luikov, A.V. (1966). *Heat and mass transfer in capillary-porous bodies*, Pergamon Press, Oxford.
- Luikov, A. V. (1968). *Analytical heat diffusion theory*, Academic Press, New York.
- Luikov, A.V. (1975). *Systems of differential equations of heat and mass transfer in capillary porous bodies*, Int. J. Heat Mass Transfer, 18, 1-14.
- Luikov, A.V. (1978). *Heat and mass transfer*, MIR Publishers, Moscow.
- Lunardini, V.J. (1981). *Heat transfer in cold climates*, Van Nostrand, New York.
- Lunardini, V.J. (1991). *Heat transfer with freezing and thawing*, Elsevier, Amsterdam.
- Menaldi, J.L. & Tarzia, D.A. (1993). Generalized Lamé-Clapeyron solution for a one-phase source Stefan problem. *Comput. Appl. Math.*, 12, 123-142.
- Mikhailov, M.D. (1975). Exact solution of temperature and moisture distributions in a porous half-space with moving evaporation front. *Int. J. Heat Mass Transfer*, 18, 797-804.
- Mikhailov, M.D. (1976). Exact solution for freezing of humid porous half-space. *Int. J. Heat Mass Transfer*, 19, 651-655.
- Muehlbauer, J.C. & Sunderland, J.E. (1965). Heat conduction with freezing or melting. *Appl. Mech. Reviews*, 18, 951-959.
- Nakano, Y. (1990). Quasi-steady problems in freezing soils, *Cold Reg. Sci. Techn.*, 17, 207-226.

- Natale, M.F.; Santillan Marcus, E.A. & Tarzia, D.A. (2010). Explicit solutions for one dimensional two-phase free boundary problems with either shrinkage or expansion. *Nonlinear Analysis Series B: Real World Applications*, 11, 1946-1952.
- Natale, M.F. & Tarzia, D.A. (2000). Explicit solutions to the two-phase Stefan problem for Storm's type materials. *Journal of Physics A: Mathematical and General*, 33, 395-404.
- Natale, M.F. & Tarzia, D.A. (2006). Explicit solutions for a one-phase Stefan problem with temperature-dependent thermal conductivity. *Bollettino dell'Unione Matematica Italiana*, 9B, 79-99.
- Olguin, M.C.; Salvadori, V.O.; Mascheroni, R.H. & Tarzia, D.A. (2008). An analytical solution for the coupled heat and mass transfer during the freezing of high-water content materials. *International Journal of Heat and Mass Transfer*, 51, 4379-4391.
- O'Neill, K. & Miller, R.D. (1985). Explanation of a rigid ice model of frost heave, *Water Resour. Res.*, 21, 281-296.
- Pattle, R.E. (1959). Diffusion from an instantaneous point source with concentration dependent coefficient. *Quart. J. Mech. Appl. Math*, 12, 407-409.
- Pekeris, C.L. & Slichter, L.B. (1939). Problem of ice formation. *J. Appl. Physics*, 10, 135-137.
- Philip, J.R. (1957). The theory of infiltration, 4, Sorptivity and algebraic infiltration equations. *Soil Sci.*, 84, 257-264.
- Philip, J.R. (1958). The theory of infiltration, 6, Effect of water depth over soil. *Soil Sci.*, 85, 278-286.
- Primicerio, M. (1981). Problemi di diffusione a frontiera libera. *Bollettino Un. Mat. Italiana*, 18A, 11-68.
- Primicerio, M. & Gianni, R. (1989). La filtración en medios porosos. *Cuadern. Inst. Mat. Beppo Levi*, 18 1-92.
- Quilghini, D. (1967). Sul problema inverso di quello di Stefan. *Riv. Mat. Univ. Parma*, 8, 131-142.
- Reginato, J.C.; Palumbo, M.C.; Moreno, I.S.; Bernardo, I.Ch. & Tarzia, D.A. (2000). Modeling nutrient uptake using a moving boundary approach. Comparison with the Barber-Cushman model. *Soil Science Society of America Journal*, 64, 1363-1367.
- Reginato, J.C. & Tarzia, D.A. (1993). The balance integral method applied to root growth of crops. *International Journal of Engineering Science*, 31, 61-70.
- Reginato, J.C.; Tarzia, D.A. & Dzioba, M.A. (1993). A model for root growth with root competition. *Plant and Soil*, 15, 185-196.
- Rogers, C. & Broadbridge, P. (1988). On a nonlinear moving boundary problem with heterogeneity: application of a reciprocal transformation. *ZAMP*, 39, 122-128.
- Rogers, C. (1986). On a class of moving boundary problems in non-linear heat conduction: Application of a Backlund transformation. *Int. J. Nonlinear Mech.*, 21, 249-256.
- Rubinstein, L.I. (1971). *The Stefan problem*, Translations of Mathematical Monographs, 27, Amer. Math. Soc., Providence, R.I.
- Salva, N.N. & Tarzia, D.A. (2010). Simultaneous determination of unknown coefficients through a phase-change process with temperature-dependent thermal conductivity, Submitted.
- Santillan Marcus, E.A.; Natale, M.F. & Tarzia, D.A. (2008). Simultaneous determination of two unknown thermal coefficients of a semi-infinite porous material through a

- desublimation moving boundary problem with coupled heat and moisture flows. *JP Journal of Heat and Mass Transfer*, 2, 73-116
- Santillan Marcus, E.A. & Tarzia, D.A. (2000a). Soluciones explícitas para el problema de desublimación en un semi-espacio húmedo poroso con una condición de flujo de calor. *Información Tecnológica*, 11, 19-24.
- Santillan Marcus, E.A. & Tarzia, D.A. (2000b). Explicit solution for freezing of humid porous half-space with heat flux condition. *International Journal of Engineering Science*, 38, 1651-1665.
- Santillan Marcus, E.A. & Tarzia, D.A. (2003). Exact solutions for drying with coupled phase change in a porous medium with a heat flux condition on the surface. *Computational and Applied Mathematics*, 22, 293-311.
- Santillan Marcus, E.A. & Tarzia, D.A. (2007). Determination of one unknown thermal coefficient of a semi-infinite porous material through a desublimation problem with coupled heat and moisture flows. *JP Journal of Heat and Mass Transfer*, 1, 251-270.
- Sanzuel, M.C. & Tarzia, D.A. (1989). Necessary and sufficient condition to obtain n phases in a one-dimensional medium with a flux condition on the fixed face. *Math. Notae*, 33, 25-32.
- Schatz, A. (1969). Free boundary problems of Stephan type with prescribed flux. *J. Math. Anal. Appl.* 28, 569-580.
- Sherman, B. (1971). Limiting behaviour in some Stefan problems as the latent goes to zero. *SIAM J. Appl. Math.*, 20, 319-327.
- Solomon, A.D. (1979). An easily computable solution to a two-phase Stefan problem. *Solar Energy*, 23, 525-528.
- Solomon, A.D.; Wilson, D.G. & Alexiades, V. (1982). A mushy zone model with an exact solution. *Letters Heat Mass Transfer*, 9, 319-324.
- Solomon, A.D.; Wilson, D.G. & Alexiades, V. (1983). Explicit solutions to change problems. *Quart. Appl. Math.*, 41, 237-243.
- Stampella, M.B. & Tarzia, D.A. (1989). Determination of one or two unknown thermal coefficients of a semi-infinite material through a two-phase Stefan problem. *Int. J. Eng. Science*, 27, 1407-1419.
- Stefan, J. (1889a). Ueber einige Probleme der Theorie der Waermeleitung. *Sitzungsberichte der Kaiserlichen Akademie der Wissenschaften, Mathematisch-naturwissenschaftliche classe*, 98, 473-484.
- Stefan, J. (1889b). Ueber die Theorie der Eisbildung, insbesondere ueber die Eisbildung im Polarmeere. *Sitzungsberichte der Kaiserlichen Akademie der Wissenschaften, Mathematisch-naturwissenschaftliche Classe*, 98, 965-983.
- Stefan, J. (1890). Ueber die Theorie der Eisbildung. *Monatshefte fur Mathematik und Physik*, 1, 1-6.
- Szekely, J.; Evans, J.W. & Sohn, H.Y. (1976). *Gas-solid reactions*, Academic Press, New York.
- Talamucci, F. (1997). Analysis of the coupled heat-mass transport in freezing porous media, *Survey in Math. in Industry*, 7, 93-139.
- Talamucci, F. (1998). Freezing processes in saturated soils, *Math. Models Meth. Appl. Sci.*, 8, 107-138.


- Tarzia, D.A. (1981). An inequality for the coefficient \mapsto of the free boundary $s(t) = 2\sigma\sqrt{t}$ of the Neumann solution for the two-phase Stefan problem. *Quart. Appl. Math.*, 39, 491-497.
- Tarzia, D.A. (1982). Determination of the unknown coefficients in the Lamé'-Clapeyron problem (or one-phase Stefan problem). *Adv. Appl. Math.*, 3, 74-82.
- Tarzia, D.A. (1983). Simultaneous determination of two unknown thermal coefficients through an inverse one-phase Lamé'-Clapeyron (Stefan) problem with an overspecified condition on the fixed face. *Int. J. Heat Mass Transfer*, 26, 1151-1158.
- Tarzia, D.A. (1984a). A new variant for the simultaneous calculation of some thermal coefficients of a semi-infinite material through a phase-change problem with an over-condition on the fixed face. *Latin Amer. J. Heat Mass Transfer*, 8, 227-235.
- Tarzia, D.A. (1984b). Soluciones exactas del problema de Stefan unidimensional. *Cuadern. Inst. Mat. Beppo Levi*, 12, 5-36.
- Tarzia, D.A. (1987). Determination of unknown thermal coefficients of a semi-infinite material for the one-phase Lamé'-Clapeyron (Stefan) problem through the Solomon-Wilson-Alexiades mushy zone model. *Int. Comm. Heat. Mass Transfer*, 14, 219-228.
- Tarzia, D.A. (1990a). A variant of the heat balance integral method and a new proof of the exponentially fast asymptotic behaviour of the solutions in heat conduction problems with absorption. *Int. J. Engineering Science*, 28, 1253-1259.
- Tarzia, D.A. (1990b). Neumann-like solution for the two-phase Stefan problem with a simple mushy zone model. *Computational and Applied Mathematics (ex Matemática Aplicada Computacional)*, 9, 201-211.
- Tarzia, D.A. (1991a). Sobre una nueva variante para el cálculo simultáneo de coeficientes térmicos de un material semi-infinito a través de un problema directo o inverso de Stefan a dos fases. *Math. Notae*, 35, 25-41.
- Tarzia, D.A. (1991b). Six free boundary problems for the heat-diffusion equation. *Revista Un. Mat. Argentina*, 37, 294-309.
- Tarzia, D.A. (1993). Approximate and analytic methods to solve some parabolic free boundary problems, In *Free Boundary Problems Involving Solids (FBP'90)*, J.M. Chadam - H. Rasmussen (Eds.), Pitman Research Notes in Mathematics, Vol. 281, pp. 190-196, Longman, Essex.
- Tarzia, D.A. (1998). The determination of unknown thermal coefficients through phase change process with temperature-dependent thermal conductivity. *International Communications in Heat and Mass Transfer*, 25, 139-147.
- Tarzia, D.A. (2000a). A bibliography on moving-free boundary problems for the heat-diffusion equation. The Stefan and related problems, *MAT - Serie A*, 2, 1-297. See: [http://web.austral.edu.ar/descargas/facultad-cienciasEmpresariales/mat/Tarzia-MAT-SerieA-2\(2000\).pdf](http://web.austral.edu.ar/descargas/facultad-cienciasEmpresariales/mat/Tarzia-MAT-SerieA-2(2000).pdf)
- Tarzia, D.A. (2000b). Explicit solution to some free boundary problems for the heat equation, In *International Conference on Free Boundary Problems (FBP'99)*, N. Kenmochi (Ed.), GAKUTO International Series, Mathematical Sciences and Applications, Vol. 13, pp. 385-398, Gottotosho, Tokyo.
- Tarzia, D.A. (2004). An explicit solution for a two-phase unidimensional Stefan problem with a convective boundary condition at the fixed face. *MAT - Serie A*, 8, 21-27.

- Tarzia, D.A. (2007). Exact solution for a Stefan problem with convective boundary condition and density jump. *PAMM – Proceedings on Applied Mathematics and Mechanics*, 7, 1040307-1040308.
- Tarzia, D.A. & Turner, C.V. (1992). A note on the existence of a waiting time for a two-phase Stefan problem. *Quart. Appl. Math.*, 50, 1-10.
- Tarzia, D.A. & Turner, C.V. (1999). Estimation of the occurrence of the phase-change process in spherical coordinates. *International Communications in Heat and Mass Transfer*, 26, 559-568.
- Tarzia, D.A. & Villa, L.T. (1991). Mathematical considerations on the heat transfer with phase change with negligible latent heat. *Latin American Applied Research*, 21, 1-6.
- Taylor, A.B. (1986). *Mathematical models in applied mechanics*, Clarendon Press, Oxford .
- Tien, R.H. & Geiger, G.E. (1967). A heat-transfer analysis of the solidification of a binary eutectic system. *J. Heat Transfer*, 89C, 230-234.
- Tien, R.H. & Koump, V. (1970). Effect of density change on the solidification of alloys. *J. Heat Transfer*, 92C, 11-16.
- Tirskii, G.A. (1959). Two exact solutions of Stefans nonlinear problems. *Soviet Physics Dokl.*, 4, 288-292.
- Tritscher, P. & Broadbridge, P. (1994). A similarity solution of a multiphase Stefan problem incorporating general non-linear heat conduction. *Int. J. Heat Mass Transfer*, 37, 2113-2121.
- Tsubaki, T. & Boley, B.A. (1977). One-dimensional solidification of binary mixtures. *Mech. Res. Comm.*, 4, 115-122.
- Vázquez, J.L. (2007). *The porous medium equation. Mathematical theory*, Clarendon Press, Oxford.
- Villa, L.T. (1987). La ecuación de la difusión y su aplicación a problemas de frontera libre. *Cuadern. Inst. Mat. Beppo Levi*, 14, 99-116.
- Voller, V.R. (2006). A similarity solution for solidification of an under-cooled binary alloy. *Int. J. Heat Mass Transfer*, 49, 1981-1985.
- Voller, V.R. (2008a). A numerical method for the Rubinstein binary- alloy problem in the presence of an under-cooled liquid. *Int. J. Heat Mass Transfer*, 51, 696-706.
- Voller, V.R. (2008b). An enthalpy method for modeling dendritic growth in a binary alloy. *Int. J. Heat Mass Transfer*, 51, 823-834.
- Warrick, A.W. & Broadbridge, P. (1992). Sorptivity and macroscopic capillary length relationships. *Water. Resour. Researh*, 28, 427-431.
- Weber, H. (1901). *Die partiellen Differential-Gleichungen der Mathematischen Physik, nach Riemann's Vorlesungen, t. II*, Braunwschweig.
- Weiner, J.H. (1955). Transient heat conduction in multi-phase media. *British J. Appl. Physics*, 6, 361-363.
- White, R.E. (1985). The binary alloy problem: existence, uniqueness, and numerical approximation. *SIAM J. Numer. Anal.*, 22, 205-244.
- Wilson, D.G. (1978). Existence and uniqueness for similarity solutions of one dimensional multi-phase Stefan problems. *SIAM J. Appl. Math.*, 35, 135-147.
- Wilson, D.G. (1982). Lagrangian coordinates for moving boundary problems. *SIAM J. Appl. Math.*, 42, 1195-1201.

- Wilson, D.G. & Solomon, A.D. (1986). A Stefan-type problem with void formation and its explicit solution. *IMA J. Appl. Math.*, 37, 67-76.
- Wilson, D.G. & Solomon, A.D & Alexiades, V. (1982). A shortcoming of the explicit solution for the binary alloy solidification problem. *Letters Heat Mass Transfer*, 9, 421-428.
- Zel'dovich, Y.B. & Kompaneets, A.S. (1950). *Towards a theory of heat conduction with thermal conductivity depending on the temperature*. In collection of papers dedicated to 70th anniversary of A.F. Ioffe, Izd. Akad. Nauk. SSSR, Moscow, 61-72 (in Russian).

IntechOpen

IntechOpen

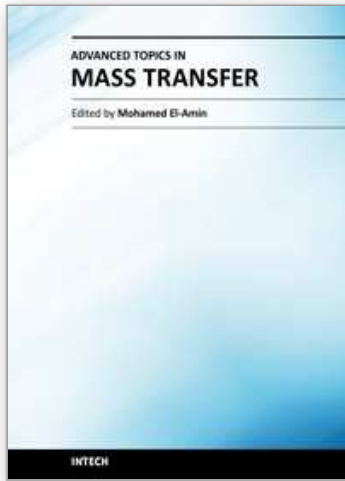

Advanced Topics in Mass Transfer

Edited by Prof. Mohamed El-Amin

ISBN 978-953-307-333-0

Hard cover, 626 pages

Publisher InTech

Published online 21, February, 2011

Published in print edition February, 2011

This book introduces a number of selected advanced topics in mass transfer phenomenon and covers its theoretical, numerical, modeling and experimental aspects. The 26 chapters of this book are divided into five parts. The first is devoted to the study of some problems of mass transfer in microchannels, turbulence, waves and plasma, while chapters regarding mass transfer with hydro-, magnetohydro- and electro- dynamics are collected in the second part. The third part deals with mass transfer in food, such as rice, cheese, fruits and vegetables, and the fourth focuses on mass transfer in some large-scale applications such as geomorphologic studies. The last part introduces several issues of combined heat and mass transfer phenomena. The book can be considered as a rich reference for researchers and engineers working in the field of mass transfer and its related topics.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Domingo Alberto Tarzia (2011). Explicit and Approximated Solutions for Heat and Mass Transfer Problems with a Moving Interface, Advanced Topics in Mass Transfer, Prof. Mohamed El-Amin (Ed.), ISBN: 978-953-307-333-0, InTech, Available from: <http://www.intechopen.com/books/advanced-topics-in-mass-transfer/explicit-and-approximated-solutions-for-heat-and-mass-transfer-problems-with-a-moving-interface>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen