

Flow-shop scheduling problem under uncertainties: Review and trends

Eliana María González-Neira^{a,b,*}, Jairo R. Montoya-Torres^c and David Barrera^b

^a*Doctorado en Logística y Gestión de Cadenas de Suministros, Universidad de La Sabana, Km 7 autopista norte de Bogotá, D.C., Chía, Colombia*

^b*Departamento de Ingeniería Industrial, Facultad de Ingeniería, Pontificia Universidad Javeriana, Cra. 7 No. 40-62 - Edificio José Gabriel Maldonado, Bogotá D.C., Colombia*

^c*School of Management, Universidad de los Andes, Calle 21 # 1-20, Bogotá, D.C., Colombia*

CHRONICLE

Article history:

Received January 2 2017
Received in Revised Format
January 3 2017
Accepted February 7 2017
Available online
February 8 2017

Keywords:

Flow shop
Flexible flow shop
Uncertainties
Stochastic
Fuzzy
Production logistics
Review

ABSTRACT

Among the different tasks in production logistics, job scheduling is one of the most important at the operational decision-making level to enable organizations to achieve competitiveness. Scheduling consists in the allocation of limited resources to activities over time in order to achieve one or more optimization objectives. Flow-shop (FS) scheduling problems encompass the sequencing processes in environments in which the activities or operations are performed in a serial flow. This type of configuration includes assembly lines and the chemical, electronic, food, and metallurgical industries, among others. Scheduling has been mostly investigated for the deterministic cases, in which all parameters are known in advance and do not vary over time. Nevertheless, in real-world situations, events are frequently subject to uncertainties that can affect the decision-making process. Thus, it is important to study scheduling and sequencing activities under uncertainties since they can cause infeasibilities and disturbances. The purpose of this paper is to provide a general overview of the FS scheduling problem under uncertainties and its role in production logistics and to draw up opportunities for further research. To this end, 100 papers about FS and flexible flow-shop scheduling problems published from 2001 to October 2016 were analyzed and classified. Trends in the reviewed literature are presented and finally some research opportunities in the field are proposed.

1. Introduction

Logistics and supply chain concepts have evolved over the years, initially involving only transportation activities and then expanding to include product flows, information flows, and reverse flows until finally reverse flows, integrated chains, and networks were incorporated. Although there is diversity in definitions, there is a common understanding that logistics involves three principal stages called supply, production, and distribution (Farahani et al., 2014). Despite this taxonomy, many distribution and production problems share similar mathematical formulations and solution procedures. Due to the vast variety of problems and knowledge that all these stages comprise, we are going to focus on production

* Corresponding author Tel: +57-1-3208320 Ext. 5306.
E-mail: eliana.gonzalez@javeriana.edu.co (E. M. González-Neira)

logistics processes, with a particular view on scheduling of jobs and tasks. Indeed, many product distribution problems have been analyzed in the literature as transportation problems, but they can also be viewed as scheduling problems. So, scheduling activities are performed in at least two stages of the logistics system.

Generally speaking, scheduling consists in the allocation of limited resources to activities over time in order to optimize one or more desired objectives established by decision-makers. Both resources and activities can be of different types, so the theory of scheduling has many applications in manufacturing and services, playing a crucial role in the competitiveness of organizations and industries (Brucker, 2007; Leung et al., 2004; Pinedo, 2012). Scheduling problems can be classified depending on the configuration of resources (often called the production environment). Among the principal configurations, single-machine, parallel-machines, flow-shop (FS), flexible flow-shop (FFS), job-shop, flexible job-shop, and open-shop configurations can be found and can be analyzed in a deterministic or a stochastic way (Pinedo, 2012). Particularly, FS problems (including FFS) have been extensively studied due to their versatility and applicability in the textile, chemical, electronics, automobile manufacturing (Mirsanei et al., 2010; Zandieh et al., 2006), iron and steel (Pan et al., 2013), food processing, ceramic tile (Ruiz et al., 2008), packaging (Adler et al., 1993), pharmaceutical, and paper (Gholami et al., 2009) industries, among others.

The standard FS problem consists in m machines (resources) in series. There are n jobs (tasks) that have to be processed on every machine. All jobs must follow the same processing route on the shop floor; that is, jobs are performed initially on the first machine, next on the second machine, and so on, until machine m is reached. The decision to be taken is to determine the processing sequence of the n jobs on each machine. This results in a solution space of $n!^m$ (Pinedo, 2012). When the objective function is the makespan, the problem has been proved to be strongly NP-complete for three or more machines (Lee, Cheng, & Lin, 1993) and for the tardiness objective (Du et al., 2012). A generalization of the FS and parallel-machines environments is the FFS. In this case there are c stages, and at least one stage has two or more machines in parallel that process the same kind of operation. Thus, the decision to be made is which of the parallel machines each job should be allocated to at each stage. It can be seen that when there is only one machine in all stages then the problem is a standard FS one (Pinedo, 2012).

Most of the studies in FS and FFS scheduling have considered that all information is known, that is, deterministic. Nevertheless, within organizations, various parameters are not exactly known and vary over time, causing deterministic decisions to be inadequate. That is why scheduling under uncertainties is a very important issue that has received more attention from researchers in the last years (Elyasi & Salmasi, 2013a; Juan et al., 2014). Particularly in the area of stochastic flow shop (SFS), only one literature review has been published, in the year 2000 by (Gourgand et al., 2000a). Nevertheless, considering the growing and significance of this field it is important to update the state of the art and give some future directions for research.

This paper provides a general view of the developments in FS and FFS scheduling under uncertainties over the last 15 years and how these advances influence the research on production logistics. Section 2 describes the notation used for the literature review. Section 3 describes the different solution approaches presented in the literature and current state of research. Finally, several directions for future research are outlined in Section 4.

2. Notation

In order to present the literature review on FS and FFS problems under uncertainties we are going to follow the notation originally presented by Graham et al. (1979) and later adapted by Gourgand et al. (2000b) for stochastic static FS problems. In order to include (FFS) problems, we extend the notation presented by Gourgand et al. (2000b) since it was designed to classify stochastic FS problems only. We also adapted the notation to include unknown parameters modeled using both stochastic distribution and

fuzzy sets. According to the notation in Graham et al. (1979), scheduling problems can be represented using three fields named $\alpha|\beta|\gamma$. The α field indicates the shop configurations. For the purpose of this review, two symbols are required: Fm (an FS with m machines) and FFc (an FFS with c stages). Field β denotes the special constraints and assumptions which differ from the standard problem of the specific shop. It includes uncertain parameters and the way in which they are modeled. Table 1 presents the basic notation of parameters (in the deterministic version) and characteristics of the shop problem. Depending on how the uncertain parameters are modeled, let us use the following conventions:

- When a parameter is modeled using a probability distribution we will denote it as *parameter*~*PF*, where *PF* is the probability function. For example, if the processing times of job j on machine i (p_{ij}) in an FS problem are modeled with a normal distribution with mean μ_{ij} and variance σ_{ij}^2 , then its notation is $p_{ij} \sim Normal(\mu_{ij}, \sigma_{ij}^2)$.
- When a general distribution is used, the parameter is denoted as $r_j \sim Gen$
- If the uncertain parameter is modeled as a fuzzy number, the notation becomes $Fuz(\text{parameter})$, that is, $Fuz(p_{ij})$.
- If the parameter is not modeled with a distribution probability or as a fuzzy number but it can take random values in a specific interval, it is denoted as $L \leq \text{Parameter} \leq U$. For example, $L_j \leq d_j \leq U_j$ if the due date of job j varies between the values L_j and U_j .
- For inverse scheduling in which a controllable parameter is adjusted, we denote it as $adj(\text{parameter})$.

Table 1
Notation used in β field

Type	Notation	Meaning	
Parameters	d_j	Due date of job j	
	p_{ij}	Processing time of job j on machine i (in an FS) or processing time of job j in stage i (in an FFS)	
	r_j	Release date of job j	
	s_{gh}	When a machine switches over from one job family to another, s_{gh} denotes the sequence-dependent setup times between family g and job family h	
	s_{ij}	Sequence-independent setup time of job j on machine i	
	s_{ijk}	Sequence-dependent setup time when job k is going to be processed just after job j on machine i	
	t_{im}	Transportation time between machines i and m in an FS or between stages i and m in an FFS	
	w_j	Weights of jobs	
	Special characteristics	R_m	Unrelated parallel machines in the case of FFS environments
		Ag	Breakdown level of the shop. Some researches uses this approach to define the time between failures (TBF) (Holthaus, 1999)
BPM		Time taken for basic preventive maintenance	
MPM		Time taken for minimal preventive maintenance	
SZ_j		Size of job j . This characteristic can be used when a machine can process batches and jobs have different sizes	
$batch(b)$		Machines can process a batch of b jobs simultaneously	
$block$		When the buffer capacities between machines in an FS or between stages in an FFS are limited, the jobs must wait in the previous machine (FS) or stage (FFS), blocking it until sufficient space is released in the buffer.	
$brkdown(a, b)$		Machine breakdowns. The information enclosed in parentheses is: a the time between failures (TBF) and b the time to repair (TTR).	
$dgrdtn$		Degradation of machines due to shocks. It means that machines have to be subject to preventive maintenance	
$dynarrv$		Dynamic arrivals.	
$fmls$		Families of jobs. When jobs of the same family or group are processed consecutively on the same machine, a setup time for each job is not needed.	
lot		Lot sizing	
$lotstrm$		Lot streaming	
nwt		No wait. Jobs are not allowed to wait between machines	
$prec$		Precedence. It can take place in parallel machines of a FFS, implying that a job can only be processed after all predecessors have been completed.	
$prmp$		Preemption. The processing of a job on a machine can be interrupted and finished later. Penalties may apply.	
$prmu$		Permutation. This only happens in FS and indicates that the execution sequence of jobs in all machines is the same.	
$rcrc$	Recirculation or reentrant: a job may visit a machine or a stage more than once.		
$splt$	Order splitting		

Finally, field γ corresponds to the decision criteria or optimization objectives. In order to explain the possible objectives in the γ field, let us define:

- c_{ij} , the completion time of job j on machine i for FS or in stage i for an FFS problem
- C_j , the completion time of job j on the last machine in an FS or in the last stage in an FFS
- F_j , the flow time of job j , calculated as $F_j = C_j - r_j$
- L_j , the lateness of job j , calculated as $L_j = C_j - d_j$
- T_j , the tardiness of job j , calculated as $T_j = \max(C_j - d_j, 0)$
- E_j , the earliness of job j , calculated as $E_j = \max(d_j - C_j, 0)$
- $U_j = 1$ if the job j is tardy, that is, if $C_j - d_j > 0$, and 0 otherwise.

The possible objective functions (X) for the deterministic counterparts of scheduling problems are presented in Table 2. It is important to note that the γ field is extended to express one of the following ways to deal with uncertainty:

{	$X_{w.p.1}$	<i>minimization with probability 1 of criterion X</i>
	X_{st}	<i>stochastic minimization of criterion X</i>
	$E[X]$	<i>minimization of the expected value of criterion X</i>
	$Rob(X)$	<i>robust schedule according to criterion X</i>
	$Fuz(X)$	<i>schedule according to the fuzzy approach for criterion X</i>
	$Intvl(X)$	<i>schedule according to the interval number approach for criterion X</i>

Table 2
Objective functions in deterministic scheduling

Notation (X)	Formula	Meaning
C_{max}	$\max_j C_j$	Makespan or maximum completion time
F_{max}	$\max_j F_j$	Maximum flow time
L_{max}	$\max_j L_j$	Maximum lateness
T_{max}	$\max_j T_j$	Maximum tardiness
\bar{C}	$\sum_j C_j$	Total/average completion time
\bar{C}^w	$\sum_j w_j C_j$	Total/average weighted completion time
\bar{F}	$\sum_j F_j$	Total/average flow time
\bar{F}^w	$\sum_j w_j F_j$	Total/average weighted flow time
T	$\sum_j T_j$	Total tardiness
T^w	$\sum_j w_j T_j$	Total weighted tardiness
E	$\sum_j E_j$	Total earliness
E^w	$\sum_j w_j E_j$	Total weighted earliness
U	$\sum_j U_j$	Total number of tardy jobs
WIP		Work-in-process inventory
THR		Throughput time

The complete $\alpha|\beta|\gamma$ notation presented is illustrated using five examples:

- $F3|Fuz(p_{ij})|C_{max}$ corresponds to an FS environment with three machines in which the processing times are modeled using fuzzy numbers and the objective function is the makespan.

- $FFc|p_{ij} \sim \text{Lognormal}(\mu_{ij}, \sigma_{ij}) | E[\bar{C}], E[T]$ is an FFS with c stages in which the processing times follow a lognormal distribution with mean μ_{ij} and standard deviation σ_{ij} . The problem analyzes a bi-objective function that is solved through a Pareto approach. For this case, the objectives are the expected total completion time and the expected total tardiness.
- $FFc|brkdw \sim (\exp(\mu_s), \text{Lognormal}(\alpha_s, \beta_s)) | F_{w,p,1}$ is an FFS with c stages in which machine breakdowns are stochastic. The time between failures follows an exponential distribution with mean μ_s at each stage. The time to repair follows a lognormal distribution with mean α_s and standard deviation of β_s at stage s . The objective function is the minimization of the flow time with probability 1.
- $Fm|r_j | Fuz(\alpha C_{max} + \beta T)$ consists of an FS with m machines that considers deterministic release times. The objective function is to minimize the weighted sum of makespan and tardiness, but the weights for each function α and β are not known and are thus modeled as fuzzy numbers.
- $Fm|Range(d_j) | Rob(T_{max})$ corresponds to an FS environment with m machines in which the due dates are random variables that can vary in an interval. The objective is to construct a robust schedule according to a maximum tardiness criterion.

3. Literature review

As mentioned previously, FS and FFS under uncertainties have not been well studied as deterministic counterparts. Only one literature review presented by (Gourgand et al., 2000a) was found for the static version of the stochastic FS. Those authors noticed that the majority of researches considered that either processing times or breakdowns of machines were subject to uncertainties. In addition, that review revealed that the majority of the revised works analyzed the cases of FS with only two machines. Since then, this field has been growing and there are more complex applications nowadays. The nomenclature presented in the previous section was used to summarize the type of problem addressed in 100 papers published between 2001 and October 2016. The year 2001 was chosen as the starting point in time as it corresponds to the time immediately after the publication of the review in (Gourgand et al., 2000a).

According to Fink (1998) and Badger et al. (2000), from a methodological point of view, a literature review is a systematic, explicit, and reproducible approach for identifying, evaluating, and interpreting the existing body of documents. This paper follows the principles of systematic literature reviews, in contrast to narrative reviews, by being more explicit in the selection of the studies and employing rigorous and reproducible evaluation methods (Delbufalo, 2012; Thomé et al., 2016). A set of criteria was defined to collect and identify the research papers from the Science Citation Index compiled by Clarivate Analytics (formerly the Institute for Scientific Information, ISI) and SCOPUS databases. The inclusion and exclusion criteria are explained next:

- Inclusion criteria: Title–abstract–keywords (flowshop OR "flow shop" OR flowline) AND (random OR randomness OR stochastic OR uncertainty OR uncertainties OR robust OR robustness OR fuzzy) AND publication year > 2000
- Exclusion criteria:
 - Random elements are part of the solution method but not characteristics of the parameters. For example, all parameters and objective function are deterministic but the solution method is a random key genetic algorithm.
 - The article is not about scheduling. For example, the main topic of the paper is "subsea flowline buckle capacity considering uncertainty".
 - The paper is written in a language other than English.
 - The paper was published in conference proceedings.

The list of reviewed papers is presented in Table 3. The first column of the table indicates the bibliographical reference (including the publication year), the second one describes the problem

addressed in the paper with the proposed notation, and the third column briefly describes the type of solution approach and in some cases other details that may be of interest. This table follows a similar format to that presented in (Ruiz & Vázquez-Rodríguez, 2010). The fourth to sixth columns indicate which approach was used for modeling uncertain parameters. The seventh to eleventh columns indicate what kind of solution method was used to deal with uncertainty. Lastly, the twelfth to fourteenth columns show what kind of method was employed for optimization.

As illustrated in the table, there is a trend of an increase in the number of papers published on FS and FFS under uncertainties. This is helped by the existence of more rapid computers and advances that allow more complex problems to be solved. Fig. 1 shows the evolution of the number of papers separately for FS and FFS under uncertainties and the total values. There is a big difference between FS and FFS, with FFS representing 25% of the revised works.

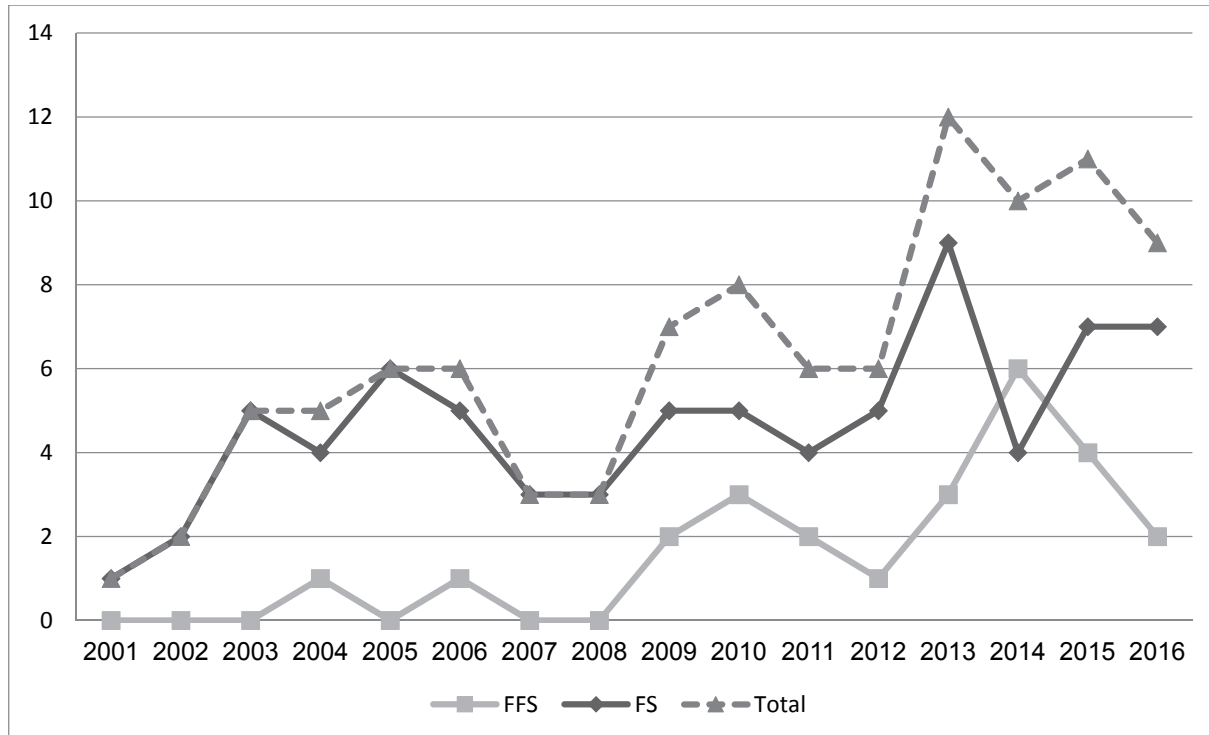


Fig. 1. Number of papers per year on FS and FFS under uncertainties

There are some issues to be highlighted from the literature, so the following subsections summarize the findings in terms of four characteristics:

- Uncertain parameters and methods to describe them (fuzzy, bounded, probability)
- Approach used to deal with uncertainty (fuzzy, robust, stochastic (not simulation), simulation-optimization and interval theory)
- Optimization methods
- Objective function

Table 3
Classification of the reviewed works (Continued)

Reference	Problem	Solution approach	Modeling of uncertain parameters						Approach taken to deal with uncertainty					Optimization method		
			Fuzzy	Bounded	Probability	Fuzzy	Robust	Stochastic (not simulation)	Simulation-optimization	Interval theory	Exact	Heuristic	Metaheuristic			
(Cwik & Józefczyk, 2015)	$F_m prmu, L_{ij} \leq p_{ij} \leq U_{ij} Rob(Cmax)$	Minmax regret with an evolutionary heuristic		✓						✓						✓
(Framinan & Perez-Gonzalez, 2015)	$F_m p_{ij} \sim \text{Lognormal}(\mu_{ij}, CV * \mu_{ij}) E[Cmax]$	CV: coefficient of variation, new NEH-based heuristics			✓					✓						✓
(Lin & Chen, 2015)	$FFc R_m, s_{ijk}, prmp, p_{ij} \sim \text{Empirical distributions} E[F], E[Fmax]$	Real application in a semiconductor back-end assembly facility. Simulation-optimization approach (genetic algorithm and optimal computing budget allocation). The probability distributions of processing times are not specified			✓					✓						✓
(Mou et al., 2015)	$F_m prmu, adj(p_{ij}) H + (\Delta C + \Delta P)$ <i>H</i> : Hamming distance, ΔC : adjustment of processing times, ΔP : adjustment of processing times.	Inverse scheduling, multi-objective evolutionary algorithm														✓
(Nagasawa et al., 2015)	$F_m prmu, L_{ij} \leq p_{ij} \leq U_{ij} Rob(\alpha PeakPower + (1 - \alpha) Inventory)$	Robust production scheduling model that considers random processing times and the peak power consumption.		✓										✓		
(Noroozi & Mokhtari, 2015)	$F_m batch(b), p_{ij} \sim \text{Uniform}(\alpha, \beta) E[Cmax]$	Practical application of printed circuit boards assembly line Simulation-optimization (Monte Carlo + genetic algorithm)			✓					✓						✓
(Qin et al., 2015)	$FFc, R_m dynarrv, s_{ijk}, p_{ij} \sim \text{Erlang}(k, \lambda) E[Cmax]$	Rescheduling, ant colony optimization			✓					✓						✓
(Wang et al., 2015)	$FFc p_{ij} \sim \text{Uniform}(\alpha, \beta) Rob(Cmax)$	Order-based estimation of distribution algorithm. Robustness with $\lambda Cmax + (1 - \lambda) SD[Cmax]$			✓					✓						✓
(Ying, 2015)	$F2 L_{ij} \leq p_{ij} \leq U_{ij} Rob(Cmax)$	Simulated annealing and iterated greedy algorithms separately. The iterated greedy approach is more effective in small instances while simulated annealing is more effective in large instances.														✓
(Zandieh & Hashemi, 2015)	$FFc brkdwnt(\exp(\lambda_1), \exp(\lambda_2)) E[\bar{C}]$	Simulation-optimization approach with genetic algorithm			✓					✓						✓
(Adressi et al., 2016)	$F_m fmsis, nwt, brkdwnt(\text{Weibull}(\alpha_i, \beta_i), k) E[Cmax]$	Genetic algorithm and simulated annealing separately			✓					✓						✓
(Fazayeli et al., 2016)	$F_m brkdwnt(\exp(\lambda_{1i}), \exp(\lambda_{2i})) Rob(Cmax)$	β -robustness criterion. The objective is $\max[\text{probability}(Cmax \leq X)]$ Simulation-optimization approach with a hybridization of genetic algorithm and simulated annealing			✓					✓						✓

3.1. Uncertain parameters and methods to describe them

According to Li and Ierapetritou (2008), in scheduling under uncertainties, several methods have been used to describe the uncertain parameters: bounded form, probability description, and fuzzy description. The bounded or interval form is when there is insufficient information to describe the data with a probability function but information about the lower and upper bounds in which the parameter can vary exists. In the probabilistic approach, the uncertainties are modeled with a probability distribution function. This method is used when there is enough information (historical data) to estimate these probabilities. Finally, fuzzy sets are also useful when there is no available historical data to determine the probability distribution. Fig. 2 presents the distribution of reviewed papers according to the ways in which uncertain parameters are modeled. A probability distribution is the most frequently used approach to model uncertainties. It is very practical in situations where organizations have sufficient information to estimate the distribution functions of the parameter.

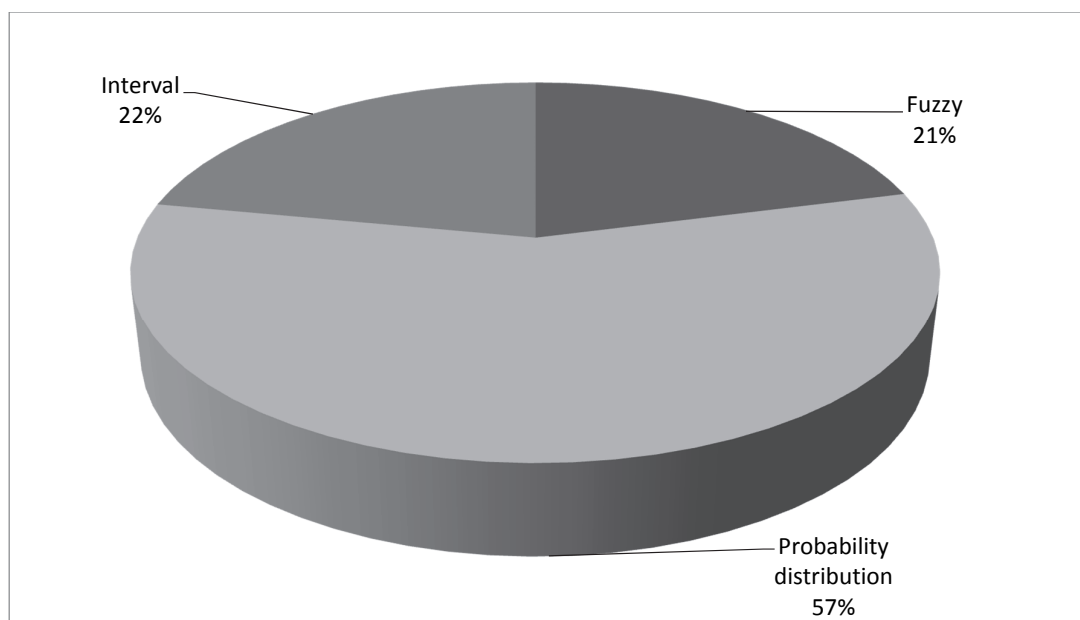


Fig. 2. Distribution of methods for modeling uncertain parameters

Fig. 3 presents the distribution of the parameters under uncertainty. It can be seen that 79% of the analyzed papers deal with only one stochastic parameter, 19% deal with two parameters, and only 2% deal with three parameters. The processing times are the most frequently studied parameter subject to uncertainty, representing 74% of shortlisted works, while the second most frequently used parameter is the breakdowns. Nevertheless, the consideration of breakdowns is still far from the use of processing times.

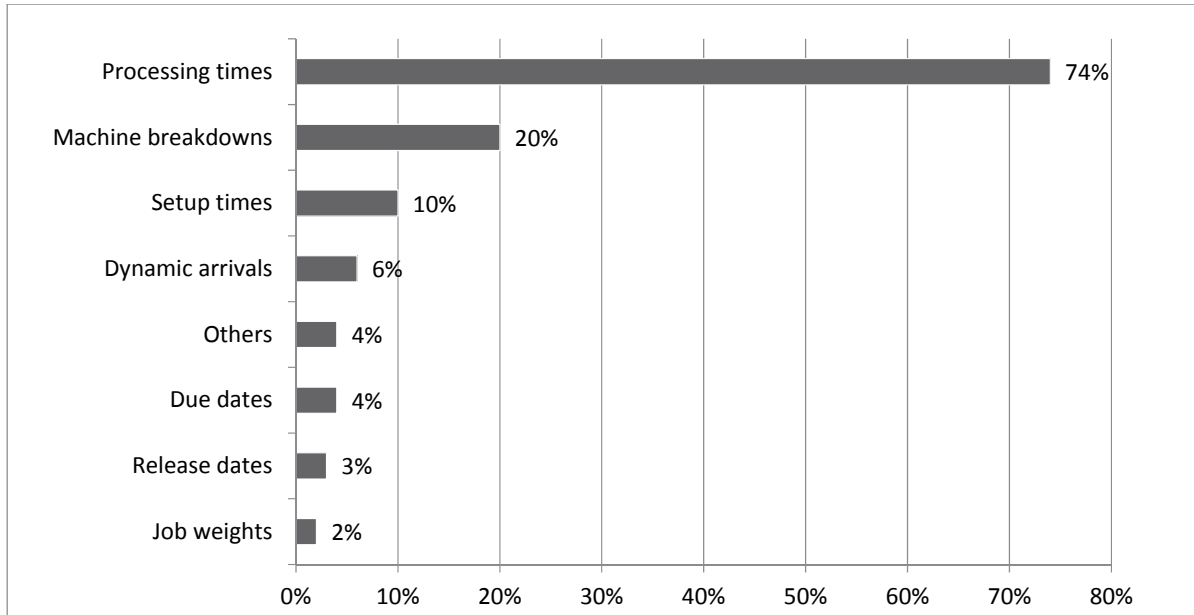


Fig. 3. Distribution of parameters under uncertainty

3.2 Approach to deal with uncertainty

Many approaches exist to deal with uncertain data: sensitivity analysis, fuzzy logic, stochastic optimization, and robust optimization (Behnamian, 2016; Elyasi & Salmasi, 2013a; Li & Ierapetritou, 2008). Sensitivity analysis is used to determine how a given model result can change with changes in the input parameters. This method has not been used much in scheduling due to the complex nature of this problem, which makes it impractical. The fuzzy programming method consists in the uncertain parameters being modeled as fuzzy numbers and constraints being modeled as fuzzy sets. In stochastic scheduling, discrete or continuous probability distributions are used to model random parameters. This approach is divided into three categories: two-stage or multi-stage stochastic programming, chance constraint programming, and simulation-optimization. Finally, robust optimization focuses on obtaining preventive schedules that minimize the effects of disruptions so the initial schedule does not change drastically after the disruption. Another approach to deal with uncertainty is the use of interval number theory, which is directly related with the representation of uncertain parameters through a bounded form. Interval number theory, or interval arithmetic, was pioneered by (Moore & Bierbaum, 1979). This method was originally used for bounding and rounding errors in computer programs. Since then, it has been generalized in order to extend its applications for dealing with numerical uncertainty in other fields (Lei, 2012).

Fig. 4 shows the approaches used in the reviewed literature. The stochastic approach has been employed the most, representing 60% of papers. It is important to note that among the papers using the stochastic approach, half used the simulation-optimization method, which has shown very good results in comparison with other methods. We highlight that few papers (9%) used a combination of two approaches.

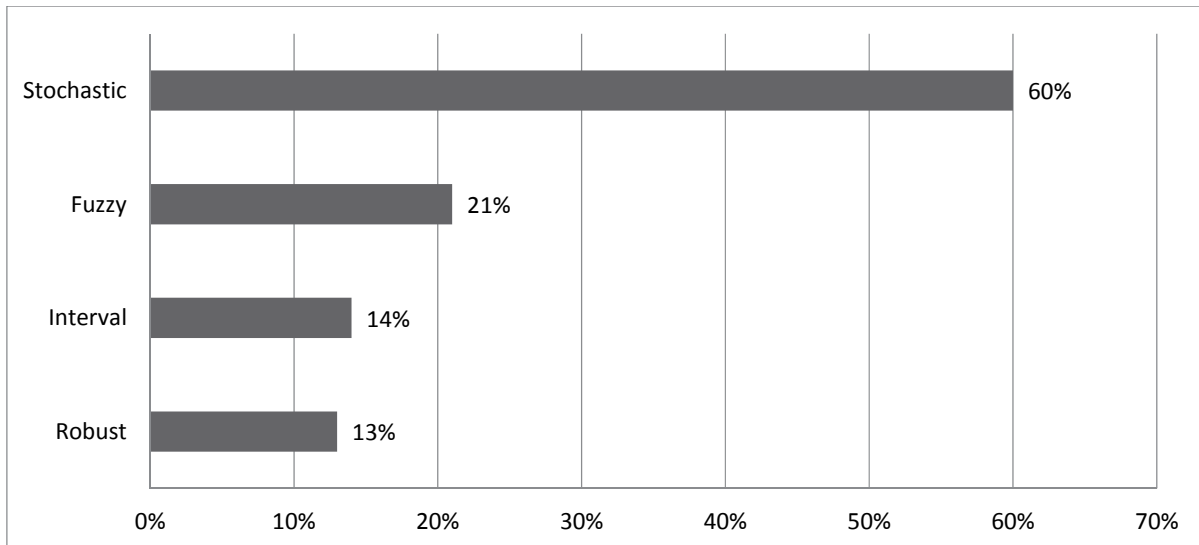


Fig. 4. Distribution of solution approach to deal with uncertainty

3.3. Optimization methods

Looking closer at the optimization approach to deal with these complex problems, 25% of reviewed papers employed exact approaches such as dominance analysis, Markov chains, mixed-integer linear programming, fuzzy linear programming models, and chance-constraint programming. Heuristic algorithms, including dispatching rules and more sophisticated heuristics, were applied in 17% of the works. Finally, 53% of articles used metaheuristics, with genetic algorithms, which were used in 24% of the total reviewed papers, standing out. Fig. 5 shows the distribution of metaheuristics among the 53 papers that implemented them as part of the solution approach.

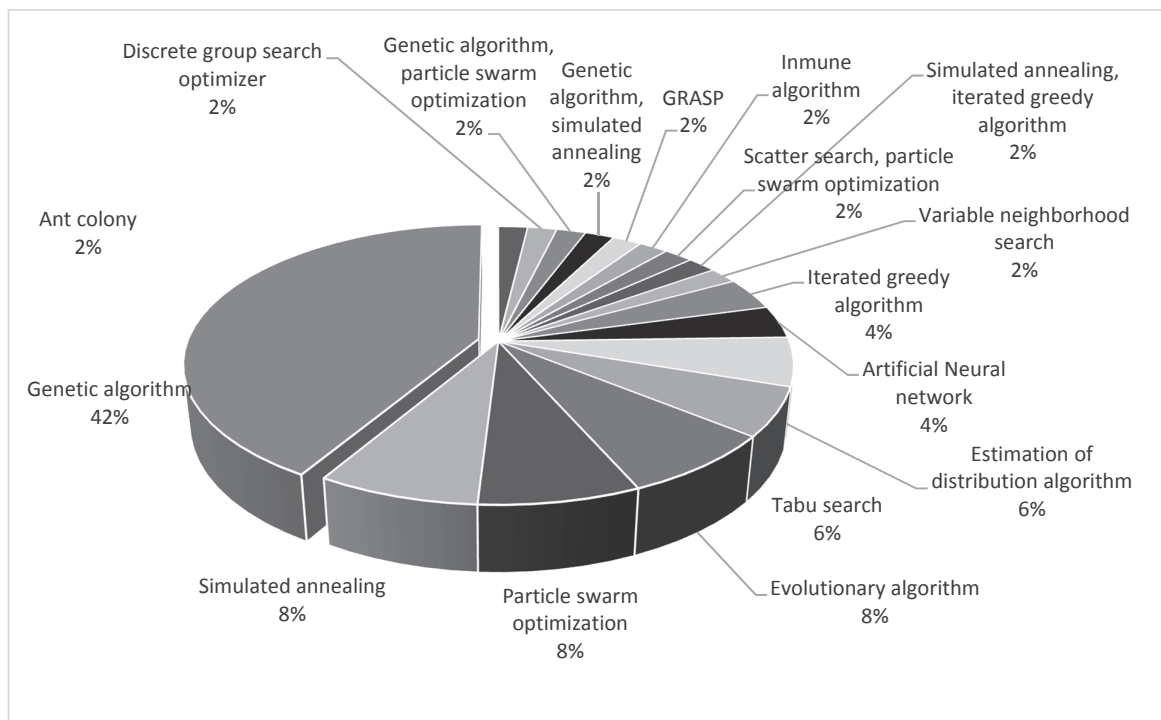


Fig. 5. Distribution of metaheuristics

3.4 Objective functions (decision criteria)

Most (81%) of the reviewed works deal with a single objective, 8% considers two objectives, and the others deal with three objective functions. Makespan, as in many other scheduling problems, is the most frequently evaluated metric, being considered by 64% of single-objective and 73% of multi-objective papers (see Table 4). It is important to note that the work of (González-Neira et al., 2016) is the only one in the reviewed literature that addressed qualitative decision criteria. These authors included the importance of customers independently of the weight of jobs to represent the cost, in monetary terms, of tardy deliveries.

Table 4
Distribution of revised literature according objective function

Decision criteria	Single objective	With other objectives	Total
C_{max}	64%	9%	73%
F_{max}	0%	1%	1%
L_{max}	1%	0%	1%
T_{max}	1%	0%	1%
\bar{C}	5%	2%	7%
\bar{C}^w	0%	1%	1%
\bar{F}	1%	3%	4%
\bar{F}^w	1%	0%	1%
T	1%	5%	6%
T^w	1%	2%	3%
E	0%	2%	2%
E^w	0%	2%	2%
U	3%	1%	4%
WIP	1%	0%	1%
THR	1%	1%	2%
Cost of inventory	1%	0%	1%
Utilization of machines	0%	1%	1%
Cost of production system	0%	1%	1%
Total	81%		

4. Conclusions and research opportunities

We have surveyed 100 papers on FS and FFS scheduling under uncertainties published between 2001 and 2016. The amount of scientific work in this field has increased over the years. It is clear that with the growth of technology providing faster execution times, more complex problems can be solved. The vast majority of the reviewed works use probability distributions to model uncertainties, with the processing times followed by machine breakdowns being the most frequently analyzed uncertain parameters. This outcome of the current review represents an opportunity for researchers to deal with other parameters that in the real world are subject to uncertainties such as setup times, release dates, job weights, and so on. In fact, few studies take into account more than one uncertain parameter simultaneously, which is another opportunity for future work.

Regarding the objective function, most of the surveyed papers addressed the makespan as a single objective. Moreover, there is limited research in this field with multiple objectives. Therefore, future research might focus on other criteria such as flow time, lateness, completion time, tardiness, and their weighted counterparts, as well as the study of at least two objectives with different existing multi-

objective methodologies. In addition, new research can be done to include qualitative decision criteria, since only one paper published during the period under study considered this type of objective.

With regard to the approaches to deal with uncertainties, stochastic methods, including simulation-optimization, have been employed most often. Robust methods have not been used as much as stochastic approaches and they present the problem that a possibility exists that an uncertainty with low probability may lead to elimination of good solutions. So, hybridization of stochastic approaches such as simulation-optimization with robust methods can overcome the conservativeness of robust approaches.

Finally, in reference to the optimization methods, metaheuristics present an increasing trend and cover more than 50% of reviewed research. Hybridization of metaheuristics combined with any of the four methods to deal with uncertainties and multi-criteria approaches is another line for future research.

References

- Adler, L., Fraiman, N., Kobacker, E., Pinedo, M., Plotnicoff, J. C., & Wu, T. P. (1993). BPSS: A Scheduling Support System for the Packaging Industry. *Operations Research*, 41(4), 641–648. <https://doi.org/10.1287/opre.41.4.641>
- Adressi, a., Tasouji Hassanpour, S., & Azizi, V. (2016). Solving group scheduling problem in no-wait flexible flowshop with random machine breakdown. *Decision Science Letters*, 5(JANUARY), 157–168. <https://doi.org/10.5267/j.dsl.2015.7.001>
- Alcaide, D., Rodriguez-Gonzalez, A., & Sicilia, J. (2002). An approach to solve the minimum expected makespan flow-shop problem subject to breakdowns. *European Journal of Operational Research*, 140(2), 384–398. [https://doi.org/10.1016/S0377-2217\(02\)00077-2](https://doi.org/10.1016/S0377-2217(02)00077-2)
- Alfieri, A. (2007). Due date quoting and scheduling interaction in production lines. *International Journal of Computer Integrated Manufacturing*, 20(6), 579–587. <https://doi.org/10.1080/09511920601079363>
- Allahverdi, A. (2004). Stochastically minimizing makespan on a three-machine flowshop. *International Journal of Industrial Engineering: Theory Applications and Practice*, 11(2), 124–131. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-3943102113&partnerID=tZOtx3y1>
- Allahverdi, A. (2006). Two-machine flowshop scheduling problem to minimize total completion time with bounded setup and processing times. *International Journal of Production Economics*, 103(1), 386–400. <https://doi.org/10.1016/j.ijpe.2005.10.002>
- Allahverdi, A., Aldowaisan, T., & Sotskov, Y. N. (2003). Two-machine flowshop scheduling problem to minimize makespan or total completion time with random and bounded setup times. *International Journal of Mathematics and Mathematical Sciences*, 2003(39), 2475–2486. <https://doi.org/10.1155/S016117120321019X>
- Allahverdi, A., & Aydilek, H. (2010a). Heuristics for the two-machine flowshop scheduling problem to minimise makespan with bounded processing times. *International Journal of Production Research*, 48(21), 6367–6385. <https://doi.org/10.1080/00207540903321657>
- Allahverdi, A., & Aydilek, H. (2010b). Heuristics for the two-machine flowshop scheduling problem to minimize maximum lateness with bounded processing times. *Computers & Mathematics with Applications*, 60(5), 1374–1384. <https://doi.org/10.1016/j.camwa.2010.06.019>
- Allahverdi, A., & Savsar, M. (2001). Stochastic proportionate flowshop scheduling with setups. *Computers & Industrial Engineering*, 39(3–4), 357–369. [https://doi.org/10.1016/S0360-8352\(01\)00011-0](https://doi.org/10.1016/S0360-8352(01)00011-0)
- Almeder, C., & Hartl, R. F. (2013). A metaheuristic optimization approach for a real-world stochastic flexible flow shop problem with limited buffer. *International Journal of Production Economics*, 145(1), 88–95. <https://doi.org/10.1016/j.ijpe.2012.09.014>
- Averbakh, I. (2006). The minmax regret permutation flow-shop problem with two jobs. *European Journal of Operational Research*, 169(3), 761–766. <https://doi.org/10.1016/j.ejor.2004.07.073>
- Aydilek, A., Aydilek, H., & Allahverdi, A. (2013). Increasing the profitability and competitiveness in a

- production environment with random and bounded setup times. *International Journal of Production Research*, 51(1), 106–117. <https://doi.org/10.1080/00207543.2011.652263>
- Aydilek, A., Aydilek, H., & Allahverdi, A. (2015). Production in a two-machine flowshop scheduling environment with uncertain processing and setup times to minimize makespan. *International Journal of Production Research*, 53(9), 2803–2819. <https://doi.org/10.1080/00207543.2014.997403>
- Aydilek, H., & Allahverdi, A. (2010). Two-machine flowshop scheduling problem with bounded processing times to minimize total completion time. *Computers & Mathematics with Applications*, 59(2), 684–693. <https://doi.org/10.1016/j.camwa.2009.10.025>
- Aydilek, H., & Allahverdi, A. (2013). A polynomial time heuristic for the two-machine flowshop scheduling problem with setup times and random processing times. *Applied Mathematical Modelling*, 37(12–13), 7164–7173. <https://doi.org/10.1016/j.apm.2013.02.003>
- Azadeh, A., Jaihoonian, M., Shoja, B. M., & Seyedmahmoudi, S. H. (2012). An integrated neural network–simulation algorithm for performance optimisation of the bi-criteria two-stage assembly flow-shop scheduling problem with stochastic activities. *International Journal of Production Research*, 50(24), 7271–7284. <https://doi.org/10.1080/00207543.2011.645511>
- Azadeh, A., Moghaddam, M., Geranmayeh, P., & Naghavi, A. (2010). A flexible artificial neural network–fuzzy simulation algorithm for scheduling a flow shop with multiple processors. *The International Journal of Advanced Manufacturing Technology*, 50(5–8), 699–715. <https://doi.org/10.1007/s00170-010-2533-6>
- Azaron, A., Katagiri, H., Kato, K., & Sakawa, M. (2006). Longest path analysis in networks of queues: Dynamic scheduling problems. *European Journal of Operational Research*, 174(1), 132–149. <https://doi.org/10.1016/j.ejor.2005.02.018>
- Badger, D., Nursten, J., Williams, P., & Woodward, M. (2000). Should All Literature Reviews be Systematic? *Evaluation & Research in Education*, 14(3–4), 220–230. <https://doi.org/10.1080/09500790008666974>
- Baker, K. R., & Altheimer, D. (2012). Heuristic solution methods for the stochastic flow shop problem. *European Journal of Operational Research*, 216(1), 172–177. <https://doi.org/10.1016/j.ejor.2011.07.021>
- Baker, K. R., & Trietsch, D. (2011). Three heuristic procedures for the stochastic, two-machine flow shop problem. *Journal of Scheduling*, 14(5), 445–454. <https://doi.org/10.1007/s10951-010-0219-4>
- Balasubramanian, J., & Grossmann, I. E. (2002). A novel branch and bound algorithm for scheduling flowshop plants with uncertain processing times. *Computers & Chemical Engineering*, 26(1), 41–57. [https://doi.org/10.1016/S0098-1354\(01\)00735-9](https://doi.org/10.1016/S0098-1354(01)00735-9)
- Balasubramanian, J., & Grossmann, I. E. (2003). Scheduling optimization under uncertainty—an alternative approach. *Computers & Chemical Engineering*, 27(4), 469–490. [https://doi.org/10.1016/S0098-1354\(02\)00221-1](https://doi.org/10.1016/S0098-1354(02)00221-1)
- Bayat, M., Heydari, M., & Mahdavi Mazdeh, M. (2013). Heuristic for stochastic online flowshop problem with preemption penalties. *Discrete Dynamics in Nature and Society*, 2013, 1–10. <https://doi.org/10.1155/2013/916978>
- Behnamian, J. (2016). Survey on fuzzy shop scheduling. *Fuzzy Optimization and Decision Making*, 15(3), 331–366. <https://doi.org/10.1007/s10700-015-9225-5>
- Behnamian, J., & Fatemi Ghomi, S. M. T. (2014). Multi-objective fuzzy multiprocessor flowshop scheduling. *Applied Soft Computing*, 21, 139–148. <https://doi.org/10.1016/j.asoc.2014.03.031>
- Brucker, P. (2007). *Scheduling Algorithms* (5th ed.). Berlin, Heidelberg: Springer Berlin Heidelberg. <https://doi.org/10.1007/978-3-540-69516-5>
- CELANO, G., COSTA, A., & FICHERA, S. (2003). An evolutionary algorithm for pure fuzzy flowshop scheduling problems. *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems*, 11(6), 655–669. <https://doi.org/10.1142/S0218488503002466>
- Chaari, T., Chaabane, S., Loukil, T., & Trentesaux, D. (2011). A genetic algorithm for robust hybrid flow shop scheduling. *International Journal of Computer Integrated Manufacturing*, 24(9), 821–833. <https://doi.org/10.1080/0951192X.2011.575181>
- Chang, Y.-C., & Huang, W.-T. (2014). An enhanced model for SDBR in a random reentrant flow shop

- environment. *International Journal of Production Research*, 52(6), 1808–1826. <https://doi.org/10.1080/00207543.2013.848491>
- Chen, G., & Shen, Z.-J. M. (2007). Probabilistic asymptotic analysis of stochastic online scheduling problems. *IIE Transactions*, 39(5), 525–538. <https://doi.org/10.1080/07408170600941623>
- Choi, S. H., & Wang, K. (2012). Flexible flow shop scheduling with stochastic processing times: A decomposition-based approach. *Computers & Industrial Engineering*, 63(2), 362–373. <https://doi.org/10.1016/j.cie.2012.04.001>
- Chutima, P., & Yiangkamolsing, C. (2003). Application of fuzzy genetic algorithm for sequencing in mixed-model assembly line with processing time. *International Journal of Industrial Engineering : Theory Applications and Practice*, 10(4), 325–331. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-1942422550&partnerID=tZOtx3y1>
- Cui, Z., & Gu, X. (2014). A Discrete Group Search Optimizer for Hybrid Flowshop Scheduling Problem with Random Breakdown. *Mathematical Problems in Engineering*, 2014, 1–11. <https://doi.org/10.1155/2014/621393>
- Ćwik, M., & Józefczyk, J. (2015). Evolutionary Algorithm for Minmax Regret Flow-Shop Problem. *Management and Production Engineering Review*, 6(3), 3–9. <https://doi.org/10.1515/mper-2015-0021>
- Delbufalo, E. (2012). Outcomes of inter-organizational trust in supply chain relationships: a systematic literature review and a meta-analysis of the empirical evidence. *Supply Chain Management: An International Journal*, 17(4), 377–402. <https://doi.org/10.1108/13598541211246549>
- Diep, T., Kenné, J.-P., & Dao, T.-M. (2010). Feedback optimal control of dynamic stochastic two-machine flowshop with a finite buffer. *International Journal of Industrial Engineering Computations*, 1(2), 95–120. <https://doi.org/10.5267/j.ijiec.2010.02.001>
- Du, J., & Leung, J. Y.-T. (1990). Minimizing Total Tardiness on One Machine Is NP-Hard. *Mathematics of Operations Research*, 15(3), 483–495. <https://doi.org/10.2307/3689992>
- Ebrahimi, M., Fatemi Ghomi, S. M. T. M. T., & Karimi, B. (2014). Hybrid flow shop scheduling with sequence dependent family setup time and uncertain due dates. *Applied Mathematical Modelling*, 38(9–10), 2490–2504. <https://doi.org/10.1016/j.apm.2013.10.061>
- Elyasi, A., & Salmasi, N. (2013a). Stochastic flow-shop scheduling with minimizing the expected number of tardy jobs. *International Journal of Advanced Manufacturing Technology*, 66(1–4), 337–346. <https://doi.org/10.1007/s00170-012-4328-4>
- Elyasi, A., & Salmasi, N. (2013b). Stochastic scheduling with minimizing the number of tardy jobs using chance constrained programming. *Mathematical and Computer Modelling*, 57(5–6), 1154–1164. <https://doi.org/10.1016/j.mcm.2012.10.017>
- Farahani, R. Z., Rezapour, S., Drezner, T., & Fallah, S. (2014). Competitive supply chain network design: An overview of classifications, models, solution techniques and applications. *Omega*, 45, 92–118. <https://doi.org/10.1016/j.omega.2013.08.006>
- Fazayeli, M., Aleagha, M.-R., Bashirzadeh, R., & Shafaei, R. (2016). A hybrid meta-heuristic algorithm for flowshop robust scheduling under machine breakdown uncertainty. *International Journal of Computer Integrated Manufacturing*, 29(7), 709–719. <https://doi.org/10.1080/0951192X.2015.1067907>
- Feng, X., Zheng, F., & Xu, Y. (2016). Robust scheduling of a two-stage hybrid flow shop with uncertain interval processing times. *International Journal of Production Research*, 54(12), 3706–3717. <https://doi.org/10.1080/00207543.2016.1162341>
- Fink, A. (1998). *Conducting Research Literature Reviews: From Paper to the Internet*. (A. Fink, Ed.), *BMS: Bulletin of Sociological Methodology / Bulletin de Méthodologie Sociologique* (Vol. 60). Thousand Oaks, CA, USA: Sage Publications, Ltd. <https://doi.org/10.2307/24359723>
- Framinan, J. M., & Perez-Gonzalez, P. (2015). On heuristic solutions for the stochastic flowshop scheduling problem. *European Journal of Operational Research*, 246(2), 413–420. <https://doi.org/10.1016/j.ejor.2015.05.006>
- Geismar, H. N., & Pinedo, M. (2010). Robotic cells with stochastic processing times. *IIE Transactions*, 42(12), 897–914. <https://doi.org/10.1080/0740817X.2010.491505>

- Geng, J.-C., Cui, Z., & Gu, X.-S. (2016). Scatter search based particle swarm optimization algorithm for earliness/tardiness flowshop scheduling with uncertainty. *International Journal of Automation and Computing*, 13(3), 285–295. <https://doi.org/10.1007/s11633-016-0964-8>
- Gholami-Zanjani, S. M., Hakimifar, M., Nazemi, N., & Jolai, F. (2016). Robust and Fuzzy Optimisation Models for a Flow shop Scheduling Problem with Sequence Dependent Setup Times: A real case study on a PCB assembly company. *International Journal of Computer Integrated Manufacturing*, 1–12. <https://doi.org/10.1080/0951192X.2016.1187293>
- Gholami, M., Zandieh, M., & Alem-Tabriz, A. (2009). Scheduling hybrid flow shop with sequence-dependent setup times and machines with random breakdowns. *The International Journal of Advanced Manufacturing Technology*, 42(1–2), 189–201. <https://doi.org/10.1007/s00170-008-1577-3>
- González-Neira, E. M., García-Cáceres, R. G., Caballero-Villalobos, J. P., Molina-Sánchez, L. P., & Montoya-Torres, J. R. (2016). Stochastic flexible flow shop scheduling problem under quantitative and qualitative decision criteria. *Computers & Industrial Engineering*, 101, 128–144. <https://doi.org/10.1016/j.cie.2016.08.026>
- Gören, S., & Pierreval, H. (2013). Taking advantage of a diverse set of efficient production schedules: A two-step approach for scheduling with side concerns. *Computers & Operations Research*, 40(8), 1979–1990. <https://doi.org/10.1016/j.cor.2013.02.016>
- Gourgand, M., Grangeon, N., & Norre, S. (2000a). A review of the static stochastic flow-shop scheduling problem. *Journal of Decision Systems*, 9(2), 1–31. <https://doi.org/10.1080/12460125.2000.9736710>
- Gourgand, M., Grangeon, N., & Norre, S. (2000b). Meta-heuristics for the deterministic hybrid flow shop problem. *Journal European Des Systemes Automates*, 34(9), 1107–1135. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-0041780055&partnerID=tZOtx3y1>
- Gourgand, M., Grangeon, N., & Norre, S. (2003). A contribution to the stochastic flow shop scheduling problem. *European Journal of Operational Research*, 151(2), 415–433. [https://doi.org/10.1016/S0377-2217\(02\)00835-4](https://doi.org/10.1016/S0377-2217(02)00835-4)
- Gourgand, M., Grangeon, N., & Norre, S. (2005). Markovian analysis for performance evaluation and scheduling in m machine stochastic flow-shop with buffers of any capacity. *European Journal of Operational Research*, 161(1), 126–147. <https://doi.org/10.1016/j.ejor.2003.08.032>
- Graham, R. L., Lawler, E. L., Lenstra, J. K., & Kan, A. H. G. R. (1979). Optimization and Approximation in Deterministic Sequencing and Scheduling: a Survey. In *Annals of Discrete Mathematics* (Vol. 5, pp. 287–326). Elsevier. [https://doi.org/10.1016/S0167-5060\(08\)70356-X](https://doi.org/10.1016/S0167-5060(08)70356-X)
- Han, Y., Gong, D., Jin, Y., & Pan, Q. (2016). Evolutionary multi-objective blocking lot-streaming flow shop scheduling with interval processing time. *Applied Soft Computing*, 42, 229–245. <https://doi.org/10.1016/j.asoc.2016.01.033>
- Heydari, M., Mahdavi Mazdeh, M., & Bayat, M. (2013). Scheduling stochastic two-machine flow shop problems to minimize expected makespan. *Decision Science Letters*, 2(3), 163–174. <https://doi.org/10.5267/j.dsl.2013.04.005>
- Holthaus, O. (1999). Scheduling in job shops with machine breakdowns: An experimental study. *Computers and Industrial Engineering*, 36(1), 137–162. [https://doi.org/10.1016/S0360-8352\(99\)00006-6](https://doi.org/10.1016/S0360-8352(99)00006-6)
- Hong, T. P., & Chuang, T. N. (2005). Fuzzy Gupta scheduling for flow shops with more than two machines. *International Journal of Computers and Applications*. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-23444452878&partnerID=tZOtx3y1>
- Huang, C.-S., Huang, Y.-C., & Lai, P.-J. (2012). Modified genetic algorithms for solving fuzzy flow shop scheduling problems and their implementation with CUDA. *Expert Systems with Applications*, 39(5), 4999–5005. <https://doi.org/10.1016/j.eswa.2011.10.013>
- Javadi, B., Saidi-Mehrabad, M., Haji, A., Mahdavi, I., Jolai, F., & Mahdavi-Amiri, N. (2008). No-wait flow shop scheduling using fuzzy multi-objective linear programming. *Journal of the Franklin Institute*, 345(5), 452–467. <https://doi.org/10.1016/j.jfranklin.2007.12.003>
- Jiao, B., Chen, Q., & Yan, S. (2011). A Cooperative Co-evolution PSO for Flow Shop Scheduling Problem with Uncertainty. *Journal of Computers*, 6(9), 1955–1961. <https://doi.org/10.4304/jcp.6.9.1955-1961>

- Jiao, B., & Yan, S. (2014). A cooperative co-evolutionary particle swarm optimiser based on a niche sharing scheme for the flow shop scheduling problem under uncertainty. *Mathematical Structures in Computer Science*, 24(5), e240502. <https://doi.org/10.1017/S0960129512000461>
- Juan, A. A., Barrios, B. B., Vallada, E., Riera, D., & Jorba, J. (2014). A simheuristic algorithm for solving the permutation flow shop problem with stochastic processing times. *Simulation Modelling Practice and Theory*, 46, 101–117. <https://doi.org/10.1016/j.simpat.2014.02.005>
- Kalczynski, P. J., & Kamburowski, J. (2004). Generalization of Johnson's and Talwar's scheduling rules in two-machine stochastic flow shops. *Journal of the Operational Research Society*, 55(12), 1358–1362. <https://doi.org/10.1057/palgrave.jors.2601802>
- Kalczynski, P. J., & Kamburowski, J. (2005). Two-Machine Stochastic Flow Shops With Blocking and the Traveling Salesman Problem. *Journal of Scheduling*, 8(6), 529–536. <https://doi.org/10.1007/s10951-005-4782-z>
- Kalczynski, P. J., & Kamburowski, J. (2006). A heuristic for minimizing the expected makespan in two-machine flow shops with consistent coefficients of variation. *European Journal of Operational Research*, 169(3), 742–750. <https://doi.org/10.1016/j.ejor.2004.08.045>
- Kasperski, A., Kurpisz, A., & Zieliński, P. (2012). Approximating a two-machine flow shop scheduling under discrete scenario uncertainty. *European Journal of Operational Research*, 217(1), 36–43. <https://doi.org/10.1016/j.ejor.2011.08.029>
- Katragjini, K., Vallada, E., & Ruiz, R. (2013). Flow shop rescheduling under different types of disruption. *International Journal of Production Research*, 51(3), 780–797. <https://doi.org/10.1080/00207543.2012.666856>
- Lee, C.-Y., Cheng, T. C. E., & Lin, B. M. T. (1993). Minimizing the Makespan in the 3-Machine Assembly-Type Flowshop Scheduling Problem. *Management Science*, 39(5), 616–625. <https://doi.org/10.1287/mnsc.39.5.616>
- Lei, D. (2012). Interval job shop scheduling problems. *The International Journal of Advanced Manufacturing Technology*, 60(1–4), 291–301. <https://doi.org/10.1007/s00170-011-3600-3>
- Leung, J., Kelly, L., & Anderson, J. H. (2004). *Handbook of Scheduling: Algorithms, Models, and Performance Analysis*. Boca Raton, FL, USA: CRC Press, Inc.
- Li, Z., & Ierapetritou, M. (2008). Process scheduling under uncertainty: Review and challenges. *Computers & Chemical Engineering*, 32(4–5), 715–727. <https://doi.org/10.1016/j.compchemeng.2007.03.001>
- Liefooghe, A., Basseur, M., Humeau, J., Jourdan, L., & Talbi, E.-G. (2012). On optimizing a bi-objective flowshop scheduling problem in an uncertain environment. *Computers & Mathematics with Applications*, 64(12), 3747–3762. <https://doi.org/10.1016/j.camwa.2012.02.051>
- Lin, J. T., & Chen, C.-M. (2015). Simulation optimization approach for hybrid flow shop scheduling problem in semiconductor back-end manufacturing. *Simulation Modelling Practice and Theory*, 51, 100–114. <https://doi.org/10.1016/j.simpat.2014.10.008>
- Liu, Q., Ullah, S., & Zhang, C. (2011). An improved genetic algorithm for robust permutation flowshop scheduling. *The International Journal of Advanced Manufacturing Technology*, 56(1–4), 345–354. <https://doi.org/10.1007/s00170-010-3149-6>
- Matsveichuk, N. M., Sotskov, Y. N., Egorova, N. G., & Lai, T.-C. (2009). Schedule execution for two-machine flow-shop with interval processing times. *Mathematical and Computer Modelling*, 49(5–6), 991–1011. <https://doi.org/10.1016/j.mcm.2008.02.004>
- Matsveichuk, N. M., Sotskov, Y. N., & Werner, F. (2011). The dominance digraph as a solution to the two-machine flow-shop problem with interval processing times. *Optimization*, 60(12), 1493–1517. <https://doi.org/10.1080/02331931003657691>
- Mirsanei, H. S., Zandieh, M., Moayed, M. J., & Khabbazi, M. R. (2010). A simulated annealing algorithm approach to hybrid flow shop scheduling with sequence-dependent setup times. *Journal of Intelligent Manufacturing*, 22(6), 965–978. <https://doi.org/10.1007/s10845-009-0373-8>
- Moore, R. E., & Bierbaum, F. (1979). *Methods and applications of interval analysis* (Vol. 2). Philadelphia: Siam.
- Mou, J., Li, X., Gao, L., & Yi, W. (2015). An effective L-MONG algorithm for solving multi-objective

- flow-shop inverse scheduling problems. *Journal of Intelligent Manufacturing*. <https://doi.org/10.1007/s10845-015-1129-2>
- Nagasawa, K., Ikeda, Y., & Irohara, T. (2015). Robust flow shop scheduling with random processing times for reduction of peak power consumption. *Simulation Modelling Practice and Theory*. <https://doi.org/10.1016/j.simpat.2015.08.001>
- Nakhaeinejad, M., & Nahavandi, N. (2013). An interactive algorithm for multi-objective flow shop scheduling with fuzzy processing time through resolution method and TOPSIS. *The International Journal of Advanced Manufacturing Technology*, 66(5–8), 1047–1064. <https://doi.org/10.1007/s00170-012-4388-5>
- Nezhad, S. S., & Assadi, R. G. (2008). Preference ratio-based maximum operator approximation and its application in fuzzy flow shop scheduling. *Applied Soft Computing*, 8(1), 759–766. <https://doi.org/10.1016/j.asoc.2007.06.004>
- NG, C. T., MATSVEICHUK, N. M., SOTSKOV, Y. N., & CHENG, T. C. E. (2009). TWO-MACHINE FLOW-SHOP MINIMUM-LENGTH SCHEDULING WITH INTERVAL PROCESSING TIMES. *Asia-Pacific Journal of Operational Research*, 26(6), 715–734. <https://doi.org/10.1142/S0217595909002432>
- Niu, Q., & Gu, X. S. (2008). A novel particle swarm optimization for flow shop scheduling with fuzzy processing time. *Journal of Donghua University (English Edition)*, 25(2), 115–122. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-54849420518&partnerID=tZOtx3y1>
- Noroozi, A., & Mokhtari, H. (2015). Scheduling of printed circuit board (PCB) assembly systems with heterogeneous processors using simulation-based intelligent optimization methods. *Neural Computing and Applications*, 26(4), 857–873. <https://doi.org/10.1007/s00521-014-1765-z>
- Pan, Q.-K., Wang, L., Mao, K., Zhao, J.-H., & Zhang, M. (2013). An Effective Artificial Bee Colony Algorithm for a Real-World Hybrid Flowshop Problem in Steelmaking Process. *IEEE Transactions on Automation Science and Engineering*, 10(2), 307–322. <https://doi.org/10.1109/TASE.2012.2204874>
- Paul, S. K., & Azeem, A. (2010). Minimization of work-in-process inventory in hybrid flow shop scheduling using fuzzy logic. *International Journal of Industrial Engineering : Theory Applications and Practice*, 17(2), 115–127. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-77955062869&partnerID=tZOtx3y1>
- Petrovic, S., & Song, X. (2006). A new approach to two-machine flow shop problem with uncertain processing times. *Optimization and Engineering*, 7(3), 329–342. <https://doi.org/10.1007/s11081-006-9975-6>
- Pinedo, M. L. (2012). *Scheduling: Theory, algorithms and systems*. Springer (4th ed., Vol. 4). New York: Springer Science & Business Media. <https://doi.org/10.1007/978-1-4614-2361-4>
- Qin, W., Zhang, J., Song, D., Zhang, J., & Song, D. (2015). An improved ant colony algorithm for dynamic hybrid flow shop scheduling with uncertain processing time. *Journal of Intelligent Manufacturing*. <https://doi.org/10.1007/s10845-015-1144-3>
- Rahmani, D., & Heydari, M. (2014). Robust and stable flow shop scheduling with unexpected arrivals of new jobs and uncertain processing times. *Journal of Manufacturing Systems*, 33(1), 84–92. <https://doi.org/10.1016/j.jmsy.2013.03.004>
- Rahmani, D., Ramezani, R., & Mehrabad, M. S. (2014). Multi-objective flow shop scheduling problem with stochastic parameters: fuzzy goal programming approach. *International Journal of Operational Research*, 21(3), 322–340. <https://doi.org/10.1504/IJOR.2014.065411>
- Ramezani, R., & Saidi-Mehrabad, M. (2013). Hybrid simulated annealing and MIP-based heuristics for stochastic lot-sizing and scheduling problem in capacitated multi-stage production system. *Applied Mathematical Modelling*, 37(7), 5134–5147. <https://doi.org/10.1016/j.apm.2012.10.024>
- Ruiz, R., Şerifoğlu, F. S., & Urlings, T. (2008). Modeling realistic hybrid flexible flowshop scheduling problems. *Computers & Operations Research*, 35(4), 1151–1175. <https://doi.org/10.1016/j.cor.2006.07.014>
- Ruiz, R., & Vázquez-Rodríguez, J. A. (2010). The hybrid flow shop scheduling problem. *European Journal of Operational Research*, 205(1), 1–18. <https://doi.org/10.1016/j.ejor.2009.09.024>

- Safari, E., Sadjadi, S. J., & Shahanaghi, K. (2009). Minimizing expected makespan in flowshop with on condition based maintenance constraint by integrating heuristics and simulation. *World Journal of Modelling and Simulation*, 5(4), 261–271. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-78649455491&partnerID=tZOtx3y1>
- Sancar Edis, R., & Ornek, M. A. (2009). A tabu search-based heuristic for single-product lot streaming problems in flow shops. *The International Journal of Advanced Manufacturing Technology*, 43(11–12), 1202–1213. <https://doi.org/10.1007/s00170-008-1798-5>
- Schultmann, F., Fröhling, M., & Rentz, O. (2006). Fuzzy approach for production planning and detailed scheduling in paints manufacturing. *International Journal of Production Research*, 44(8), 1589–1612. <https://doi.org/10.1080/00207540500353939>
- Shahnaghi, K., Shahmoradi-Moghadam, H., Noroozi, A., & Mokhtari, H. (2016). A robust modelling and optimisation framework for a batch processing flow shop production system in the presence of uncertainties. *International Journal of Computer Integrated Manufacturing*, 29(1), 92–106. <https://doi.org/10.1080/0951192X.2014.1002814>
- Soroush, H. M., & Allahverdi, A. (2005). Stochastic two-machine flowshop scheduling problem with total completion time criterion. *International Journal of Industrial Engineering : Theory Applications and Practice*, 12(2), 159–171. Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-33746598230&partnerID=tZOtx3y1>
- Sotskov, Y. N., Allahverdi, A., & Lai, T.-C. (2004). Flowshop scheduling problem to minimize total completion time with random and bounded processing times. *Journal of the Operational Research Society*, 55(3), 277–286. <https://doi.org/10.1057/palgrave.jors.2601682>
- Swaminathan, R., Pfund, M. E., Fowler, J. W., Mason, S. J., & Keha, A. (2007). Impact of permutation enforcement when minimizing total weighted tardiness in dynamic flowshops with uncertain processing times. *Computers & Operations Research*, 34(10), 3055–3068. <https://doi.org/10.1016/j.cor.2005.11.014>
- Temız, İ., & Erol, S. (2004). Fuzzy branch-and-bound algorithm for flow shop scheduling. *Journal of Intelligent Manufacturing*, 15(4), 449–454. <https://doi.org/10.1023/B:JIMS.0000034107.72423.b6>
- Thomé, A. M. T., Scavarda, L. F., & Scavarda, A. J. (2016). Conducting systematic literature review in operations management. *Production Planning & Control*, 27(5), 408–420. <https://doi.org/10.1080/09537287.2015.1129464>
- Wang, K., & Choi, S. H. (2010). Decomposition-based scheduling for makespan minimisation of flexible flow shop with stochastic processing times. *Engineering Letters*, 18(1). Retrieved from <http://www.scopus.com/inward/record.url?eid=2-s2.0-76549084080&partnerID=tZOtx3y1>
- Wang, K., & Choi, S. H. (2011). A decomposition-based approach to flexible flow shop scheduling under machine breakdown. *International Journal of Production Research*, 50(1), 215–234. <https://doi.org/10.1080/00207543.2011.571456>
- Wang, K., & Choi, S. H. (2014). A holonic approach to flexible flow shop scheduling under stochastic processing times. *Computers & Operations Research*, 43(1), 157–168. <https://doi.org/10.1016/j.cor.2013.09.013>
- Wang, K., Choi, S. H., & Qin, H. (2014). An estimation of distribution algorithm for hybrid flow shop scheduling under stochastic processing times. *International Journal of Production Research*, 52(24), 7360–7376. <https://doi.org/10.1080/00207543.2014.930535>
- Wang, K., Choi, S. H., Qin, H., & Huang, Y. (2013). A cluster-based scheduling model using SPT and SA for dynamic hybrid flow shop problems. *The International Journal of Advanced Manufacturing Technology*, 67(9–12), 2243–2258. <https://doi.org/10.1007/s00170-012-4645-7>
- Wang, K., Huang, Y., & Qin, H. (2016). A fuzzy logic-based hybrid estimation of distribution algorithm for distributed permutation flowshop scheduling problems under machine breakdown. *Journal of the Operational Research Society*, 67(1), 68–82. <https://doi.org/10.1057/jors.2015.50>
- Wang, L., Zhang, L., & Zheng, D.-Z. Z. (2005a). A class of hypothesis-test-based genetic algorithms for flow shop scheduling with stochastic processing time. *The International Journal of Advanced Manufacturing Technology*, 25(11–12), 1157–1163. <https://doi.org/10.1007/s00170-003-1961-y>
- Wang, L., Zhang, L., & Zheng, D.-Z. Z. (2005b). Genetic ordinal optimisation for stochastic flow shop

- scheduling. *The International Journal of Advanced Manufacturing Technology*, 27(1–2), 166–173. <https://doi.org/10.1007/s00170-004-2154-z>
- Wang, S., Wang, L., Liu, M., & Xu, Y. (2015). An order-based estimation of distribution algorithm for stochastic hybrid flow-shop scheduling problem. *International Journal of Computer Integrated Manufacturing*, 28(3), 307–320. <https://doi.org/10.1080/0951192X.2014.880803>
- Yang *, T., Kuo, Y., & Chang, I. (2004). Tabu-search simulation optimization approach for flow-shop scheduling with multiple processors — a case study. *International Journal of Production Research*, 42(19), 4015–4030. <https://doi.org/10.1080/00207540410001699381>
- Yimer, A. D., & Demirli, K. (2009). Fuzzy scheduling of job orders in a two-stage flowshop with batch-processing machines. *International Journal of Approximate Reasoning*, 50(1), 117–137. <https://doi.org/10.1016/j.ijar.2007.08.013>
- Ying, K. (2015). Scheduling the two-machine flowshop to hedge against processing time uncertainty. *Journal of the Operational Research Society*, 66(9), 1413–1425. <https://doi.org/10.1057/jors.2014.100>
- Zandieh, M., Fatemi Ghomi, S. M. T., & Moattar Hussein, S. M. (2006). An immune algorithm approach to hybrid flow shops scheduling with sequence-dependent setup times. *Applied Mathematics and Computation*, 180(1), 111–127. <https://doi.org/10.1016/j.amc.2005.11.136>
- Zandieh, M., & Gholami, M. (2009). An immune algorithm for scheduling a hybrid flow shop with sequence-dependent setup times and machines with random breakdowns. *International Journal of Production Research*, 47(24), 6999–7027. <https://doi.org/10.1080/00207540802400636>
- Zandieh, M., & Hashemi, A. (2015). Group scheduling in hybrid flexible flowshop with sequence-dependent setup times and random breakdowns via integrating genetic algorithm and simulation. *International Journal of Industrial and Systems Engineering*, 21(3), 377. <https://doi.org/10.1504/IJISE.2015.072273>



© 2017 by the authors; licensee Growing Science, Canada. This is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).