

FROST HEAVE PREDICTION OF CHILLED PIPELINES
BURIED IN UNFROZEN SOILS

by

J.M. Konrad¹ and N.R. Morgenstern²

(to be submitted to the Canadian Geotechnical Journal)

SUMMARY

Frost heave is an important consideration in the design of buried chilled pipelines. A procedure for calculating the amount of heave under a chilled gas pipeline is presented based on a finite-difference formulation of the heat and mass transfer in saturated soils. The frost heave of the soil is characterized in terms of the segregation potential concept developed in earlier papers by the authors. Good agreement is found between the predictions of heave obtained with this procedure and that observed in long-term full-scale experiments at a test site in Calgary, Canada. Additional calculations are presented to explore the influence of pipeline temperature, pipe insulation and ground temperature on frost heave of buried pipelines.

INTRODUCTION

Burying a chilled gas pipeline in permafrost preserves the frozen state, prevents undue thermal degradation, and thereby resolves most of the problems associated with pipeline operation in ice-rich ground. However,

¹ Division of Building Research,
National Research Council,
Ottawa, Ontario, K1A 0R6

² The University of Alberta,
Edmonton, Alberta, T6G 2G7

where the pipeline passes through unfrozen soil, the ground around the pipe freezes. Because of the presence of fine-grained soil along the right-of-way, the potential for frost heaving may exist for many kilometres of a pipeline route. Two important new design considerations arise under these conditions. First, how much frost heave will occur over the lifetime of the project? Second, how much differential heave will occur and will it lead to unacceptable strains in the pipe? For example, where the pipeline crosses from frozen to unfrozen and back to frozen ground, it will be restrained from heaving where it is buried in frozen soil but will be subjected to heave across the unfrozen soil. Can this differential heave lead to distress?

Frost action in soils has received considerable attention in the literature. It is well known that frost heave is not only caused by freezing of in situ pore water, but also by water flow to a freezing front. This water flow is induced by a suction gradient that develops in the frozen soil. Although considerable research has been devoted to the frost heave process, there has been no general agreement on an engineering theory that would allow prediction of the amount and rate of frost heave as a function of the soil type, applied load and boundary conditions.

This paper proposes a basis for calculating the amount of heave under a chilled gas pipeline based on a finite-difference formulation of the heat and mass transfer in saturated soils. The frost heave concepts used in the modelling have been established previously by Konrad and Morgenstern (1980, 1981 and 1982) and will be summarized briefly below. The model is used to evaluate and predict the results of a field test program in Calgary

reported by Slusarchuk et al. (1978). The Calgary test facility consists of four 120-cm pipe test sections buried in a frost-susceptible silt. These pipeline sections have been in operation since 1974 and maintained at a temperature of -8.5°C . Finally, the frost heave analysis will be used to evaluate certain aspects of the design of a chilled gas pipeline particularly with respect to the effect of pipe insulation and variations in pipe operating temperature and in-ground temperature on frost heaving.

THE FROZEN FRINGE IN FREEZING SOILS

In a fine-grained soil, not all of the water within the soil pores freezes at 0°C . In some clays, up to 50% of the moisture may exist as a liquid at -2°C . This unfrozen water is mobile and can migrate under the action of a suction gradient. The characteristics of unfrozen water in frozen soils have been reviewed by Anderson and Morgenstern (1973) and Tsytoich (1975). Clear evidence of mass transport through a frozen zone underneath an ice lens was given by Dirksen and Miller (1966) and Hoekstra (1966). This led Miller (1972) to propose that an ice lens in a freezing soil grows somewhere in the frozen soil, slightly behind the frost front, i.e., the warmest isotherm at which ice can exist in the soil pores. This temperature depends mainly upon pore size, applied pressure and solute concentration. In silty soils, the average pore size is relatively large and the frost front is then close to the 0°C isotherm. The temperature at the base of the ice lens (or freezing front) is referred to here as the segregation-freezing temperature, T_s , because the segregational heaving process takes place at that isotherm. The frozen soil between the frost front and the freezing front is called the frozen fringe. Direct evidence for the existence of a frozen fringe has been published by Loch and Kay (1978), and Konrad and Morgenstern (1982b). In addition to these

considerations, Hoekstra (1969) and Mageau and Morgenstern (1979) published experimental data indicating that frozen soil on the cold side of the warmest ice lens (or freezing front) had little to no effect on the rate of water migration to that lens. That is, an ice lens acts like a cut-off with regard to water flow into the frozen soil.

From an engineering point of view, it appears therefore that the mechanics of frost heave can be regarded as a problem of impeded drainage in a two-layered incompressible system to an ice-water interface that exists at the freezing front (T_g isotherm). Substantial suctions are generated at this interface but the frozen fringe is the major source of resistance to water flow to the segregation front due to its low permeability, (Konrad and Morgenstern, 1980). Consequently, frost heave characteristics of a freezing soil should be related to the characteristics of the frozen fringe. Hence, it would appear necessary to obtain precise knowledge of the distribution of temperature and permeability within the frozen fringe. Rather than pursue this, we have taken the view that precise point measurements of permeability, temperature and suction would not ultimately be of direct value in a predictive theory; instead, unique and overall frozen fringe characteristics of a given soil should be deducible from controlled laboratory freezing tests and these frost heave characteristics should constitute input parameters to a general theoretical formulation of simultaneous heat and mass transfer.

SOIL FREEZING CHARACTERISTICS FOR LABORATORY TESTS

As mentioned above, in order to develop a useful frost heave theory, the characteristics of the frozen fringe must be measured or inferred from laboratory tests. Konrad and Morgenstern (1980, 1981 and 1982)

demonstrated that representative parameters can be obtained in the laboratory without detailed measurements at the scale of the frozen fringe. This section summarizes the results of the laboratory freezing program.

One-dimensional freezing tests with fixed cold and warm plate temperatures were conducted for various applied surcharges on about 10-cm diameter and 10-cm high soil samples. Temperature profiles were obtained throughout the test by means of thermistors installed in the cell wall. Water intake or expulsion and heave were monitored with time.

Two distinct phases of frost heave may be recognized for this type of freezing test: frost heave during an advancing frost front created by a positive net heat extraction rate; frost heave corresponding to the growth of the final ice lens initiated at maximum frost front penetration.

During the advancing frost front phase or transient freezing, it has been demonstrated that a given freezing soil can be characterized either by its segregation-freezing temperature, T_s , and the overall permeability of the frozen fringe, \bar{K}_f , or by its segregation potential, SP (Fig. 1). The segregation potential, itself explicable in terms of detailed characteristics of the frozen fringe (T_s , \bar{K}_f), is readily obtained from the laboratory tests, as it is the ratio of the water intake flux and the temperature gradient in the frozen soil near the frost front. Furthermore, SP constitutes the necessary coupling parameter between heat and mass flow required to predict frost heave. These parameters of the freezing soils

are dependent upon applied pressure at the freezing front, P_e , suction at the frost front, P_u , and rate of cooling of the current frozen fringe, \dot{T}_f . The rate of cooling during transient freezing, related to the degree of thermal imbalance within the soil, is defined here as the change in average temperature of the frozen fringe per unit time and can be approximated by the change of temperature per unit time at the 0°C isotherm (Fig. 2) using the following relationship:

$$\dot{T}_f \approx \Delta T_i (\Delta t=1) = \text{grad } T (t + \Delta t) \Delta X \quad (1)$$

where ΔT_i is the change in temperature during a time step $\Delta t=1$ at the level of the frost front at time, t ,

$\text{grad } T$ is the temperature gradient,

ΔX is the advance of the frost front per unit time.

A unique frost heave characteristic surface (SP, P_u, \dot{T}_f) for a given applied pressure can be determined for a given soil from controlled freezing tests. By fitting functions to the experimental relations between SP and P_u at different rates of cooling and providing interpolation procedures, the surface shown in Figure 3 can be used to characterize mass transfer in freezing Devon silt (Konrad and Morgenstern, 1982a) for zero applied load. The frost heave model using the previous input predicted the observed behaviour of all the freezing tests conducted in this investigation remarkably well. It has also been demonstrated that these frost heave concepts established for Devon silt can be extended to any fine-grained soil.

It has been known for a long time that applied pressure inhibits frost heave. The influence of pressure can be explained in terms of stress-induced changes in unfrozen water content within the frozen soil. This in turn affects the segregation-freezing temperature and the overall permeability of the frozen fringe, and hence SP. Konrad and Morgenstern (1982b) established that the segregation-freezing temperature of a given soil becomes colder with increasing applied pressures. At the formation of the final ice lens, a simple expression was found to fit experimental results:

$$|T_s| = |T_{so}| + AP_e \quad (2)$$

where T_s is the temperature of the freezing front for an applied pressure, P_e ,

T_{so} is the temperature of the freezing front for zero surcharge,

A is a soil constant.

Experimental data also showed that the average permeability of the frozen fringe decreases with increasing applied surcharge and may be fitted by:

$$\bar{K}_f = \bar{K}_{fo} e^{-BP_e} \quad (3)$$

where \bar{K}_f is the permeability of the frozen fringe at a given surcharge, P_e ,

\bar{K}_{fo} is the permeability for zero applied load,

B is a soil constant.

In freezing tests with applied surcharge, it has been observed, both by the authors and others, that water may be first expelled from the sample but later attracted to the freezing front. Konrad and Morgenstern (1982b) established that expulsion of water occurs only during the advancing frost front phase. Moreover, it is a function of applied pressure and rate of cooling of the frozen fringe. When the rate of cooling is close to zero, i.e., close to thermal steady state, water is always attracted to the freezing front, provided that the applied pressure is smaller than the real "shut-off" pressure for which no water flow to the ice lens is possible. This shut-off pressure is too high to be of interest for practical applications.

Figure 4 shows the experimental relationship between SP and applied pressure (for Devon silt) for the case of atmospheric pressure at the frost front (i.e., $P_u = 0$) and at the formation of the final ice lens (i.e., $\dot{T}_f \approx 0$). This relationship is readily expressed by:

$$SP = SP_o e^{-aP_e} \quad (4)$$

where SP_o is obtained for zero applied pressure,

a is a soil constant.

As separate supporting evidence, Figure 7 presents data reported by Northern Engineering Services (1975) for Calgary silt. Despite some scatter, which is attributable to both natural variations and variation in freezing procedure, it is clear that Equation 4 is also valid for Calgary silt. This empirical finding suggests that only a limited number of well

controlled freezing tests on any one soil may be required to adequately characterize its segregation potential over a wide range of overburden pressures.

SOIL FREEZING CHARACTERISTICS FOR FIELD CONDITIONS

The previous laboratory studies have shown that the frozen fringe is the seat of the segregational process in freezing soils. The authors take the view that the overall characteristics of the frozen fringe developed in the field should be identical to that developed in laboratory freezing tests. In other words, it is argued that the temperature at which migratory water freezes should not depend upon whether the soil is frozen in the field or in the laboratory. This proposition should also hold for the average ice content of the frozen fringe, hence for its overall permeability, and its segregation potential. Obviously, one has to ensure that the soil sample and the parameters affecting the segregation potential are representative of the field conditions. Sample representation should be achievable by using undisturbed soil specimens or at worst by compacting remoulded soil to the field density. Evaluation of the parameters affecting SP, i.e., suction at the frost front, rate of cooling of the frozen fringe and applied pressure, appears, at first sight, to require a substantial number of tests and this might seem to be a serious limitation on the practical use of the frost heave model that has been developed. These problems can be overcome by seeking an upper-bound value to frost heave and by considering the following simplifications inherent in field freezing conditions.

Because of the relatively large thickness of the frozen soil in the field, the small temperature gradients and the small frost front penetration rate when compared with laboratory imposed thermal regimes, it can

readily be shown that the rate of cooling of the frozen fringe in the field is very small soon after freezing begins. For example, if the frozen soil is 1 m thick and the temperature gradient in the frozen fringe is $0.1^{\circ}\text{C}/\text{cm}$, a frost penetration rate of 1 mm/h produces a rate of cooling of about $0.01^{\circ}\text{C}/\text{h}$. It is argued, therefore, that the soil freezing characteristics in field conditions may be approximated by the characteristics of the frozen fringe corresponding to the formation of the final ice lens obtained in laboratory freezing tests with constant temperature boundary conditions, i.e., where \dot{T}_f is close to zero. This, however, does not imply that a single ice lens is growing in the field.

Since the segregation potential decreases with increasing suctions at the frost front, an upper-bound of frost heave can be computed by taking P_u close to atmospheric pressure. In a laboratory test this would correspond to a warm plate temperature close to 0°C to ensure small values of P_u since the length of unfrozen soil at the formation of the final ice lens would be very small. This assumption is not too conservative, because in many field freezing conditions P_u will be small enough to ignore owing to the presence of fissures in the soil resulting in large soil mass permeability. The upper-bound solution also assumes that water is abundantly available at the freezing front.

Finally, as the frost front penetrates deeper, the influence of overburden cannot be neglected. The effect of overburden becomes even more important if additional loading from berms or other types of surcharges are introduced. From the previous laboratory studies and considering that an

upper-bound of frost heave is obtained by neglecting transient cooling of the frozen fringe and assuming zero suction at the frost front, the field frost heave characteristics of a given soil simply reduce to:

$$\begin{aligned}
 |T_s| &= |T_{so}| + A P_e \\
 \left\{ \begin{array}{l} \text{and} \\ \bar{k}_f = \bar{k}_{fo} e^{-BP} \end{array} \right. & \text{or } SP = SP_o e^{-aP} \quad (5)
 \end{aligned}$$

where the subscript o refers to freezing under no applied load.

It appears, therefore, that only a limited number of well controlled freezing tests may be required to adequately characterize the segregation potential of any freezing soil in the field over a wide range of overburden pressures. In practice, three freezing tests using constant temperature boundary conditions and different applied surcharges covering the expected range in the field suffice to define the field frost heave characteristics. One should ensure a warm plate temperature close to 0°C (say + 1°C) and enough freezing time to grow the final ice lens. By using cold step temperatures of about -5°C to -8°C and about 10-cm high samples, the time required to reach the maximum frost front penetration and hence the final ice lens growth is relatively short (less than 1 day). Therefore, the field frost heave characteristics of any soil, using undisturbed or reconstituted samples, can be obtained in less than 4 days using a single freezing cell.

A SIMPLE FROST HEAVE MODEL FOR FREEZING AROUND A CHILLED PIPE

Frost Heave During an Advancing Frost Front

Frost heave results from a complex interaction between heat and mass

transfer in freezing soils. Fourier's general equation is widely used to model heat transfer in freezing ground when conduction dominates. Appreciable simplifications are achieved by assuming that the thermal properties of frozen soil are independent of the temperature and there is no convective heat transfer. Moreover, the amount of unfrozen water remaining in the frozen soil is lumped at the frost front by a dimensionless parameter. Although these parameters influence slightly the position of the 0°C isotherm and the rate of frost penetration, realistic predictions of frost heave depend on the accuracy of mass transfer modelling, i.e., the use of adequate parameters characterizing the segregational process in freezing soil.

The heat and mass transfer for the case of freezing around a buried pipe should be formulated in two-dimensional space. Furthermore, ambient air temperature variations with time should also be taken into account in order to simulate ground temperature variations around the pipe. This may render the mathematical formulation of the problem too sophisticated for many engineering purposes. As the direction of ice lensing is always perpendicular to the heat flow, pipe heave will result essentially from ice formation in a sector beneath the pipe. Thus, it is convenient to approximate the temperature distribution beneath the centre line of the pipe by a simplified model that assumes radial heat flow. Furthermore, air temperature variations will be neglected in the following but could be considered with ease in a more comprehensive analysis.

The general non-dimensional form of the equation of transient heat flow in cylindrical polar coordinates (r, θ, z) reduces to the two-dimensional equation for the case where the temperature, T , is independent of z :

$$\frac{1}{\alpha} \frac{dT}{dt} = \frac{d^2T}{dr^2} + \frac{1}{r} \frac{dT}{dr} + \frac{1}{r^2} \frac{d^2T}{d\theta^2} \quad (6)$$

where α is the thermal diffusivity of the medium.

The sector beneath the pipe shown in Figure 5 is one of circular symmetry along the centre line which results in $\frac{d^2T}{d\theta^2} = 0$, and Equation 6 simplifies to:

$$\frac{1}{\alpha} \frac{dT}{dt} = \frac{d^2T}{dr^2} + \frac{1}{r} \frac{dT}{dr} \quad (7)$$

Equation 7 holds independently in the frozen soil and in the unfrozen soil. Both continuity of temperature and heat flux must be satisfied at each boundary. For the case of radial heat flow beneath the pipe, the following temperature boundary conditions are considered:

$$\begin{aligned} T &= T_c \text{ for } r = r_o \\ T &= T_i = 0^\circ\text{C for } r = r_o + X(t) \\ \frac{dT}{dr} &= 0 \text{ at large depth for } r = r_o + X(t) + Z(t) \end{aligned} \quad (8)$$

where T_c is the cold side temperature or pipe temperature,

r_o is the radius of the pipe,

$X(t)$ is the thickness of the frozen soil at time, t ,

$Z(t)$ is the thickness of the unfrozen soil at time, t .

In freezing saturated soils, internal heat created by the phase change of the water is liberated at two locations: at the base of the warmest ice lens where the migratory water freezes with a heat release equal to vL , and at the frozen-unfrozen interface where the pore water freezes as the frost front advances with a heat generation equal to $\epsilon nL \frac{dX}{dt}$. For simplicity, the latter heat generation is lumped to the 0°C isotherm.

The continuity of heat flux can readily be expressed at the 0°C isotherm per unit area as:

$$k_f \left(\frac{dT}{dr}\right)_f = k_u \left(\frac{dT}{dr}\right)_u + vL + \epsilon nL \frac{dX}{dt} \quad (9)$$

where k is the thermal conductivity,

v is the water migration rate,

dT/dr is the temperature gradient,

the subscript f and u refer, respectively, to frozen and unfrozen,

ϵ is a dimensionless factor taking into account the proportion of water remaining unfrozen in the frozen soil,

n is the porosity of the unfrozen soil,

L is the latent heat of freezing of water,

$\frac{dX}{dt}$ is the rate of frost front penetration.

The heat-conduction equations are solved numerically using the finite difference scheme proposed by Crank and Nicholson (1947). The moving

boundary condition associated with the penetration of the frost front is accounted for by a supplementary node at the frozen-unfrozen interface. As illustrated in Figure 5, the nodes are unequally spaced in the frozen zone because of frost heave and equally spaced in the unfrozen soil. The details of the finite difference formulation are given by Konrad (1980).

Total frost heave is the combination of the segregational heave, h_s , and the amount of heave, h_1 , arising from the expansion of in situ pore water during freezing. For a time interval, Δt , incremental total frost heave is obtained from:

$$\Delta h = 1,09 v \Delta t + 0,09 \varepsilon n \Delta X \quad (10)$$

According to an earlier paper by Konrad and Morgenstern (1980), the water flux, v , to the freezing front may be calculated for each time step using Darcy's law in the frozen fringe with the following equation:

$$v = \frac{H}{d} \bar{K}_f \quad (11)$$

where $H_w = \frac{P_w}{\gamma_w} = \frac{1}{\gamma_w} \left[\frac{L}{V_w} \ln \frac{T_s^*}{T_o^*} + \frac{V_i}{V_w} P_e \right]$ (Clausius-Clapeyron equation, Konrad

and Morgenstern, 1982b) and represents the suction potential at the base of the warmest ice lens,

T_s^* is the segregation-freezing temperature in K and is obtained from Equation 5,

T_o^* is the temperature of the freezing point of pure water in K,

γ_w is the unit weight of water,

V_w and V_i are, respectively, the specific volume of water and ice,
 \bar{K}_f is the overall permeability of the frozen fringe obtained
from Equation 5,

d is the length of the frozen fringe which can be computed

$$\text{from } d = \frac{T_s}{\text{grad } T_f}.$$

Alternatively, the water flux, v , to the freezing front may also be
obtained using the segregation potential of the freezing soil (Equation 5)
from:

$$v = SP (P_e) \text{grad } T_f \quad (12)$$

Since the frost heave parameters, T_s , \bar{K}_f and SP , are dependent upon
applied pressure, the model evaluates the pressure at the freezing front as
follows:

$$P_e(t) = P_{ov} + \gamma_f X(t) + P_{ad}(t) \quad (13)$$

where P_{ov} is the initial overburden pressure,

γ_f is the unit weight of the frozen soil of thickness, $X(t)$,

P_{ad} is an additional pressure.

The additional pressure must be introduced when the surcharge is increased
during the freezing process, either by the placement of a berm above the
pipe or by restraining loads applied by means of hydraulic jacks and
reaction piles. Moreover, P_{ad} is a function of time since the width of the
frost bulb changes with time (Fig. 5). The present analysis does not take

into consideration the resistance to upward motion of the frozen bulb. Since SP decreases with increasing pressure, this simplification results in a conservative frost heave prediction.

For many soils (silty sands to sandy silts), field freezing conditions result in suction at the frozen-unfrozen interface small enough to ignore and the previous equations for water flow are applicable. However, for clays, significant suctions at the frozen-unfrozen interface may exist as a consequence of the relatively low permeability of clays. Equation 11 should, therefore, be rewritten for a two-layered medium composed of the frozen fringe and the unfrozen soil (Konrad and Morgenstern, 1980). Obviously, for accuracy the frost heave characteristics of the frozen fringe should correspond to the range of the actual suctions at the frost front in the field.

Growth of the Final Ice Lens

The pipeline proposed to carry chilled gas from northern Canada and Alaska to southern markets, once built, may operate for tens of years. Therefore, sufficient time for transient freezing to be completed is available and it is of particular interest to develop a frost heave model when the frost front does not penetrate further into the unfrozen soil. For these conditions, frost heave corresponds to the growth of the "final" ice lens. In reality, because of variations in thermal regime associated with the field, small fluctuations in the frost depth may occur and several ice lenses may, therefore, be expected. An upper-bound of frost heave during this phase is obtained by neglecting these variations, as will be shown later.

Experimental data given by Konrad and Morgenstern (1980) show that if the heat extraction rate is not maintained artificially constant during the growth of the final ice lens, the heave rate decays monotonically with time and frost heave will ultimately stop. Konrad (1980) established that this was related to the warming of the base of the final ice lens as the height of the samples increases with time because of ice lens growth.

Experimental results have shown that the dominant mechanism governing the rate of heaving of the final ice lens is the current heat deficit existing at the segregation front. Frost heave prediction is, therefore, obtained from:

$$\frac{dh}{dt} = \frac{1,09}{L} [k_f \left(\frac{dT}{dr}\right)_f - k_u \left(\frac{dT}{dr}\right)_u] \quad (14)$$

where the temperature gradients on each side of the freezing front are obtained from the steady state temperature distribution around a cylindrical heat source in which the geometrical boundary conditions vary with time as the ice lens grows thicker.

For saturated soils, the ultimate heave is obtained when the suction at the base of the warmest ice lens reaches zero. By setting $P_u = 0$ in the Clausius-Clapeyron equation (Equation 11), one readily obtains the temperature, T_a , for which the pressure in the liquid film beneath the ice lens is atmospheric, as a function of applied pressure:

$$T_a (^{\circ}\text{C}) = \frac{-P V_e}{L} T_o^* (^{\circ}\text{K}) \quad (15)$$

DESCRIPTION OF THE CALGARY TEST FACILITY

In order to study the effects of a chilled gas pipeline buried in frost susceptible soil, a frost heave program was undertaken in Calgary by Northern Engineering Services Co. Ltd. (N.E.S.) for Canadian Arctic Gas Study Limited. This program involved a field test facility, a laboratory testing program and model pipeline studies. The results of these full-scale tests are given by Slusarchuk et al. (1978) and Carlson et al. (1981); detailed laboratory data can be obtained from the interim report presented by N.E.S. (1975).

Site Conditions

A site was selected in the University of Calgary area which was characterized by an upper soil strata (8 m) of frost susceptible nature and a high water table ensuring a ready supply of water to the freezing front.

The moisture content of the test facility soil varied between 18% and 22% and the plastic limit between 14% and 18% with a liquid limit of 24% to 31%. Grain size distributions were determined from samples taken at different depths and showed that, in general, the soil contained 13% sand sizes, 64% silt and 23% clay sizes.

The depth to the free groundwater table was monitored in open standpipes and in August 1973 was found to lie between 2.3 and 2.6 m below original ground surface. The results of in situ field permeability tests indicated that the Darcy coefficient of permeability was between $0,6 \times 10^{-4}$ and 1.10^{-4} cm/s. Visual inspection of undisturbed Shelby tube samples indicated that a number of fissures were present in the soil.

Description of test facility

The main objectives of the field test facility were to monitor the performance of a chilled pipeline buried in unfrozen soil, to determine the effect of increasing overburden pressures in reducing frost heave and to examine the effects of replacing some of the frost susceptible soil beneath the pipe with gravel. Therefore, four separate sections using 1.20-m diameter pipe, each 12.2 m long, were buried under different conditions at the test facility. These conditions were represented by the control, deep burial, restrained and gravel sections. At the control section, the pipe was buried 0,75 m below nominal ground surface. This represented the minimum "normal" burial situation and was taken to be the base condition with which the other test sections were compared. The pipe at the deep burial section was placed 1,70 m below nominal ground surface, in order to study the effect of additional overburden pressures on heave rate. At the restrained section, the pipe was buried 0.75 m below nominal ground surface and loading of the pipe through the restraint beam was achieved using two hydraulic jacks (it is important to note that the restraint was a constant loading restraint and not a "no displacement" restraint). At the gravel section the pipe was buried 0,75 m below nominal ground surface, but the trench was dug 1 m deeper and backfilled with gravel. Cross sections of the four test pipeline sections are shown on Figure 6.

The pipe temperature in all sections was maintained at -8.5°C for about 7 years and the facility is still operating. The chilled air began to circulate through the buried pipe sections on March 20, 1974.

Temperatures, vertical displacements (heave), and pore water pressures were measured in the ground around the freezing pipe.

Calgary silt freezing characteristics from laboratory tests

N.E.S. (1975) conducted a series of laboratory freezing tests on undisturbed Calgary silt samples. Frost heave and amount of water flowing into or out of the samples were measured for various applied surcharges. The samples were frozen with a constant cold side step temperature but the warm end temperature was less controlled. This resulted, in some cases, in a continuous frost front advance without the formation of a final ice lens, which is a typical feature of tests performed with constant temperature boundary conditions. Moreover, as discussed by Konrad and Morgenstern (1982b), water expulsion will occur in freezing tests with applied pressure depending on the rate of cooling of the current frozen fringe, hence on the rate of frost front penetration. Therefore, the results of some freezing tests performed by N.E.S. in which the applied load was relatively high and in which the frost front did not reach a stable position should be used with caution.

Figure 7 presents the results of the analysis of the freezing tests reported by N.E.S. (1975) expressed in terms of the segregation potential at the formation of the final ice lens or near it. Since the length of the unfrozen soil at the end of freezing was very small, it is argued that the calculated freezing parameter, SP, corresponds actually to the case where P_u , the suction at the frozen-unfrozen interface, is close to zero. SP for each test is readily obtained by dividing the measured water intake velocity by the temperature gradient in the frozen soil near the 0°C isotherm.

Despite some scatter which is attributable to both natural variations of soil and variations in testing procedure, and in suction at the frost

front, it should be to stressed that the relationship between the segregation potential and applied pressure for Calgary silt is similar to that obtained for Devon silt (Konrad and Morgenstern, 1982b) using well controlled laboratory freezing tests. For Calgary silt, the mean value of frost heave characteristics can be accounted for in a simple manner by the following equation:

$$SP = SP_0 e^{-a \cdot P} \quad (16)$$

where $SP_0 = 230 \times 10^{-5} \text{ mm}^2/(\text{s}^\circ\text{C})$

$$a = 9.5 \text{ MPa}^{-1}$$

Due to the important scatter, these frost heave characteristics may be bounded by introducing in Equation 16, $SP_0(\text{max}) = 300 \times 10^{-5} \text{ mm}^2(\text{s}^\circ\text{C})$ and $SP_0(\text{min}) = 180 \times 10^{-5} \text{ mm}^2/(\text{s}^\circ\text{C})$, a remaining the same.

COMPARISON BETWEEN PREDICTION AND FIELD OBSERVATIONS

At any time, the frost bulb around the buried pipes could be delineated from the ground temperature readings to an accuracy of about 10 cm. The movement of the frost bulb with time around the deep burial section is shown in Figure 8. From the actual shape of the frost bulb it appears at first sight that the simplified model assuming radial heat flow in a sector beneath the centre line of the pipe will be adequate for engineering purposes.

The results of the model simulation, i.e., frost heave and frost penetration below the centre line of the pipe, will be compared to the

observed data in order to confirm the fundamental concepts of frost heave mechanics put forward by the authors and to validate the field frost heave model and its engineering applicability.

The freezing conditions prevailing at each instrumented section of the Calgary test site were simulated using the field frost heave model presented previously. The main input parameters necessary to solve the heat transfer formulation were taken from the N.E.S. interim report (1975) and can be summarized as follows.

The ground temperature was inferred from the thermistor readings and taken as $+6.5^{\circ}\text{C}$. The condition of zero heat flux was applied at a depth of 15.6 m below the original position of the centre of the pipe. Parametric studies revealed that the temperature distribution in the upper part of the soil is not very sensitive to the location of the lower boundary for depths greater than 15 m.

The temperature in the pipes varied between -10°C and -7°C with fluctuations in ambient atmospheric temperature. A mean value of about -8.5°C was adopted for the simulation. Furthermore, during the first 50 days of freezing, the pipe temperature was assumed to decrease linearly from -3.2°C to -8.5°C which closely represents the actual conditions.

The thermal conductivities of the frozen soil and the unfrozen soil were taken, respectively, as $1.8 \text{ W}/(\text{m}^{\circ}\text{C})$ and $1.5 \text{ W}/(\text{m}^{\circ}\text{C})$. The amount of unfrozen water remaining in the frozen soil was taken as 10% of the initial water content. Since the water table was at the same level or even higher

than the base of the pipes, the soil was assumed to be fully saturated with a porosity of about 0.38.

Control Section

As shown in Figure 7, the data obtained from laboratory freezing tests on Calgary silt present some scatter. In order to evaluate the influence of this scatter in SP on frost heave and frost penetration, the simulation of the control section will be performed with the upper, mean and lower values of the segregation potential determined from the laboratory tests (Equation 15). The initial overburden pressure in the field was estimated to be 11 kPa. After 400 days, a berm was placed on the top of the pipe, which increased the stress on the freezing bulb by approximately 6.4 kPa.

Figure 9 summarizes the results obtained from the frost heave model using as input the different values of the segregation potential of Calgary silt. An initial conclusion from these results is that the heat-conduction problem has been adequately formulated with radial heat flow beneath the pipe, since the computed frost depth with time compares very well with the measured position of the 0°C isotherm. It is worthwhile to stress that the actual position of the frost front was determined by means of temperature measurements and that a check by drilling was also performed, which increases significantly the results of the reported field tests. In Slusarchuk et al. (1978), the position of the frost front was given with respect to the pipe's base, which is a datum that varies with time as a result of frost heaving. In Figure 9, the position of the frost front is taken with respect to the initial position of the base of the pipe. This has the advantage of recognizing readily the different phases of frost heave, i.e., one where the frost front advances and another one with a

"quasi" stationary frost line. The thickness of the frozen soil at any time is obtained by adding both total heave and frost depth. The maximum frost penetration is approximately 2.3 m, which produces a stress at the freezing-front at the end of transient freezing of about 52 kPa.

Using the upper-bound value of the segregation potential of Calgary silt as input parameter results in a slightly smaller frost penetration than observed but in an overprediction of frost heave. Also, the time required to reach the maximum frost penetration is about 1300 days which is significantly less than observed. With the lower-bound value of SP, the simulated frost penetration is slightly deeper than the measured one and the predicted total heave at any time is smaller than the actual observations. Using the mean value of the segregation potential given by Equation 16 yields the best approximation of both field frost heave and frost depth below the pipe. This parametric study reveals that frost heave is more sensitive to variations in SP than frost penetration. For instance, if the values of frost heave and frost depth computed with the mean value of SP are taken as reference, a 20% increase in SP results in an increase in frost heave of 23% and a decrease in frost penetration of 10%, whereas, a decrease of 20% in SP produces only an 11% reduction in frost heave and a 7% increase in the frost depth. These results are consistent with the fact that internal heat released at the freezing front significantly affects the position of the 0°C isotherm. It is well known that high water intake rates retard the frost penetration, whereas small water migration rates increase the speed of frost front advance.

It is also expected that for an equal relative change in SP (positive or negative) different relative changes in frost heave will occur, since

the thickness of the frozen soil influences significantly the temperature gradient near the 0°C isotherm in the case of radial heat flow. For a constant pipe temperature, higher temperature gradients near the frost front will be obtained for shallower frost penetration and induce higher frost heave rates according to Equation 11. Furthermore, the relationship between temperature gradient and thickness of frozen soil is not linear and thus accounts for the difference in frost heave variations.

This parametric study thus confirms that acceptable frost heave and frost penetration predictions were obtained with the field model for either the upper or lower bound values of the segregation potential of Calgary silt, the best simulation being obtained with the mean value of SP obtained from laboratory freezing tests. It is also encouraging that Nixon (1982) has successfully predicted the heave of circular freezing tests using essentially the same model and data.

The frost heave model indicated also that the rate of cooling of the frozen fringe was less than $0,01^{\circ}\text{C}/\text{h}$ after about 40 days of freezing. This result justifies, therefore, the use of freezing parameters corresponding to the formation of the final ice lens in laboratory freezing tests with fixed temperature boundary conditions.

Heave Prediction for the Deep Burial, Gravel and Restrained Sections

It is now of benefit to apply the field frost heave model with the average characteristics deduced from the laboratory testing in order to assess the amount of heave for the deep burial, gravel and restrained sections. In those three sections, the stresses at the freezing front are

higher than those obtained in the control section and are approximately 60 to 150 kPa. This permits testing of the model over a wider stress range.

The initial overburden for the deep burial section is 18 kPa, for the gravel section 34 kPa, and for the restrained section 11 kPa. The loading history for the restrained section is given in Figure 12. For both the gravel and the deep burial sections a surface berm has been added which increases the stress at the frost bulb by about 6.4 kPa after 400 days of freezing. The results of the simulation are summarized on Figures 10 to 12 and compared with actual field measurements, which correspond to about 2000 days of freezing (Carlson et al, 1981).

Inspection of Figures 10 and 11 demonstrates that the field frost heave model adequately predicts both total heave and frost penetration for the deep burial and gravel sections. At the restrained section (Fig. 12) the actual frost heave is about 75% of the predicted value and the actual frost depth is greater than the predicted one. If the simulation is performed with the lower limit of SP, the prediction is significantly improved. Furthermore, it is of value to stress that major differences in heave rate are observed for the first 200 days of freezing and that relatively good agreement is obtained thereafter. This may suggest variable soil conditions and high sensitivity of frost heave parameters to these conditions in the upper part of the soil. Furthermore, during the early stage of freezing, higher rates of cooling of the frozen fringe will also affect SP and therefore the heave rate. However, the assumptions made in the frost heave model ($P_u = 0$ and $\dot{T}_f = 0$) will yield conservative results.

Final Remarks for the Calgary Test Site Results

In the previous analysis, the excess pore pressure immediately beneath the frost front can also be calculated by the model by assuming a given length of flow in intact unfrozen soil and its permeability. For the control section, the negative excess pore pressure beneath the frost line was calculated to be in the range of -0.8 kPa to -0.2 kPa, assuming a permeability of the intact unfrozen soil of about 10^{-5} cm/s. The frost heave model predicts that the negative pore pressures in the unfrozen soil decrease with frost penetration. Since the piezometers (Terra Tec Model P-1022) installed at the test site have an accuracy of 0.6 kPa, such small negative pore pressure changes could not be measured. This is consistent with the field observations reported by Slusarchuk et al. (1978).

The previous analysis also reveals that for the temperature conditions at the Calgary test site, an advancing frost front occurs for about 1500 to 2500 days and that a final ice lens will grow with a "quasi" stationary frost front.

The application of the frost heave model to simulate the growth of the final ice lens for the temperature boundary conditions that remain constant with time yields the results summarized below:

<u>Section</u>	<u>Heave at 30 years (m)</u>
Control	0.98
Deep Burial	0.96
Gravel	0.92
Restrained	0.84

Since the frost front is relatively shallow (<2.5 m), the freezing system will be very sensitive to variations in thermal regime associated with changes in air temperatures. Therefore, it is expected that several ice lenses will form in the field. The previous figures are thought to represent an upper-bound of frost heave, since field data after 1980 have shown that the actual frost heave rate fluctuates in response to summer and winter temperatures. During the summer the measured frost heave rate is almost zero as the base of growing ice lens temperature warms up, which may even result in some thawing. This moderating effect is not taken into consideration in the frost heave simulation reported here.

PRACTICAL RESULTS FOR THE DESIGN OF A CHILLED GAS PIPELINE
IN DISCONTINUOUS PERMAFROST

The data obtained from the Calgary test facility validated the field frost heave model presented herein as well as the general concept of frost heave mechanics recently put forward by Konrad and Morgenstern (1980, 1981, 1982). Additional support is given by Nixon (1982). It is now of value to use the field frost heave model to provide information for different environmental conditions and on the utility of several design alternatives, as they might be used in a pipeline project. The effect of variations in pipeline freezing temperatures, ground temperatures and pipeline insulation on frost heave will be analyzed in the following.

Influence of Pipeline Temperature

Figure 13 illustrates the variation in total heave and frost penetration below the original position of the base of the pipe for

different values of the pipeline temperature. The initial ground temperature was taken as $+2^{\circ}\text{C}$ in order to simulate the conditions that might be found in southern discontinuous permafrost areas along a pipeline route. The parameters for the freezing soil are given by Equation 16.

Several consequences of altering the pipeline temperature can be noticed. Colder freezing temperatures result in higher total heave and larger frost penetration. The time required to attain the maximum frost front penetration increases with decreasing pipe freezing temperatures. For $T_c = -1^{\circ}\text{C}$, the frost line will reach its maximum penetration after about 3 years, whereas for $T_c = -10^{\circ}\text{C}$ the frost front will continue to advance even after 30 years of freezing.

Figure 13 also reveals that the relationship between T_c and total heave is not linear. A freezing temperature five times colder results in a heave only 1.35 times larger. This arises from the fact that drastic freezing temperature changes in the pipeline are associated with drastic changes in frost penetration but not in temperature gradients in the frozen fringe as shown in Figure 13. Since the thickness of the current fringe is related to the temperature gradient, and recalling Equation 11 which demonstrates that the water flux is more or less inversely proportional to the frozen fringe thickness, the previous results then readily follow.

Influence of Ground Temperature

Figure 14 illustrates the variations in total heave and frost penetration below the original position of the pipeline base for different ground temperatures. The freezing temperature of the pipe is constant for all the simulated cases and is taken as -8.5°C . The parameters of the

freezing soil have been slightly altered in order to study the sensitivity of total heave with respect to these parameters. For this analysis, SP_0 is equal to $175 \times 10^{-5} \text{ mm}^2/(\text{S}^\circ\text{C})$.

The results presented in Figure 14 warrant further explanation. The model predicts that the highest heave is obtained for the warmest ground temperature. This is contrary to the prediction by the model presented by Hwang (1977) based on energy considerations for the case of the upper-bound frost heave of a pipe. Hwang (op. cit.) predicts that the colder the ground temperature, the higher the resulting frost heave. The present field frost heave model predicts that the colder the ground temperature, the deeper the frost penetration into the unfrozen soil. Therefore, if the pipe temperature is the same in all cases, it is clear that the temperature gradient across the current fringe decreases with increasing depth. Hence, when the ground temperature decreases (Fig. 14), this in turn increases the length of the frozen fringe with a concomitant decrease of the overall hydraulic gradient, which reduces water flux to the freezing front and, hence, total heave.

It should also be emphasized that the stresses at the freezing front increase with depth. Therefore, low stresses are associated with warmer ground temperature, whereas, higher stresses at the freezing front develop with colder ground temperature, thus also affecting heave rate.

For colder ground temperatures, the frost front penetrates deeper and takes longer to reach its maximum depth. As indicated in Figure 14, in situ water freezing contributes more to the total heave in the case of a

colder ground temperature. This explains the fact that total heave is not that sensitive to ground temperature variations.

Influence of Pipe Insulation

Figure 15 illustrates the effect of insulating the pipeline. The selected ground temperature was $+2^{\circ}\text{C}$ and the pipeline temperature -8.5°C . Frost heave was calculated for different insulation thicknesses. The thermal conductivity of the insulation was considered to be 10 times smaller than that of the frozen soil. A 5-cm thick insulation reduces total heave by about 20%, whereas a 15-cm thick insulation reduces total heave by approximately 45%. Conversely, the frost penetration is also reduced with increasing thickness of the insulation.

Soil - Pipeline Interaction

One of the main objectives of the research program on frost heave mechanics was to establish fundamental frost heave parameters of soils in order to develop a procedure for forecasting the heave of a chilled buried gas pipeline, under both unrestrained and restrained conditions. The examples cited previously demonstrate that unrestrained heave is predicted in a reasonable manner. Restrained heave may also be predicted by calculating the normal stress required to deform the pipeline encased in frozen soil in a differential manner. This stress can then be used as an externally applied stress in the frost heave calculation to moderate the predicted heave. In this way, an iterative solution can be developed for soil-structure interaction analyses of differential frost heave. Guidance in these calculations is given by Nixon, Morgenstern and Reesor (1983).

CONCLUSION

During freezing of small soil specimens in the laboratory, substantial variations in the rate of cooling of the frozen fringe and of the suction at the frost front (frozen-unfrozen interface) occur, leading to important variations in the segregation potential of the soil.

Contrary to this, these parameters do not vary significantly during field freezing; this is partly because of the larger scale of field conditions resulting in relatively small temperature gradients and thus in small rates of cooling of the frozen fringe, and partly because of a higher mass permeability of the unfrozen soil due to fissures, thus reducing the suction at the frost front. It has been shown by the present study that a realistic upper-bound to frost heave for field freezing conditions can be computed if the freezing characteristics of a fine-grained soil used as input correspond to those obtained from laboratory freezing tests, provided:

- (1) the density of the soil sample used in the laboratory testing is essentially the same as that existing in the field;
- (2) the freezing characteristics reflect the conditions at the onset of the formation of the final ice lens, i.e., a "quasi" stationary frost front;
- (3) the suction at the frost front is relatively small. In a laboratory test this would correspond to a warm plate temperature close enough to 0°C to ensure a small length of unfrozen soil and, hence, small values of the suction at the frost front.

The freezing characteristics of a soil subjected to freezing in the field then reduce simply to a relationship between the segregation potential, SP, and the applied pressure at the freezing front given by:

$$SP = SP_0 e^{-aP}$$

Both soil constants, SP_0 and a , can be obtained from controlled freezing tests with constant temperature boundary conditions. Furthermore, only a few tests are required to adequately define the previous relationship.

The predictive power of the field frost heave model, in which the freezing soil is characterized by the previous relationship, has been shown through the successful detailed analysis of the performance, over several years, of the chilled pipeline sections at the test facility at Calgary, Alberta.

In conclusion, although many field problems are multidimensional, frost heave can be calculated very simply using the freezing characteristics obtained from one-dimensional frost heave tests, provided that the thermal problem can be approximated either with an analytical solution or using approximate numerical models.


ACKNOWLEDGEMENTS

This work has been supported in part by funds from the National Research Council of Canada.


REFERENCES

- ANDERSON, D.M., and MORGENSTERN, N.R. 1973. Physics, chemistry and mechanics of frozen ground. Proceedings, 2nd International Conference on Permafrost, Yakutsk, U.S.S.R., pp. 257-288.
- CARLSON, L.E., ELLWOOD, J.R., NIXON, J.F. and SLUSARCHUK, W.A. 1981. Field test results of operating a chilled, buried pipeline in frozen ground. Proceedings, 4th Canadian Permafrost Conference, Calgary, Alberta, March 2-6, 1981.
- CRANK, J., and NICHOLSON, P. 1947. A practical method for the numerical evaluation of solutions of partial differential equations of the heat conduction type. Proceedings of the Cambridge Philosophical Society, 43, pp. 50-67.
- DIRKSEN, C. and MILLER, R.D. 1966. Closed-system freezing of unsaturated soil. Proc. Soil. Sci. Soc. Amer., 30, pp 168-173.
- HOEKSTRA, P. 1966. Moisture movement in soils under temperature gradients with the cold side temperature below freezing. Water Resources Res., 2, pp. 241-250
- HOEKSTRA, P. 1969. Water movement and freezing pressures. Proc. Soil Sci. Soc. Am., 33, pp. 512-518.
- HWANG, C.T. 1977. Frost heave design of a chilled gas pipeline. 30th Canadian Geotechnical Conference, Saskatoon, Sask.
- KONRAD, J.-M. 1980. Frost heave mechanics. Ph.D. thesis, Department of Civil Engineering, University of Alberta, Edmonton, Alta.
- KONRAD, J.-M., and MORGENSTERN, N.R. 1980. A mechanistic theory of ice lens formation in fine-grained soils. Canadian Geotechnical Journal, 17, pp. 473-486.

- KONRAD, J.-M. and MORGENSTERN, N.R. 1981. The segregation potential of a freezing soil. *Canadian Geotechnical Journal*, 18, pp. 482-491.
- KONRAD, J.-M and MORGENSTERN, N.R. 1982a. Prediction of frost heave in the laboratory during transient freezing. *Canadian Geotechnical Journal*, 19, pp. 250-259.
- KONRAD, J.-M. and MORGENSTERN, N.R. 1982b, Effects of applied pressure on freezing soils. *Canadian Geotechnical Journal*, 19, pp.
- LOCH, J.P.G. and KAY, B.D. 1978. Water redistribution in partially frozen, saturated silt under several temperature gradients and overburden loads. *Soil Science Society of America, Journal*, 42(3), pp. 400-406.
- MILLER, R.D. 1972. Freezing and heaving of saturated and unsaturated soils. *Highway Research Record*, No. 393, pp. 1-11.
- NIXON, J.F. 1982. Field frost heave predictions using the segregation potential concept. *Canadian Geotechnical Journal*, 19, pp.
- NIXON, J.F., MORGENSTERN, N.R. and REESOR, S.N. 1983. Frost heave - pipeline interaction using continuum mechanics. *Canadian Geotechnical Journal* (in press).
- NORTHERN ENGINEERING SERVICES, 1975. Interim report on results from frost effects study. Unpublished.
- SLUSARCHUK, W., CLARK, J., NIXON, J.F., MORGENSTERN, N.R. and GASKIN, P. 1978. Field test results of a chilled pipeline buried in unfrozen ground. *Proceedings, 3rd International Conference on Permafrost*, Edmonton, Alta., pp. 878-890.
- PENNER, E. and GOODRICH, L.E. 1980. Location of segregated ice in frost susceptible soil. *Proceedings, 2nd International Symposium on Ground Freezing*, Trondheim, pp. 626-639.
- TSYTOVICH, N.A. 1975. *The mechanics of frozen ground*. McGraw-Hill Book Company, New York, N.Y.

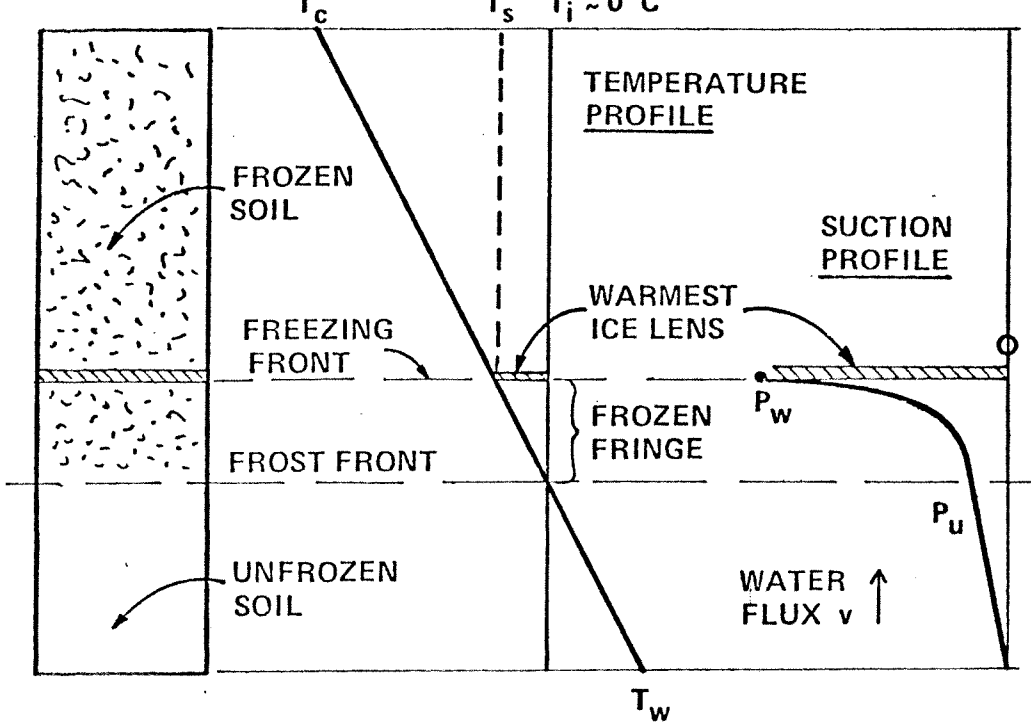

a) CONDITIONS ASSOCIATED WITH THE FROZEN FRINGE

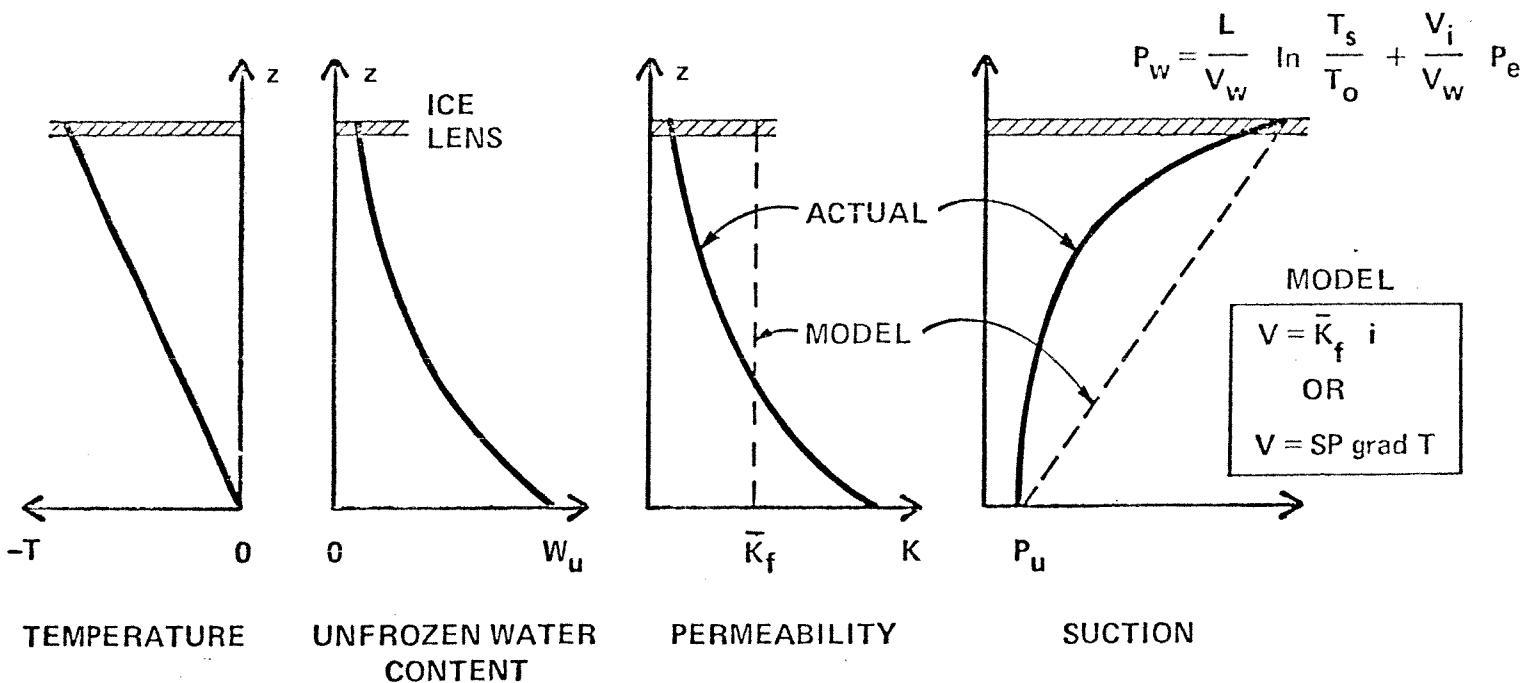

b) CHARACTERISTICS OF THE FROZEN FRINGE

FIGURE 1

CHARACTERISTICS OF A FREEZING SOIL

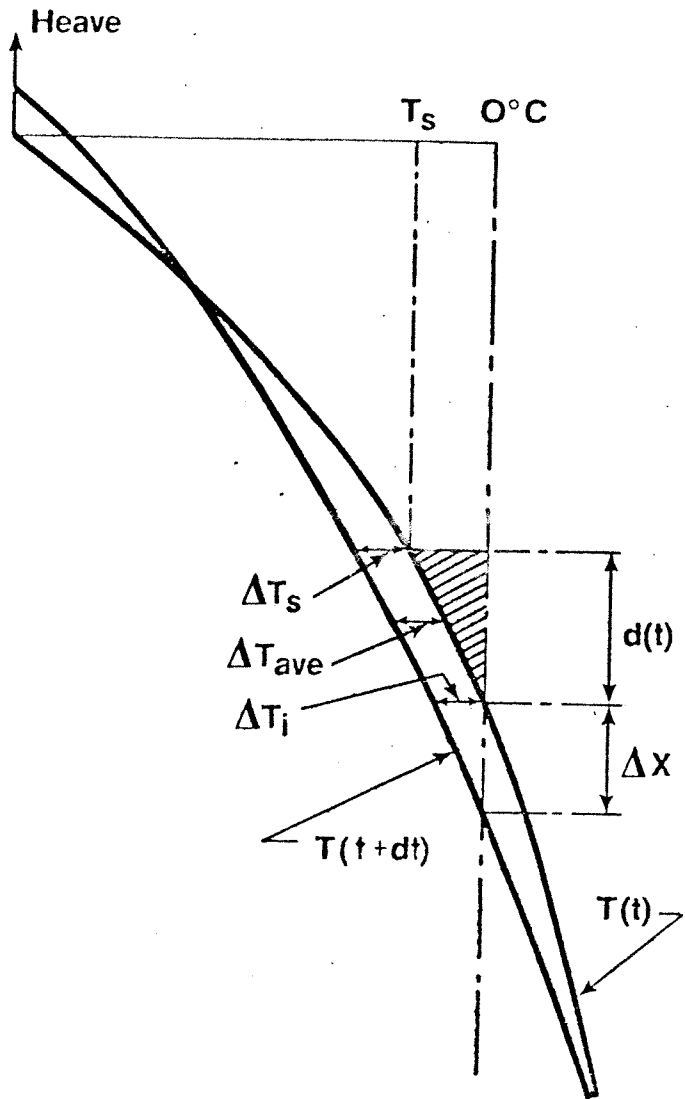


FIGURE 2

COOLING OF THE FROZEN FRINGE DURING
TRANSIENT FREEZING

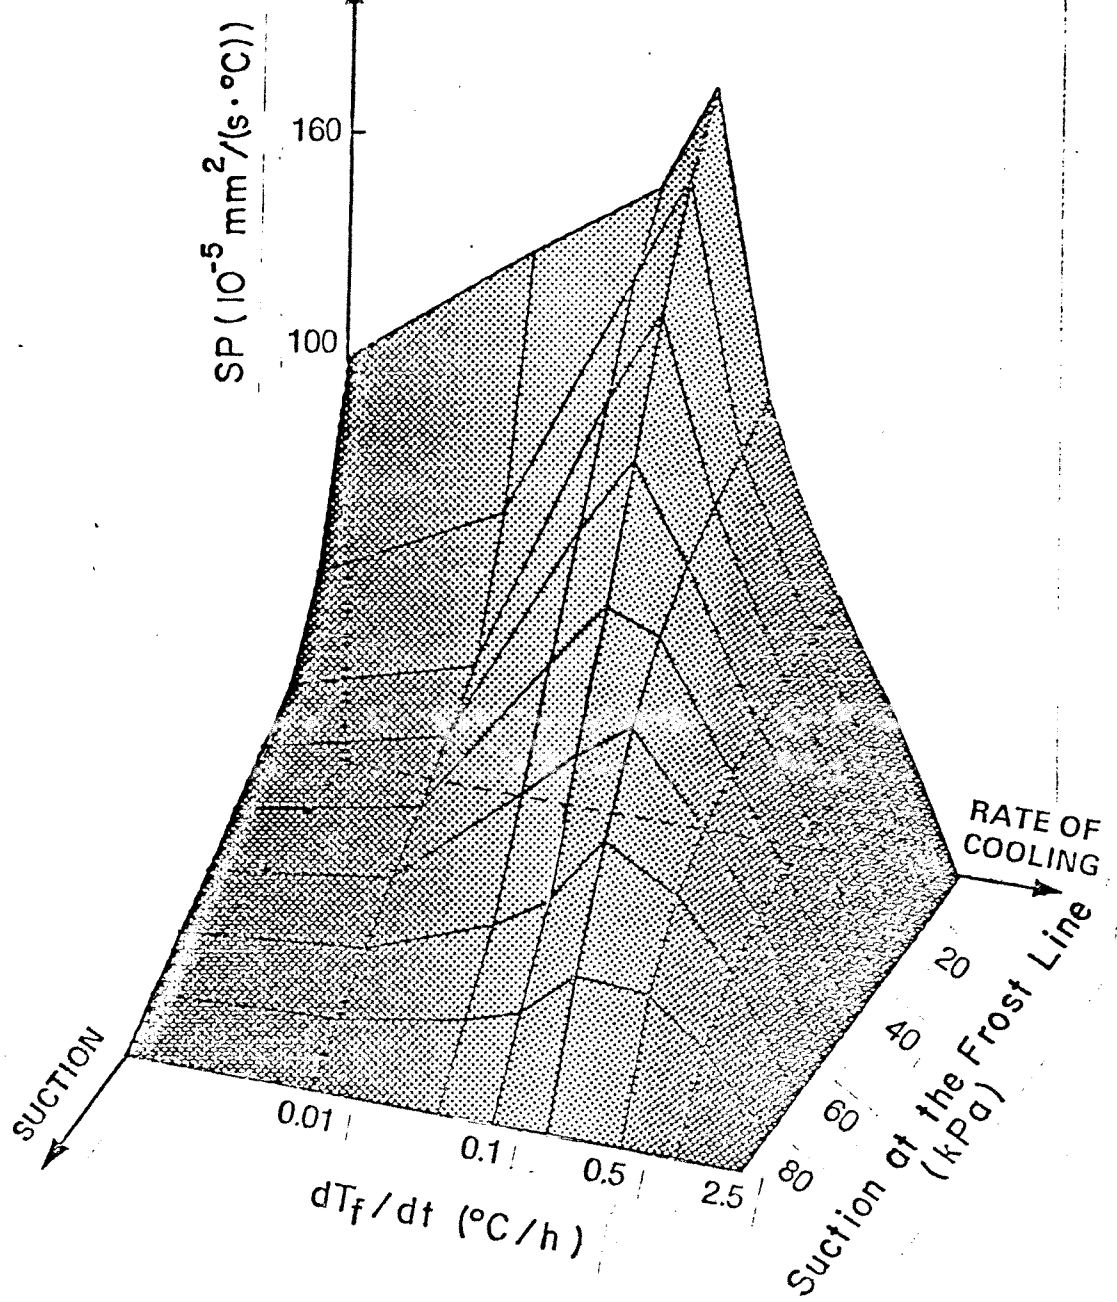


FIGURE 3

CHARACTERISTIC FROST HEAVE SURFACE FOR DEVON SILT USED FOR LABORATORY FREEZING TESTS SIMULATION (NO APPLIED LOAD)

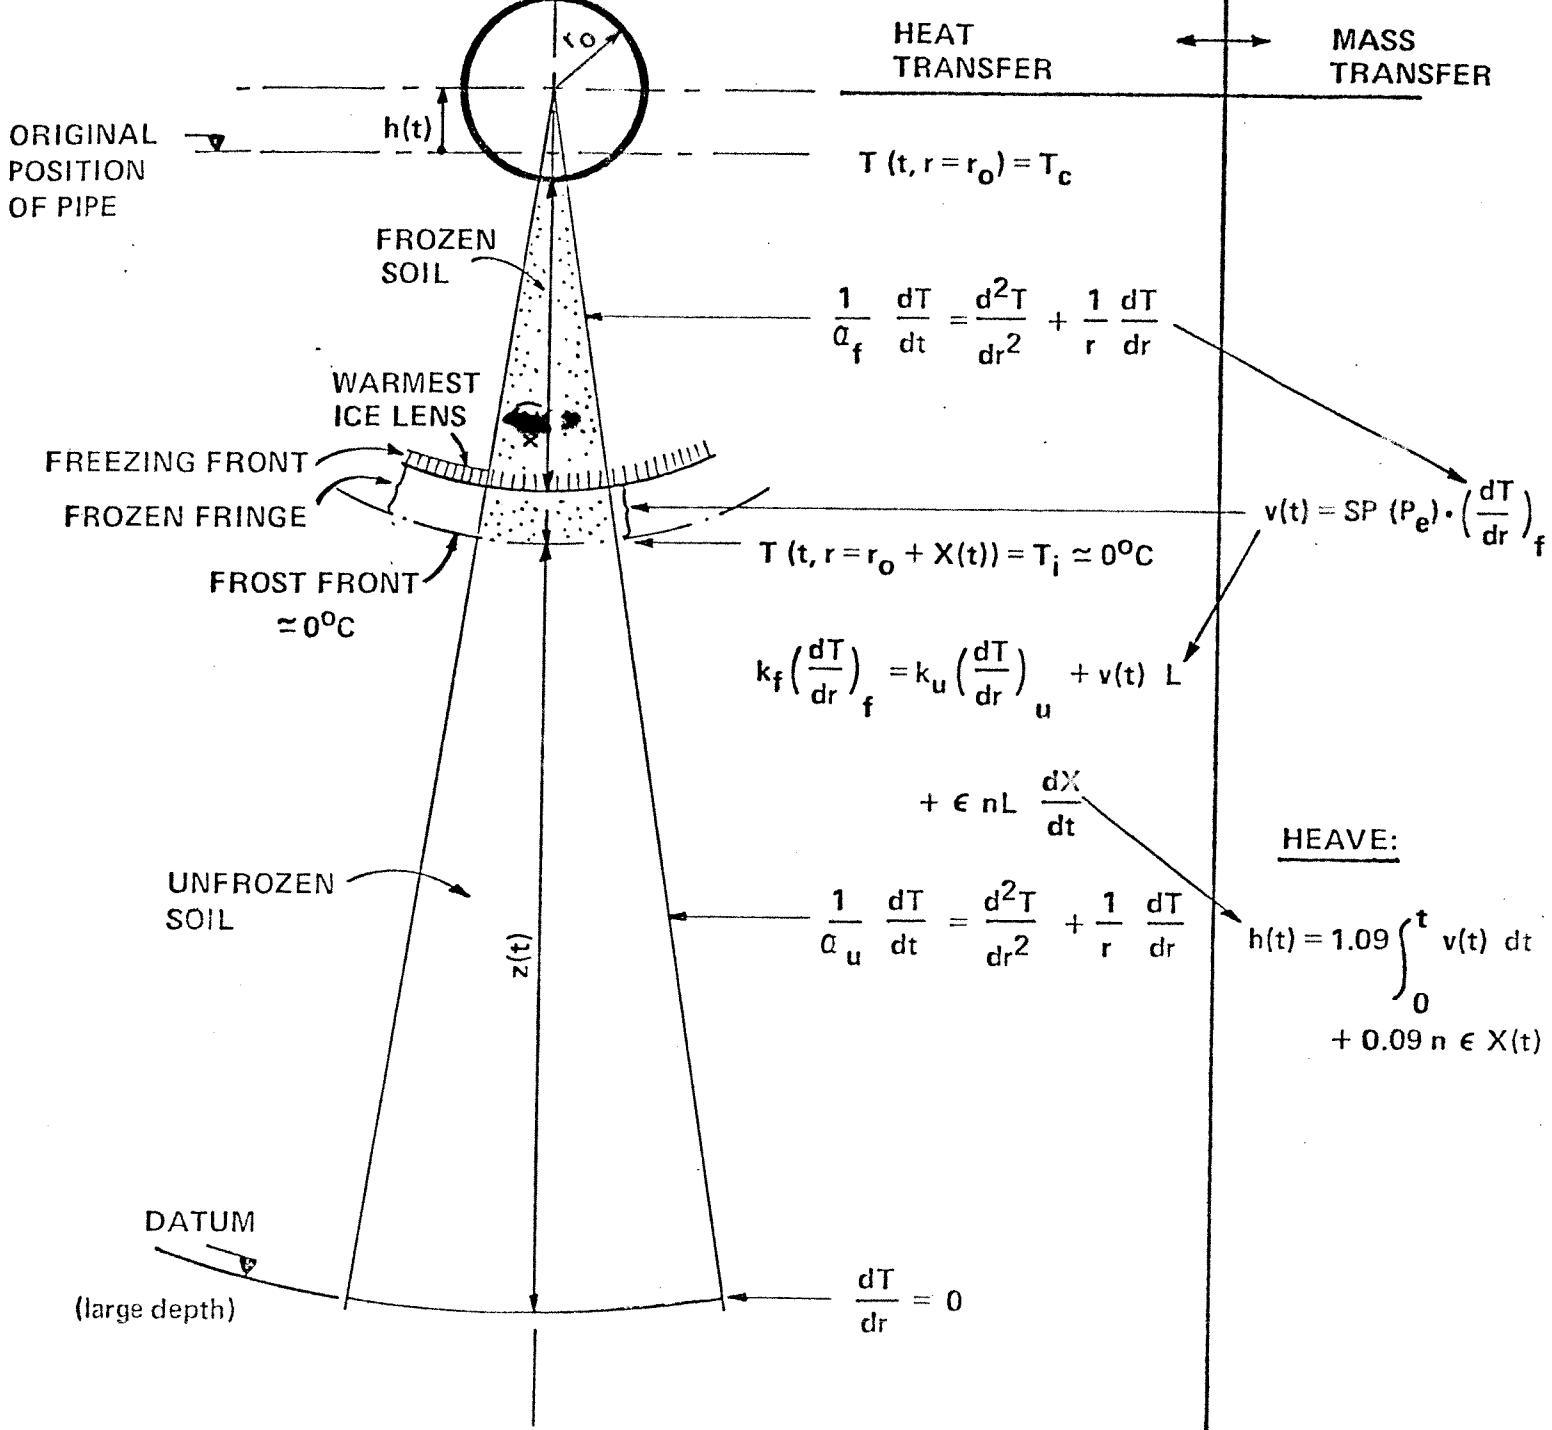


FIGURE 5

EQUATIONS FOR THE FIELD FROST HEAVE MODEL UNDER A PIPELINE CONSIDERING RADIAL HEAT FLOW

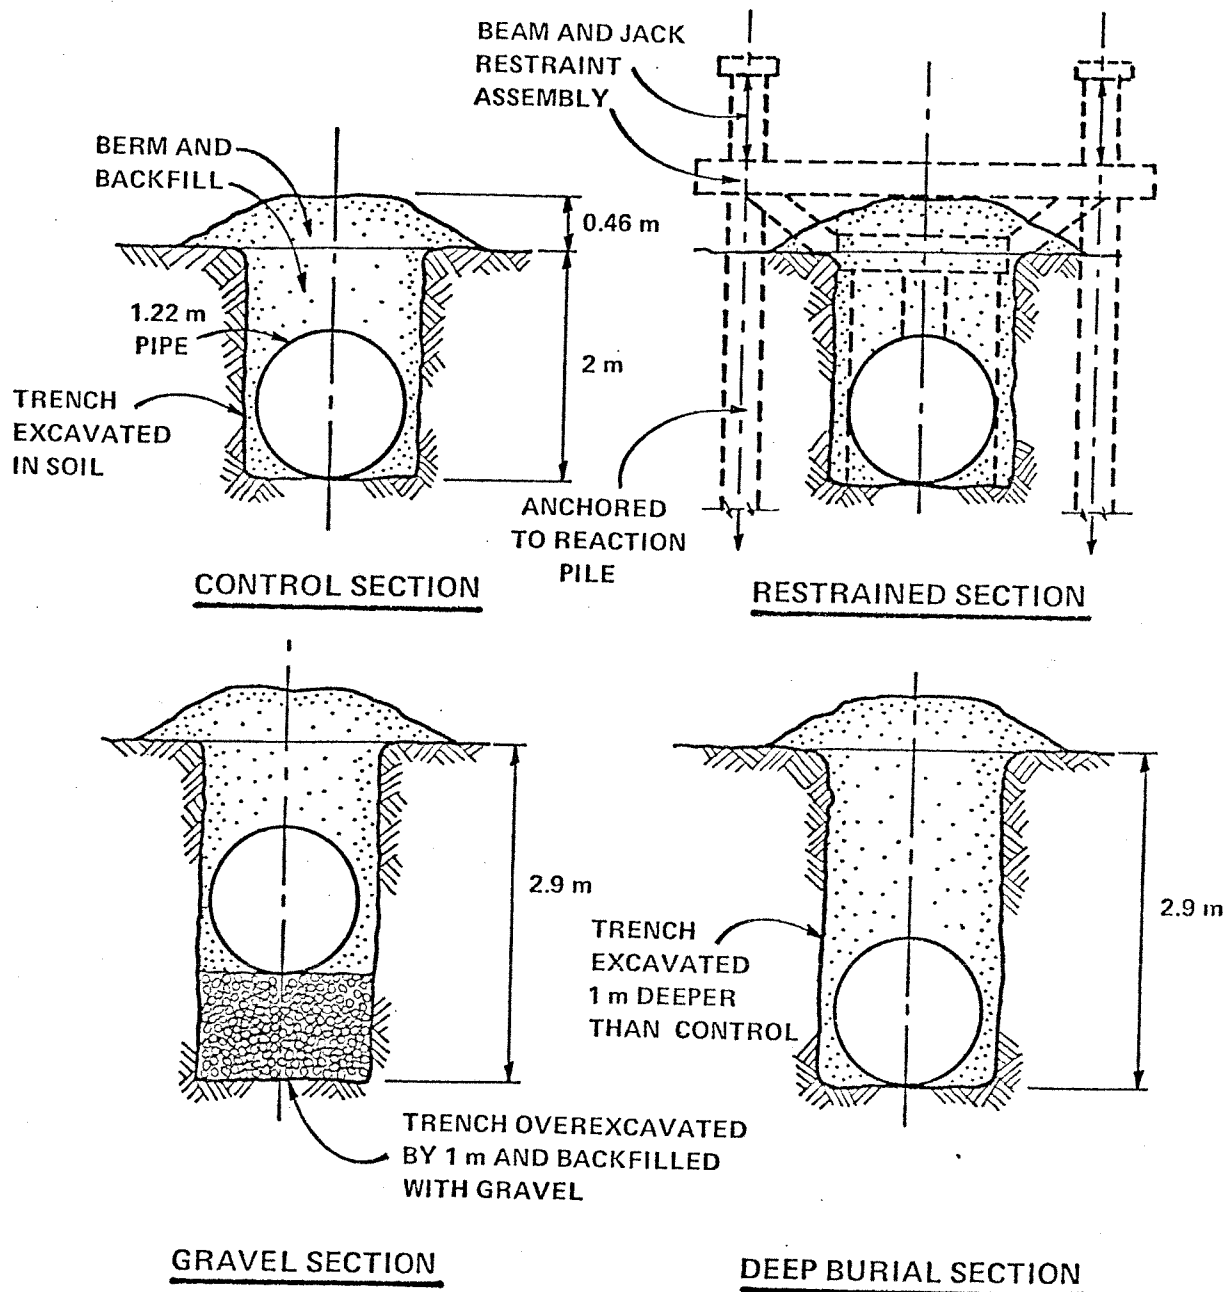


FIGURE 6

SCHMATIC VIEW OF TEST SECTIONS
AFTER SLUSARCHUK ET AL.(1978)

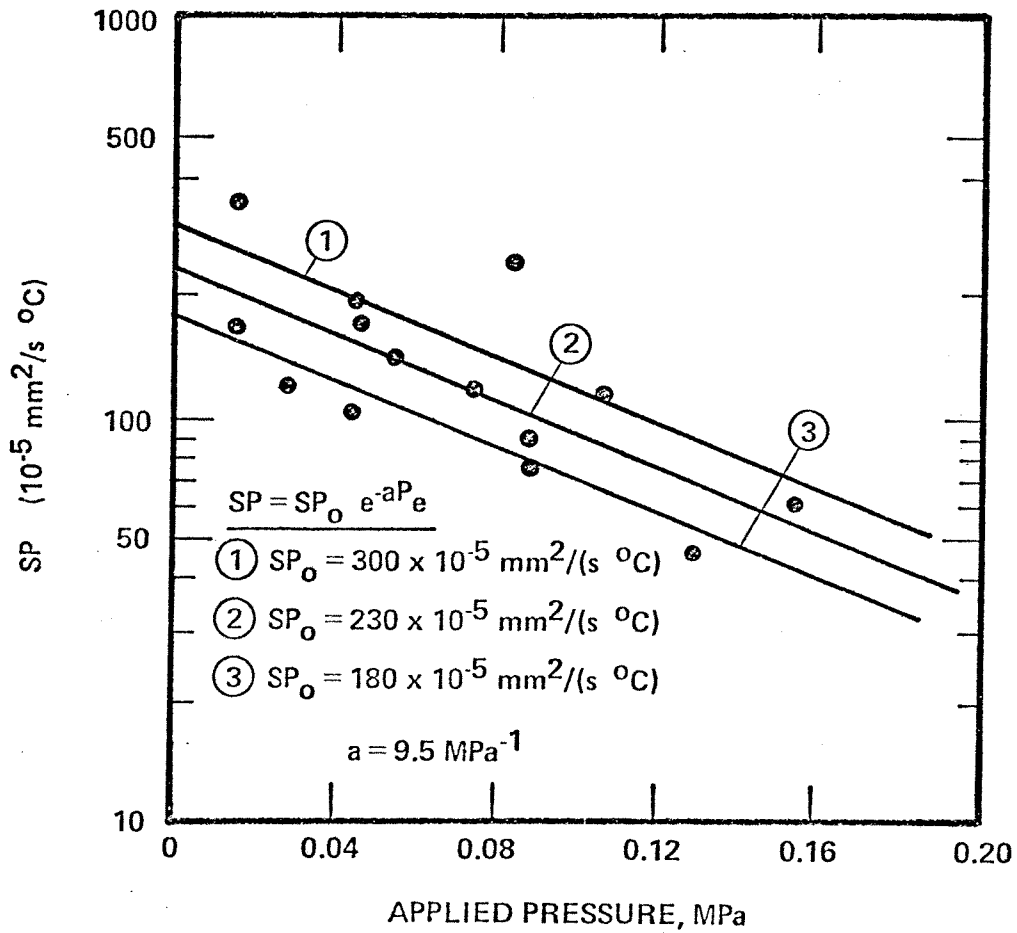


FIGURE 7

RESULTS OF THE ANALYSIS OF FREEZING TESTS
 REPORTED BY NORTHERN ENGINEERING SERVICES
 (1975)

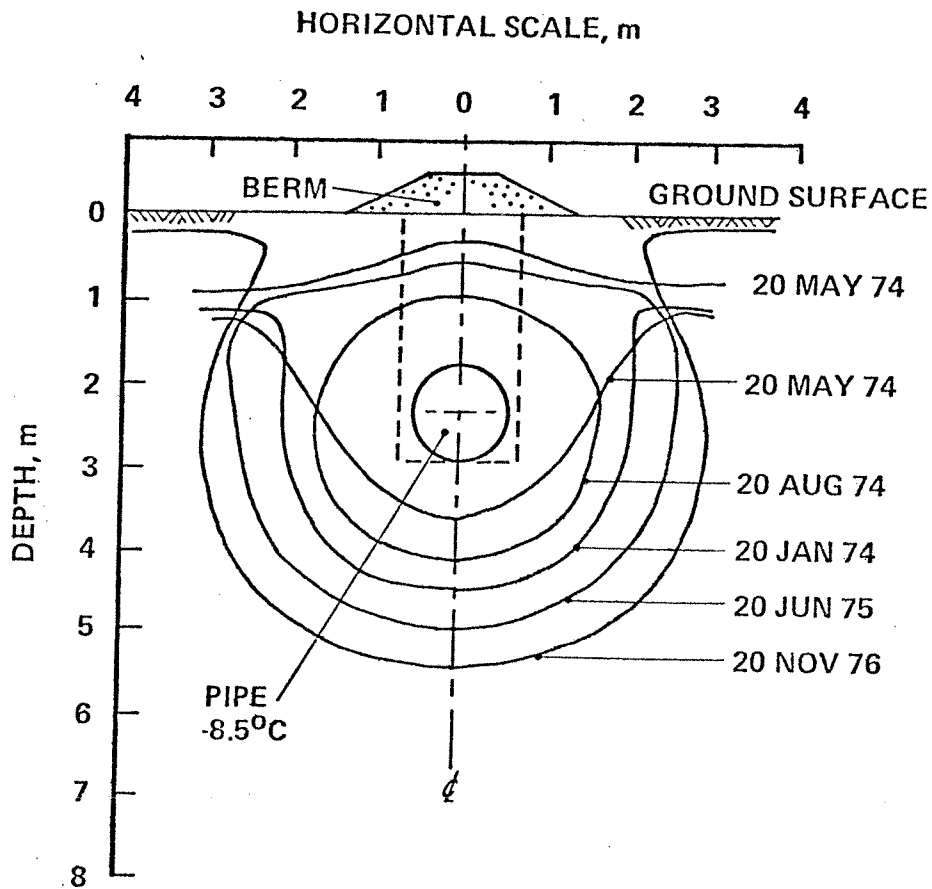


FIGURE 8

FROST PENETRATION AROUND DEEP BURIAL SECTION
AFTER SLUSARCHUK ET AL. (1978)

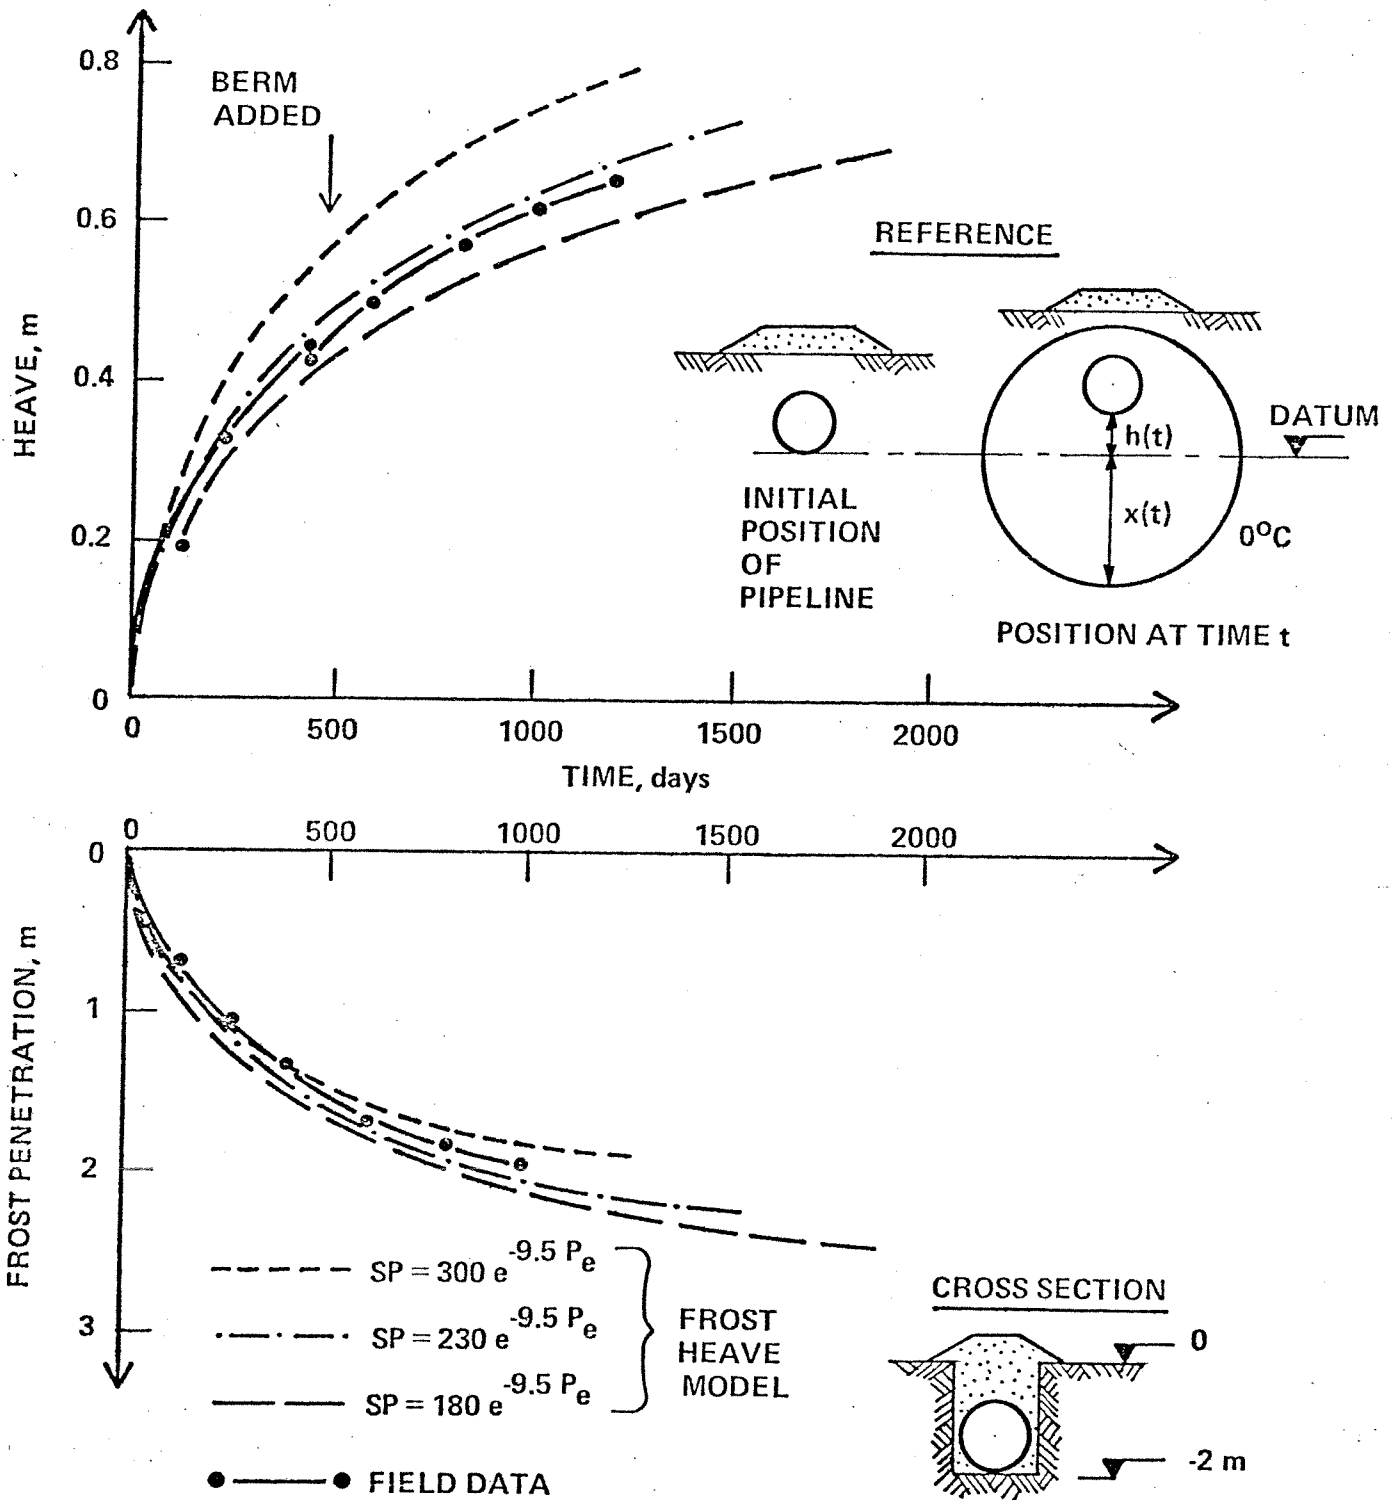


FIGURE 9

PREDICTIONS AND OBSERVATIONS FOR THE CONTROL SECTION

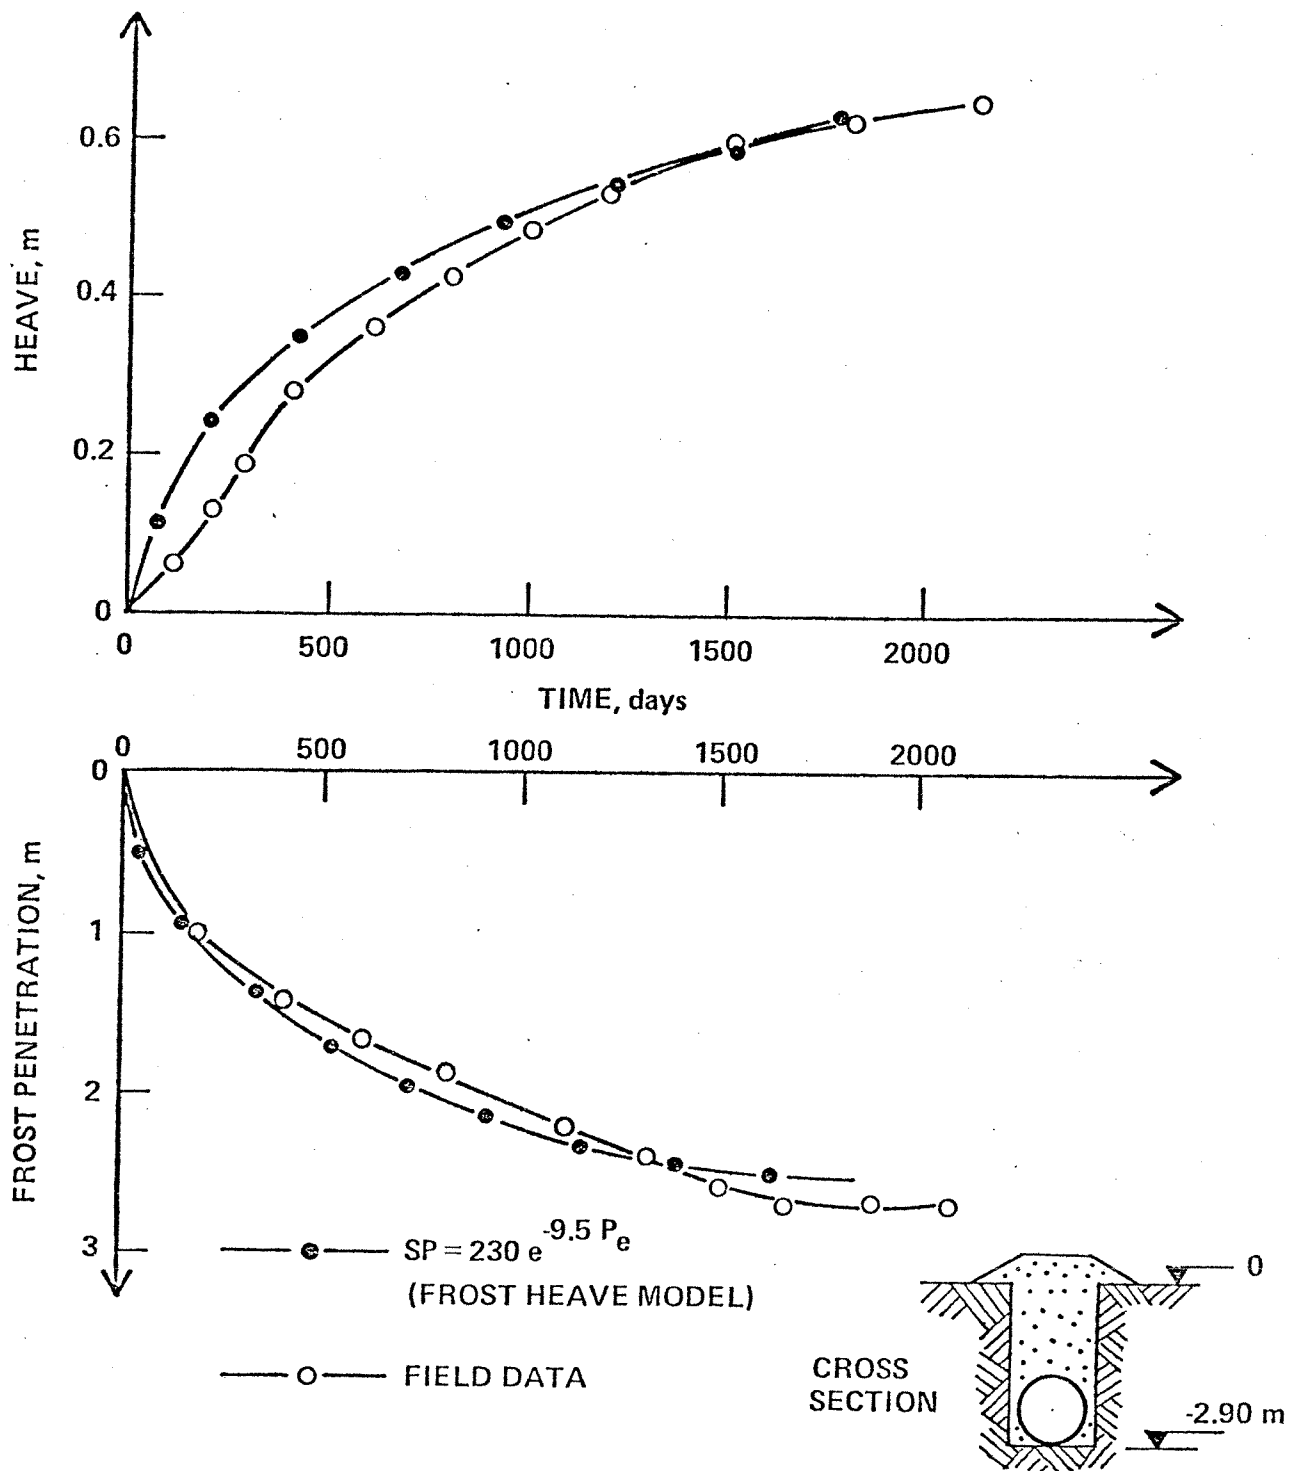


FIGURE 10

PREDICTIONS AND OBSERVATIONS FOR THE DEEP BURIAL SECTION

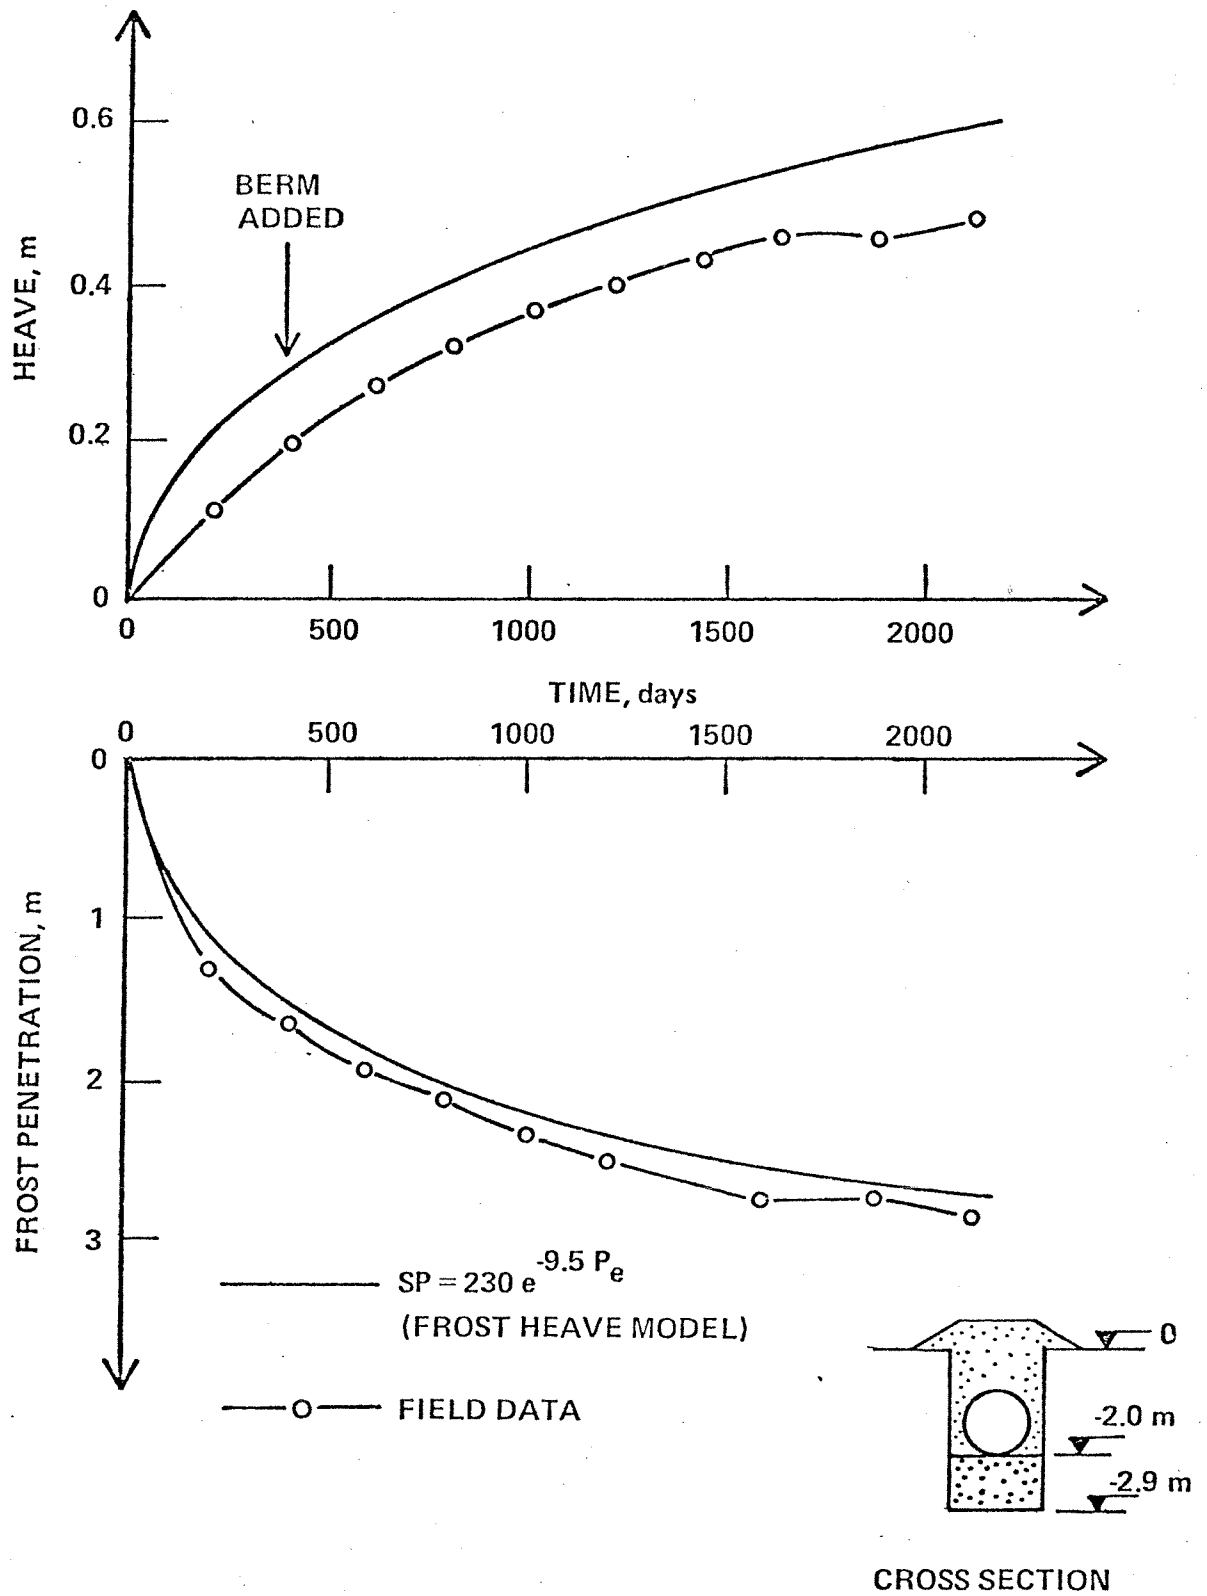


FIGURE 11

PREDICTIONS AND OBSERVATIONS FOR THE GRAVEL SECTION

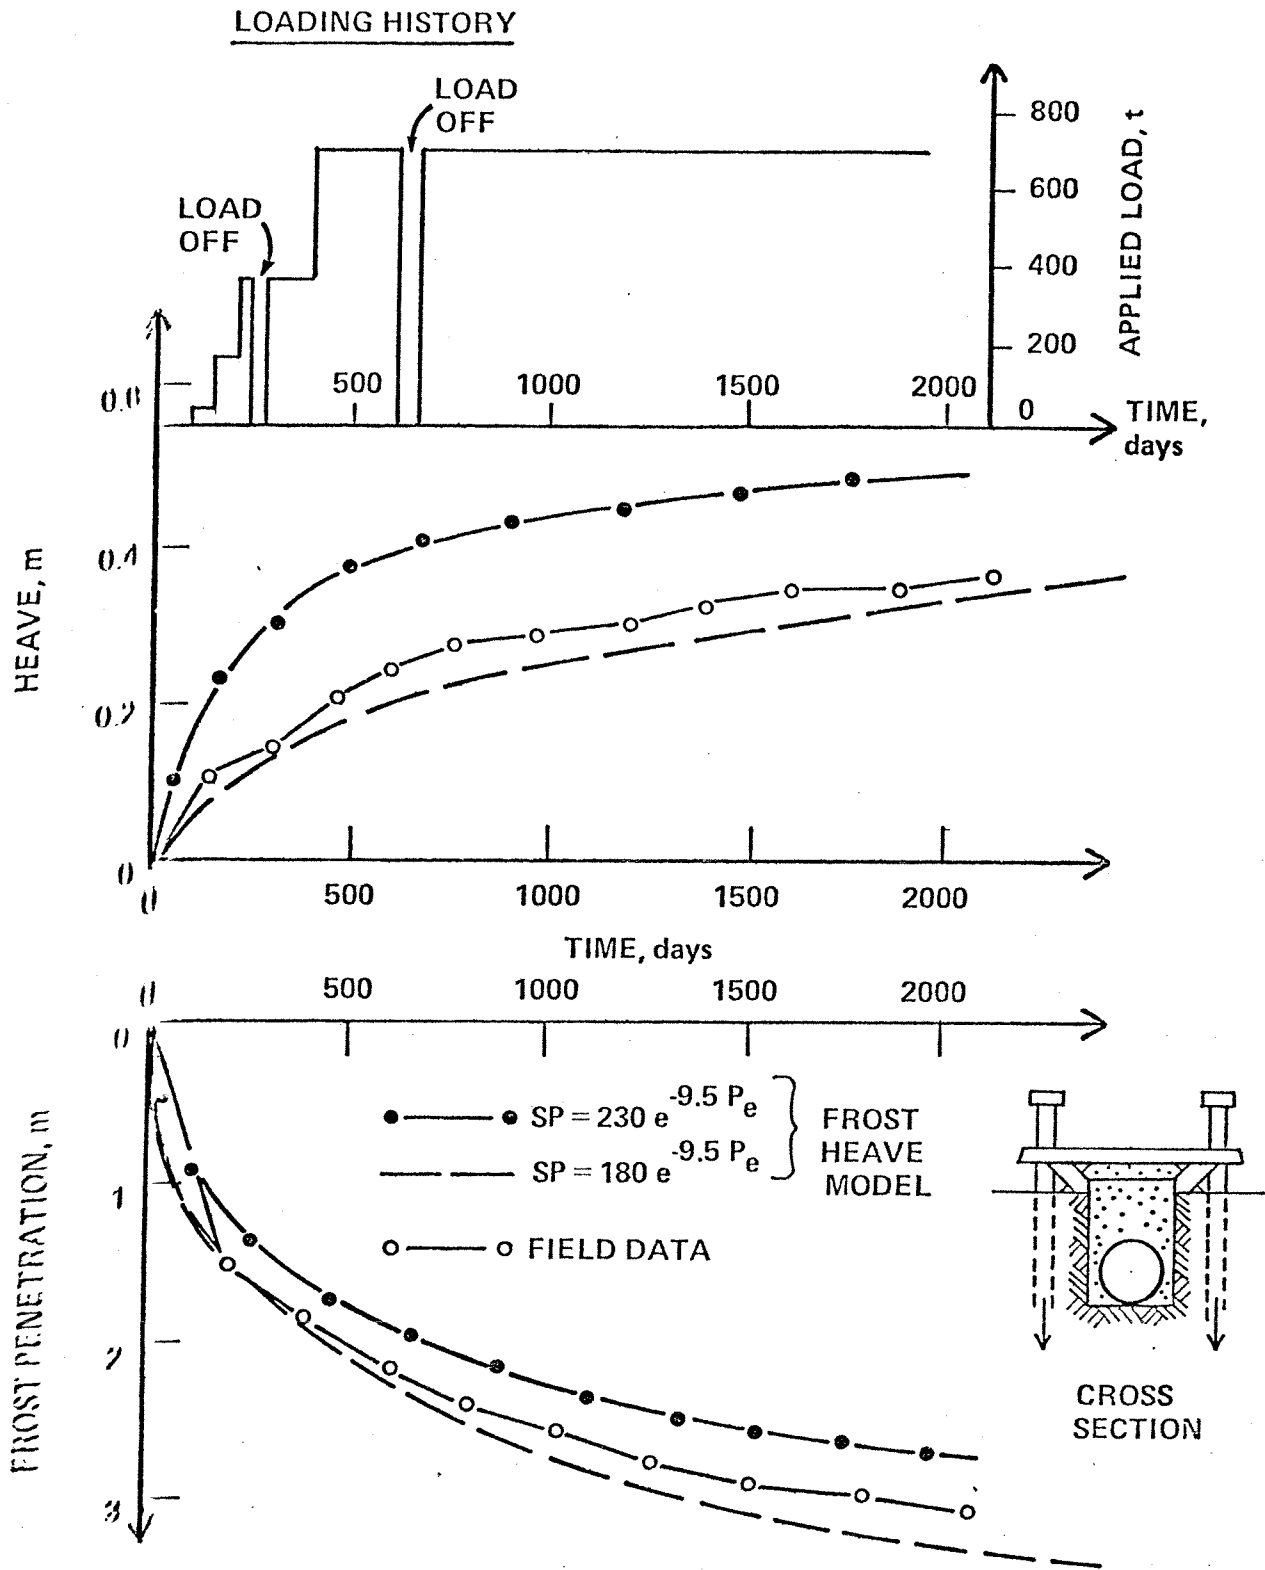


FIGURE 12

PREDICTIONS AND OBSERVATIONS FOR THE RESTRAINED SECTION

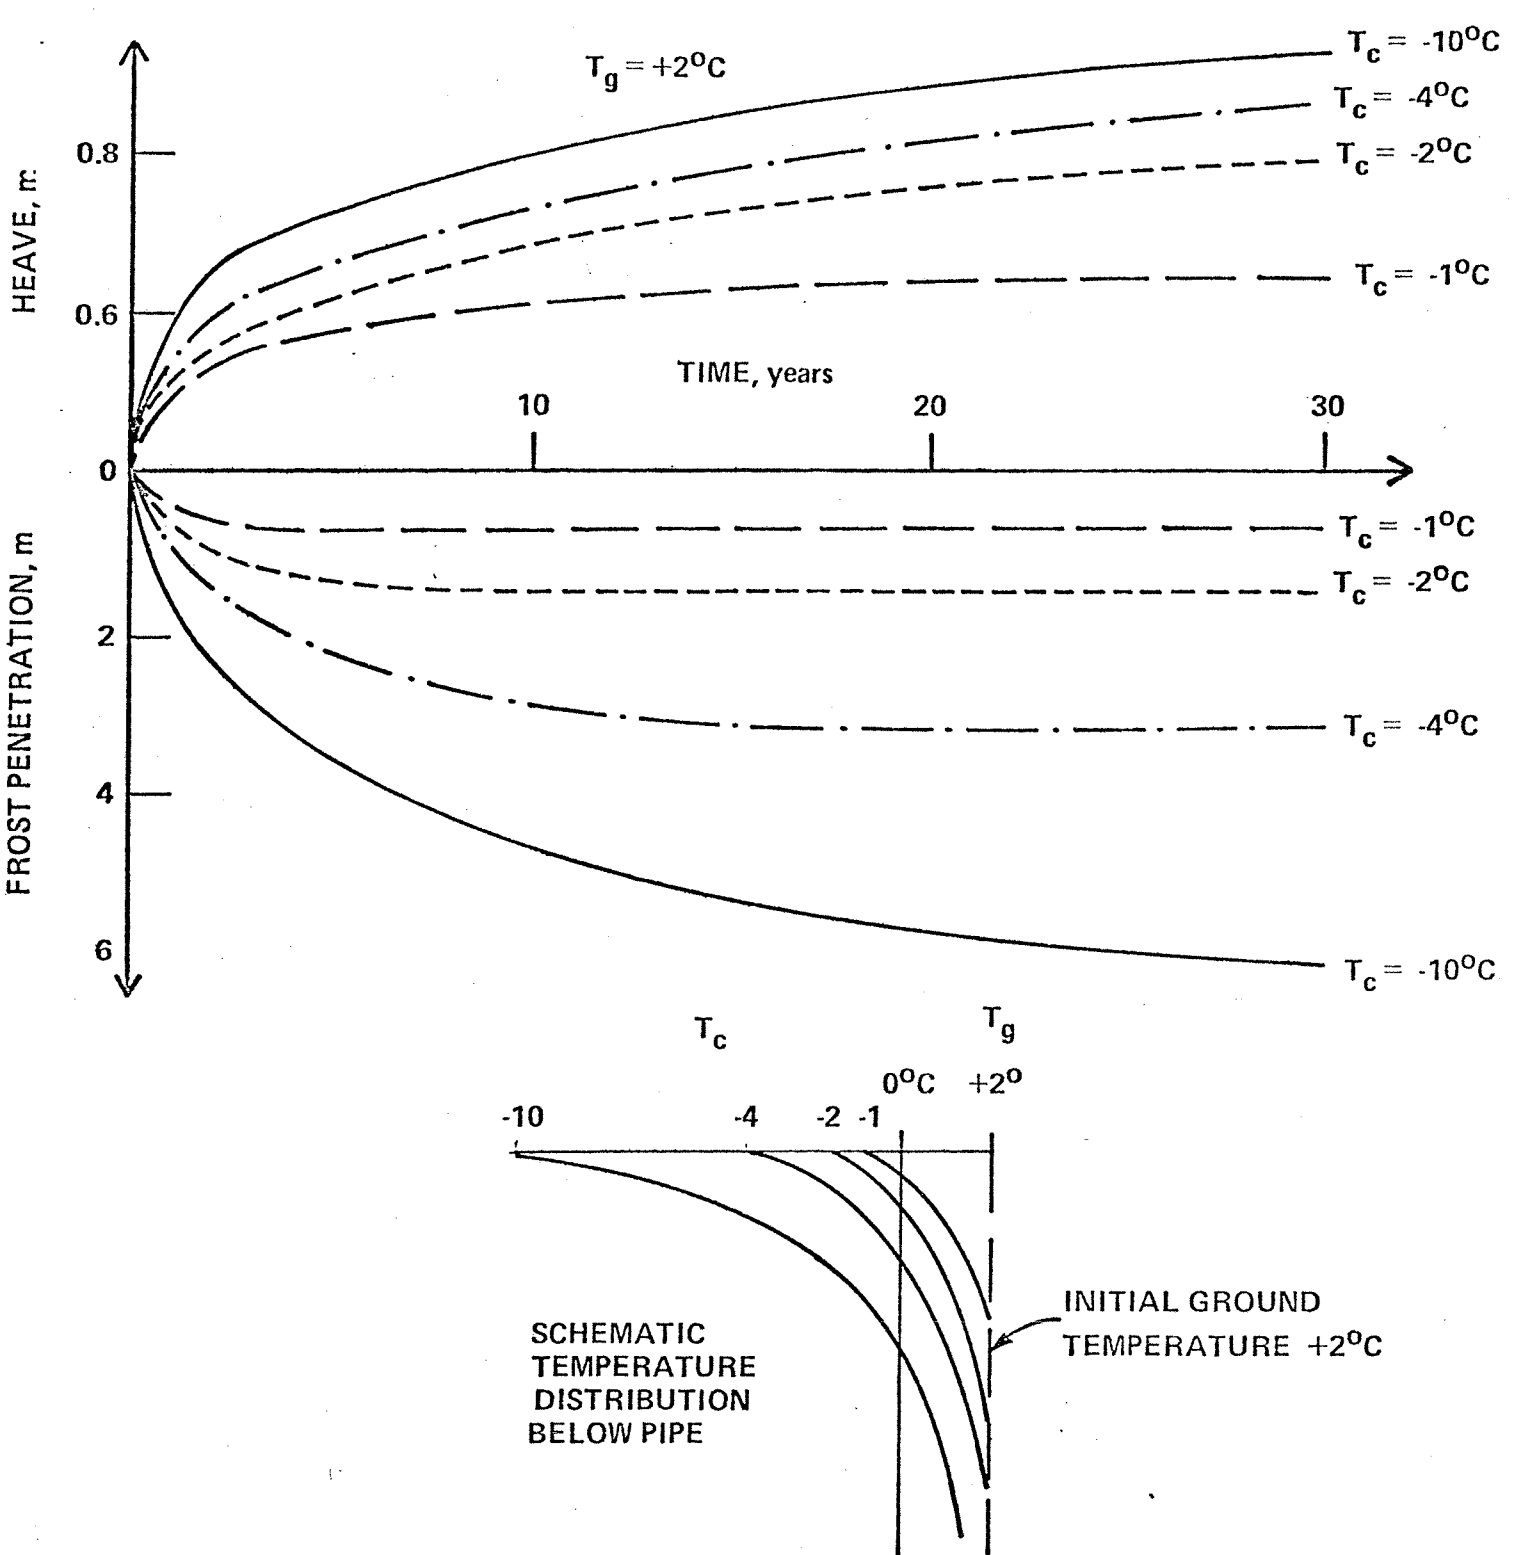


FIGURE 13

EFFECT OF VARIOUS PIPELINE OPERATION TEMPERATURES USING THE FROST HEAVE MODEL



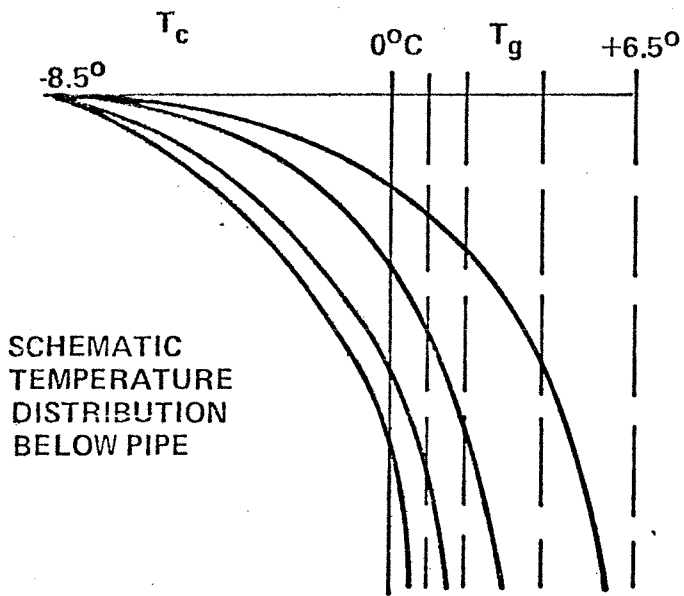


FIGURE 14

EFFECT OF VARIOUS GROUND TEMPERATURES USING THE FROST HEAVE MODEL

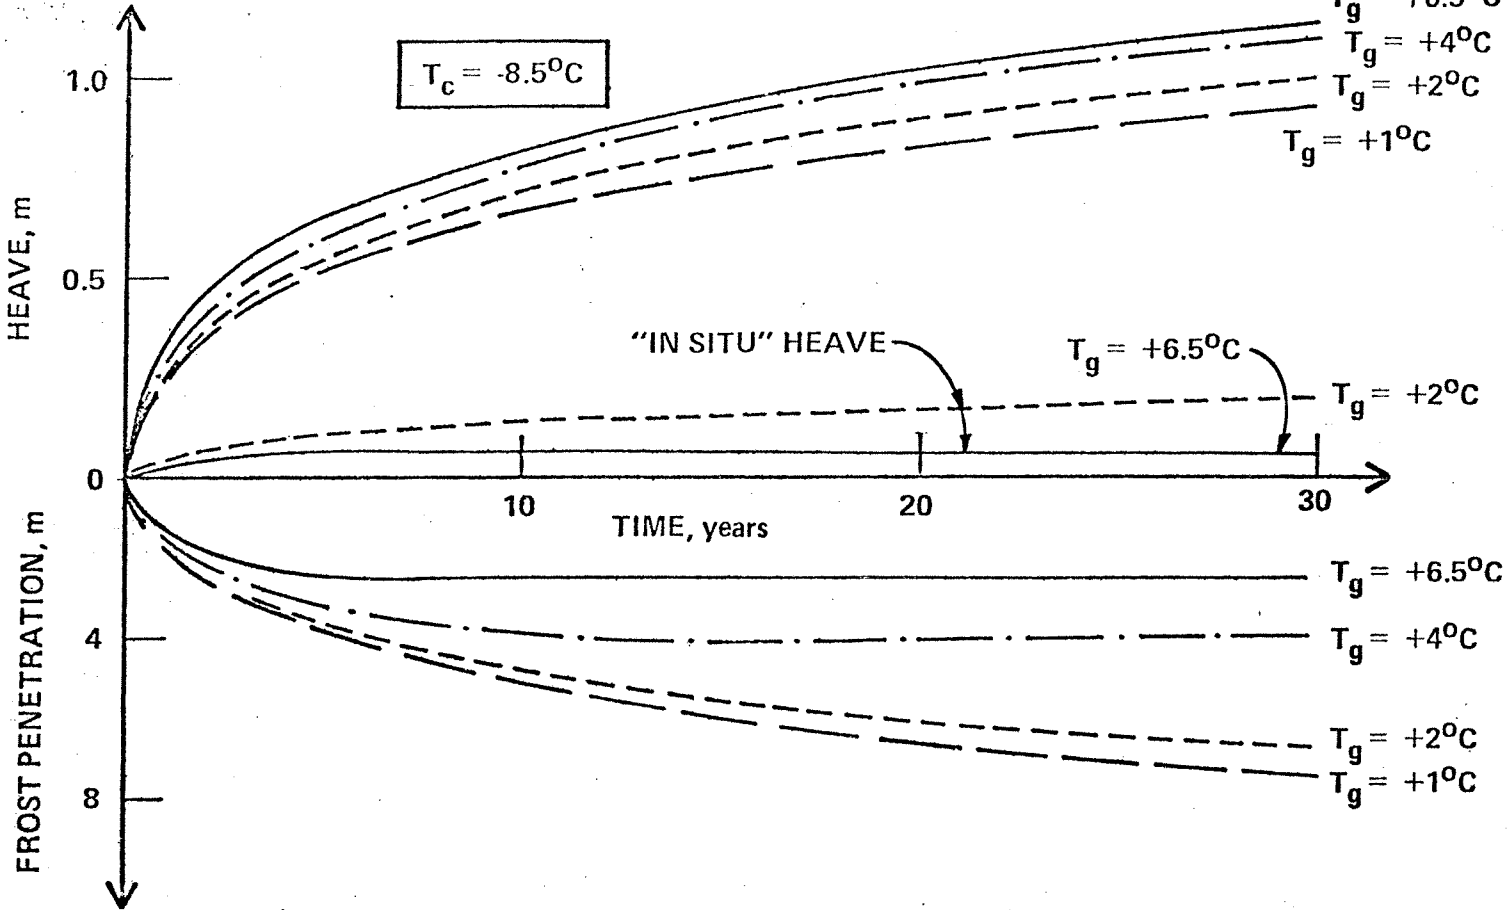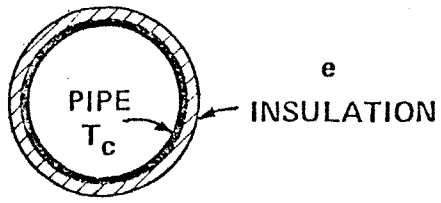

$$\frac{\lambda_f}{\lambda_{ins}} = 10$$

$$T_c = -8.5^\circ\text{C}$$

$$T_g = +2.0^\circ\text{C}$$

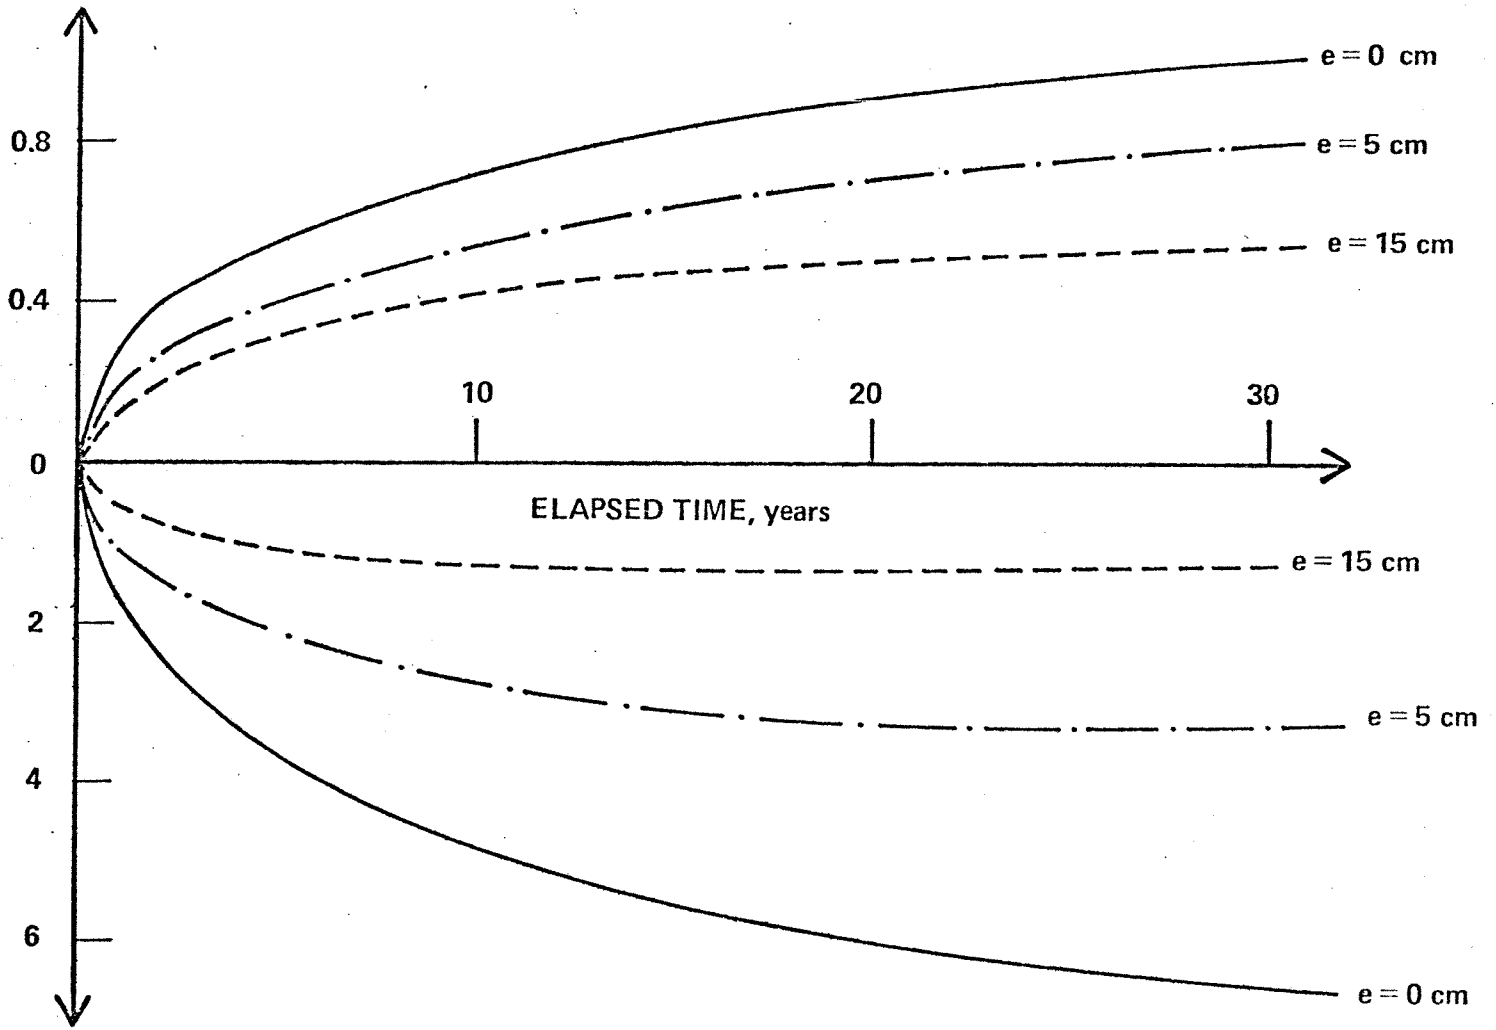


FIGURE 15

EFFECT OF PIPELINE INSULATION USING THE FROST HEAVE MODEL