

Document downloaded from:

<http://hdl.handle.net/10251/62456>

This paper must be cited as:

Anquela Julián, AB.; Martín Furones, ÁE.; Berné Valero, JL.; Padin Devesa, J. (2013). GPS and GLONASS Static and Kinematic PPP results. *Journal of Surveying Engineering*. 139(1):47-58. doi:10.1061/(ASCE)SU.1943-5428.0000091.



The final publication is available at

[http://dx.doi.org/10.1061/\(ASCE\)SU.1943-5428.0000091](http://dx.doi.org/10.1061/(ASCE)SU.1943-5428.0000091)

Copyright American Society of Civil Engineers

Additional Information

GPS + GLONASS Static and Kinematic PPP Results

A. B. Anquela¹; A. Martín²; J. L. Berné³; and J. Padín⁴

Abstract: Precise point positioning (PPP) involves observations from a single global navigation satellite system (GNSS) receiver and benefits of satellite orbit and clock products obtained from the global infrastructure of permanent stations. PPP avoids the expense and logistic difficulties of deploying a network of GNSS receivers around survey areas in isolated places, such as the arctic or less populated areas. Potential accuracies are at the centimeter level for static applications and at the subdecimeter level for kinematic applications. Static and kinematic PPP based on the processing of global positioning system (GPS) observations is limited by the number of visible satellites, which is often insufficient for urban or mountain applications, or it can be partially obstructed or present multipath effects. Even if a number of GPS satellites are available, the accuracy and reliability can still be affected by poor satellite geometry. One possible way of increasing satellite signal availability and positioning reliability is to integrate GPS and global navigation satellite system (GLONASS) observations. This case study deals with the possibilities of combining GPS and GLONASS dual-frequency measurements on the static and kinematic PPP solution to reduce the convergence time and improve the accuracy of the solution. The results show that the addition of the GLONASS constellation does not always improve the convergence of static PPP; the kinematic results (car and walk trajectories) present better accuracy from the GPS + GLONASS solution rather than the GPS-only solution. The *MagicGNSS* software was used in processing of all observations. DOI: [10.1061/\(ASCE\)SU.1943-5428.0000091](https://doi.org/10.1061/(ASCE)SU.1943-5428.0000091). © 2013 American Society of Civil Engineers.

CE Database subject headings: Global positioning systems; Case studies; Surveys; Satellites.

Author keywords: GNSS; Precise point positioning; GLONASS.

Introduction

Precise point positioning (PPP) has attracted much interest in recent years and has provided an alternative to precise relative processing because of its possibilities as a reliable absolute positioning technique. PPP can provide subdecimeter-to-centimeter positioning accuracy without the use of base stations (e.g., Zumberge et al. 1997; Kouba and Héroux 2001; Gao and Shen 2002). PPP employs carrier phase and pseudorange observations in processing algorithms, where precise satellite orbits and clock information are used instead of broadcast information. Thus, PPP has the benefit of using the most accurate postmission or near-real-time information as published by the International Global Navigation Satellite System (GNSS) Service (IGS).

PPP was first developed for use in static applications (e.g., Zumberge et al. 1997) and has been studied extensively in recent years (Kouba and Héroux 2001; Gao and Shen 2001; Bisnath et al.

2002; Colombo et al. 2004; Chen et al. 2009; Geng et al. 2010). With the development of final, near-real-time or real-time satellite orbit and clock products, kinematic PPP is being increasingly used in research and applications. Kinematic PPP is used in airborne and marine applications overseas; in sparsely populated regions such as mountains, prairies, or desert regions; and in areas where the GNSS infrastructure is poorly developed, such as Greenland and northern Canada (Chen 2004; Héroux et al. 2004; Jensen and Ovstedal 2008).

Even with more than 30 satellites in the global positioning system (GPS) constellation, there are situations where the satellite signal may be partially obstructed (urban positioning in general, mountains, open-pit mines, or heavy tree cover), which in turn affect the availability and reliability of the PPP solution. A possible method to ensuring a continuous solution is the use of the full range of satellites from both the GPS and global navigation satellite system (GLONASS) systems.

Since the beginning of 2010, the revitalized Russian constellation GLONASS has 21 operational satellites; thus, a PPP solution with GPS + GLONASS can take advantage of extended satellite availability. As a result, a major improvement in PPP can be expected in terms of shorter convergence time and increased accuracy. In Cai and Gao (2007), four processing sessions, each with 3-h data from three IGS stations (HERT, GOPE, and YARR), were analyzed with the conclusion that no significant convergence improvement was found, indicating that this improvement is dependent on improvements in the satellite geometry for position determination. In the same study, 12 h of observations from the HERT station were analyzed with the conclusion that GLONASS did not have a significant impact on the positioning coordinates and errors for GPS + GLONASS solutions compared with the GPS-only solutions. A kinematic measurement campaign was performed by Hesselbarth and Wanninger (2008), in which they concluded that adding GLONASS observations to GPS reduces convergence times by a factor of 1.5–2.5 for underdecimeter accuracies; however, the

¹Dept. of Cartographic Engineering, Geodesy and Photogrammetry, Polytechnic Univ. of Valencia, C/Camino de Vera s/n, Valencia 46022, Spain. E-mail: aemartin@upvnet.upv.es

²Dept. of Cartographic Engineering, Geodesy and Photogrammetry, Polytechnic Univ. of Valencia, C/Camino de Vera s/n, Valencia 46022, Spain (corresponding author). E-mail: anquela@cgf.upv.es

³Dept. of Cartographic Engineering, Geodesy and Photogrammetry, Polytechnic Univ. of Valencia, C/Camino de Vera s/n, Valencia 46022, Spain. E-mail: jlberne@cgf.upv.es

⁴Dept. of Cartographic Engineering, Geodesy and Photogrammetry, Polytechnic Univ. of Valencia, C/Camino de Vera s/n, Valencia 46022, Spain. E-mail: jpadin@cgf.upv.es

Note. This manuscript was submitted on February 1, 2012; approved on June 5, 2012; published online on August 11, 2012. Discussion period open until July 1, 2013; separate discussions must be submitted for individual papers. This paper is part of the *Journal of Surveying Engineering*, Vol. 139, No. 1, February 1, 2013. ©ASCE, ISSN 0733-9453/2013/1-1–12/\$25.00.

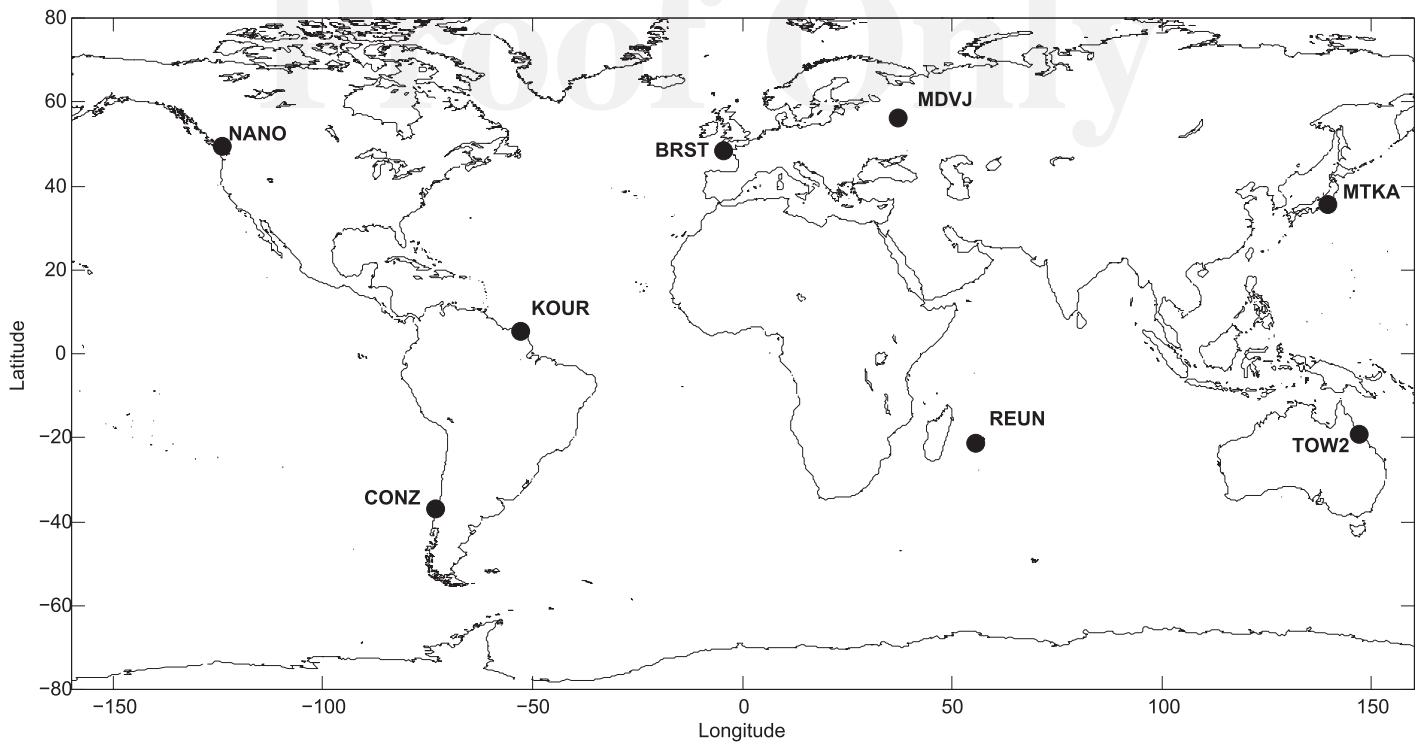


Fig. 1. Location of the eight IGS stations used in the study; coastline file from the NGDC (2010)

Table 1. Receivers, Antennas, Recorded Sample Interval, and Location in Latitude and Longitude for the IGS Permanent Sites

Location	Receiver	Antenna	Sample interval (s)	Latitude (°)	Longitude (°)
BRST (France)	LEICA GRX1200GGPRO	LEIAT504GG	30	48°22'49"	355°30'12"
CONZ (Chile)	LEICA GRX1200GGPRO	TPSCR3_GGD	30	-36°50'37"	289°58'28"
KOUR (French Guyana)	JPS LEGACY	ASH701946.3	30	5°15'7"	307°11'38"
MDVJ (Russia)	TPS NETG3	JPSREGANT_DD_E	30	56°1'17"	37°12'52"
MTKA (Japan)	ASHTECH Z18	ASH701073.1	30	35°40'46"	139°33'41"
NANO (Canada)	LEICA GRX1200GGPRO	LEIAT504GG	30	49°17'41"	253°54'48"
REUN (Reunion Island, France)	TRIMBLE NETR5	TRM55971.00	30	-21°12'29"	55°34'18"
TOW2 (Australia)	LEICA GRX1200GGPRO	AOAD/M_T	30	-19°16'09"	147°03'20"

68 convergence time is not reduced for centimeter accuracy [accuracy
 69 is understood here as the difference between the PPP solution in
 70 comparison with the reference solution obtained from the differential
 71 kinematic carrier-phase processing of a short (2.8 km) baseline
 72 from a permanent reference station]. In Kjorsvik et al. (2009), 14
 73 days of continuous observations at 1 Hz in a shuttle ferry traveling
 74 between Lauvvik and Oanes outside Stavanger, Norway, were
 75 processed in the kinematic PPP mode, where the contribution of
 76 GLONASS was found not to be significant. In Píriz et al. (2009), 20
 77 control stations distributed worldwide were analyzed using 1 day of
 78 observation data. The RMS of the GPS-only and GLONASS-only
 79 position differences were approximately 5 mm in the horizontal
 80 components and above 1 cm in the vertical component; therefore,
 81 GPS + GLONASS positioning did not bring much benefit with
 82 respect to GPS only or GLONASS only. However, when only 1 h of
 83 static station data was used, the GPS + GLONASS solution was
 84 noticeably more accurate and considerably more robust than the
 85 GPS-only solution. In Melgard et al. (2010), one antenna at a fixed
 86 location for a 24-h period in Oslo, Norway, showed that the average
 87 convergence time improvement when adding GLONASS to GPS
 88 observations was about of 40% [the convergence criterion was
 89 considered as the time when the three-dimensional (3D) position

arrives within 40 cm of the reference position and remains there for
 a minimum of 10 min]. In Azab et al. (2011), five IGS reference
 stations were processed. The results showed that there was a significant
 improvement in the convergence and repeatability of the PPP GPS +
 GLONASS solution, especially in the first observation hour where
 positioning accuracy can be achieved with only 30 min of observation
 for the combined GPS + GLONASS solution, while it requires
 approximately 3 h for the GPS-only solution. A final reference,
 not for the PPP results but for relative baselines computed using
 GPS-only, GLONASS-only, and GPS + GLONASS constellations,
 is the recent study by Alcay et al. (2012), which concludes that
 there is no significant difference between the GPS-only and GPS +
 GLONASS results (for some baselines, repeatabilities are slightly
 better using GPS-only; for others, the repeatabilities improve
 when adding GLONASS and the GLONASS-only results are not as
 accurate as the GPS only and GPS + GLONASS).

Over the last few years, a number of organizations have developed
 online PPP GNSS processing services. These services provide PPP
 processing results to the user free of charge and with unlimited
 access, providing the opportunity to obtain high-precision
 coordinates in a recognized datum (e.g., ITRF). One of these online

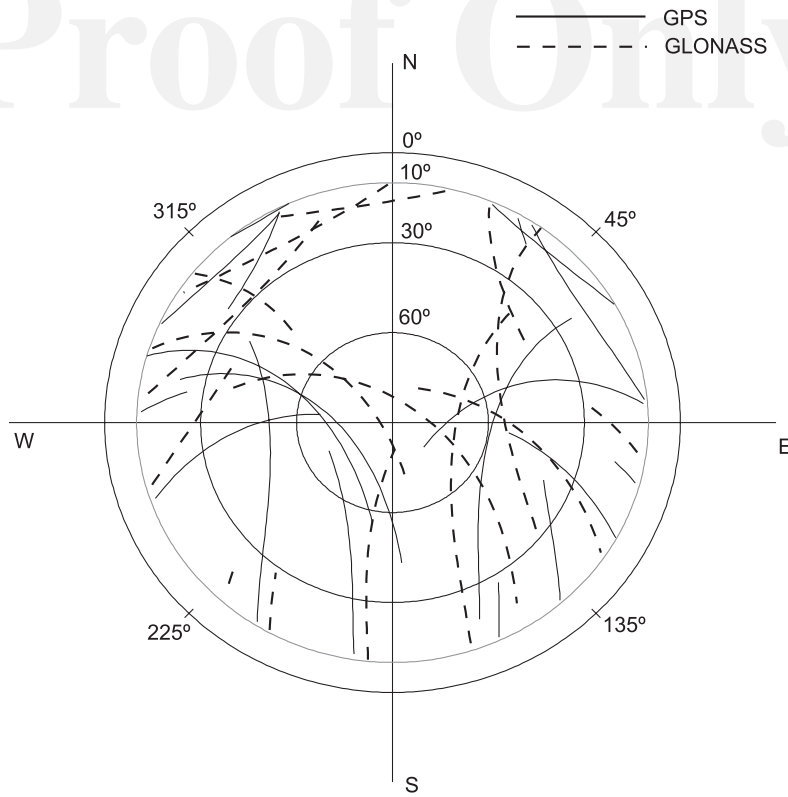


Fig. 2. Skyplot of the GPS and GLONASS constellations for the IGS MDVJ station (December 13, 2010)

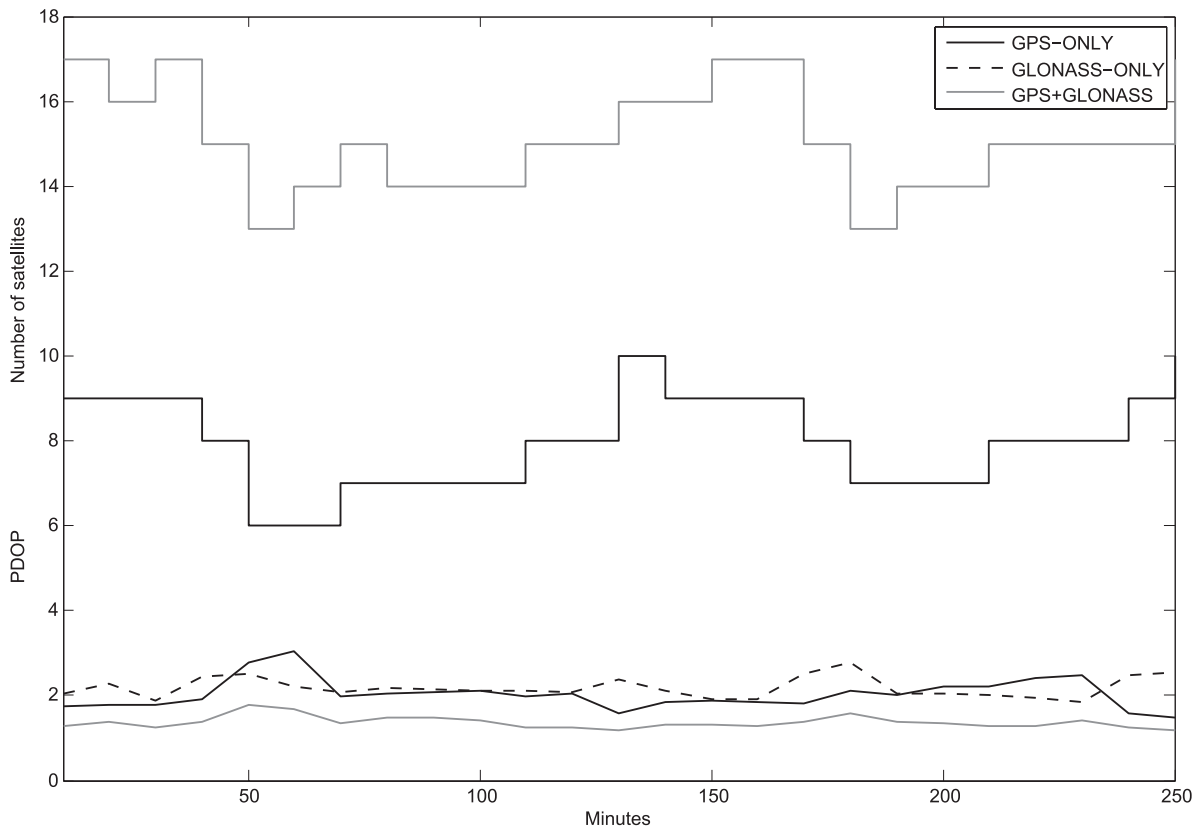


Fig. 3. PDOP and number of satellites for GPS-only, GLONASS-only, and GPS + GLONASS constellations for the IGS MDVJ station (December 13, 2010)

software services is *MagicGNSS*, from GMV Aerospace and Defence (2010). This service (based on code and phase dual-frequency ionosphere-free combinations) was used in the processing of the observations used in this study. *MagicGNSS* consists of a batch least-squares algorithm that minimizes measurement residuals and solves for GNSS satellite orbits and clock, phase ambiguities, tropospheric zenith delays, and also for station/receiver coordinates and clock in

PPP postprocess (Piriz et al. 2008). *MagicGNSS* has been able to process GLONASS observables since January 1, 2010; thus, the interchannel bias estimation can also be computed in the PPP post-process (Piriz et al. 2009). Orbit and clock GPS and GLONASS files are generated internally twice per hour (on the hour and at the half hour), with a latency of 30 min from a network of GNSS stations distributed worldwide. GLONASS satellite clocks are post-processed to be aligned to IGS time. These GLONASS orbit and clock files are used in any PPP postprocess solution; however, if IGS rapid or final files are available, they are used instead of the internal files for the GPS observations. Therefore, it is always possible to combine GPS and GLONASS in PPP postprocesses. A comparison of static and kinematic GPS-only PPP results of *MagicGNSS* software compared with other online software, such as the automatic precise positioning service (APPS), Canadian Spatial Reference System Online Global GPS Processing Service (CSRS-PPP), GPS analysis and position software (GAPS), or scientific software, such as *BERNESE*, can be found in Martín et al. (2011, 2012), where the good performance of *MagicGNSS* was demonstrated.

With the revitalization of the GLONASS satellite system, it has become worthwhile to investigate the usefulness of GLONASS on global positioning in terms of accuracy and precision. To investigate this for the PPP technique, this paper presents a complete analysis based on a case study using the GPS + GLONASS satellite constellation, both in static and kinematic modes; thus, it can be used to complete the previous references on the topic.

Table 2. Mean RMS of Static PPP Measurements Residuals

	Mean RMS of code residuals (m)	Mean RMS of phase residuals (m)
GPS only	0.260	0.012
GLONASS only	0.450	0.040
GPS + GLONASS	0.300	0.018

Table 3. Mean Convergence Time

Mean convergence time to reach an accuracy level of	GPS only (min)			GLONASS only (min)			GPS + GLONASS (min)		
	North	East	Up	North	East	Up	North	East	Up
1 or 10 cm	70	95	100	130	150	160	60	77	85
10 cm	37.5	37.5	44.5	70	80	95	33	33	38

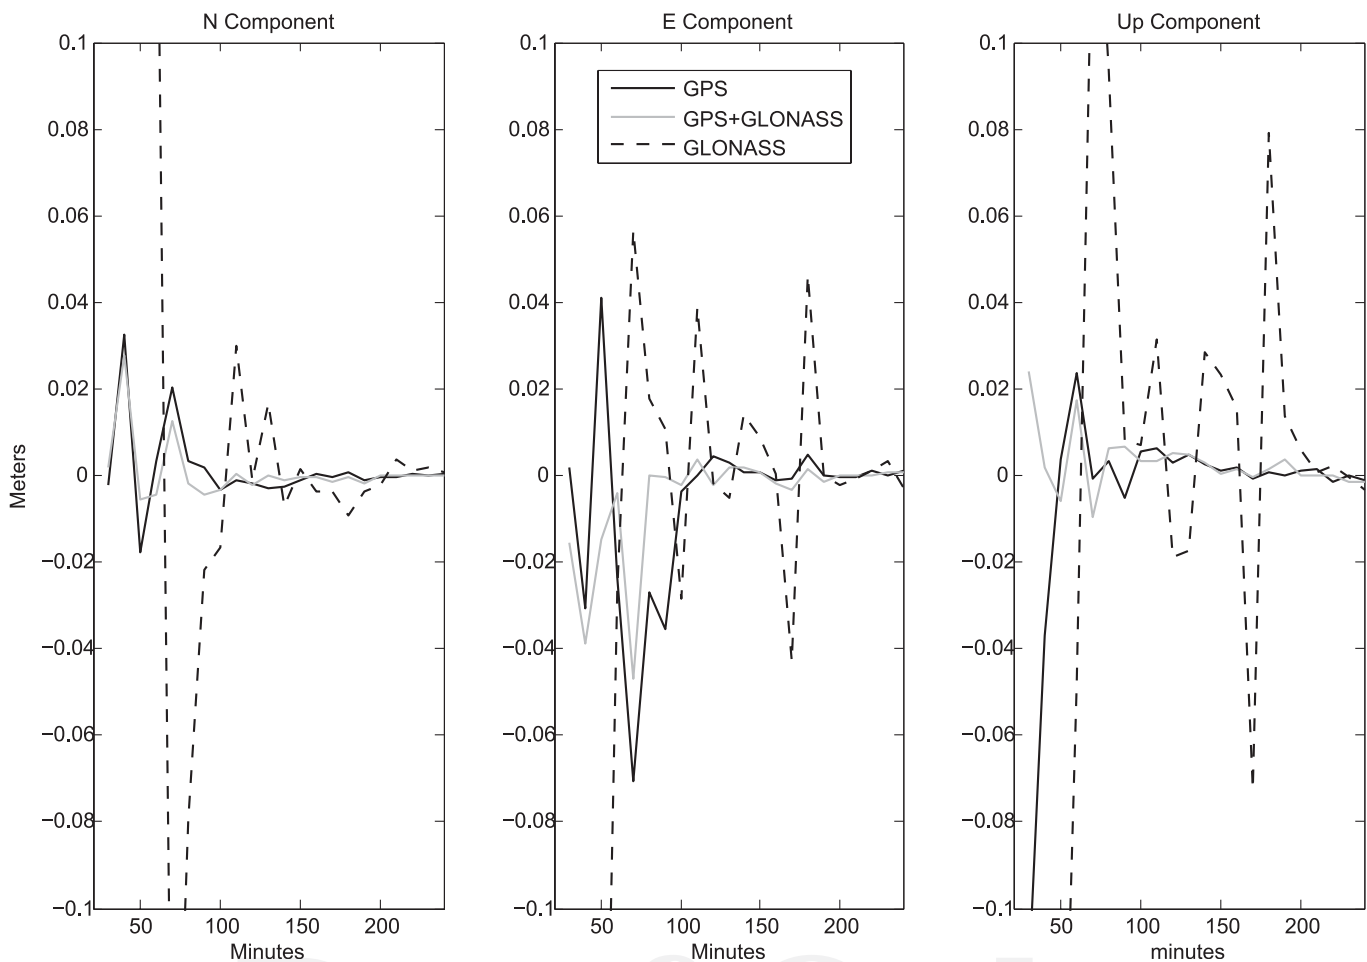


Fig. 4. Example of lower convergence time of GPS + GLONASS compared with the GPS-only or GLONASS-only solution

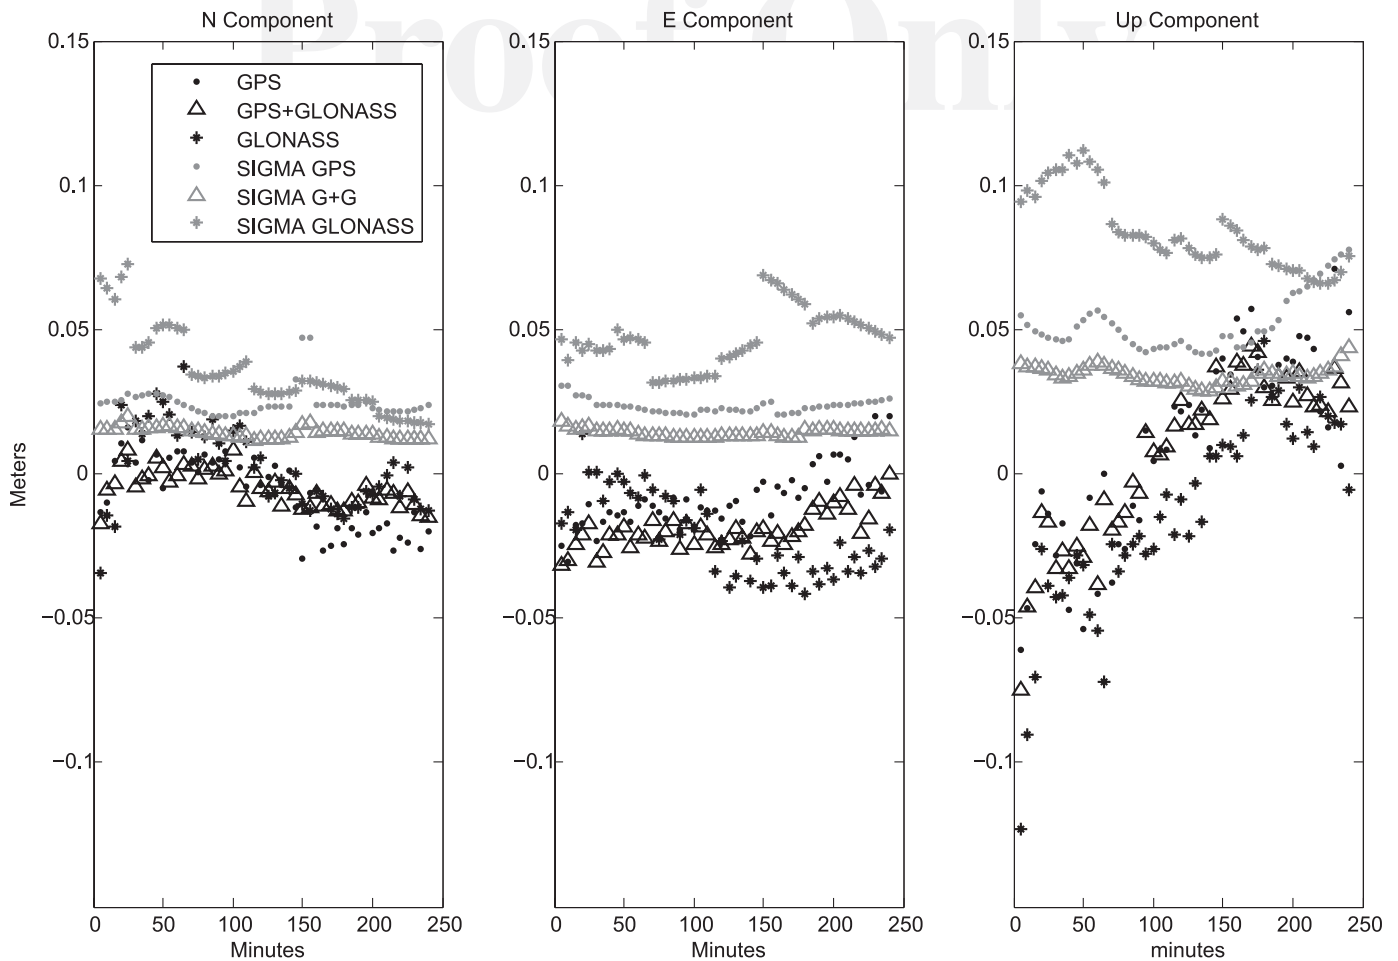


Fig. 5. Kinematic PPP bias and standard deviations in the calculation of the coordinates for GPS-only, GLONASS-only, and GPS + GLONASS solutions for the IGS MDVJ station (December 13, 2010)

Static PPP Results

The *MagicGNSS* software was used to process daily observation files at eight IGS stations (BRST, CONZ, KOUR, MDVJ, MTKA, NANO, REUN, and TOW2) (Fig. 1). The properties and locations of the selected receivers in the IGS network are listed in Table 1. The stations were selected based on their location to provide a balanced geographical sample capable of providing various satellite geometries of GPS and GLONASS observables. For the first 4 h of Day 33 (February 2), Day 211 (July 30), and Day 347 (December 13) of 2010, dual-frequency phase and code data recorded at 30-s intervals were processed and compared using GPS-only, GLONASS-only, and GPS + GLONASS constellations.

The antennas were in a location with a clear view of the sky; therefore, no obstructed satellite signal or multipath effects were expected. An improvement in the satellite geometry from the GPS-only or GLONASS-only solution compared with the GPS + GLONASS solution was computed using the geometric dilution of precision (PDOP), where a mean improvement of 27% was found for the GPS + GLONASS constellation compared with the GPS-only constellation and 80% for the comparison with the GLONASS-only constellation. As an example, this improvement in the satellite geometry can be seen in Figs. 2 and 3, where Fig. 2 presents a sky plot of the GPS and GLONASS constellations for the MDVJ station for December 13 during the 4 h of observation, and Fig. 3 is the associated PDOP and number of satellites for GPS-only, GLONASS-only, and GPS +

Table 4. Mean RMS of Kinematic PPP Measurements Residuals

	Mean RMS of code residuals (m)	Mean RMS of phase residuals (m)
GPS only	0.280	0.005
GLONASS only	0.280	0.004
GPS + GLONASS	0.420	0.007

Table 5. Statistical Resume of the Kinematic PPP Bias for the IGS Stations

Mean value	GPS only (m)			GPS + GLONASS (m)		
	North	East	Up	North	East	Up
RMS	0.036	0.042	0.113	0.029	0.031	0.069
Standard deviation	0.032	0.031	0.099	0.026	0.028	0.063
Range	0.177	0.160	0.675	0.166	0.157	0.341

GLONASS constellations. The convergence of the PPP static technique has been studied by comparing the results of stacking observations with 10-min intervals for every station during the three days of the study with the mean weekly IGS coordinates as a reference. Thus, a total of 576 GPS or GLONASS solutions and 576 GPS + GLONASS solutions were compared analyzed.

Table 2 presents the mean RMS residuals for the code and phase observations, showing the precision of the raw data in the static

178
179
180
181
182
183

determination. Table 3 summarizes the mean convergence time for GPS-only, GLONASS-only, and GPS + GLONASS in the north (N), east (E), and up (Up) components. The results are divided into rows, in which the first one is the mean convergence time required to reach an accuracy level of 1 cm and the second is the convergence time to reach an accuracy level of 10 cm. As mean global values in

Table 6. Percentages of Solutions with Better RMS, Standard Deviation, and Range for GPS-only, GPS + GLONASS, and Equivalent Values in the Kinematic PPP Research at IGS Sites

Equivalent value for GPS and G + G	Better value for GPS only	Better value for G + G
43%	16%	41%

Note: G + G = GPS + GLONASS constellation.

Table 7. Statistical Resume of the Kinematic PPP Bias for the 11 IGS Stations Where the GLONASS-Only Solution Has Been Obtained

Mean value	GPS only (m)			GLONASS only (m)			GPS + GLONASS (m)		
	North	East	Up	North	East	Up	North	East	Up
RMS	0.014	0.015	0.032	0.040	0.044	0.081	0.013	0.012	0.026
Standard deviation	0.010	0.009	0.024	0.027	0.025	0.052	0.009	0.007	0.021
Range	0.043	0.044	0.105	0.121	0.105	0.264	0.042	0.035	0.101

this study, the GPS + GLONASS solution used 20% less time to converge to a 1-cm accuracy level than the GPS-only solution and 50% less time than the GLONASS-only solution. These percentages were similar for the north, east, and up components. Moreover, the GPS + GLONASS solution used 13% less time to converge to a 10-cm accuracy level than the GPS-only solution and 57% less time than the GLONASS-only solution. Again, these percentages were similar for the north, east, and up components.

A deep analysis of the results, showed that 50% of the solutions (including the north, east, and up components) converged to a 1-cm accuracy level using less time for the GPS + GLONASS configuration in comparison with the GPS-only configuration (Fig. 4 is an example), 21% of the solutions required the same approximate time, and the other 29% of the solutions presented less convergence time in the GPS-only than in the GPS + GLONASS solution. In the case of the convergence time required to reach an accuracy level of 10 cm, the aforementioned percentages were 68, 28, and 4%, respectively. Only three cases were found in which the GLONASS-only solution presented less convergence time than the GPS-only solution [the up component of the CONZ station (December 13, 2010) and REUN station (December 13, 2010) and the north component of the KOUR station (December 13, 2010)], and only one presented less convergence time than the GPS + GLONASS solution [the up component of the MDVJ station (February 2010)]. Finally, no clear relationship between the PDOP improvement as a result of an increasing number of satellites in the GPS + GLONASS configuration and less convergence time was found.

184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210

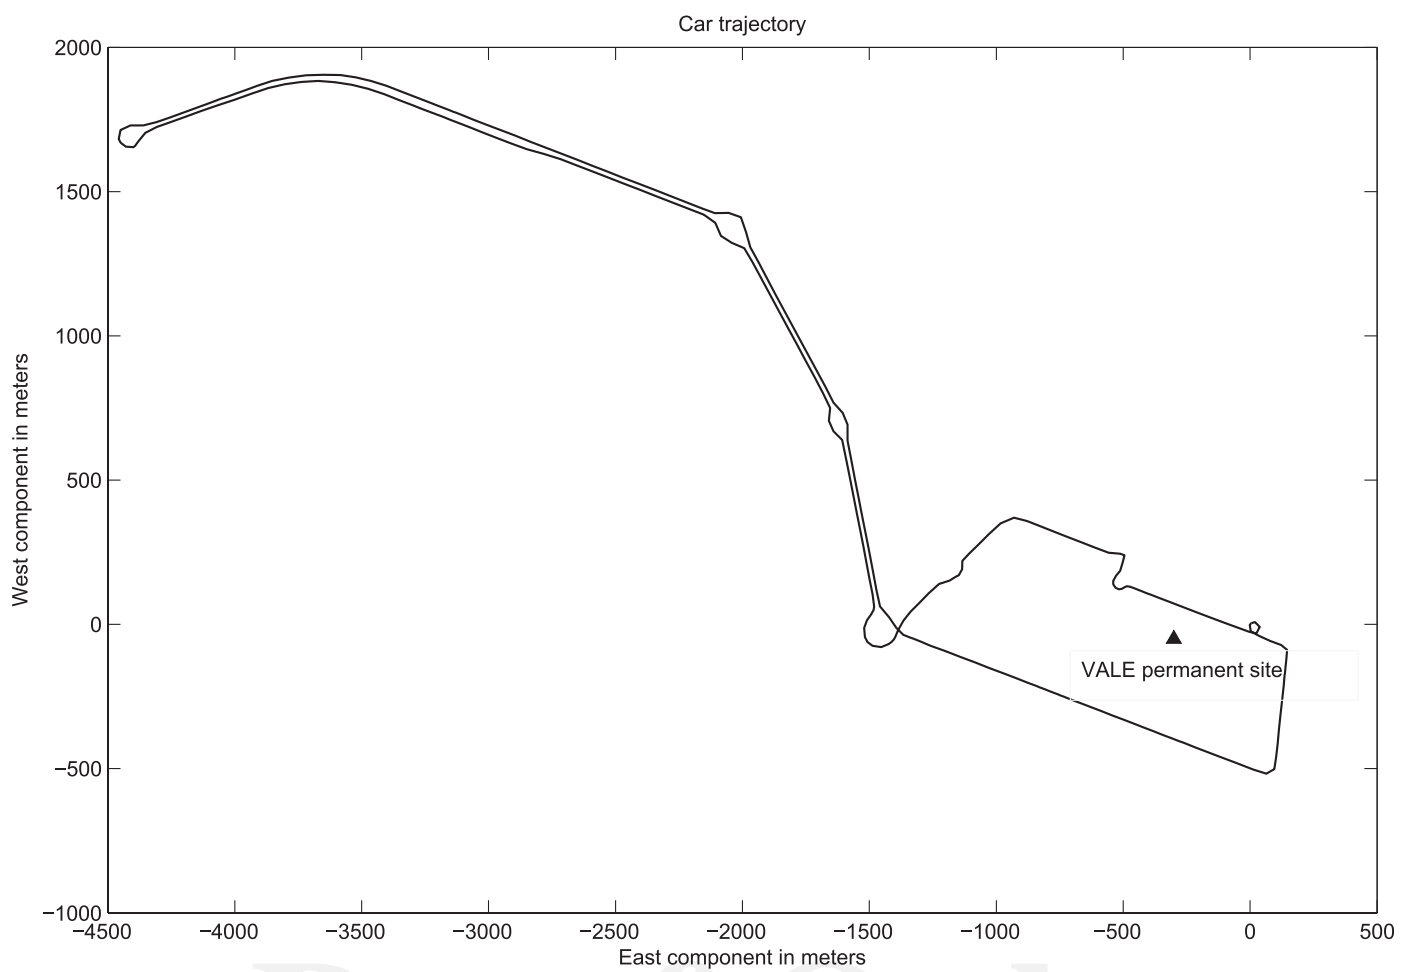


Fig. 6. Car trajectory used for the kinematic analysis

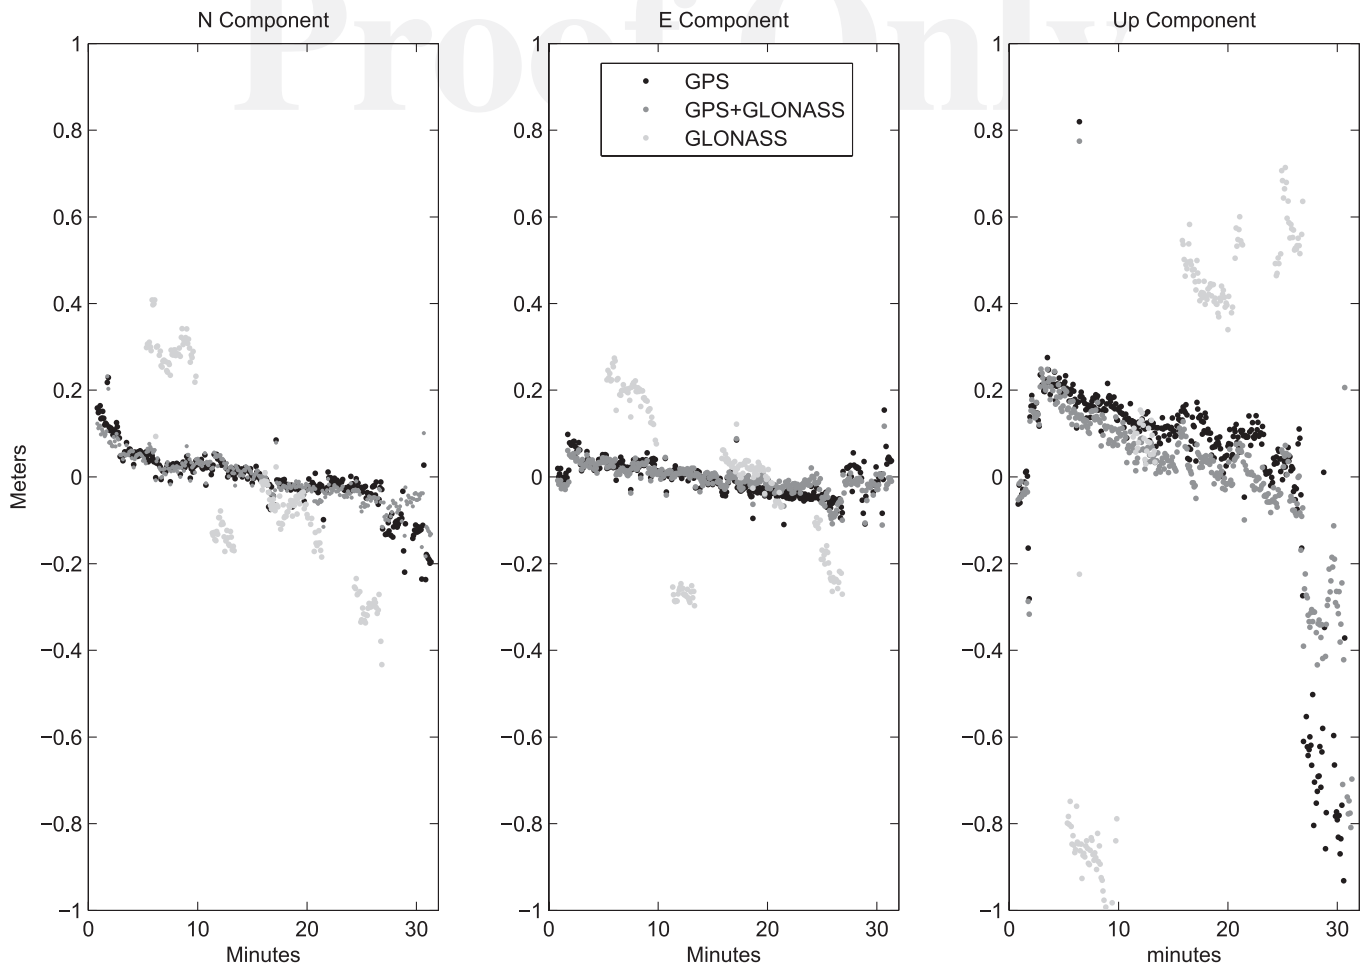


Fig. 7. Kinematic PPP bias using GPS only, GLONASS only, and GPS + GLONASS for the car trajectory

211 These results indicate that the GPS + GLONASS solution
 212 does not present better results than the GPS-only solution in all of
 213 the cases (this result can be found in some of the papers presented
 214 in the introduction). The explanation is related to the differences
 215 in the design of the GPS and GLONASS satellites. First, the
 216 GLONASS satellites have a cesium-based (Cs) frequency standard and
 217 will consequently have a slightly worse short-time stability than
 218 rubidium-based (Rb) satellites (e.g., all of the GPS satellites of Block
 219 IIR, and approximately 50% of the GPS satellites of the Blocks II and
 220 IIA) (Hofmann-Wellenhof et al. 2008). Short-time frequency instabil-
 221 ity leads to increased errors of interpolated satellite clock
 222 corrections, yielding increased noise in the corrected code and phase
 223 observations (Kjorsvik et al. 2009), and thus limiting the impact on
 224 the parameter estimates and their precision. Second, while GPS
 225 signals are modulations of the same carriers, L1 and L2, for all of the
 226 satellites, the GLONASS carrier frequencies depend on the emitting
 227 channel. There are 12 channels for the 21 satellites. Because various
 228 L1 and L2 frequencies are used by the various GLONASS satellites,
 229 the receiver hardware delays are different for the various frequency
 230 channels. In addition, these biases vary considerably for receivers
 231 from various manufacturers (Wanninger 2012). Therefore, when
 232 processing the RINEX files, the additional GLONASS satellites
 233 increase the number of observations; however, the introduction of
 234 the GLONASS data also considerably increases the number of
 235 parameters (GLONASS ambiguities and intersystem hardware
 236 delays) to be estimated. Consequently, no significant improve-
 237 ment in terms of formal errors can be expected from adding the

GLONASS data to GPS (Bruyninx 2007). Therefore, the expected
 improvement of the results using the complete GPS + GLONASS
 system rather than GPS-only system could not be attained as
 a result of the variability of the GLONASS code and phase
 observations, which are generally larger than the GPS and the
 introduction of interchannel biases for GLONASS frequencies and
 intersystem biases (Hefty et al. 2010; Hefty and Gerhatova 2011).

Kinematic PPP Results

The kinematic configuration should be analyzed to complete the
 case study. It is highlighted that only the solutions of the postprocess
 are compared and analyzed; the fact that the postprocessing meth-
 odologies are different for the static and kinematic cases is not
 considered here. In addition, kinematic PPP will be the best choice
 for checking the performance of the GLONASS constellation in
 zones where the satellite signal may be partially obstructed, result-
 ing in the limit case where no PPP solution using the GPS-only or
 GLONASS-only configuration can form as a result of the lack of
 satellites but GPS + GLONASS configuration can provide results.

Kinematic Solutions at Fixed Sites

The GNSS observations from the eight permanent IGS stations used
 in the static PPP research were used to test and evaluate the GPS +
 GLONASS kinematic PPP. These static data were processed using

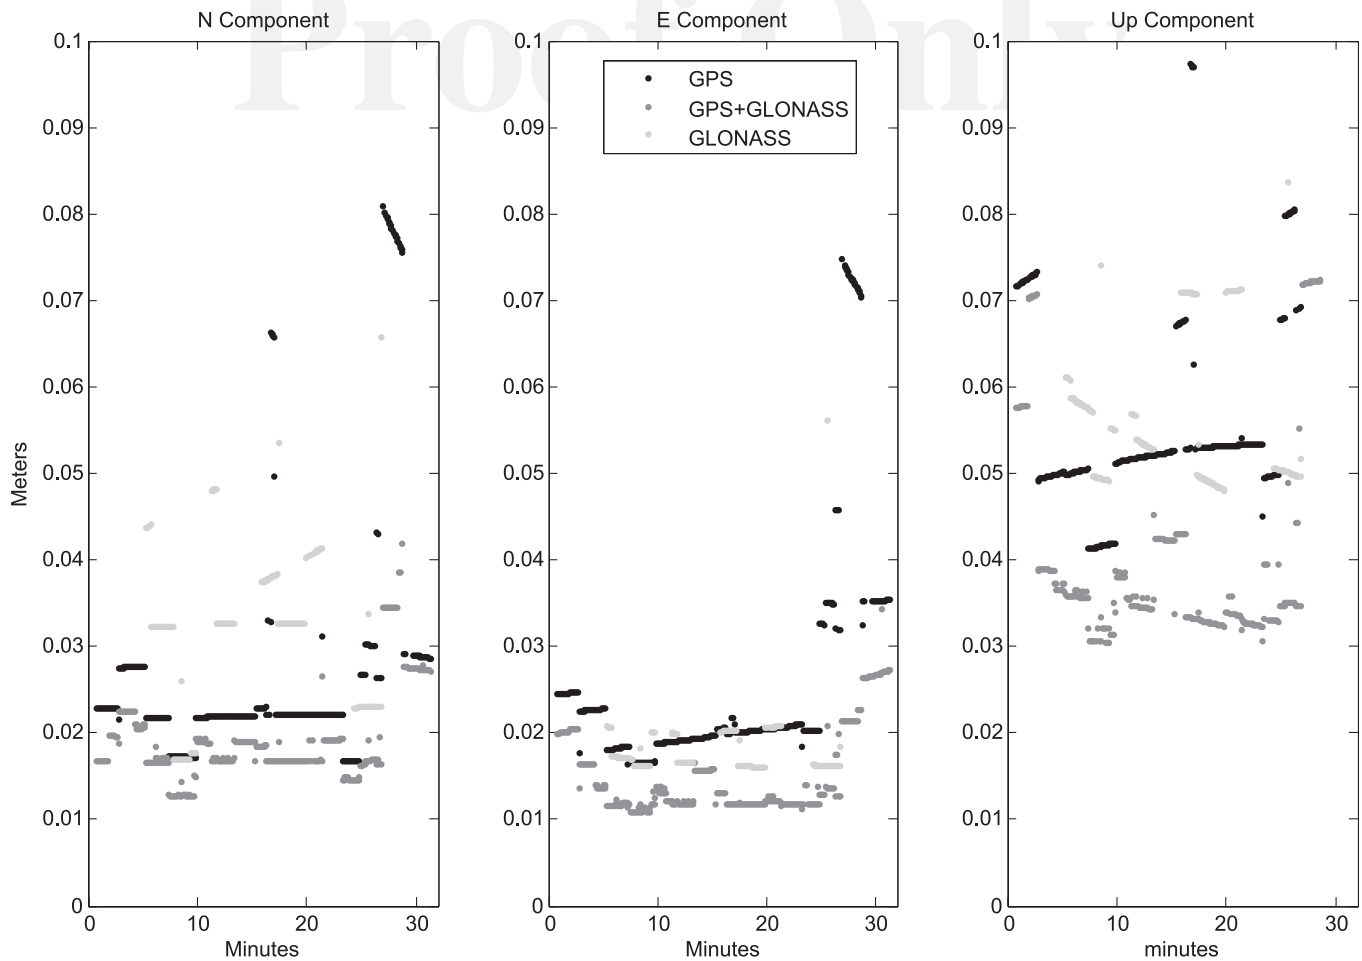


Fig. 8. Standard deviations in the calculation of the coordinates of Fig. 7

Table 8. Statistical Resume of the Kinematic PPP Bias for the Car Trajectory

Mean value	GPS only (m)			GLONASS only (m)			GPS + GLONASS (m)		
	North	East	Up	North	East	Up	North	East	Up
RMS	0.552	0.646	0.824	1.652	2.124	2.132	0.409	0.891	0.984
Standard deviation	0.090	0.082	0.332	0.244	0.210	0.622	0.080	0.077	0.190
Range	1.366	1.480	2.603	1.816	1.835	2.772	1.306	1.464	1.892

the kinematic PPP method with the *MagicGNSS* software (the process here is not based on a dynamic filter for the kinematic positions; it uses a batch estimator as in the static case). The coordinate bias was obtained by comparing the kinematic PPP solution for every epoch with the weekly IGS coordinates as a reference. As an example, Fig. 5 shows the bias of the kinematic PPP solution using GPS only, GLONASS only, and GPS + GLONASS for Station MDVJ on December 13. The standard deviations in the calculation of the kinematic coordinates are also included in Fig. 5.

Table 4 presents the mean RMS residuals for the code and phase observations, showing the precision of the raw data in the kinematic determination. The mean RMS, mean standard deviation, and mean range (the maximum value minus the minimum value) of the bias of the kinematic PPP solution were taken as parameters to compare the GPS-only and GLONASS-only results with the GPS + GLONASS

results. Table 5 presents the values for this statistical information, where the better performance of the GPS + GLONASS solution in comparison with the GPS-only solution can be seen; especially in the up component, where a 40% reduction can be found in the RMS and standard deviation and a 50% reduction in the range. As in the static case, a deep analysis of the results showed that not all the GPS + GLONASS solutions presented a lower bias than the GPS-only solutions. Table 6 presents the percentage of kinematic PPP solutions with a lower mean RMS, standard deviation, and range using GPS + GLONASS in comparison with GPS only. This percentage is 41%; however, 16% of the observations still have a lower mean RMS, standard deviation, and range for the GPS-only solution than the GPS + GLONASS solution. These percentages were computed for the eight permanent stations on the three days under study by taking into account the north, east, and up components.

To consider all the possible cases, the GLONASS-only solution was also considered. The GLONASS-only results were obtained only for 11 observation files because of the low number of GLONASS satellites in the other sessions and as a result of the inclusion of the interchannel bias as a new parameter to be adjusted, which generates no GLONASS-only solution with *MagicGNSS* in the kinematic mode in some cases (Alvaro Mozo, private communication). As in Table 5, Table 7 presents the mean values for the statistical information (mean RMS, standard deviation, and range) based on the coordinate bias (comparison between epoch-by-epoch kinematic PPP solution and the weekly IGS coordinates) for the stations where the GLONASS-only solution was obtained. As in

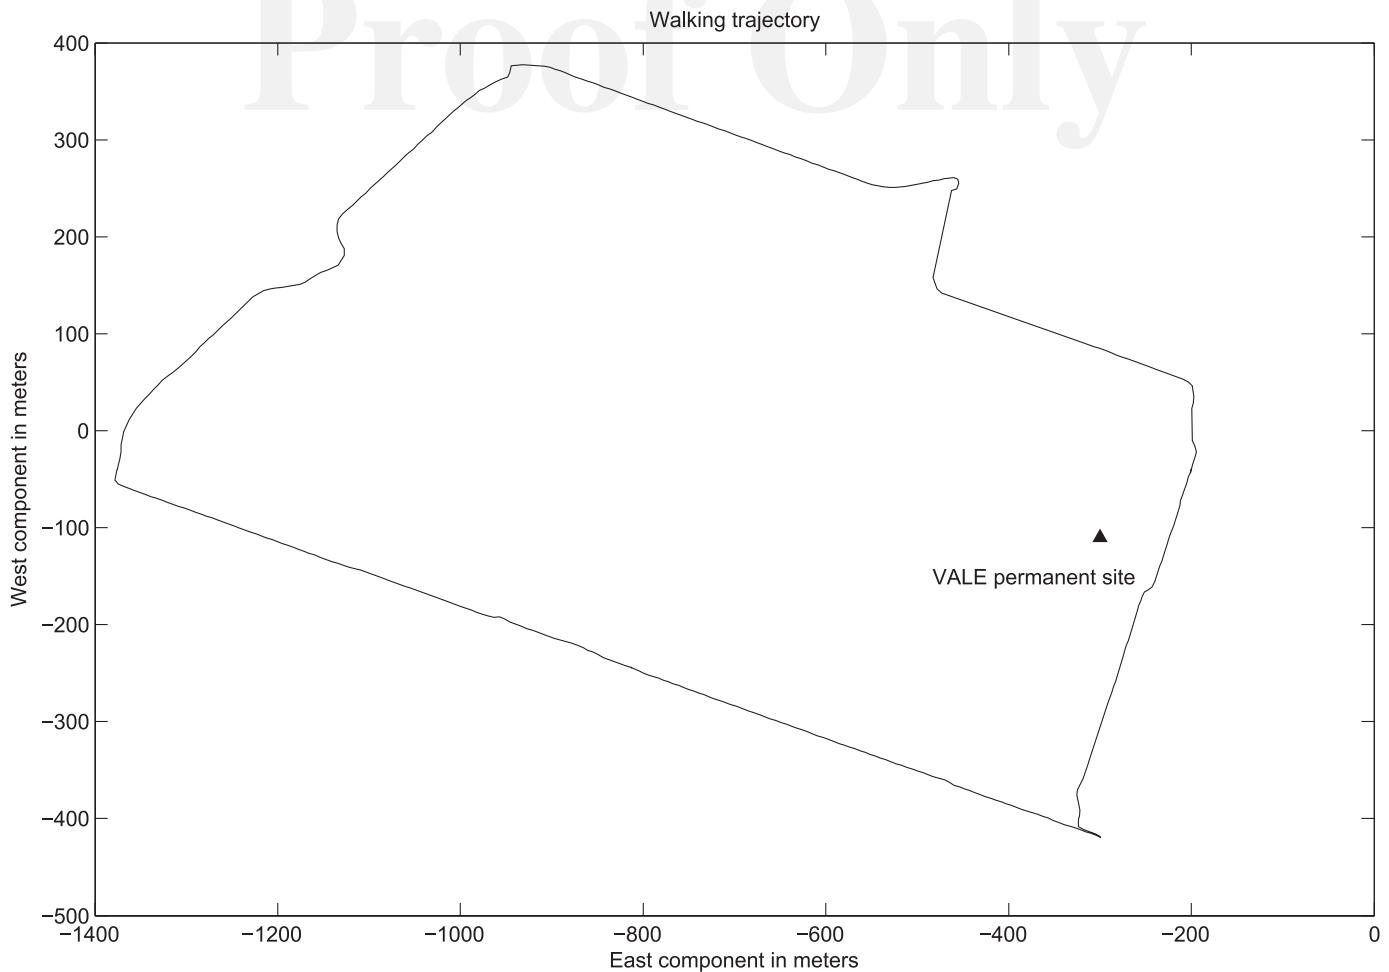


Fig. 9. Walking trajectory used for the kinematic analysis

Table 5, better performance was obtained for the GPS + GLONASS solution. Finally, GLONASS-only solution was never better than the GPS + GLONASS solution and was only better than GPS-only solution in the east component of the NANO station (July, 30, 2010) and the BRST station (December 13, 2010).

The PDOP evolution and the number of GPS and GPS + GLONASS satellites are presented in Fig. 3. If the PDOP evolution with the evolution of the kinematic bias of the results and the evolution of the standard deviation of the coordinate solution are compared, no clear correlation is found. Thus, the improvement in the geometry of the combined constellation in comparison with the GPS-only constellation does not mean a direct improvement in the kinematic PPP solution or in the standard deviation of this solution, as was found in the static case.

Testing in the Kinematic Environment

Kinematic PPP is vulnerable to data quality issues. Kinematic files are clearly noisier than IGS data sets from reference stations. Such kinematic observation data represent a more realistic scenario than the IGS data sets because a GNSS antenna mounted on a vehicle is strongly susceptible to multipath problems and signal loss as a result of vehicle dynamics and obstructions (for example, in an urban canyon environment). Such signal loss is currently the main problem with kinematic PPP use because the system must be reinitialized to resolve ambiguities. In the two subsequent sections, two tests are

used to compare GPS-only, GLONASS-only, and GPS + GLONASS kinematic PPP in a kinematic environment.

Car Trajectory

On February 28, 2011, GNSS data were collected at 5-s intervals for a car trajectory analysis in the environs of the Technical University of Valencia (Fig. 6). The streets are wide enough to allow a strong GNSS signal. In addition to the dual-frequency GPS + GLONASS receiver in the car (Trimble R8 with TRMR8_GNSS antenna), there was another dual-frequency GPS + GLONASS receiver (Trimble NETRS with TRM29659.00 antenna) at a fixed, precisely known, location [the permanent International Association of the Geodesy Reference Frame subcommission for Europe (EUREF) site VALE]. The fixed site and the rover were never more than 5 km from each other. Thus, it was possible to obtain precise short baseline solutions for the rover receiver (mean horizontal deviation under 2 cm for planimetric coordinates and under 3 cm for the vertical coordinate). The resulting relative trajectory was used as the real trajectory to which the kinematic PPP solutions were compared with the obtain coordinate bias indicated in Fig. 7. The standard deviation in the calculation of the coordinates can be seen in Fig. 8.

Table 8 presents the mean values for the statistical information (RMS, standard deviation, and range) of the coordinate bias for the GPS-only, GLONASS-only, and GPS + GLONASS solutions. A slight improvement based on the standard deviation and range was found for the north and east components of the GPS + GLONASS

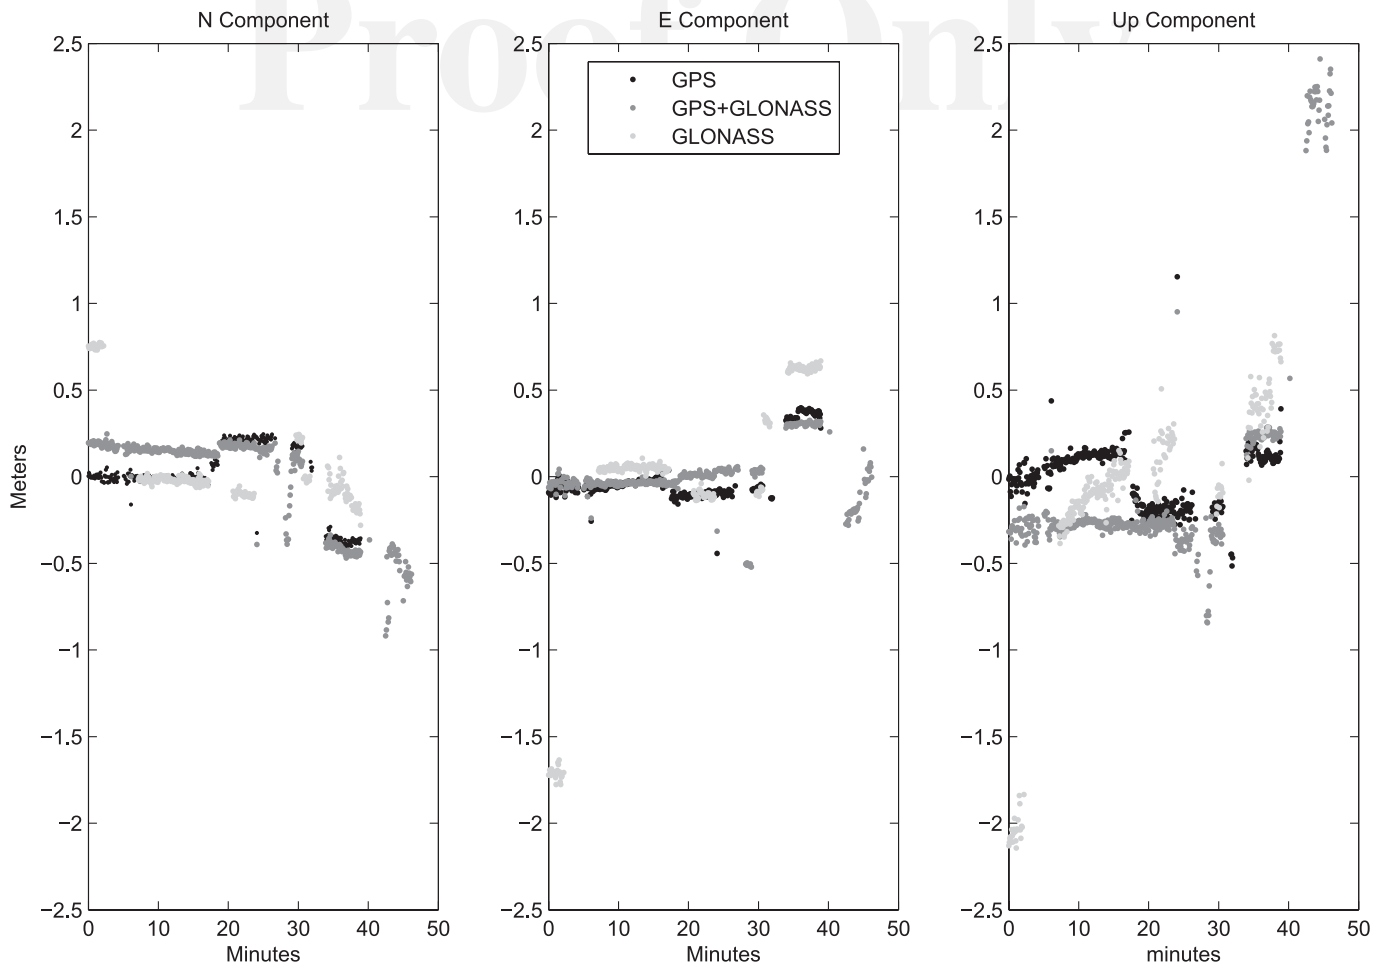


Fig. 10. Kinematic PPP bias using GPS only, GLONASS only, and GPS + GLONASS for the walking trajectory

solution in comparison with the GPS-only solution, and there was a reduction of 42% in the standard deviation and 27% in the range for the up component. The mean PDOP was reduced by 21% for the GPS + GLONASS solution in comparison with the GPS-only solution. In addition, the GLONASS-only solution was never better than the GPS-only solution or the GPS + GLONASS solution.

The final part of the trajectory presents the major bias values in the GPS-only, GLONASS-only, and GPS + GLONASS solutions (the northeast part in Fig. 6) because of the building obstructions on the campus. This is an example of the sensitivity of PPP to interruptions in signal tracking and data gaps, which significantly influence the accuracy of kinematic PPP; that is, the momentary loss of the satellite signal not only produces no PPP solution. However, in the case of a solution it presents a higher bias and standard deviation in the calculation of the coordinates. Finally, only 2% of the solutions were not found in the GPS-only solution in comparison with the GPS + GLONASS solution because of the building obstructions of the satellite signal.

Walking Trajectory

The final test was conducted on February 18, 2011. In this test, a walking trajectory around the campus of the Technical University of Valencia was analyzed (Fig. 9). The data were recorded at 5-s intervals using the same GNSS dual-frequency receiver as in the car trajectory, and—as in the analysis of the car trajectory—the data from the VALE permanent station were used to obtain the real trajectory (with the

same precision level) to be compared with the kinematic PPP solutions to obtain the coordinate bias to analyze. In the GLONASS-only and GPS + GLONASS solutions, two GLONASS satellites (R6 and R21) were manually excluded before processing because of the high RMS on the code residual (70–80 m); this procedure can also be found in Kjorsvik et al. (2009). Fig. 10 presents the coordinate bias for the GPS-only, GLONASS-only, and GPS + GLONASS solutions without the R6 and R21 satellites. The standard deviation in the calculation of the coordinates can be seen in Fig. 11.

Table 9 presents the mean values for the statistical information (RMS, standard deviation, and range) of the coordinate bias for the GPS-only, GLONASS-only, and GPS + GLONASS solutions for the first 30 min of the walking trajectory (before multiple signal losses). As in the car trajectory, a slight improvement can be found for the east component of the GPS + GLONASS solution in comparison with the GPS-only solution, and reductions of 62 and 44% in the standard deviation for the north and up components, respectively, were obtained. The mean PDOP was reduced by 31% for the GPS + GLONASS solution in comparison with the GPS-only solution.

In addition, the GLONASS-only solution was never better than the GPS-only solution or the GPS + GLONASS solution. However, as can be seen in Fig. 10, this is the test that produced the most significant data gaps for GPS and GLONASS signals; 30% of the code or phase observations were not processed by the *MagicGNSS* software with none of the GPS-only, GLONASS-only, or GPS + GLONASS constellations. Most of the issues arose in the final part of the trajectory (in exactly the same zone in which the data gaps

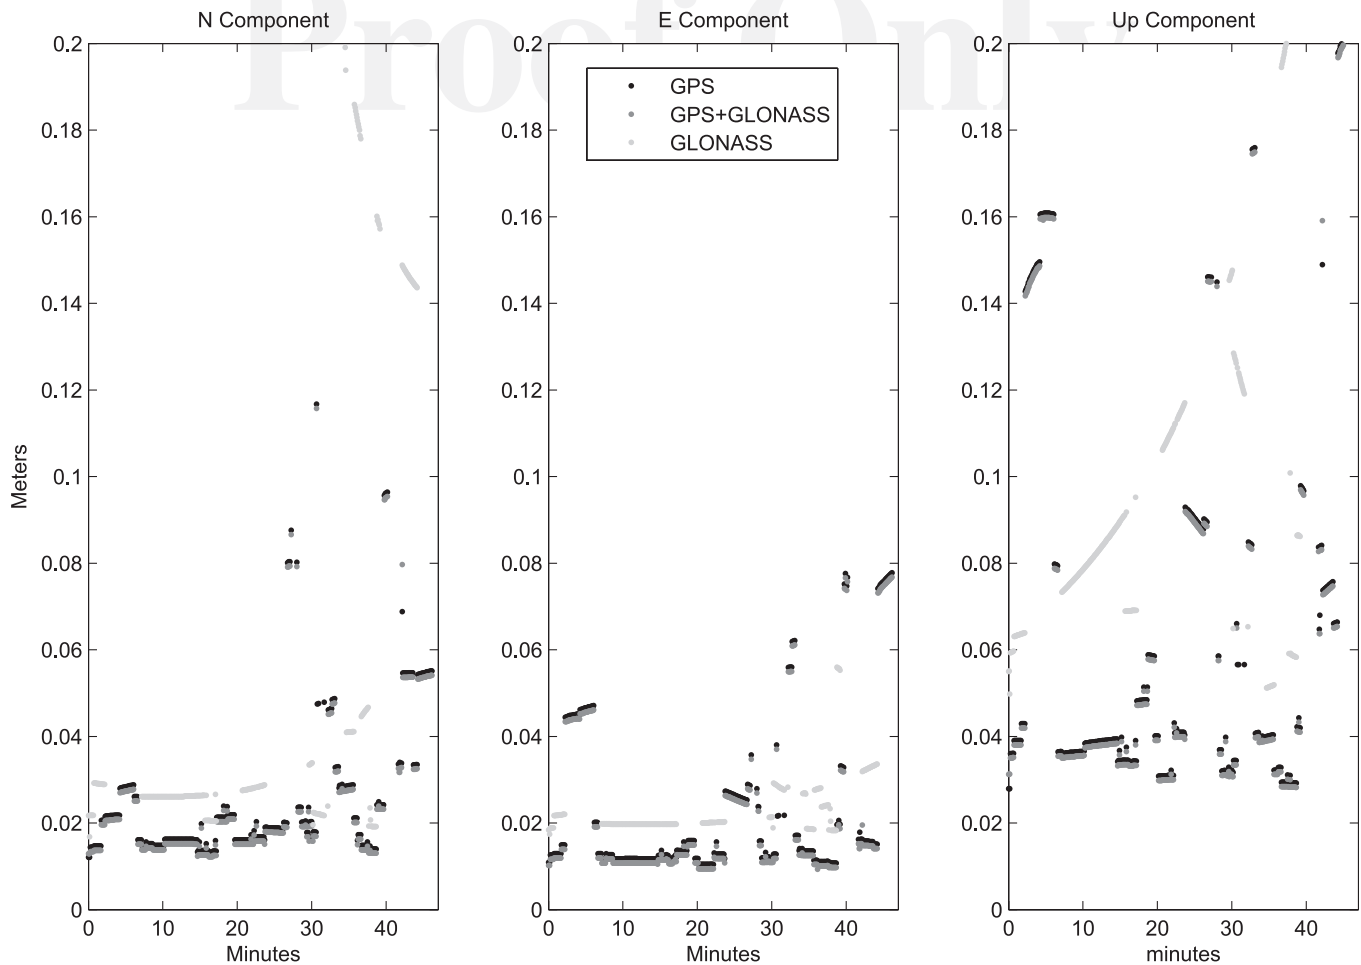


Fig. 11. Standard deviation in the calculation of the coordinates of Fig. 10

Table 9. Statistical Resume of the Kinematic PPP Bias for the Walking Trajectory

Mean value	GPS only (m)			GLONASS only (m)			GPS + GLONASS (m)		
	North	East	Up	North	East	Up	North	East	Up
RMS	0.125	0.198	0.679	1.039	0.969	0.710	0.220	0.763	0.095
Standard deviation	0.101	0.045	0.157	0.277	0.604	0.706	0.045	0.037	0.088
Range	0.570	0.487	1.431	0.902	1.884	2.649	0.538	0.369	1.397

occurred in the car trajectory because of building obstructions). For that portion of the trajectory, continuous jumps in the solutions can be found. Finally, only 7% of the solutions were not found in the GPS-only solution in comparison with the GPS + GLONASS solution because of the building obstructions of the satellite signal, resulting in no solution with the GPS-only constellation mostly in the final part of the trajectory (Fig. 10).

Conclusions

This study aimed at testing the performance of a dual-frequency GPS + GLONASS PPP solution in both static and kinematic environments in comparison with GPS-only and GLONASS-only solutions. It has been shown that the addition of the GLONASS

constellation improved the satellite availability and geometry by more than 20%. This improvement allows for precise surveying in urban areas or when the satellite signal is partially obstructed. However, this improvement in the geometry of the combined constellation in comparison with the GPS-only or GLONASS-only constellation does not necessarily mean an improvement in the static or kinematic PPP solution or in the standard deviation of the solution.

The main conclusion of the static study is that the addition of the GLONASS constellation improves the convergence of static PPP by 20% as a mean value for a 1-cm accuracy level and by 13% for a 10-cm accuracy level. However, if the total convergence time is considered, the GPS-only solution presents a better convergence time in 29% of the cases in comparison with the GPS + GLONASS results. Thus, the GPS + GLONASS results do not present better results than the GPS-only solution in all of the static cases.

The mean kinematic results from the permanent IGS sites showed that a 40% reduction can be found in the mean RMS and standard deviation of the GPS + GLONASS results in comparison with the GPS-only results and 50% in the range. However, 16% of the solutions presented a lower mean RMS, standard deviation, and range for the GPS-only solution in comparison with the GPS + GLONASS results. Thus, the GPS + GLONASS results do not present better results than the GPS-only solution in all of the kinematic cases using the IGS permanent stations. The kinematic results from the kinematic environment (car and walking trajectories) presented better accuracy with the GPS + GLONASS solution than the GPS-only solution.

Finally, the GLONASS-only solutions were not as accurate as the GPS-only or GPS + GLONASS solutions in either the static or kinematic mode. Thus, in this case study, the GPS + GLONASS solution was noticeably more accurate than the GPS-only solution if the mean results in the static and kinematic solutions for the IGS sites are considered, and more accurate and robust in all the kinematic environment cases (here, robust means that the GPS + GLONASS kinematic PPP can produce a solution when signal tracking interruptions are present). Two main factors are expected to contribute to further improvements; i.e., the ongoing and planned next generation of GLONASS satellites (GLONASS-K) and further improvements in the precision of the GPS and GLONASS orbit and clock products.

Acknowledgments

This research is supported by Spanish Science and Innovation Directorate Project No. AYA2010-18706. The authors greatly appreciate the efforts of the IGS, Analysis and Data Centers, and tracking station managers for generating high-quality data and products and for making them available to the GNSS community in a timely and reliable way. The authors would like to thank Alvaro Mozo and Ricardo Píriz from GMV Aerospace for the free use of the online software *MagicGNSS* and their valuable comments on how *MagicGNSS* works. The three anonymous reviewers are kindly acknowledged for their contribution to the improvement of the paper with their valuable comments and suggestions.

References

- Alcay, S., Inal, C., Yigit, C. O., and Yetkin, M. (2012). "Comparing GLONASS-only with GPS-only and hybrid positioning in various length of baselines." *Acta Geod. Geoph. Hung.*, 47(1), 1–12.
- Azab, M., El-Rabbany, A., Shoukry, M. N., and Khalil, R. (2011). "Precise point positioning using combined GPS/GLONASS measurements." *Proc., FIG Working Week 2011, Bridging the Gap between Cultures, Marrakech, Morocco*.
- Bisnath, S. N., Beran, T., and Langley, R. B. (2002). "Precise platform positioning with a single GPS receiver." *GPS World*, 13(4), 42–49.
- Bruyninx, C. (2007). "Comparing GPS-only with GPS + GLONASS positioning in a regional permanent GNSS network." *GPS Solutions*, 11(2), 97–106.
- Cai, C., and Gao, Y. (2007). "Precise point positioning using combined GPS and GLONASS observations." *J. Global Positioning Syst.*, 6(1), 13–22.
- Chen, K. (2004). "Real-time precise point positioning and its potential application." *Proc., ION GNSS 17th Int. Technical Meeting of the Satellite Division*, Long Beach, CA.
- Chen, W., Hu, C., Gao, S., Chen, Y., and Ding, X. (2009). "Error correction models and their effects on GPS precise point positioning." *Surv. Rev.*, 41(313), 238–252.
- Colombo, O. L., Sutter, A. W., and Evans, A. G. (2004). "Evaluation of precise, kinematic GPS point positioning." *Proc., ION GNSS 17th Int. Technical Meeting of the Satellite Division*, Long Beach, CA.
- Gao, Y., and Shen, X. (2001). "Improving convergence speed of carrier phase based precise point positioning." *Proc., of ION GPS 200*, Salt Lake City, 1532–1539.
- Gao, Y., and Shen, X. (2002). "A new method for carrier phase based precise point positioning navigation." *J. Inst. Navig.*, 49(2), 109–116.

- Geng, J., Meng, X., Teferle, N., and Dodson, A. (2010). "Performance of precise point positioning with ambiguity resolution for 1- to 4-hour observation periods." *Surv. Rev.*, 42(316), 155–165.
- GMV Aerospace and Defence. (2010). "MagicGNSS precise point positioning by email." (<http://magicgnss.gmv.com/ppp/>) (Mar. 2010).
- Hefty, J., and Gerhatova, L. (2011). "Specificities of GLONASS pseudorange and phase processing in the precise point positioning algorithms when combining with GPS." *Proc., European General Assembly, Vienna, Austria*.
- Hefty, J., Gerhatova, L., and Burgan, J. (2010). "Combination of GPS and GLONASS in PPP algorithms and its effect on site coordinates determination." *Proc., Journées Systèmes de Référence Spatio-Temporels, New Challenges for Reference Systems and Numerical Standards in Astronomy*, Paris, 200–201.
- Héroux, P., et al. (2004). "Products and applications for precise point positioning—Moving towards real-time." *Proc., ION GNSS 17th Int. Technical Meeting of the Satellite Division*, Long Beach, CA.
- Hesselbarth, A., and Wanninger, L. (2008). "Short-term stability of GNSS satellite clocks and its effects on precise point positioning." *Proc., ION GNSS 21st Int. Technical Meeting of the Satellite Division of the Institute of Navigation*, Institute of Navigation, Manassas, VA, 1855–1863.
- Hofmann-Wellenhof, B., Lichtenegger, H., and Wasele, E. (2008). *GNSS, global navigation satellite systems: GPS, GLONASS, GALILEO & more*, Springer, New York.
- Jensen, A. B. O., and Ovstedal, O. (2008). "The effect of different tropospheric models on precise point positioning in kinematic mode." *Surv. Rev.*, 40(308), 173–187.
- Kouba, J., and Héroux, P. (2001). "Precise point positioning using IGS orbit and clock products." *GPS Solutions*, 5(2), 12–28.
- Kjorsvik, N. S., Ovstedal, O., and Gjevestad, J. G. O. (2009). "Kinematic precise point positioning during marginal satellite availability." *Proc., Int. Association of Geodesy Symposia 133: Observing Our Changing Earth*, 691–699.
- Martín, A., Anquela, A. B., Berné, J. L., and Sanmartín, M. (2012). "Kinematic GNSS-PPP results from various software packages and raw data configurations." *Sci. Res. Essays*, 7(3), 419–431.
- Martín, A., Anquela, A. B., Capilla, R., and Berné, J. L. (2011). "PPP technique analysis based on time convergence, repeatability, IGS products, different software processing, and GPS + GLONASS constellation." *J. Surv. Eng.*, 137(3), 99–108.
- Melgard, T., Vigen, E., Orpen, O., and Ulstein, J. H. (2010). "Pulling in all signals. PPP with GPS and GLONASS: The new G2." *GPS World*, 21(3), 28–35.
- National Geophysical Data Center (NGDC). (2010). "Global self-consistent, hierarchical, high-resolution shoreline database (GSHHS)." (<http://www.ngdc.noaa.gov/mgg/shorelines/gshhs.html>) (Feb. 2010).
- Píriz, R., Calle, D., Mozo, A., Navarro, P., Rodríguez, D., and Tobías, G. (2009). "Orbits and clocks for GLONASS precise-point-positioning." *Proc., ION GNSS 22nd Int. Technical Meeting of the Satellite Division of the Institute of Navigation*, Institute of Navigation, Manassas, VA.
- Píriz, R., Mozo, A., Navarro, P., and Rodríguez, D. (2008). "MagicGNSS: Precise GNSS products out of the box." *Proc., ION GNSS 21st Int. Technical Meeting of the Satellite Division of the Institute of Navigation*, Institute of Navigation, Manassas, VA, 1242–1251.
- Wanninger, L. (2012). "Carrier-phase inter-frequency biases of GLONASS receivers." *J. Geodesy*, 86(2), 139–148.
- Zumberge, J. F., Hefflin, M. B., Jefferson, D. C., Watkins, M. M., and Webb, F. H. (1997). "Precise point positioning for the efficient and robust analysis of GPS data from large networks." *J. Geophys. Res.*, 102(B3), 5005–5018.

AUTHOR QUERIES

AUTHOR PLEASE ANSWER ALL QUERIES

- Q: 1_Please clarify the use of “+” in the title; can this be changed to “and”?
- Q: 2_Please verify “A. Martín” is correct and not “A. Martín Furones.”
- Q: 3_AU: Please check our changes to the English throughout to make sure your meaning has been preserved.
- Q: 4_Is GLONASS the combination of GPS and GNSS? Both GLONASS and GNSS seem to expand to global navigation satellite system. Please clarify which is, or if both are, correct.
- Q: 5_Please verify the formatting of the university address is correct for each affiliation. Specifically, “C\Camino de Vera s/n.”
- Q: 6_AU: In the affiliations please supply the title/position for each author.
- Q: 7_AU: Please spell out acronym ITRF.
- Q: 8_AU: For the MDVJ station, what was the day in February 2010?
- Q: 9_If this is an acronym, please expand.
- Q: 10_AU: Please provide the name and location of the publisher for the reference “Azab et al. (2011).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 11_AU: Please provide the name and location of the publisher for the reference “Chen (2004).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 12_AU: Please provide the name and location of the publisher for the reference “Colombo et al. (2004).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 13_AU: Please provide the name and location of the publisher for the reference “Gao and Shen (2001).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 14_AU: Please provide the name and location of the publisher for the reference “Hefty and Gerhatova (2011).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 15_AU: Please provide the name and location of the publisher for the reference “Hefty et al. (2010).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 16_AU: Please provide the name and location of the publisher for the reference “Heroux et al. (2004).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 17_AU: Please provide the name and location of the publisher for the reference “Kjorsvik et al. (2009).” If there is no “publisher,” then please provide the name and location of the sponsor.
- Q: 18_If available, please provide the full date of access (mm/dd/yyyy) in NGDC 2010.
- Q: 19_AU: In Table 2, please supply a heading for column 1.
- Q: 20_AU: In Table 4, please supply a heading for column 1.
-
-