


# GPS Sounding of the Atmosphere from Low Earth Orbit: Preliminary Results



R. Ware,\* M. Exner,+ D. Feng,# M. Gorbunov,@ K. Hardy,& B. Herman,# Y. Kuo,\*\*  
T. Meehan,++ W. Melbourne,++ C. Rocken,\* W. Schreiner,+ S. Sokolovskiy,@  
F. Solheim,\* X. Zou,\*\* R. Anthes,+ S. Businger,## and K. Trenberth\*\*

## ABSTRACT

This paper provides an overview of the methodology of and describes preliminary results from an experiment called GPS/MET (Global Positioning System/Meteorology), in which temperature soundings are obtained from a low Earth-orbiting satellite using the radio occultation technique. Launched into a circular orbit of about 750-km altitude and 70° inclination on 3 April 1995, a small research satellite, *MicroLab 1*, carried a laptop-sized radio receiver. Each time this receiver rises and sets relative to the 24 operational GPS satellites, the GPS radio waves transect successive layers of the atmosphere and are bent (refracted) by the atmosphere before they reach the receiver, causing a delay in the dual-frequency carrier phase observations sensed by the receiver. During this occultation, *GPS limb sounding* measurements are obtained from which vertical profiles of atmospheric refractivity can be computed. The refractivity is a function of pressure, temperature, and water vapor and thus provides information on these variables that has the potential to be useful in weather prediction and weather and climate research.

Because of the dependence of refractivity on both temperature and water vapor, it is generally impossible to compute both variables from a refractivity sounding. However, if either temperature or water vapor is known from independent measurements or from model predictions, the other variable may be calculated. In portions of the atmosphere where moisture effects are negligible (typically above 5–7 km), temperature may be estimated directly from refractivity.

This paper compares a representative sample of 11 temperature profiles derived from GPS/MET soundings (assuming a dry atmosphere) with nearby radiosonde and high-resolution balloon soundings and the operational gridded analysis of the National Centers for Environmental Prediction (formerly the National Meteorological Center). One GPS/MET profile was obtained at a location where a temperature profile from the Halogen Occultation Experiment was available for comparison. These comparisons show that accurate vertical temperature profiles may be obtained using the GPS limb sounding technique from approximately 40 km to about 5–7 km in altitude where moisture effects are negligible. Temperatures in this region usually agree within 2°C with the independent sources of data. The GPS/MET temperature profiles show vertical resolution of about 1 km and resolve the location and minimum temperature of the tropopause very well. Theoretical temperature accuracy is better than 0.5°C at the tropopause, degrading to about 1°C at 40-km altitude.

Above 40 km and below 5 km, these preliminary temperature retrievals show difficulties. In the upper atmosphere, the errors result from initial temperature and pressure assumptions in this region and initial ionospheric refraction assumptions. In the lower troposphere, the errors appear to be associated with multipath effects caused by large gradients in refractivity primarily due to water vapor distribution.

## 1. Introduction

On 3 April 1995, a Pegasus rocket carried aloft by an aircraft from Vandenberg Air Force Base launched

a small research satellite (*MicroLab 1*) into a circular orbit of about 750-km altitude and 70° inclination. The disk-shaped satellite, which circles Earth every 100 min, carried a laptop-sized Global Positioning System

\*University Navstar Consortium, Boulder, Colorado.

+University Corporation for Atmospheric Research, Boulder, Colorado.

#The University of Arizona, Tucson, Arizona.

@Russian Institute of Atmospheric Physics, Moscow, Russia.

&Lockheed Martin Missiles and Space, Palo Alto, California.

\*\*National Center for Atmospheric Research, Boulder, Colorado.

\*\*Jet Propulsion Laboratory, California Institute of Technology, Pasadena, California.

##University of Hawaii at Manoa, Honolulu, Hawaii.

*Corresponding author address:* Richard A. Anthes, University Corporation for Atmospheric Research, 1850 Table Mesa Dr., Boulder, CO 80303.

In final form 15 September 1995.

©1996 American Meteorological Society

(GPS) receiver to demonstrate sensing of the terrestrial atmosphere by the GPS limb sounding method (Melbourne et al. 1988; Ware 1992). This paper describes the first results from the GPS/Meteorology (GPS/MET) proof-of-concept experiment<sup>1</sup> (Ware et al. 1993).

The Global Positioning System is an advanced satellite navigation system offering precision global services. The system includes a constellation of 24 operational satellites and an extensive ground control system. Although GPS was developed for military needs, numerous scientific and commercial applications have matured in parallel, and the number of new applications is growing rapidly (Bevis et al. 1992; Ware and Businger 1995). It now appears that GPS is destined to become, in effect, a global utility upon which many manufacturing and service industries will rely.

In a companion paper, Businger et al. (1996) provide an overview of the applications of GPS in atmospheric science. They discuss the use of ground-based GPS receivers to estimate precipitable water with an accuracy comparable to, and in some cases better than, that of water vapor radiometers. In the GPS limb sounding method (Fig. 1), atmospheric soundings are retrieved from observations obtained when the radio path between a GPS satellite and a GPS receiver in low Earth orbit (LEO) traverses Earth's atmosphere (Hardy et al. 1992). When the path of the GPS signal begins to transect the mesopause at about 85-km altitude, it is sufficiently retarded that a detectable 1-mm ( $3 \times 10^{-12}$  s) delay in the dual-frequency carrier phase is observed by the LEO GPS receiver. GPS transmitter and LEO receiver clock errors are minimized through differencing of LEO GPS data with ground-based GPS data from tracking stations supported by the National Aeronautics and Space Administration (NASA) and the International GPS Service (Zumberge et al. 1994; Ware and Businger 1995). As the signal path descends through successively denser layers of the atmosphere, the excess path increases to approximately 1 km ( $3 \times 10^{-6}$  s) at Earth's surface. Thus, the atmosphere creates a signal with about six orders of magnitude in dynamic range.

A single LEO GPS receiver can observe more than 500 occultations per day, with roughly uniform glo-

bal coverage. This method promises to provide valuable measurements of refractivity. As discussed in the appendix, refractivity depends on temperature and water vapor through two terms, a *dry* and a *wet* term. Without knowing one term or the other, neither temperature nor moisture profiles can be recovered in the general case. Therefore, when temperature profiles are the goal, GPS limb sounding is useful only where moisture effects are negligible (and, hence, temperature can be calculated directly from refractivity with the wet term set to zero), including stratospheric, upper-tropospheric, polar, and other regions of the atmosphere with temperatures lower than 250 K, or where ancillary water vapor or temperature estimates are available (such as from independent measurements, model predictions, or climatology). However, as shown later, refractivity itself may be valuable in weather forecasting and as a global temperature change signal.

## 2. History of radio occultation methodology

The atmospheric measurements reported here are based on a radio occultation technique that was first developed at the Jet Propulsion Laboratory (JPL) and used by Stanford University for application to studies of planetary atmospheres and ionospheres. Radio occultation experiments at JPL and Stanford have played a prominent role in the NASA program for

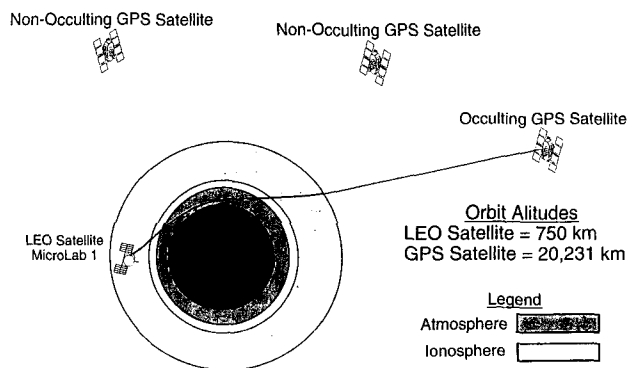


FIG. 1. Schematic of a GPS/MET sounding of the Earth's atmosphere (not to scale). The ray path descent through the neutral atmosphere lasts a minute or more, depending on the relative positions of Earth and the LEO and GPS satellites. Radio path delays observed as the ray path approaches the Earth's surface can be as large as several kilometers with ray path bending as large as 1 deg. Path delay profiles can be converted to refractivity profiles.

<sup>1</sup>The University Corporation for Atmospheric Research (UCAR) has a contract with Orbital Sciences Corporation, operator of *MicroLab 1*, that gives UCAR exclusive rights to the GPS/MET data for scientific use. UCAR is providing the data free of charge to scientists around the world via the World Wide Web (<http://pocc.gpsmet.ucar.edu>).

solar system exploration for more than three decades. They have contributed uniquely to studies of the atmospheres of Venus (Kliore et al. 1965; Fjeldbo and Eshleman 1969; Fjeldbo et al. 1971; Newman et al. 1984), Mars (Fjeldbo and Eshleman 1968; Lindal et al. 1979), the gas giants Jupiter, Saturn, Uranus, and Neptune (Lindal et al. 1981, 1985, 1987, 1990; Lindal 1992) as well as the outer-planet satellites Io, Titan, and Triton (Kliore et al. 1975; Lindal et al. 1983; Tyler et al. 1989), and to studies of planetary ring structure (Tyler 1987).

Typically, experiments involved a spacecraft transmitter linked to a terrestrial receiver via a centimeter-wavelength radio signal. The spacecraft trajectory was selected so that the propagation path from the spacecraft to Earth passed through the planetary atmosphere under study, producing distinctive variations in the amplitude and phase of the received signal. These variations were then used to infer the thermodynamic structure of the atmosphere of these planets.

Russian scientists investigated the potential of the occultation technique, aided by refraction observations from space, of the Sun as it is occulted by Earth's atmosphere (Gurvich et al. 1982). Subsequently, the use of GPS occultations for sensing the terrestrial atmosphere was proposed by Melbourne et al. (1988). More recently, investigators at JPL conducted experiments designed to refine the occultation methodology for use in sensing Earth's atmosphere, using a high-performance GPS receiver from a mountain top (Meehan et al. 1991). This experience base, combined with the availability of GPS, set the stage for development of an accurate and reliable method for remote sensing of the terrestrial atmosphere.

### 3. Characteristics of other upper-air observational systems

To put the characteristics of GPS limb sounding data and the preliminary GPS/MET temperature retrievals discussed later (section 7) into perspective, we first summarize the characteristics of other upper-air observational systems.

#### a. Radiosondes

Since the establishment of the global radiosonde network beginning in the 1940s, radiosondes have been the mainstay of the global upper-air observing system. In 1991 there were more than 1000 radiosonde

stations operated by 92 nations using 39 different types of radiosondes (NOAA 1992). Under ideal conditions and careful calibration, radiosondes are quite accurate, with temperatures accurate to about  $\pm 0.5^{\circ}\text{C}$  and relative humidities accurate to within a few percent, except under very low temperatures or very high or low relative humidities (Shea et al. 1994; Ahnert 1991; Luers and Eskridge 1995). Under operational conditions, relative humidity measurement errors are considerably greater than a few percent. Radiosondes provide data from near the surface to a height of about 30 km. Because of pressure errors, temperature accuracies are degraded in the upper troposphere and stratosphere, with typical errors of  $1^{\circ}\text{C}$  above 250 mb increasing to as large as  $4^{\circ}\text{C}$  at 10 mb (Nash and Schmidlin 1987). Radiosondes produce soundings with high vertical resolution, resolving features with vertical scales of a few tens of meters. However, the coverage of radiosondes is uneven over the globe and sparse to nonexistent over the oceans. The temporal resolution is also fairly low (12-h frequency at best, and many countries take only one observation per day), and they suffer from substantial changes in instrumentation with time (e.g., Schwartz and Doswell 1991). In particular, for humidity, complicating factors have been the use of low-quality sensors and changes in the type of humidity sensing element and, more important, changes in reporting procedures at low humidity (e.g., Elliott and Gaffen 1991). Costs are an additional issue, especially for developing countries. The upper-air radiosonde-observing network reached its peak during the Global Weather Experiment (1979), and the number of soundings has since declined by about a third (Trenberth 1995).

#### b. Satellites

Since the first meteorological satellite, *TIROS-I*, was launched on 1 April 1960, satellites have played an increasingly important role in providing first meteorological images and later temperature, moisture, and wind data for use in operational weather prediction and for research. *TIROS-I* provided only cloud images; the first satellite producing wind data was *ATS-I*, launched 6 December 1966. The first satellite producing temperature and water vapor soundings was *Nimbus III*, launched in 1969. The first operational satellite producing temperature and water vapor soundings was *NOAA-2*, launched in 1972.

Atmospheric soundings are produced by satellites in polar and geostationary orbits. The present generation of operational polar orbiters began with NASA's

prototype *TIROS-N*, launched in 1978, followed in 1979 by *NOAA-6*, the first operational spacecraft in the series, and based on the design of NASA's *TIROS-N*. Two of these satellites usually operate simultaneously, one in a morning and the other in an afternoon orbit around Earth, thus providing four observations of the entire Earth each day. These satellites carry the High Resolution Infrared Sounder, stratospheric sounder unit, microwave sounding unit (MSU), and the Advanced Very High Resolution Radiometer. Data from the microwave radiometers are unaffected by clouds and light rain, but those from the infrared radiometers are contaminated by clouds and aerosols.

The United States operates two Geostationary Operational Environmental Satellites (GOES) located over the equator at about 75° and 135°W longitude. They provide frequent cloud images, from which cloud motions are measured to estimate winds at cloud altitudes, and soundings of a large portion of the Western Hemisphere. The first of a completely new design, *GOES-8*, became operational early in 1995, and the second was successfully launched 23 May 1995. Japan and Europe also operate meteorological satellites in geostationary orbit and make the data available to the world. However, neither satellite includes sounding capabilities.

Vertical profiles of temperature and water vapor are determined from satellites by instruments that detect radiances, or electromagnetic energy emitted at specific wavelengths or frequencies. The instruments are designed to measure radiation in wavelengths or spectral channels that originate in broad layers in the atmosphere. For example, the Visible and Infrared Spin Scan Radiometer (VISSR) Atmospheric Sounder, which has been carried on the GOES since September 1980, is composed of 12 channels. Three of these peak at the surface, and the others peak at 950, 850, 600, 500, 450, 400, 150, 70, and 40 mb (Hayden 1988). The new GOES sounder has 19 channels.

Given a first-guess temperature and moisture profile, the radiative transfer equations can be "inverted" using the observed radiances in these channels to produce temperature and moisture profiles. The inversion process involves calculating temperature and moisture corrections to the first guess based on differences between the observed and calculated radiances or "brightness temperatures."

It is difficult to estimate the accuracies and other characteristics of such satellite-derived soundings because they are highly dependent on the quality of

the first-guess profiles. However, some general statements may be made. Sources of error include contamination by clouds and aerosols (with infrared sounders), space-time sampling problems, instrumentation limitations, and calibration drift. Because the satellites detect vertically integrated radiances, the vertical resolution is generally rather coarse (typically greater than 5 km), and atmospheric temperature inversions, including the tropopause, are often missed or smoothed heavily. The low vertical resolution also tends to introduce biases in the soundings. Horizontal gradients of temperature and moisture tend to be underestimated by the retrievals due to the poor vertical resolution of passive sounders. Hayden (1988) gives a table of statistics of satellite retrievals of temperature and dewpoint compared to the best estimate of these values over a data-rich region. From this table, we estimate typical errors of satellite retrievals of temperature and dewpoint to be in the range of 1°–2°C and 4°–10°C, respectively. This estimate is consistent with the results of a comparison of layer mean temperatures derived from radiosondes and satellites by Lee and Schmidlin (1991), who found that the satellite-retrieved layer temperature agreed with the radiosonde within  $\pm 1.2^\circ\text{C}$ . High spectral resolution infrared instruments containing several thousand spectral channels are under development and have the potential to improve the vertical resolution and accuracy of satellite nadir soundings (Smith et al. 1990).

Global atmospheric temperature datasets have been constructed from satellite MSU measurements of the National Oceanic and Atmospheric Administration's (NOAA) polar satellite series (Spencer and Christy 1990; Spencer et al. 1990). MSUs sample the entire globe twice daily from each of the two satellites with different equator-crossing times. One MSU channel is sensitive to thermal emission from molecular oxygen in the middle troposphere and is relatively insensitive to water vapor and the Earth's surface, thereby providing excellent long-term stability required for atmospheric monitoring. Moreover, the excellent agreement between two MSUs on different satellites (*NOAA-6* and *NOAA-7*), where the monthly mean hemispheric temperatures are reproduced to within about 0.01°C, confirms the suitability of this channel as a monitoring tool. The temperature-weighting function for channel 2 has a broad peak near 500 mb. Trenberth et al. (1992) and Hurrell and Trenberth (1992) have evaluated the MSU observations and compared them with surface and numerical weather model temperatures throughout the atmosphere. They

conclude that MSU temperatures are a valuable tool for monitoring global temperatures. However, MSU observations are limited because they lack vertical resolution and cannot resolve critical structures like the tropopause and other temperature inversions.

Satellite soundings of atmospheric moisture from Special Sensing Microwave/Imager microwave measurements from the polar-orbiting Defense Meteorological Satellite Program spacecraft (Schlüssel and Emery 1990) are useful for the total-column integral (the precipitable water). However, these and infrared sounders are unable to provide useful information on the vertical profiles and structure of moisture in the atmosphere (Illari 1989). Moreover, their useful coverage is restricted primarily to oceanic areas.

In summary, advantages of the satellite soundings available operationally today include good global coverage, high horizontal resolution, and, for the geostationary satellites, high temporal resolution (every hour, or even more frequently in special situations). Disadvantages include relatively low accuracies and low vertical resolution (compared to the radiosonde) and the interference of clouds and aerosols with the infrared radiances, which leads to contamination of the sounding or prevents the calculation of soundings below clouds altogether.

#### c. Commercial aircraft

Some commercial aircraft, through the Aeronautical Radio, Inc. Communication Addressing Reporting System (ACARS), provide thousands of accurate wind and temperature data daily to support operational weather prediction (Brewster et al. 1989). These data, however, are generally confined to cruising altitudes (9–12 km) and flight paths of commercial aircraft. Observations are also taken on ascent and descent near major airports.

#### d. Summary of upper-air temperature observation errors

Table 1 shows the estimates of temperature error standard deviations of various observational systems used in the spectral statistical interpolation for the global spectral model at the National Centers for Environmental Prediction [NCEP, for-

merly the National Meteorological Center (NMC)] as of June 1995 (J. Derber 1995, personal communication). They are derived from a combination of careful comparisons among observing systems, precision tests of instruments, and educated subjective estimates based on experience. These error estimates include both the random instrument error and sampling errors that arise from unrepresentativeness of a single measurement (due to small-scale atmospheric variability). For this reason, and because these error estimates are *tuned* to give the best results with this particular forecast model, they are generally higher than the absolute measurement errors associated with a particular instrument or system. Another contribution to the relatively high satellite temperature errors (compared to the error estimates of 1°–2°C quoted earlier) is that the satellite temperature errors are correlated in space rather than being random, independent observations. Thus, it is the relative (to each other) size of the errors shown in Table 1 that is important. We see in Table 1 that the greatest temperature errors are in the upper troposphere and lower stratosphere where GPS limb sounding temperatures are likely to be most accurate. This suggests that the use of GPS limb sounding temperature observations in this region have the potential to significantly improve the global analyses of temperature and the operational global forecasts.

## 4. Characteristics of GPS limb sounding

The potential strengths of GPS limb soundings include all-weather global coverage, high vertical reso-

TABLE 1. Observation temperature error standard deviations used in spectral statistical interpolation for the Global Spectral Model at NCEP, June 1995.

Observational system	Temperature errors (°C)					
	1000 mb	700 mb	500 mb	300 mb	100 mb	50 mb
Radiosonde	1.8	1.3	1.3	2.0	3.1	4.0
Aircraft reports	2.7	2.7	2.9	3.4	4.6	4.6
Dropsondes	1.8	1.3	1.3	2.0	3.1	4.0
ACARS	1.8	1.3	1.3	2.0	3.1	4.0
Satellite clear skies	4.7	3.9	4.0	4.5	4.0	4.0
Satellite cloudy skies	5.6	4.6	4.6	5.0	4.5	4.5

lution, high accuracy, high long-term stability, and cost effectiveness. A description of GPS and GPS limb sounding inversion methodology is included in the appendix.

A single GPS/MET satellite could provide roughly 500 refractivity soundings per day, through clouds and aerosols, with global coverage repeated every 12 h. From these refractivity soundings, valuable information on temperature or water vapor profiles can be derived. Hardy et al. (1992) estimate that soundings can be obtained beginning from about 60-km altitude and extending downward nearly to the surface over water and most land areas. Figure 2 shows the global distribution of soundings produced during one day by the *MicroLab 1* satellite in the GPS/MET experiment. The number of soundings shown is less than the maximum possible of roughly 500 per day because of 1) antenna-pointing and memory limitations for the *MicroLab 1* satellite, 2) the requirement for simultaneous tracking of the occulting GPS satellite by the LEO receiver and one of the five high-rate ground-based GPS tracking stations (described in the appendix), and 3) only setting (and not rising) occultations were observed.

The vertical resolution of several hundred meters to 1 km gives GPS limb sounding an advantage over most space-based atmospheric sensors. In particular, the radio occultation method provides vertical resolution comparable to the best limb sounders and significantly better than nadir-viewing satellite radiometers. On the other hand, GPS limb soundings represent an average measurement over a horizontal distance of several hundred kilometers, whereas the horizontal resolution of satellite radiometers is generally 20 km or less.

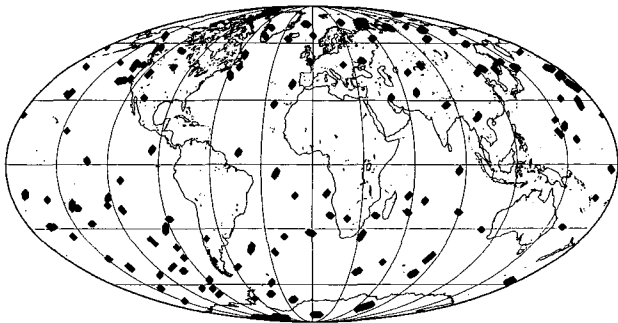


FIG. 2. Locations of GPS/MET soundings obtained during 7 h on 23 June 1995. Vertical soundings appear as single diamonds, and oblique soundings appear as a connected series of diamonds. Fewer than the maximum possible number of 500 daily soundings were observed because of satellite and tracking network limitations.

GPS/MET measurements enjoy inherently high precision because they are fundamentally carrier *phase* measurements made in a high signal to noise ratio (SNR) environment, except in the lower troposphere. This in turn results in a phase delay dynamic range of approximately  $10^6$ . In contrast, all passive radiometers, limb and nadir pointing, rely on signal *amplitude* measurements made in a comparatively low SNR environment, resulting in lower dynamic range.

One of the most elegant and attractive features of the GPS/MET instrument is its inherent stability. There is literally *nothing* in the instrument itself requiring adjustment or calibration once the satellite is in orbit and in operation. GPS satellite and GPS/MET receiver positions with an accuracy of roughly 1 m are needed, but this has been easily attained using currently existing software and readily available global GPS tracking data (Zumberge et al. 1994). The GPS phase is referenced to a ground-based hydrogen maser with  $\Delta f/f < 10^{-14}$  over 100 s. In contrast, space-based radiometers often require frequent in-orbit calibration, typically by measuring first the brightness temperature of deep space ( $2.7^\circ\text{C}$ ) and then a warm target on the spacecraft, monitored by platinum resistance thermometers. For example, the NOAA MSUs flown on the TIROS series required a separate calibration for every Earth scan.

Perhaps the single most intriguing characteristic of GPS limb sounding is its ability to leverage so effectively the multibillion dollar investment in GPS and commercial GPS receiver technology. No other space-based atmospheric sounding instrument even approaches the combination of small size, low mass and power, low cost of the GPS/MET payload, and all solid-state reliability. Future instruments, driven by the demand for high-performance commercial receivers, may be so small and affordable that their use will be limited only by the capacity of the ground segment to process and use the data. If the projected performance can be realized, these characteristics make constellations of GPS limb sounders economically feasible and capable of providing thousands of soundings daily.

Weaknesses of the GPS/MET measurement system include an ambiguity in the signal between temperature and water vapor, and errors introduced by multipath effects. The long horizontal averaging distances imposed by limb scanning (Fig. 1) can be either a strength or a weakness, depending on the application. Using geometric optics, each sample of occultation data can be associated with a point in space known to within a few meters, representing a mov-

ing average in the horizontal dimension of several hundred kilometers. The cross-beam resolution is approximately the same as the vertical resolution. Although long horizontal averaging distances may limit the application of GPS limb sounding for small-scale applications, horizontal averaging may increase the value of the method for large-scale weather and climate applications.

No existing single observational system can fully determine the global atmospheric temperature and water vapor structure. Every existing system has strengths and weaknesses regarding accuracy, spatial and temporal resolution, representativeness of volume sampled, and cost. However, many of the strengths and weaknesses of GPS limb sounding are complementary to those of other space- and ground-based sensors. Ongoing research should be focused on the question of how to best assimilate GPS limb sounding information so as to exploit its strengths and on the use of complementary systems in areas where it is weak. For example, a sounding with high horizontal and vertical resolution could be obtained by combining a GPS limb sounder and nadir radiometer.

## 5. Accuracy of temperature and water vapor profiles

When a GPS satellite, as viewed from the GPS/MET receiver, rises or sets, the GPS signal arrival time is delayed because of the refractive bending and slowing of the signal as it passes through Earth's atmosphere. As discussed by Melbourne et al. (1994a) and summarized in the appendix, the bending angle of the ray can be calculated from this delay. Further, the vertical profile of atmospheric refractivity can be calculated from the bending angles. Errors in refractivity arise from a number of sources, including 1) reference oscillator frequency drift in the LEO, GPS satellite, or ground-based GPS tracking receivers; 2) errors in receiver tracking; 3) precision orbit determination; 4) ionospheric effects that are not corrected by the dual-frequency phase measurements; 5) tracking errors due to multipath effects in the lower troposphere; and 6) departures from the atmospheric spherical symmetry assumed in the current inversion algorithms.

The relationship between refractivity, temperature, and water vapor is given by Eq. (A8) in the appendix. It follows that the temperature may be computed from known values of pressure  $P$ , refractivity  $N$ , and water vapor pressure  $e$ , as

$$T = \frac{77.6P + [6022.0P^2 + 14.92(10^5)eN]^{1/2}}{2N}, \quad (1)$$

where  $P$  and  $e$  are given in millibars and  $T$  is in Kelvins. Alternatively, if temperature is known, the water vapor pressure is given by

$$e = \frac{T^2N - 77.6PT}{3.73(10^5)}. \quad (2)$$

Several theoretical estimates of the temperature error resulting from reasonable estimates of the basic measurement errors listed above have been made assuming a dry atmosphere [ $e = 0$  in Eq. (1)]. Neglecting ionospheric and humidity effects, Melbourne et al. (1994a) estimate that the temperature error increases exponentially with height from less than  $0.1^\circ\text{C}$  near the surface to  $1^\circ\text{C}$  at 50 km (because of the neglect of the ionosphere and water vapor, these are lower-bound estimates). More realistic simulations (Melbourne et al. 1988) indicate that the temperature errors between 5–7 and 40 km, where moisture effects are negligible, should be less than  $1^\circ\text{C}$ . Gorbunov and Sokolovskiy (1993) performed simulations with a global atmospheric circulation model and found temperature and geopotential height errors of  $0.3^\circ\text{C}$  and 3 m, respectively, at equivalent altitudes, with significantly larger errors near the surface. Simulations using the UCAR inversion code that produced the temperature profiles in this paper agree closely with these earlier estimates.

We may estimate the relationship between errors or uncertainties in temperature and water vapor pressure by differentiating Eq. (2) under the assumption of no errors in  $N$  or  $P$ :

$$\Delta e \approx \frac{(2TN - 77.6P)}{3.73(10^5)} \Delta T. \quad (3)$$

For typical values of  $N = 300$ ,  $P = 1000$  mb, and  $T = 273$  K, we have

$$\Delta e \approx 0.23\Delta T, \text{ or } \Delta T \approx 4.35\Delta e. \quad (4)$$

From Eq. (1) we see that the neglect of moisture produces a cold bias in the derived temperature. We can use Eq. (4) to estimate the errors associated with

deriving water vapor profiles from known values of refractivity and independently estimated temperatures, or vice versa. Specifically, water vapor pressure can be estimated using in situ sensors to within 0.5 mb if temperature is known to within 2°C. This would be a useful estimate of water vapor over much of the lower atmosphere, where  $e$  typically varies between 5 and 20 mb and measurement or sampling errors of water vapor pressure are often greater than 1 mb. It may be more difficult to obtain useful temperature estimates given independent estimates of water vapor pressure, since  $e$  would have to be known to at least 0.23 mb (averaged over several hundred kilometers) to obtain temperature estimates accurate to within 1°C. Thus, the accuracy of moisture profiles will depend on the accuracy with which the temperature profile can be modeled or measured by independent means. Hajj et al. (1994) estimated that the error in relative humidity below 6 km will be less than 10%, providing that the temperature error is less than 2°C.

## 6. Spatial coverage and resolution

Spatial coverage is primarily a function of the GPS/MET spacecraft orbit. A simulator capable of predicting occultations as a function of the LEO orbit has been used to study a variety of orbits between 700 and 1000 km with inclinations from 45° to 99°. For the case of a single LEO receiver in a 900-km sun-synchronous polar orbit (and 24 GPS satellites), approximately 670 occultations per day will take place. Of these, approximately 500 would have geometry favorable for useful soundings with fore- and aft-viewing GPS antennas. By optimal selection of the orbit, it is possible to obtain a roughly uniform distribution over the entire surface of the earth. The GPS limb sounding technique will work equally well over water and land areas. In mountainous regions, profiles will not be available wherever the ray path is below the top of the terrain. Actual GPS/MET sounding locations for a 7-h period on 23 June 1995 are shown in Fig. 2.

Vertical and cross-beam resolutions are defined primarily by Fresnel diffraction and are expected to be several hundred meters near the ground increasing to 1 km near 60-km altitude (Melbourne et al. 1994a) with possible higher vertical resolution using Fresnel deconvolution. Along-path resolution will be 200–300 km (Kursinski et al. 1993). Recovered parameters represent weighted averages across the sam-

pling volume. The vertical resolution is significantly better than that available from space-based nadir-viewing radiometer instruments. Moreover, the sampling volume center is known much more precisely, limited primarily by horizontal atmospheric inhomogeneities and differences in bending angles for the dual-frequency GPS signals. The vertical sampling interval is determined by the GPS/MET carrier phase sampling rate of 50 Hz. Since a typical occultation scans 60 km in altitude in approximately 60 s, the average vertical sampling interval is about 20 m. The high vertical resolution for GPS limb soundings and high horizontal resolution for nadir radiometric soundings could be combined. Bengtsson et al. (1995) simulated concurrent processing of data from both sounding methods and achieved a factor of 2 reduction in residual GPS limb sounding error.

## 7. Proof of concept experiment

The first GPS/MET observation was carried out on 16 April 1995, 13 days after the successful launch of *MicroLab 1*. The first inversion of this observation, which is located over Ecuador about 150 km from Guayaquil, is shown in Fig. 3. The data were inverted under a number of simplifying assumptions, including the neglect of water vapor, the use of 1-Hz averages of the 50-Hz GPS/MET receiver data, and a simple linear combination of the dual GPS frequencies for ionospheric correction. In spite of these simplifying assumptions, the sounding showed considerable realism compared to the standard U.S. tropical atmosphere model for April and agreed remarkably well with the closest radiosonde, which was located 500 km northeast of the GPS sounding. The neglect of water vapor causes the cold bias in the GPS/MET sounding below about 8 km in Fig. 3.

Figure 4 shows four representative GPS/MET temperature retrievals compared to nearby radiosonde data and to the temperatures provided by the NCEP global analysis, interpolated in time and space to the location and time of the GPS/MET sounding. In these comparisons, the GPS/MET temperature retrievals are calculated assuming a dry atmosphere, as discussed earlier; this assumption causes a cold bias in the lower troposphere where water vapor becomes an important effect.

The soundings in Fig. 4a correspond to a location near Port Harrison, Canada (which is in the extreme northwestern portion of the province of Quebec). The GPS/MET temperatures, the temperature from the



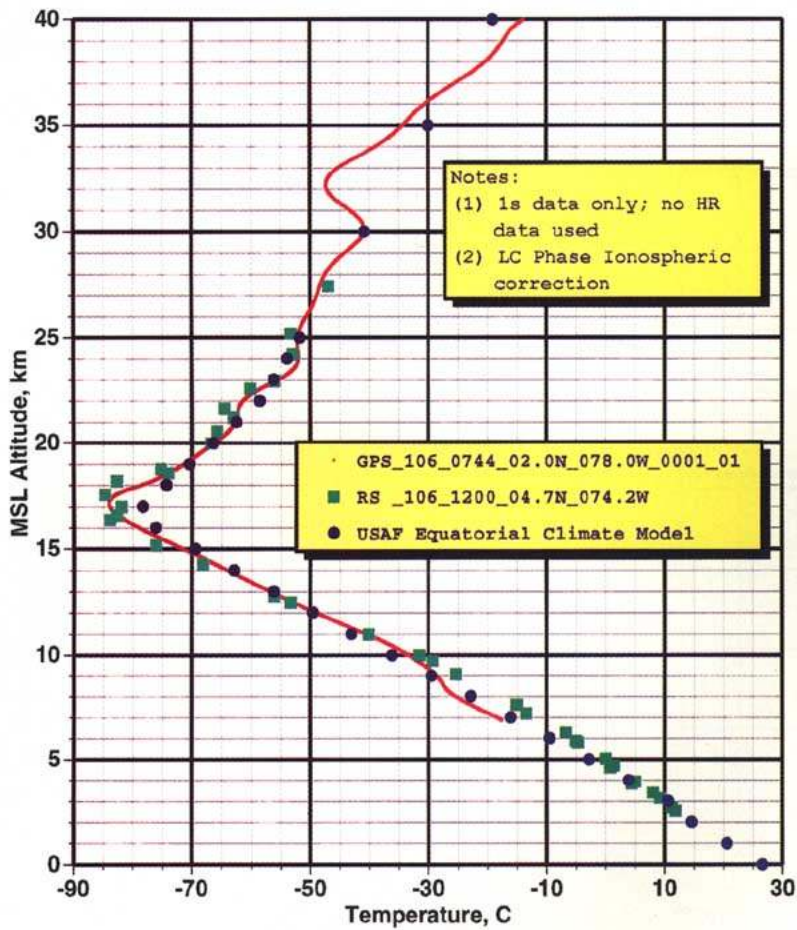


FIG. 3. The first inversion of a GPS/MET sounding, completed 26 April 1995. The observation occurred 16 April 1995 over Ecuador. The U.S. Air Force (USAF) tropical atmosphere model and nearby radiosonde (RS) profiles are also shown.

nearby radiosonde (approximately 100 km away in space and 3 h in time), and the temperatures from the NCEP analysis agree to within about 3°C from about 31 (the highest altitude reached by the radiosonde) to 5 km (the lowest altitude reached by the GPS/MET sounding). The GPS/MET sounding shows high vertical resolution and provides an excellent estimate of the location and temperature minimum of the tropopause. The complex structure of the temperature profile at and near the tropopause, in which the profile shows a *kink* feature consisting of a weak local maximum of temperature above the tropopause followed by a further decrease of temperature with height is seen in many of the GPS/MET soundings and, to the extent that this structure is revealed by the lower-resolution radiosondes and the NCEP analysis, appears to be real.

The sounding in Fig. 4b, located near Freiburg, Germany, shows that the GPS/MET temperature

sounding matches six nearby radiosondes quite well from 31 to about 7 km and again resolves the tropopause very well. From 6 to 3.5 km, neglect of the effect of water vapor causes a cold bias of approximately 8°C in the GPS/MET sounding.

The sounding shown in Fig. 4c, which is over the Aleutian Islands southwest of Anchorage, Alaska, agrees well with the nearby radiosonde and with the NCEP analysis from 26 down to 3 km. Below 3 km, the retrieved temperatures indicate the receiver probably encountered strong defocusing and/or multipath. In general, these early GPS/MET retrievals have difficulty getting below 5 km, probably due to a number of difficulties associated with the evolving inversion algorithms, defocusing of the GPS signal by atmospheric lens effects, multipath, receiver cycle slips and loss of lock, and possible terrain effects.

Figure 4d shows a sounding in the Southern Hemisphere, near Adelaide, Australia. Again, the GPS/MET retrieval matches the two nearby radiosonde soundings and the NCEP analysis well and also captures the complex temperature structure at and above the tropopause.

Figure 5, a sounding that reaches downward to about 1 km above the surface over the Kamchatka Peninsula, shows the pronounced effect of water vapor in the lower troposphere. A rough calculation using Eq. (3b) shows that the cold bias of approximately 17°C at 1 km corresponds to a water vapor pressure of 4 mb. This estimate agrees fairly well with the observed value of approximately 5.0 mb as estimated from the two nearby radiosondes. The kink feature in the tropopause is well depicted by the GPS/MET sounding in Fig. 5.

Figure 6 shows a GPS/MET retrieval over Charleston, West Virginia, compared to three nearby radiosondes, the NCEP analysis, and two high-resolution research radiosondes. As in the previous examples, the GPS/MET retrieval agrees well with the other soundings in the upper troposphere and stratosphere where water vapor effects are negligible. Of note in Fig. 6 is the presence of vertical oscillations in the tempera-




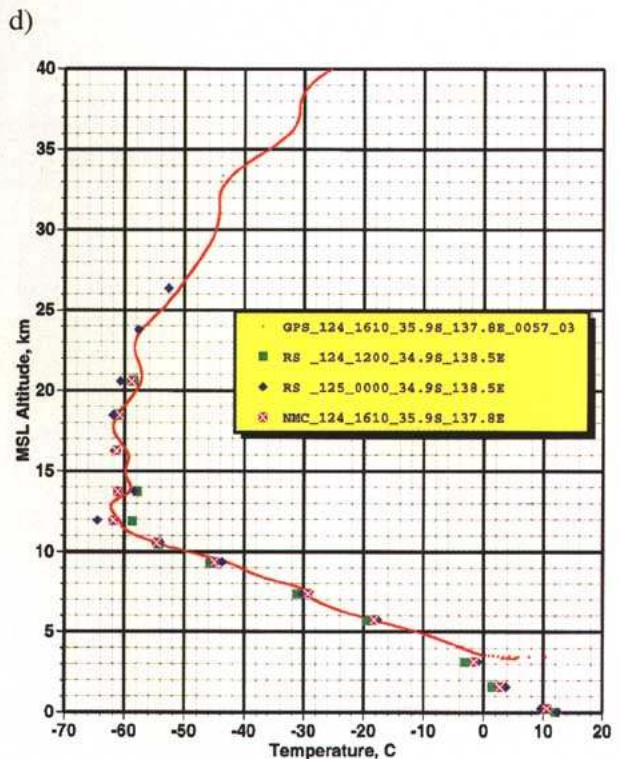


FIG. 4. GPS/MET soundings observed (a) 5 May 1995 over northwest Quebec, east of Hudson Bay and on 4 May 1995 (b) near Freiburg, Germany; (c) over the Aleutian Islands southwest of Anchorage, Alaska; and (d) near Adelaide, Australia. GPS antispoofing (A/S) was off, and a dry atmosphere was assumed. Also shown are nearby radiosonde (RS) and interpolated profiles from the NCEP analysis. The discontinuous dotted curve below 3 km in (c) is probably caused by loss of lock and/or multipath in the GPS/MET data.

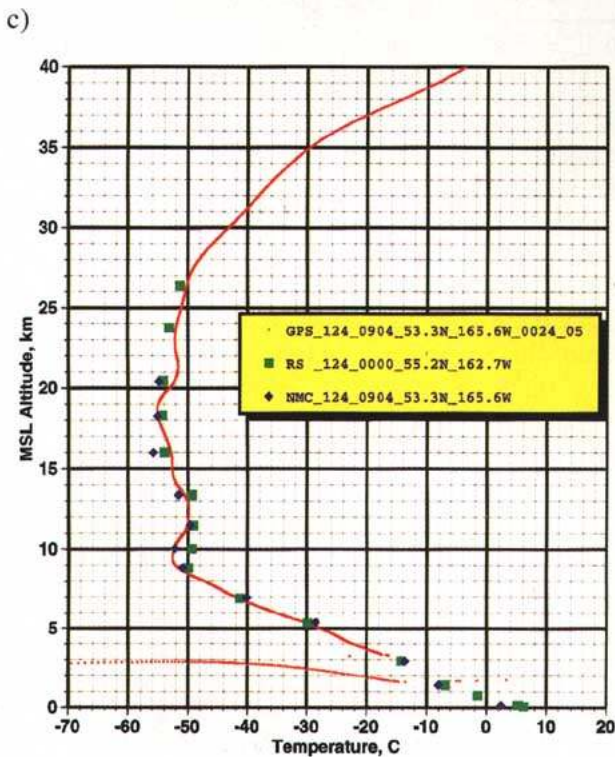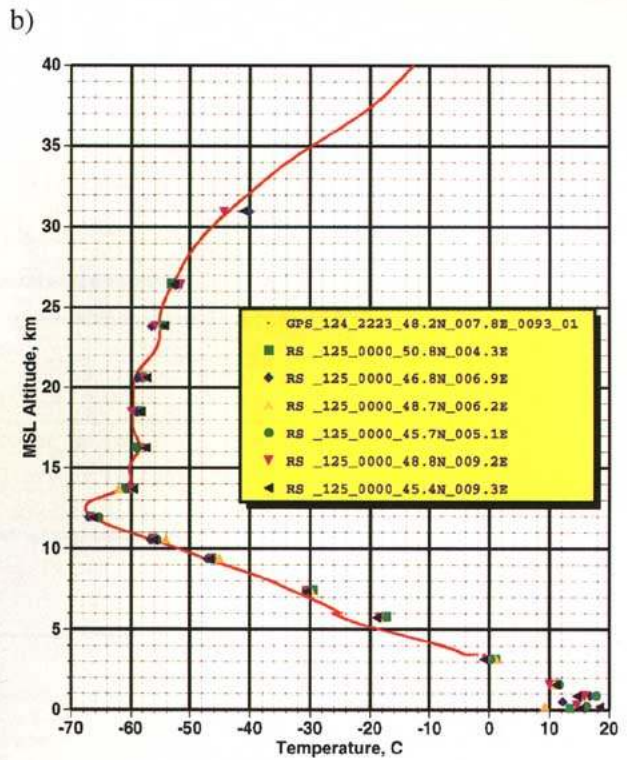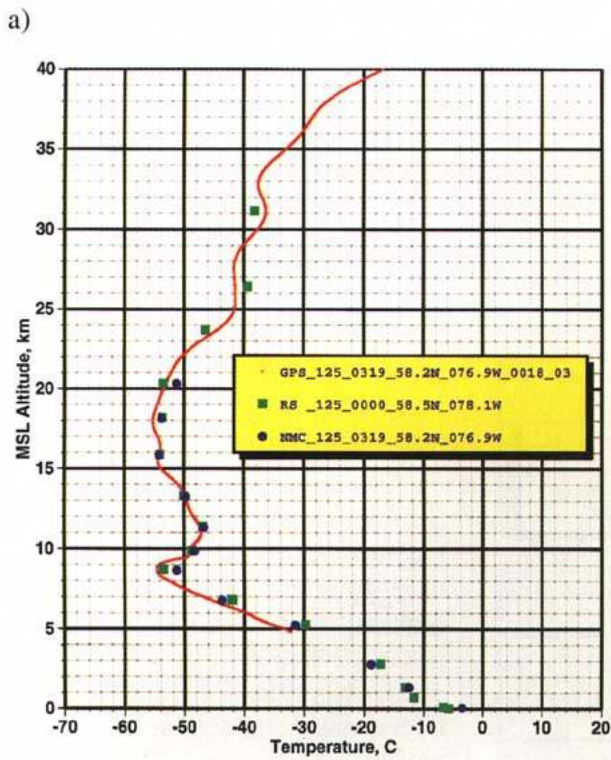

ture profile on the scale of 2 km between 10 and 20 km in the high-resolution soundings, confirming the same scale of oscillations in the GPS/MET retrieval. The high-resolution soundings also show vertical oscillations on a scale of a few hundred meters, which do not appear in this analysis of the GPS/MET sounding.

Figure 7 shows another comparison (over South Dakota) with high-resolution balloon data. This GPS/MET retrieval captures the vertical temperature structure well but shows a cool bias throughout most of the sounding compared to three high-resolution soundings and one radiosonde, all launched 5 h before the GPS/MET sounding and one radiosonde, launched 7 h after the GPS/MET sounding, and to the NCEP analysis, which is interpolated to the location and time of the GPS/MET sounding. The cool bias may be attributed to the 5 h of cold advection that occurred following the earlier soundings. The GPS/MET sounding in Fig. 7 again indicates the difficulty in the retrieval process below about 7 km.

Figure 8 shows a comparison of a GPS/MET sounding over western Lake Superior with two high-resolution balloon, two radiosonde soundings, and the NCEP analysis. As in previous soundings, the GPS/MET sounding shows excellent agreement with the other data.

Figure 9 shows a GPS/MET sounding over northwestern China (northwest of Beijing) compared to 10 radiosondes and the NCEP analysis. This figure gives a good idea of the range of variability of radiosonde temperature profiles due to the combined effect of different radiosonde errors and variations due to differences in location and time; the typical range of temperatures among the 10 radiosondes is 5°C with some differences exceeding 10°C. The GPS/MET sounding tends to run through the middle of the 10 radiosondes, except in the lower troposphere where moisture effects are important.

Figure 10a depicts a sounding, located over Parkersburg, West Virginia, with a pronounced kink in the temperature profile above the tropopause. That

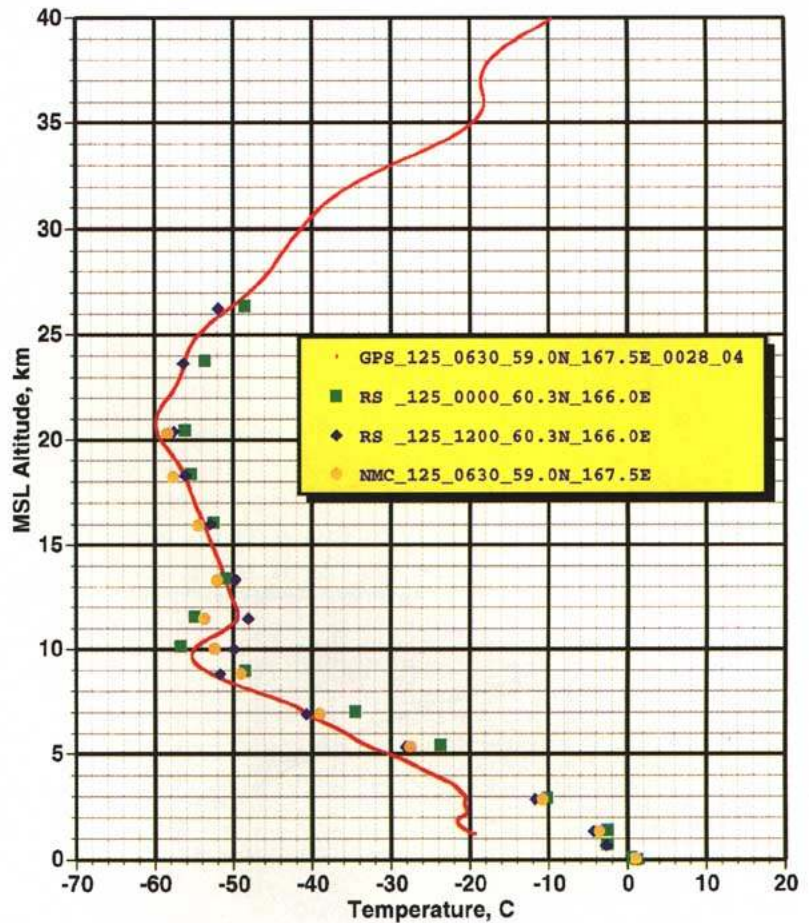


FIG. 5. GPS/MET sounding observed 5 May 1995 over the Kamchatka Peninsula, Russia. The cool GPS/MET temperature bias in the lower troposphere is due to atmospheric moisture. Also shown are nearby radiosonde (RS) and interpolated profiles from NCEP analysis.

this kink in the GPS/MET retrieval is real is demonstrated by two high-resolution soundings taken 4 h earlier. The vertical structure in the region of the tropopause is highlighted in Fig. 10b, which enlarges the soundings in Fig. 10a between 9 and 19 km. The agreement between the GPS/MET sounding and the closest high-resolution sounding is remarkable.

Figure 11 compares preliminary temperature retrievals in the upper part of the stratosphere from GPS/MET and the Halogen Occultation Experiment (HALOE). Here, there are no radiosonde or NCEP data. We found one occultation that was reasonably close in space and time to a temperature retrieval from the HALOE instrument, carried on the *Upper Atmosphere Research Satellite*. HALOE measures the attenuation of solar radiation as the sun rises or sets relative to the satellite. The HALOE sounding shows a smooth and realistic variation of temperature with

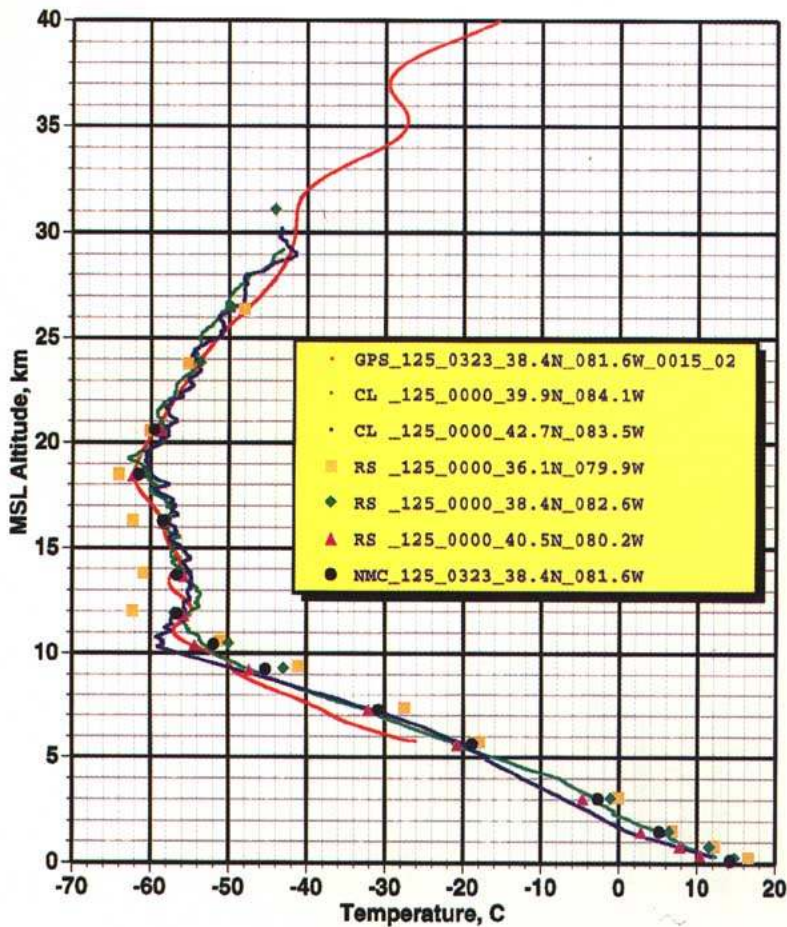


FIG. 6. GPS/MET sounding observed 5 May 1995 near Charleston, West Virginia. Also shown are high-resolution radiosonde temperature profiles (CL), radiosonde (RS), and interpolated profiles from NCEP.

height, with a maximum around 45 km. In contrast, two GPS soundings, which differ in the use of ground-based GPS tracking stations (see appendix), show unrealistic, large oscillations above 40 km with respect to the HALOE data. These oscillations, and the differences between the two soundings, appear to be related to boundary conditions at the initialization point for the retrieval inversion algorithm in the upper atmosphere. Future refinements in boundary condition modeling may reduce the oscillations. In any case, the two solutions damp exponentially with decreasing elevation and converge below about 40 km.

## 8. Scientific uses of GPS limb sounding data

GPS limb sounding data have the potential to be applied in the high-priority areas of weather forecasting

and climate research. The potential contribution of GPS limb sounding data to these scientific areas is discussed below, followed by a brief description of some of the other areas of science that may ultimately benefit from the availability of GPS occultation data.

### a. Weather analysis

GPS limb sounding could lead to significant improvements in operational weather forecasting by providing high-resolution temperature and moisture data on a global basis, complementing existing in situ and remote sensing observations. Section 3 described the strengths and weaknesses of the radiosonde, satellite, and commercial aircraft observations. GPS limb sounding has the potential to build upon the strengths of these systems and contribute to better observational coverage in both time and space with good vertical resolution of temperature and moisture over both oceans and continents, thereby improving the accuracy of numerical four-dimensional data assimilation analyses.

Although GPS limb soundings have the potential to enhance the analysis and prediction of weather and climate, significant research is re-

quired to assess this potential in detail and develop capabilities to derive maximum benefit from this new source of atmospheric data. Fundamental studies are needed to 1) quantify the accuracy of retrieved temperature and moisture profiles for the spectrum of real atmospheric conditions that will be encountered, 2) determine how these data can be most effectively used by weather forecast models, and 3) enhance the accuracy and resolution of the data by combining these models and other data sources with the retrieval process. In addition, data acquisition in the lower troposphere is currently degraded by defocusing and multipath, and improved tracking strategies and algorithms are needed.

Preliminary simulations indicate that the optimum way of using GPS limb sounding data in numerical weather prediction models may be to assimilate more fundamental observables, such as refractivity profiles or even bending angles (Eyre 1994), directly into the model rather than assimilating temperature and water



vapor profiles derived from the refractivity profiles (Zou et al. 1995). Zou's approach minimizes the difference between a model prediction and the observed profile of refractivity in a certain time window.

#### b. Global change research

Although there is consensus in the scientific community that climate change is likely as a result of the observed increases in greenhouse gases in the atmosphere (Houghton et al. 1990, 1992), there is much uncertainty about the magnitude and details of the change. Thus, there is a great need for better observational data to document the climate and how it is changing with time. The need is for both regional and global monitoring of many climatological variables.

A long record of GPS limb sounding observations could have a significant impact on climate and global change issues. One of the signals expected from the increases in greenhouse gases from anthropogenic sources is in global mean temperature. However, detection of the expected lower-tropospheric global warming is confounded by flawed and patchy observations, by natural variability that adds climatic noise to the system, and because observed climate change is not geographically uniform. Therefore, although there are clearly established upward trends in several greenhouse gases, it has not yet been possible to establish unequivocally that the approximately 0.5°C increase in global surface temperatures observed over the last century is caused by increases in greenhouse gases.

An important indicator of climate change associated with temperature change is an expected increase in water vapor (Rind et al. 1991; Gaffen et al. 1992). Water vapor itself is also a strong greenhouse gas, providing feedback effects that can substantially enhance temperature changes. Increases in greenhouse gases are expected to warm the lower troposphere and cool the stratosphere, with the amount of cooling increasing with height to at least 30 km (10 mb).

The detection of any greenhouse gas-induced temperature trends in the stratosphere is compounded by

the very large natural variability there. This variability is associated with the stratospheric quasibiennial oscillation, decadal timescale changes associated with solar activity (Van Loon and Labitzke 1990), sudden stratospheric warmings, and the effects of changes in ozone concentrations. In addition, the observational record is limited at most to four decades. Therefore, it has not been possible to detect a greenhouse gas signal in stratospheric temperatures. Nevertheless, global long-term GPS limb sounding measurements of stratospheric temperature may be useful for global climate research.

A related global change issue is the loss of ozone in the stratosphere arising from the increases in human-made chlorofluorocarbons (CFCs). CFCs are essentially inert in the troposphere but break down in the stratosphere and lead to depletion of ozone through complex heterogeneous chemistry. The most pro-

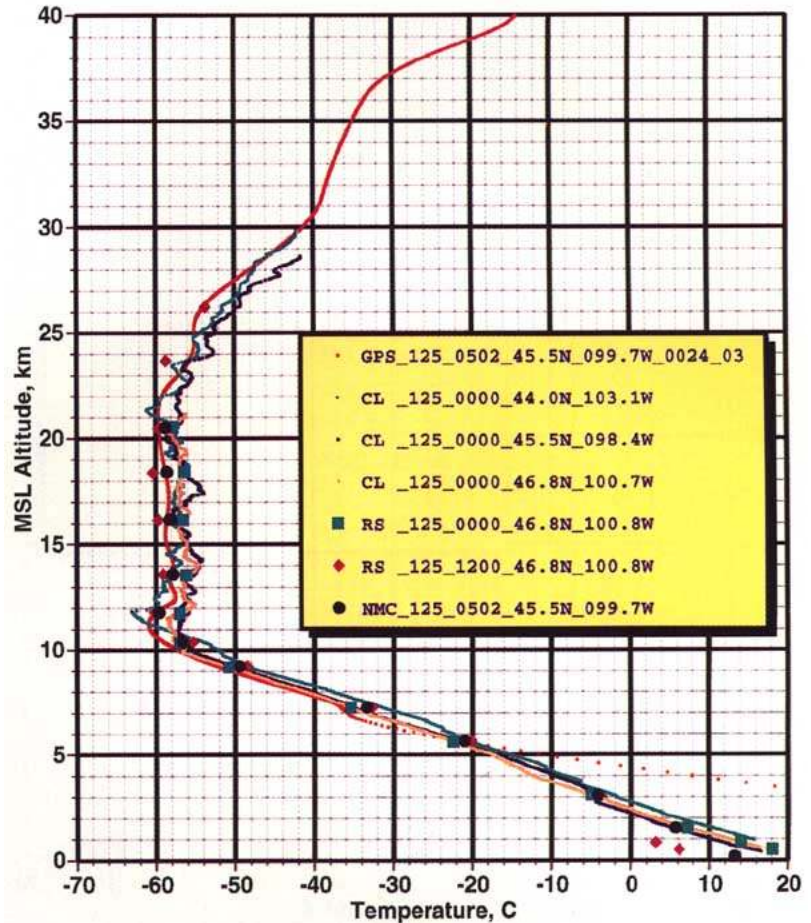


FIG. 7. GPS/MET sounding observed 5 May 1995 over South Dakota. The erratic behavior of the GPS/MET profile below about 7 km may be a result of defocusing of GPS signals by atmospheric gradients. Also shown are nearby high-resolution balloon (CL), radiosonde (RS), and interpolated profiles from the NCEP analysis.

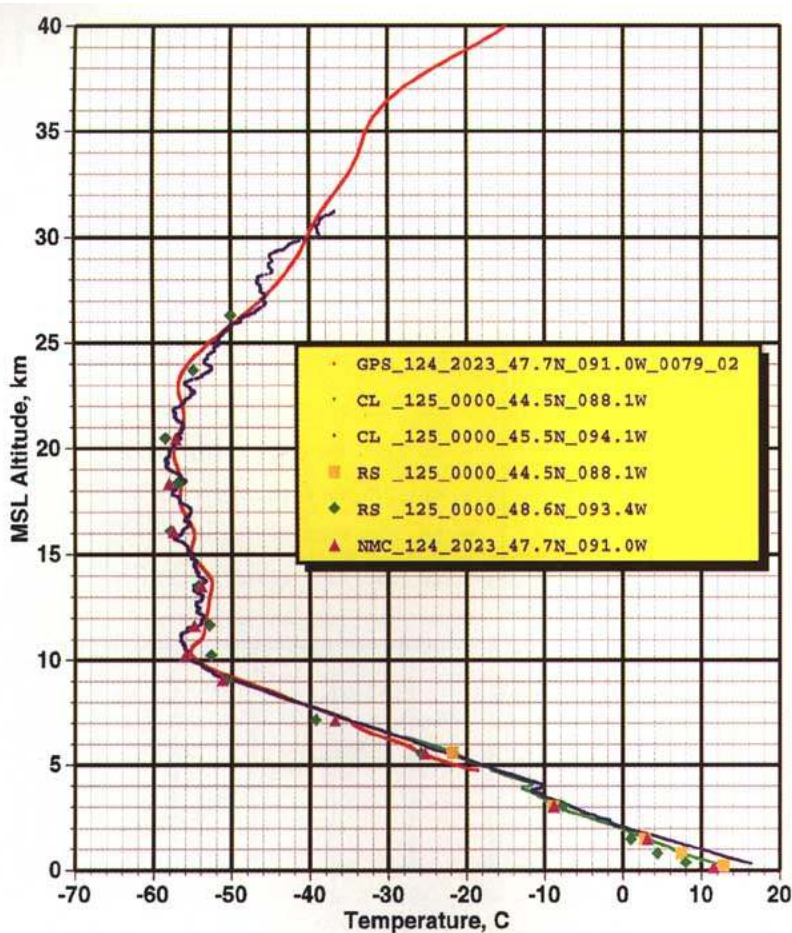


FIG. 8. GPS/MET sounding observed 4 May 1995 over western Lake Superior. Also shown are nearby high-resolution balloon (CL), radiosonde (RS), and interpolated profiles from the NCEP analysis.

nounced example of this is the emergence of the ozone hole at high latitudes during the spring in the Southern Hemisphere. Stratospheric temperatures are very critical to this process, as the polar stratospheric ice cloud particles, which play a key role in facilitating the chemical reactions leading to ozone depletion, form mainly at very low temperatures. Stratospheric cooling from increases in greenhouse gases may exacerbate ozone losses. Improved understanding of temperature changes in the stratosphere, important for global change research, could be accomplished using GPS limb sounding data.

As discussed in section 5c and the appendix, ancillary data from other sources usually will be required to derive either temperature or moisture profiles from GPS occultation data. However, profiles of atmospheric refractivity are retrieved directly from GPS occultation data. Since refractivity is a function of atmospheric temperature and moisture and these variables

have been identified as key indicators of global change, it may be possible to interpret refractivity profiles as a “holistic global change indicator.”

Model results support the conclusion that refractivity profiles could provide a useful parameter to measure long-term changes and trends in the global atmosphere. Using the National Center for Atmospheric Research Community Climate Model and ray tracing tools, Yuan et al. (1993) demonstrated that the change in refractivity resulting from a doubling of atmospheric CO<sub>2</sub> would be significant. This finding is important since refractivity profiles derived from GPS limb soundings will generally be more accurate than the derived temperature or moisture profiles.

Moreover, as illustrated in Fig. 12, Yuan et al. (1993) found that the total raw GPS limb sounding propagation delay measured as a function of height may provide an even more fundamental integrated signal of global change. If temperature and moisture increase with global warming, the total propagation delay will also increase, providing another measure of global change.

Climate change has also been linked to volcanic activity. An injection of material from a large volcanic eruption can result in massive amounts of aerosol in the lower stratosphere, which significantly limit satellite infrared observations of this and lower regions. However, because these aerosols change the radiative forcing of the atmosphere, this is precisely the time and place where accurate observations are needed to determine how the atmospheric thermal structure is changing to achieve overall radiative energy balance. Unlike passive infrared radiometers, the accuracy of GPS limb sounding observations will be relatively unaffected by these aerosols.

### c. Other research opportunities

GPS limb sounding technology also will provide an opportunity for global mapping of the ionosphere with sufficient temporal and spatial resolution to investigate many important dynamical processes in the ionosphere/thermosphere system and their relation to



processes in the atmosphere and solid Earth. For example, data from GPS limb sounding could be useful in the study of gravity waves, which transport energy and momentum through the neutral atmosphere and ionosphere. Tracing this phenomenon may be possible by mapping the total electron content (TEC) along the ray path between the LEO and GPS satellites. It has been estimated that the accuracy and precision of TEC derived in this way will approach  $10^{15}$  and  $10^{14}$   $e\ m^{-2}$ , respectively (Melbourne et al. 1988). This accuracy corresponds to 0.1% of the daytime zenith peak in TEC. Information on global energy transport through the observation of gravity waves in the stratosphere could add further to the science objectives of global change research and weather forecasting.

As an example of another opportunity, adding a LEO GPS receiver to the growing *fiducial* network used for GPS precision geodetic surveys will improve the accuracy of all positions taken in ways not possible with an exclusively Earthbound fiducial network. This will occur primarily due to the improved GPS orbits obtained when the geometry of a fiducial network includes an orbiting receiver, as demonstrated for the TOPEX/POSEIDON satellite by Melbourne et al. (1994b). Improved GPS orbits will improve the accuracy of a variety of scientific applications of GPS (e.g., Ware and Businger 1995). For example, as shown by Malla et al. (1992), a detailed covariance analysis indicates that GPS will be more effective in the study of crustal deformation “. . . when data collected from low Earth-orbiting satellites as well as from ground sites are combined, enhancing the accuracy and resolution for measuring high frequency geophysical signals over timescales of less than one day.”

Another opportunity follows from the fact that anisotropic turbulence in the horizontal atmospheric structure may cause considerable amplitude variations in the occultation signal (Dalaudier et al. 1994). Measurement of these fluctuations will allow determination of turbulence parameters responsible for vertical atmospheric diffusion.

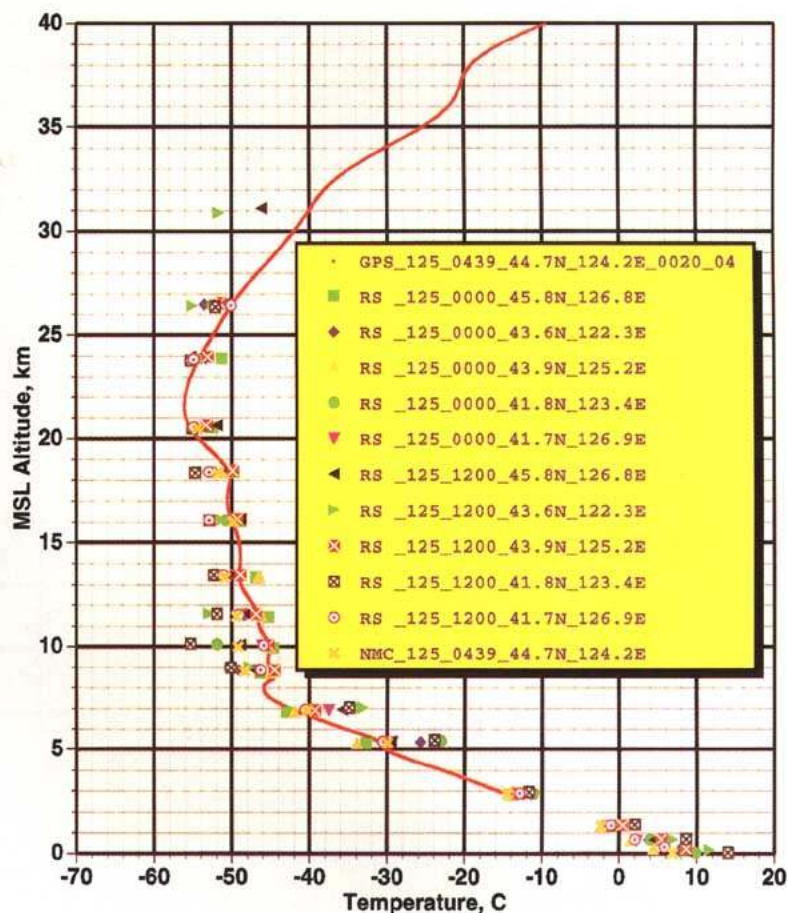


FIG. 9. GPS/MET sounding observed 5 May 1995 northwest of Beijing, China. Also shown are nearby radiosonde (RS) and interpolated profiles from the NCEP analysis.

In addition, accurate temperature profiles are needed as initial conditions for many existing and planned passive satellite remote sensing systems (e.g., humidity, ozone, other trace gases). GPS limb sounding could help provide these profiles.

Finally, the combination of GPS-sensed refractivity profiles (from space) and GPS-sensed precipitable water vapor data (from the ground) could be assimilated into four-dimensional models to improve the definition of temperature and moisture over continents.

## 9. Summary

Preliminary results show that accurate vertical temperature profiles from an altitude of approximately 40 to about 5 km can be obtained using the GPS limb sounding technique. GPS/MET-derived temperatures in this region usually agree within  $2^{\circ}\text{C}$  with tempera-

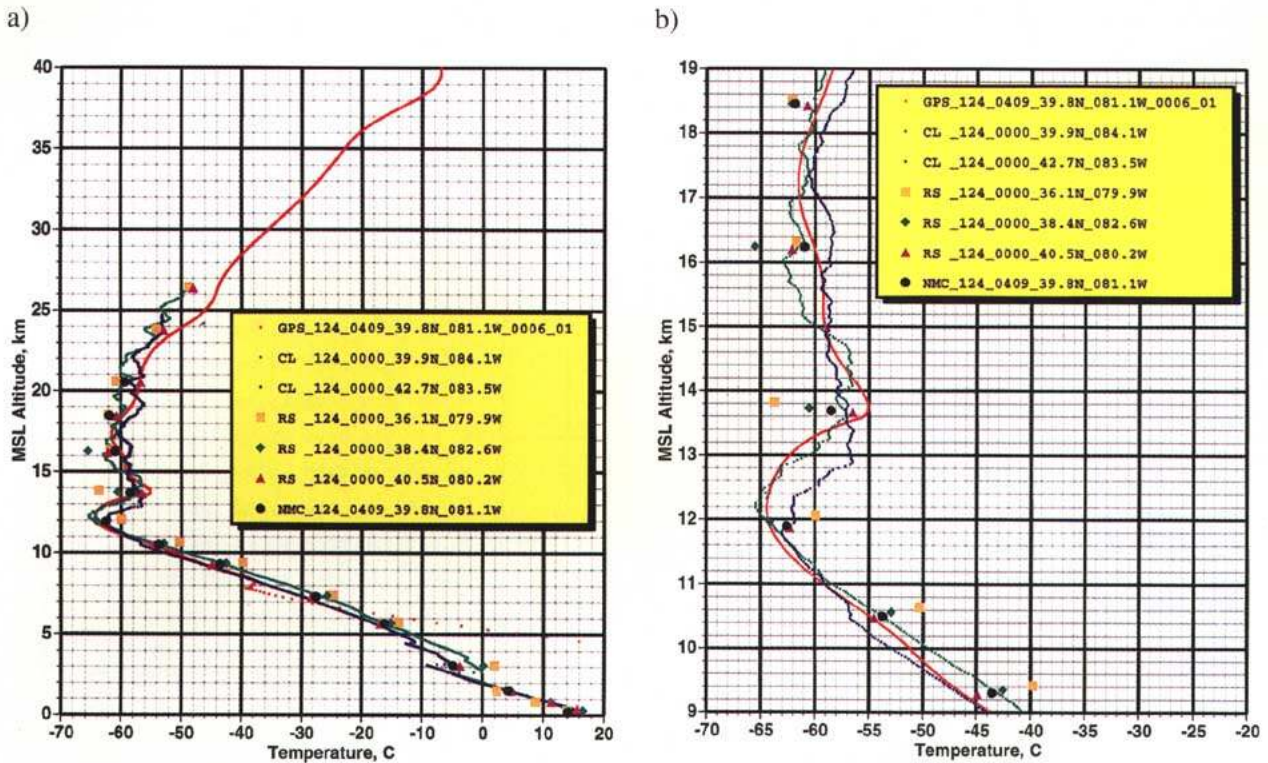


FIG. 10. GPS/MET sounding observed 4 May 1995 near Parkersburg, West Virginia: (a) regular and (b) expanded view from 9- to 19-km altitude. Erratic behavior of the GPS/MET profile below about 8 km may be a result of defocusing of GPS signals by atmospheric gradients. Also shown are nearby high-resolution balloon (CL), radiosonde (RS), and interpolated profiles from the NCEP analysis.

tures measured by nearby balloon soundings and with temperatures interpolated in time and space from the NCEP analysis. GPS/MET profiles have a vertical resolution of about 1 km and routinely resolve the location and the temperature of the tropopause.

Data above 40 km and below 5 km from these preliminary GPS/MET analyses require improved interpretation. In the upper atmosphere, the major difficulties are associated with the upper-atmosphere boundary conditions and possibly with the ionosphere. In the lower troposphere, the problems are probably linked to multipath effects caused by pressure, temperature, and water vapor gradients. These difficulties are being investigated.

## Appendix: Background and theoretical aspects of GPS limb sounding observations

### a. GPS characteristics

GPS includes 24 operational satellites, four in each of six 12-h 20 000-km circular prograde orbits, all in-

clined 55° to produce global coverage. The GPS satellites transmit two L-band carrier frequencies: 1575.42 (L1) and 1227.6 MHz (L2). Each carrier is phase modulated by a precise ranging code (P-code) consisting of pseudorandom bit sequences at 10.23 Mb s<sup>-1</sup>. In addition, the L1 carrier is modulated with a 1.023-Mb s<sup>-1</sup> pseudorandom bit sequence used for the coarse (or clear) acquisition code (C/A-code). The transmit time, as kept by the clock onboard each GPS satellite, is precisely known for each bit in the sequence. A GPS receiver identifies the incoming code bits and measures their arrival time, as kept by the receiver clock, with a precision of better than 1% of a bit length (about 1 ns or 30 cm for the P-code). A priori GPS orbital positions and clock offsets between GPS satellites are broadcast to the user along with other information on a 50-bps data message superimposed on the L1 and L2 carriers. The difference between the known transmit time and observed arrival time is a measure of the distance between the satellite and receiver plus the clock offset between transmitter and receiver clocks, a quantity referred to as *pseudorange*. A receiver simultaneously measuring pseudoranges to four satellites can instantaneously de-



termine its three components of position and its time offset from GPS time, typically with an accuracy of 10–15 m and better than 1  $\mu$ s, respectively. Modern receivers can also measure and keep continuous count of carrier phase with a precision of better than 0.5% of a wavelength (approximately 1 mm). Continuous phase can then be used to construct a record of *position change* with millimeter precision.

For reasons of national security, current U.S. government policy calls for limiting access to the Precision Positioning Service (PPS) and the accuracy of the Standard Positioning Service. Two techniques are used to limit the access and the accuracy of GPS: selective availability (S/A) and/or antispoofing (A/S). The A/S technique is a process used to deny users access to the full capabilities of the system by encryption of the high-rate P-code normally required for high-precision measurements. When so encrypted, the high-rate code is referred to as the Y code. Unless the user has the required encryption key to track the Y code, the user will not have access to the PPS. The S/A technique is believed to involve the deliberate introduction of small, random errors in the broadcast satellite ephemeris data and in the transmitted carrier and/or clock frequency. Uncorrected, S/A can result in position errors on the order of 100 m.

The TurboRogue GPS/MET receiver uses a codeless option when A/S is on, and L2 carrier phase tracking is performed without explicit knowledge of the Y code. Most codeless techniques use the Y code residing on both the L1 and L2 carriers with cross or autocorrelation to recover full wavelength L2 phase. The penalty of using a codeless technique is minor when good SNR conditions prevail or when the phase dynamics of the tracked signal are sufficiently predictable so that signal averaging can be performed. Therefore, use of codeless techniques for recovery of full wavelength L2 phase (for altitudes of about 6–40 km) results in SNR-induced errors that are small compared to other error sources. However, for the lower tropo-

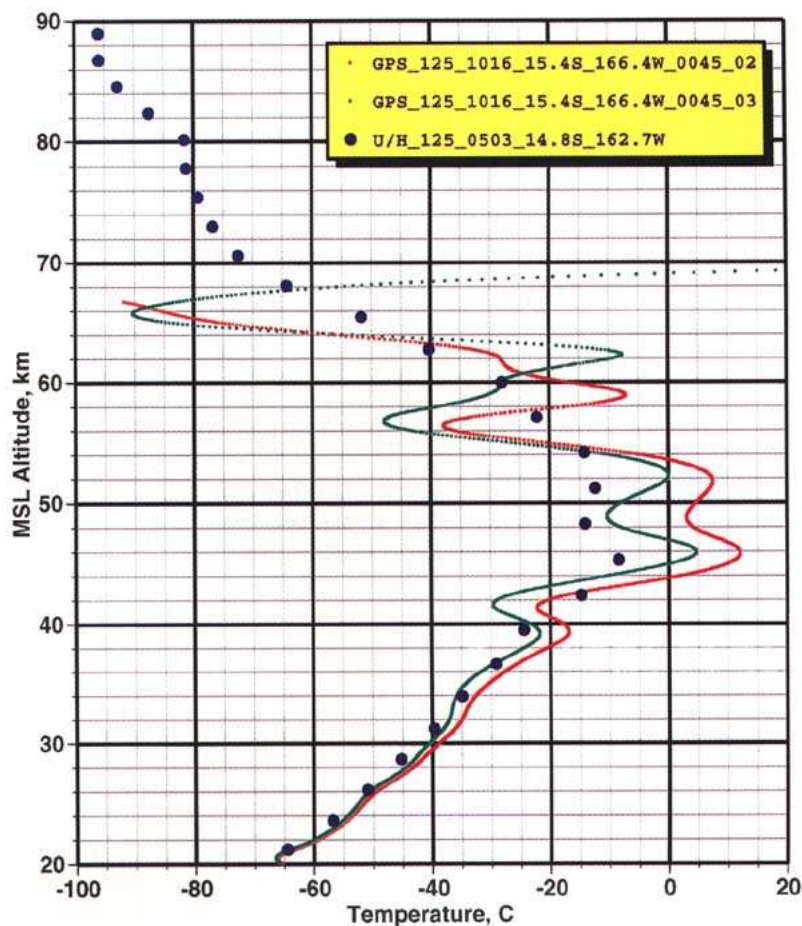


FIG. 11. Two retrievals are shown for a single GPS/MET measurement on 5 May 1995 near Western Samoa in the South Pacific. Each used a different GPS fiducial tracking site. A temperature sounding from the Halogen Occultation Experiment is shown for comparison. We attribute the large oscillations in the GPS/MET retrievals and differences between them to differences in the assumed initial altitude and pressure conditions near 70 km.

sphere where adverse SNR and signal dynamics prevail and in the upper stratosphere where SNR and ionospheric correction errors prevail, the use of high-gain antennas and Y-code receivers (when A/S is on) may be required to fully exploit the potential of GPS limb sounding.

A technique known as double differencing is employed in high-accuracy GPS geodesy to cancel most transmitter and receiver clock errors. By differencing observations of a given GPS satellite at two receivers, clock errors and S/A dithering for that satellite are canceled. This is referred to as a single difference (SD). If SDs are formed for a second GPS satellite and differenced with the first SD, a double difference is formed canceling errors common to the receiver clocks. If double differencing is used in conjunction with receiver clocks synchronized to better than 1 ms,

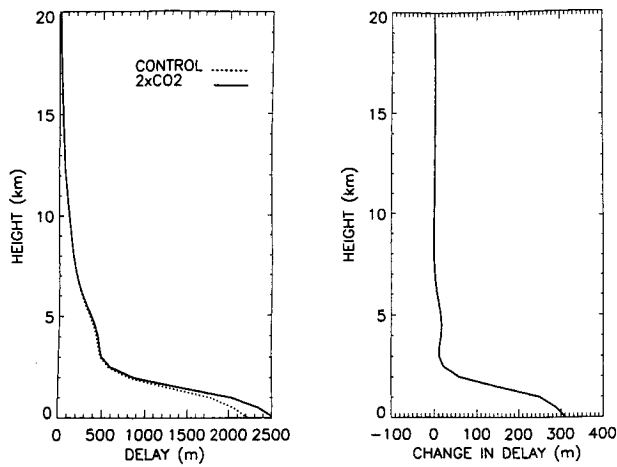


FIG. 12. Change in delay for tropical zone 10°S–10°N, averaged over the month of July, for climate model simulations of present-day and doubled carbon dioxide levels (Yuan et al. 1993).

S/A is effectively canceled, just as normal clock errors are canceled (Rocken and Meertens 1991). Therefore, A/S and S/A do not preclude the use of the GPS for occultation measurements.

For GPS/MET, ground-based data collected from precisely known 1-Hz GPS fiducial tracking sites are double differenced with the data collected from the GPS/MET LEO receiver. The tracking sites used for GPS/MET, located in Australia (Tidbinbilla), Alaska (Fairbanks), California (Pasadena), Germany (Potsdam), and Hawaii (Kokee Park), are part of the worldwide International GPS Service network.

### b. Retrieval methodology

The process described below might be considered the *classic retrieval method*. The fundamental principles have evolved over time from the original planetary occultation work conducted at JPL and Stanford (described in section 2) and are similar to methods used in seismology (Phinney and Anderson 1968). A detailed description of the retrieval methodology offered below is provided by Melbourne et al. (1994a).

#### 1) COMPENSATING FOR THE IONOSPHERE

To extract information on the neutral atmosphere, propagation delays caused by the ionosphere must be isolated and removed from the signal. Electrons in the ionosphere cause a *frequency-dependent* delay in the phase of received GPS signals. Anticipating the need for ionospheric corrections, GPS planners designed into the system the use of two carrier frequencies, L1 and L2, as previously described. By using *dual-fre-*

*quency* phase measurements and knowledge of the inverse square relationship between the ionospheric group delay and the frequency of each carrier, a simple linear correction can be derived. According to a study conducted by Hajj and Kursinski (1991), a simple linear combination correction is accurate to 1 mm for nighttime occultations below 80 km. The error increases above 80 km. Because of high electron density variability in the daytime ionosphere, the simple linear combination correction is good only to 1–5 cm below 80 km, primarily due to splitting of the L1 and L2 rays. The required correction can be expressed as follows:

$$\Delta T_{L1} = 1.5336 \Delta T_{L1-L2}, \quad (\text{A1})$$

where  $\Delta T_{L1}$  is the ionospheric time delay for L1 and  $\Delta T_{L1-L2}$  is the measurable difference in delay between L1 and L2. The Doppler frequency offset, also affected by the ionosphere, can be modeled with a similar linear correction:

$$\Delta f_{L1} = 3.529 (\Delta f_{L2} - \Delta f_{L1}), \quad (\text{A2})$$

where  $(\Delta f_{L2} - \Delta f_{L1})$  is the measurable Doppler difference (Spilker 1978).

The dominant residual error of traditional ionospheric correction results from the different bending of L1 and L2 carriers (Hardy et al. 1993). To reduce this effect, Vorob'ev and Krasilnikova (1994) suggested a modified method of ionospheric correction based on a linear combination of separate refraction angles for the two carriers. This method, used in analysis of the results presented here, assumes the same impact parameter instead of the same time (the impact parameter is defined in the following section). Correcting for ionospheric effects completes the first step in the recovery of meteorological data from the GPS/MET observables.

#### 2) RECOVERING ATMOSPHERIC INDEX OF REFRACTION

The fundamental measurement in the GPS limb sounding technique is phase delay resulting from transmission of the GPS signal through the atmosphere. Total atmospheric delay is a function of two factors: *ray bending* due to refraction and *reduced propagation velocity* in the atmosphere. The radio signal propagating from the GPS transmitter to the LEO receiver follows a path through the atmosphere that curves distinctively in response to atmospheric gradients in refractive index. The cumulative effect of the

atmosphere on the ray path can be expressed in terms of the total refractive bending angle  $\alpha$ , which has a known relationship to the atmospheric Doppler shift. For Earth's atmosphere, the maximum bending angle is on the order of 0.03 rad (1.5°). The atmospheric Doppler shift is in turn determined by taking the time derivative of the observed phase. The variation of  $\alpha$  with experiment geometry can be characterized through use of an *impact parameter*  $a$ , defined as the perpendicular distance between the center of the planet and the straight line followed by the ray approaching the atmosphere. When combined with a precise knowledge of the geometry (obtained concurrently from other GPS satellites), each sample of phase data (corrected for ionospheric effects) can be converted to the corresponding values for  $\alpha$  and  $a$ . This step is straightforward and involves simple geometrical considerations, basic laws of geometrical optics, and relativistic formulas for Doppler shift.

For an atmosphere with local spherical symmetry (i.e., no significant asymmetric *horizontal* variations in temperature or moisture), and having determined the bending angle  $\alpha(a)$  as described above, there is a unique relationship between  $\alpha(a)$  and  $\mu(r)$ , the atmospheric refractive index as a function of radius  $r$ . The refractive index profile  $\mu(r)$  is then derived through an Abel transform of the measurements of  $\alpha(a)$  obtained over the complete occultation:

$$\ln \mu(r_o) = \frac{1}{\pi} \int_{a_o}^{\infty} \frac{\alpha(a)}{(a_o^2 - a^2)^{1/2}} da, \quad (\text{A3})$$

where  $a_o$  is the value of  $a$  for the ray whose radius of closest approach is  $r_o$ . Application of Eq. (A3) will provide the index of refraction profile through the atmosphere. This transformation assumes 1) the atmospheric shells are spherical and 2) each shell has a uniform index of refraction, that is, no horizontal variations.

The assumption of spherical symmetry is a limitation that must be overcome to achieve the generality desired for an operational system. Some state-of-the-art ray-tracing algorithms developed for seismology do not depend on this assumption.

### c. Relationship of refractivity to meteorological parameters

Atmospheric parameters of interest can be derived from the refractive index profile through the following sequence of steps. To simplify the explanation, the

process will first be described for the case of dry air. Then the effect of moisture will be considered.

#### 1) DRY AIR CASE

First, as the index of refraction  $\mu$  is close to unity in the terrestrial atmosphere, it is convenient to define the refractivity:

$$N = (\mu - 1)10^6. \quad (\text{A4})$$

For dry air,  $N$  can be expressed as

$$N = 77.6 \frac{P}{T}, \quad (\text{A5})$$

where  $P$  is the pressure in millibars and  $T$  is the temperature in kelvins. Furthermore, by virtue of the equation of state, Eq. (A5) may be written as

$$N = 77.6 \rho R, \quad (\text{A6})$$

where  $\rho$  is the air density in  $\text{kg m}^{-3}$  and  $R$  is the gas constant for dry air. Equation (A6) shows that  $\rho$  is directly proportional to  $N$  for dry air, so that  $\rho(r)$  can be obtained easily from  $\mu(r)$ . Next,  $P(r)$  can be obtained from  $\rho(r)$  by integrating the equation of hydrostatic equilibrium:

$$\partial P / \partial z = -g\rho, \quad (\text{A7})$$

where  $z$  is the altitude and  $g$  is the acceleration of gravity. Finally,  $T$  can be obtained from  $P$  and  $\rho$  using the equation of state. In summary, for dry air, vertical profiles of  $\rho$ ,  $P$ , and  $T$  can be obtained from  $\mu(r)$  in a direct and simple manner.

#### 2) GENERAL CASE

The procedure described above must be modified to account for the presence of water vapor. When the effect of water vapor is included, the expression for the refractivity is

$$N = 77.6 \frac{P}{T} + 3.73(10^5) e / T^2, \quad (\text{A8})$$

where  $e$  is the vapor pressure of water in millibars. The first or dry term has been supplemented by a contribution from the second or wet term due to water vapor, which can be substantial in the lower troposphere. The wet term also exhibits considerable variation with location and time. The separate contributions

to  $N$  by the dry and wet terms cannot be distinguished uniquely through occultation measurements. This introduces an ambiguity into the profiles of  $\rho$ ,  $P$ , and  $T$ ; the effects of water vapor at variable and uncertain concentrations are indistinguishable from the effects of variations in temperature and pressure.

At altitudes above the tropopause, this ambiguity is not a significant problem as the contribution to the refractive index by water vapor is nearly always much less than 2%. Similarly, the contribution of moisture to refractive index is negligible throughout the polar atmosphere during winter. In the lower troposphere, ambiguity can be overcome. For example, if the temperature profile in the troposphere were known from model calculations, then moisture profiles could be retrieved from the measurements. This approach will work best in tropical regions where the temperature profiles exhibit relatively small changes, but moisture fields change significantly in space and time. It should be emphasized that  $\mu$  and  $N$  can still be determined uniquely regardless of the abundance of water vapor.


*Acknowledgments.* Funding for the GPS/MET program was provided by the NSF, NOAA, the FAA, and NASA. Fundamental radio occultation methods used in the program were developed by the JPL and Stanford University scientists over the past three decades as a part of the NASA planetary exploration program. The JPL developed the TurboRogue receiver and the firmware used for GPS/MET. NASA supported the development and operation of the Optical Transient Detector (the *MicroLab 1* satellite's primary experiment) and 1-Hz tracking stations needed for GPS/MET as part of the International GPS Service network. Orbital Sciences Corporation accommodated the GPS/MET payload on its MicroLab satellite and provided a Pegasus rocket launch. Allen Osborne Associates, Inc. worked with GPS/MET investigators to convert its commercial TurboRogue GPS receiver for use in space. Part of the work was supported by the Independent Research program of Lockheed Martin Missiles and Space.

## References

- Ahnert, P. R., 1991: Precision and comparability of National Weather Service upper air measurements. Preprints, *Seventh Symp. on Meteorological Observations and Instruments*, New Orleans, LA, Amer. Meteor. Soc., 221–226.
- Bengtsson, L., M. E. Gorbunov, and S. V. Sokolovskiy, 1995: Space refractive tomography of the atmosphere: Modeling of direct and inverse problems. Max-Planck-Institute for Meteorology Tech. Rep., Hamburg, Germany, in press.
- Bevis, M., S. Businger, T. A. Herring, C. Rocken, R. A. Anthes, and R. H. Ware, 1992: GPS meteorology: Remote sensing of atmospheric water vapor using the global positioning system. *J. Geophys. Res.*, **97**(D14), 15 787–15 801.
- Brewster, K. A., S. T. Benjamin, and R. Crawford, 1989: Quality control of ACARS meteorological observations—a preliminary data survey. Preprints, *Third Int. Conf. on Aviation Weather Systems*, Anaheim, CA, Amer. Meteor. Soc., 124–129.
- Businger, S., S. R. Chiswell, M. Bevis, J. Duan, R. A. Anthes, C. Rocken, R. Ware, T. Van Hove, and F. Solheim, 1996: The promise of GPS in atmospheric monitoring. *Bull. Amer. Meteor. Soc.*, **77**, xxxx–xxxx pp.
- Dalaudier, F., A. S. Gurvich, V. Kan, and C. Sidi, 1994: Middle stratosphere temperature spectra observed with stellar scintillations and in situ techniques. *Adv. Space Res.*, **14**, 961–964.
- Elliot, W. P., and D. J. Gaffen, 1991: On the utility of radiosonde humidity archives for climate studies. *Bull. Amer. Meteor. Soc.*, **72**, 1507–1520.
- Eyre, J. R., 1994: Assimilation of radio occultation measurements into a numerical weather prediction system. ECMWF Tech. Memo. 199, 34 pp.
- Fjeldbo, G., and V. R. Eshleman, 1968: The atmosphere of Mars analyzed by integral inversion of the Mariner IV occultation data. *Planet. Space Sci.*, **16**, 123–140.
- , and —, 1969: Atmosphere of Venus as studied with the Mariner V dual radio-frequency occultation experiment. *Radio Sci.*, **4**, 879–897.
- , A. J. Kliore, and V. L. Eshleman, 1971: The neutral atmosphere of Venus as studied with the Mariner V radio occultation experiments. *Astron. J.*, **76**, 123–140.
- Gaffen, D. J., W. P. Elliott, and A. Robock, 1992: Relationships between tropospheric water vapor and surface temperature as observed by radiosondes. *Geophys. Res. Lett.*, **19**, 1839–1842.
- Gorbunov, M. E., and S. V. Sokolovskiy, 1993: Remote sensing of refractivity from space for global observations of atmospheric parameters. Max-Planck-Institute for Meteorology Rep. 119, Hamburg, Germany, 58 pp.
- Gurvich, A. S., V. Kan, L. I. Popov, V. V. Ryumin, S. A. Savchenko, and S. V. Sokolovskiy, 1982: Reconstruction of the atmosphere's temperature profile from motion pictures of the sun and moon taken from the "Salyut-6" orbiter. *Izv. Atmos. Oceanic Phys.*, **18**, 1–4.
- Hajj, G. A., and E. R. Kursinski, 1991: Analysis of errors in the vertical temperature profiles recovered from GPS occultation observations. *Trans. Amer. Geophys. Union*, **72**, 372.
- , —, W. L. Bertiger, L. J. Romans, and K. R. Hardy, 1994: Assessment of GPS occultations for atmospheric profiling. Preprints, *Seventh Conf. on Satellite Meteorology and Oceanography*, Monterey, CA, Amer. Meteor. Soc., J7–J10.
- Hardy, K. R., D. P. Hinson, G. L. Tyler, and E. R. Kursinski, 1992: Atmospheric profiles from active space-based radio measurements. Preprints, *Sixth Conf. on Satellite Meteorology and Oceanography*, Atlanta, GA, Amer. Meteor. Soc., 420–423.
- , G. A. Hajj, and E. R. Kursinski, 1993: Accuracies of atmospheric profiles obtained from GPS occultations. *Proc. Institute of Navigation GPS-93 Conf.*, Salt Lake City, UT, Institute of Navigation, 1545–1556.
- Hayden, C. M., 1988: GOES-VAS simultaneous temperature-moisture retrieval algorithm. *J. Appl. Meteor.*, **27**, 705–733.
- Houghton, J. T., G. J. Jenkins, and J. J. Ephraums, Eds., 1990: *Scientific Assessment of Climate Change*. Cambridge University Press, 365 pp.
- , B. A. Callander, and S. K. Varney, Eds., 1992: *Climate Change 1992*. Cambridge University Press, 200 pp.

- Hurrell, J. W., and K. E. Trenberth, 1992: An evaluation on monthly mean MSU and ECMWF global atmospheric temperatures for monitoring climate. *J. Climate*, **5**, 1424–1440.
- Illari, L., 1989: The quality of satellite precipitable water content data and their impact on analyzed moisture fields. *Tellus*, **41A**, 319–337.
- Kliore, A. J., D. L. Cain, G. S. Levy, V. R. Eshleman, G. Fjeldbo, and F. D. Drake, 1965: Occultation experiment: Results of the first direct measurement of Mars' atmosphere and ionosphere. *Science*, **149**, 1243–1248.
- , G. Fjeldbo, B. L. Seidel, D. N. Seetnam, T. T. Sesplaukis, P. M. Woiceshyn, and S. I. Rasool, 1975: The atmosphere of Io from Pioneer 10 radio occultation measurements. *Icarus*, **24**, 407–410.
- Kursinski, E. R., G. A. Hajj, and K. R. Hardy, 1993: Temperature or moisture profiles from radio occultation measurements. Preprints, *Eighth Symp. on Meteorological Observation and Instrumentation*, Anaheim, CA, Amer. Meteor. Soc., J153–J158.
- Lee, H. S., and F. J. Schmidlin, 1991: Comparisons of satellite-retrieved layer temperature and correlative radiosonde data. Preprints, *Seventh Symp. on Meteorological Observations and Instruments*, New Orleans, LA, Amer. Meteor. Soc., 276–280.
- Lindal, G. F., 1992: The atmosphere of Neptune: An analysis of radio occultation data acquired with voyager. *Astron. J.*, **103**, 967–982.
- , H. B. Hotz, D. N. Sweetnam, Z. Shippony, J. P. Brenkle, G. V. Hartsell, R. T. Spear, and W. H. Michael, 1979: Viking radio occultation measurements of the atmosphere and topography of Mars: Data acquired during 1 Martian year of tracking. *J. Geophys. Res.*, **84**, 8443–8456.
- , and Coauthors, 1981: The atmosphere of Jupiter: An analysis of the Voyager radio occultation measurements. *J. Geophys. Res.*, **86**, 8721–8727.
- , G. E. Wood, H. B. Hotz, D. N. Sweetnam, V. R. Eshleman, and G. L. Tyler, 1983: The atmosphere of Titan: An analysis of the Voyager 1 radio occultation measurements. *Icarus*, **53**, 348–363.
- , D. N. Sweetnam, and V. R. Eshleman, 1985: The atmosphere of Saturn: An analysis of the Voyager radio occultation measurements. *Astron. J.*, **90**, 1136–1146.
- , J. R. Lyons, D. N. Sweetnam, V. R. Eshleman, D. P. Hinson, and G. L. Tyler, 1987: The atmosphere of Uranus: Results of radio occultation measurements with Voyager 2. *J. Geophys. Res.*, **92**, 14 987–15 001.
- , —, —, —, —, and —, 1990: The atmosphere of Neptune: Results of radio occultation measurements with the Voyager 2 spacecraft. *Geophys. Res. Lett.*, **17**, 1733–1736.
- Luers, J. K., and R. E. Eskridge, 1995: Temperature corrections for the VIZ and Vaisala radiosondes. *J. Appl. Meteor.*, **34**, 1241–1253.
- Malla, R. P., S. C. Wu, and S. M. Lichten, 1992: Geocenter location and variations in Earth orientation using GPS. *J. Geophys. Res. (Solid Earth)*, **98**, 4611–4617.
- Meehan, T. K., E. R. Kursinski, G. A. Hajj, J. M. Srinivasan, and S. J. DiNardo, 1991: Analysis of GPS signals occulted by the atmosphere as tracked from Mauna Kea using the TurboRogue GPS receiver. *Trans. Amer. Geophys. Union*, **72**, 372.
- Melbourne, W. G., T. P. Yunck, L. E. Young, B. H. Hager, G. F. Lindal, C. H. Liu, and G. H. Born, 1988: GPS geoscience instrument for EOS and Space Station. JPL Proposal to NASA AO OSSA-1-88, 81 pp.
- , and Coauthors, 1994a: The application of spaceborne GPS to atmospheric limb sounding and global change monitoring. JPL Publ. 94-18, 147 pp.
- , B. D. Tapley, and T. P. Yunck, 1994b: The GPS flight experiment on TOPEX/POSEIDON. *Geophys. Res. Lett.*, **21**, 2171–2174.
- Nash, J., and F. J. Schmidlin, 1987: WMO international radiosonde comparison, instruments and observing methods. World Meteorological Organization Rep. 30, WMO/TD-No. 195, 103 pp.
- Newman, M., G. Schubert, A. J. Kliore, and I. R. Patel, 1984: Zonal winds in the middle atmosphere of Venus from Pioneer Venus radio occultation data. *J. Atmos. Sci.*, **41**, 1901–1913.
- NOAA, 1992: *Strategic Plan for Upper Air Observations*. 18 pp.
- Phinney, R. A., and D. L. Anderson, 1968: On the radio occultation method for studying planetary atmospheres. *J. Geophys. Res.*, **73**, 1819–1827.
- Rind, D., E.-W. Chiou, W. Chu, J. Larsen, S. Oltmans, J. Lerner, M. P. McCormick, and L. McMaster, 1991: Positive water vapor feedback in climate models confirmed by satellite data. *Nature*, **349**, 500–503.
- Rocken, C., and C. Meertens, 1991: Monitoring selective availability dither frequencies and their effect on GPS data. *Bull. Geodesique*, **71**, 162–169.
- Schlüssel, P., and W. J. Emery, 1990: Atmospheric water vapor over the oceans from SSM/I measurements. *Int. J. Remote Sens.*, **11**, 753–766.
- Schwartz, B. E., and C. A. Doswell, 1991: North American rawinsonde observations: Problems, concerns, and a call to action. *Bull. Amer. Meteor. Soc.*, **72**, 1885–1896.
- Shea, D. J., S. J. Wifley, I. R. Stern, and T. J. Hoar, 1994: An introduction to atmospheric and oceanographic data. NCAR Tech. Note NCAR/TN-4044 IA, 132 pp.
- Smith, W. L., and Coauthors, 1990: GHIS—The GOES High-Resolution Interferometer Sounder. *J. Appl. Meteor.*, **29**, 1189–1204.
- Spencer, R. W., and J. R. Christy, 1990: Precise monitoring of global temperature trends from satellites. *Science*, **247**, 1558–1562.
- , —, and N. C. Grody, 1990: Global atmospheric temperature monitoring with satellite microwave measurements: Method and results 1979–84. *J. Climate*, **3**, 1111–1128.
- Spilker, J. J., 1978: GPS signal structure and performance characteristics. *J. Inst. Nav.*, **25**(2), 121–146.
- Trenberth, K. E., 1995: Atmospheric circulation climate changes. *Clim. Change*, **31**, 427–453.
- , J. R. Christy, and J. W. Hurrell, 1992: Monitoring global monthly mean surface temperatures. *J. Climate*, **5**, 1405–1423.
- Tyler, G. L., 1987: Radio propagation experiments in the outer solar system with Voyager. *Proc. IEEE*, **75**, 1404–1431.
- , and Coauthors, 1989: Voyager radio science observations of Neptune and Triton. *Science*, **246**, 1466–1473.
- Van Loon, H., and K. Labitzke, 1990: Association between the 11-year solar cycle and the atmosphere. Part IV: The stratosphere, not grouped by the phase of the QBO. *J. Climate*, **3**, 827–837.

- Vorob'ev, V. V., and T. G. Krasilnikova, 1994: Estimation of the accuracy of the atmospheric refractive index recovery from Doppler shift measurements at frequencies used in the NAVSTAR system. *Phys. Atmos. Ocean*, **29**, 602-609.
- Ware, R., 1992: GPS sounding of Earth's atmosphere. *GPS World*, **3**, 56-57.
- , and S. Businger, 1995: Global positioning finds applications for geosciences research. *Trans. Amer. Geophys. Union*, **76**, 187.
- , M. Exner, B. Herman, W. Kuo, and T. Meehan, 1993: Active atmospheric limb sounding with an orbiting GPS receiver. *Trans. Amer. Geophys. Union*, **74**, 336.
- Yuan, L., R. A. Anthes, R. H. Ware, C. Rocken, W. Bonner, M. Bevis, and S. Businger, 1993: Sensing climate change using the global positioning system. *J. Geophys. Res.*, **98**(D8), 14 925-14 937.
- Zou, X., Y.-H. Kuo, and Y.-R. Guo, 1995: Assimilation of atmospheric radio refractivity using a nonhydrostatic mesoscale model. *Mon. Wea. Rev.*, **123**, 2229-2249.
- Zumberge, J., R. Neilan, G. Beutler, and J. Kouba, 1994: The international GPS service for geodynamics-benefits to users. *Proc. Seventh Technical Meeting of the Institute of Navigation*, Institute of Navigation, Salt Lake City, UT, 1663-1666



Tenth Conference on **Numerical Weather Prediction**

18-22 July 1994  
Portland, Oregon

Softbound, 640+ pages, B&W, \$50/list, \$35/members.  
Send prepaid orders to: Order Department, AMS,  
45 Beacon Street, Boston, MA 02108-3693.

**PREPRINT VOLUME**

The phenomenal growth in the field of numerical weather prediction is evident from the record number of papers, over 285 in all, which were presented at this meeting. Papers published in this impressive preprint volume include data analysis; quality control; initialization; data assimilation; regional and mesoscale modeling; medium- and extended-range forecast problems; numerical methods; modeling of physical processes, including convective, radiative, and surface- and boundary-layer processes; orographic effects; model output statistics; and forecast verification and predictability.