



This is a repository copy of *Higher order mode circularly polarized two-layer rectangular dielectric resonator antenna*.

White Rose Research Online URL for this paper:
<http://eprints.whiterose.ac.uk/130521/>

Version: Accepted Version

Article:

Abdulmajid, A.A., Khalil, Y. and Khamas, S.K. orcid.org/0000-0001-9488-4107 (2018)
Higher order mode circularly polarized two-layer rectangular dielectric resonator antenna.
IEEE Antennas and Wireless Propagation Letters, 17 (6). pp. 1114-1117. ISSN 1536-1225

<https://doi.org/10.1109/LAWP.2018.2834981>

© 2018 IEEE. This is an author produced version of a paper subsequently published in IEEE Antennas and Wireless Propagation Letters. Uploaded in accordance with the publisher's self-archiving policy. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

Higher Order Mode Circularly Polarized Two-Layer Rectangular Dielectric Resonator Antenna

Abdulmajid A. Abdulmajid, Yas Khalil, and Salam Khamas

Abstract— A two-layer higher order mode circularly polarized (CP) rectangular dielectric resonator antenna (RDRA) is proposed at a frequency range of 10 to 13GHz using a single-feed. The configuration incorporates the DRA and a dielectric coat layer with respective dielectric constants of 10 and 3.5. Utilizing the outer layer offers a number of advantages such as wider impedance and CP bandwidths of ~21%, and 9.5%, respectively, as well as a high gain of ~11dBic. Close agreement has been achieved between experimental and simulated results.

Index Terms—Dielectric resonator antenna, circular polarization, high order mode, 3D printing.

I. INTRODUCTION

The last few decades have witnessed a considerable growth in wireless communication systems, with a particular attention being given to high frequency ranges such as the X- and mm-wave bands. Owing to their attractive radiation characteristics such as high radiation efficiencies and wider bandwidths, DRAs are more favorable for high frequency applications [1-5]. In addition, DRA excitation at higher frequencies can be achieved by employing a slot aperture coupling that has been demonstrated experimentally for the first time in [6]. In order to maintain practical antenna dimensions and increase the gain, higher order mode DRAs need to be considered at higher frequencies. The earlier studies on higher order mode DRAs have been mainly focused on linearly polarized radiation [7-9]. On the other hand, circularly polarized DRAs' radiation is less influenced by atmosphere conditions and insensitive to the transmitter and receiver orientations. As a result, singly-fed CP DRAs that operate at lower order modes have been reported in numerous studies with novel approaches such as employing a rotated slot-fed RDRA [10], or proposing a properly engineered DRA geometry with a wide axial ratio (AR) bandwidth of ~9% [11]. Therefore, higher order modes CP DRAs have received increased interest recently. For example, a higher order mode dual-band CP chamfered RDRA has been reported using a single feed point [12]. The dual bands have been achieved by exciting the TE_{111} and TE_{113} resonance modes with respective impedance and axial ratio bandwidths of 11.4% and 1.4% as well as a gain of ~7dBic for the TE_{113} mode. In addition, a quadrature-fed CP RDRA has been proposed in [13] by exciting the TE_{111} and TE_{113} resonance modes with a maximum gain of 6dBic. In a recent study, a cross slot-fed dual band CP DRA that operates in the TE_{111} and TE_{113} higher order mode has been presented with respective impedance and AR bandwidths of 8.4 % and 2.2% and a gain of ~4.3dBic for the TE_{113} mode [14]. Therefore, TE_{113} represents the highest mode order that has been considered for a CP DRA. It is well known that increasing the mode order results in a considerably higher gain [7, 9], which represents a key requirement at higher frequency applications. However, higher order modes are usually associated with a narrower bandwidth, which can be attributed to the fact that the DRA effective dielectric constant increases with the mode order [8]. A well-known technique to improve the bandwidth is the incorporation of a dielectric coat in the configuration, which has been demonstrated for linearly polarised cylindrical and hemispherical lower order mode DRAs [15-18]. However, the impact of the dielectric coat on the

performance of higher order modes and/or circularly polarized DRAs has not been considered earlier. In this letter, a CP DRA that operates in the $TE_{11,11}$ higher order mode is proposed, where the aforementioned narrow bandwidth issue has been addressed by coating the DRA with a dielectric layer. The presented results demonstrate that combining

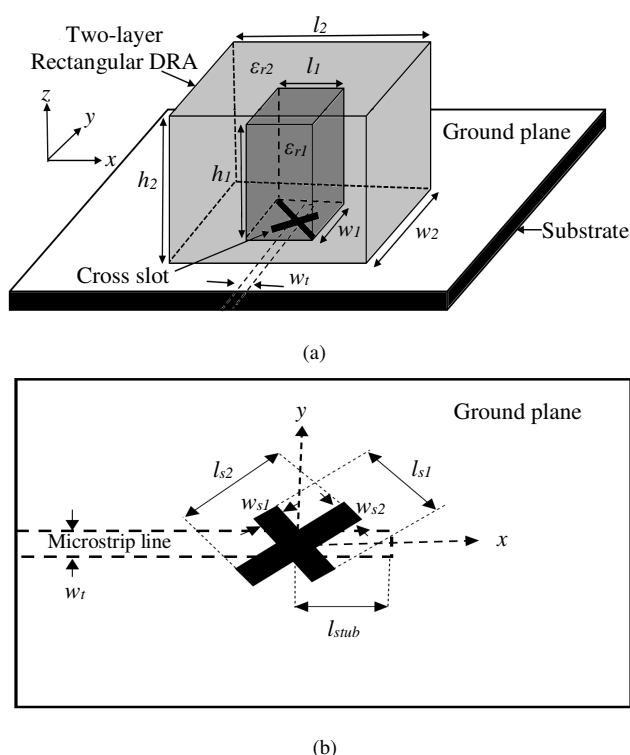


Fig. 1. Geometry of the configuration (a) Layered rectangular DRA (b) Top view of the feed network.

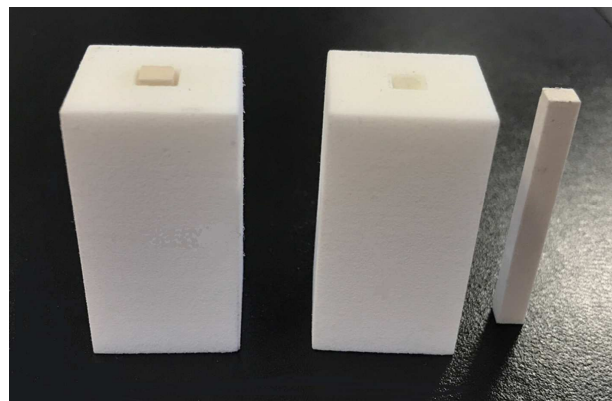


Fig. 2. The outer dielectric coat and the rectangular DRA before and after assembly.

DRA that operates in a higher-order mode, outer dielectric layer and cross slot excitation presents a novel approach for generating wider impedance and CP bandwidths of $\sim 21\%$, and 9.5% , respectively, together with an enhanced gain of $\sim 11\text{dBic}$. The simulations have been conducted using CST microwave studio [19]. A prototype of the layered higher order mode DRA has been built and measured with close agreement between experimental and simulated results.

I. ANTENNA CONFIGURATION

Figure 1 illustrates the proposed layered RDRA configuration and feed network, where a cross slot has been employed to excite the antenna [20, 21]. The DRA has been fabricated using Alumina with a dielectric constant of 10 and a loss tangent of $\tan\delta < 0.002$. Two configurations have been considered that utilize the same DRA element without, and with, a dielectric coat. The DRA dimensions have been chosen as $l_1 = w_1 = 4\text{ mm}$ and $h_1 = 40\text{ mm}$. Further, the outer layer has been fabricated using a 3D printed Polyimide layer with a dielectric constant of 3.5 and dimensions of $l_2 = w_2 = 20\text{ mm}$ and $h_2 = 41\text{ mm}$. A central rectangular air-gap has been created in the Polyimide dielectric coat to accommodate the DRA as illustrated in Figure 2. Once the coat is fabricated, the DRA has been inserted in the central air-gap and a dielectric powder has been utilized to fill any gaps between the DRA and the coat.

A 50Ω microstrip-feed line has been etched on a Rogers RO4535 substrate with a dielectric constant of 3.48 and a loss tangent of 0.0037. The respective length, width, and thickness of the substrate are 150mm, 100mm, and 0.8mm. Furthermore, in order to excite the CP RDRA two slots have been etched on the copper ground plane. Each slot is tilted by an angle of 45° with respect to the microstrip line that has been printed on the backside of the substrate. Additionally, unequal slot lengths have been chosen in order to excite two near-degenerate orthogonal modes of equal amplitude and 90° phase difference that are needed to generate the CP radiation [20]. The coupling cross slot element lengths have the same width of $w_{s1} = w_{s2} = 1\text{ mm}$ and unequal lengths of $l_{s1} = 4.4\text{ mm}$ and $l_{s2} = 5\text{ mm}$. In addition, an open stub length of $l_{\text{stub}} = 2.5\text{ mm}$ has been utilized for optimum matching. Furthermore, a double sided adhesive copper tape has been employed to eliminate the potential air-gaps between the DRA and ground plane [22]. The reflection coefficient has been measured using an E5071C vector network analyzer, whereas the radiation patterns and gain have been measured using an NSI system.

III. RESULTS

A. Single Layer Higher Order Mode CP RDRA

A rectangular DRA prototype has been fabricated with dimensions that supports the TE_{117} mode at 11.1GHz. The simulated and measured reflection coefficients are presented in Figure 3, with respective impedance bandwidths of 1.9% and 1.78%. The measured resonance frequency is 11.2GHz, which agrees well with the simulated counterpart. The broadside gain and AR are depicted in Figure 4 with measured and simulated gains of $\sim 7.5\text{dBic}$ at 11.2GHz. The simulated CP operation bandwidth extends from 11.1 to 11.37GHz, which corresponds to a 3dB AR bandwidth of 2.4% that agrees well with a measured AR bandwidth of 2.3% over a frequency range of 11.1 to 11.4GHz.

B. Two-layer Higher Order Mode CP RDRA

Incorporating a dielectric coating layer, with a relative permittivity of ϵ_{r2} , creates a transition region between the DRA and free space,

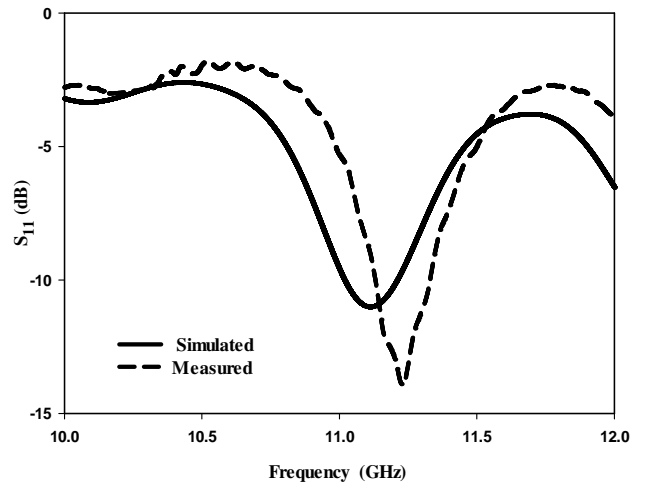


Fig. 3. Reflection coefficient of a single layer RDRA operating in the TE_{117} mode

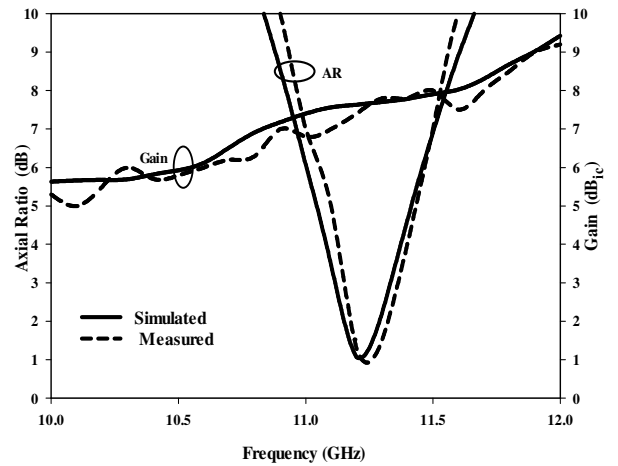


Fig. 4. Gain and the axial ratio of a single layer higher order mode DRA.

which improves the impedance bandwidth considerably [2]. The DRA inner magnetic field distribution can be represented as an array of short magnetic dipoles, in which a maximum gain can be accomplished when the separation distance between the adjacent magnetic dipoles is $\sim 0.4\lambda_0$, where λ_0 is the free space wavelength [7]. In addition, when the DRA is surrounded by another dielectric medium, the maximum gain can be achieved when the adjacent magnetic dipoles are separated by a distance of $\sim 0.4\lambda_g$, where $\lambda_g = \lambda_0 / \sqrt{\epsilon_{r2}}$, which results in a lower profile and a more practical configuration. Therefore, a prototype of a two-layer DRA has been fabricated and measured in order to demonstrate the potential of such antenna.

The magnetic field distribution inside the DRA is illustrated in Figure 5, where it can be observed that the separation distance between adjacent short magnetic dipoles, S , for the $\text{TE}_{11,11}$ mode is 6.6mm at 11.3GHz, which exceeds $0.44\lambda_g$. Therefore, a higher gain of 11.1dBic has been achieved at this frequency point. Similarly, it can be noted that for the $\text{TE}_{11,13}$ mode, the separation distance is 5.6mm, which corresponds to less than $\sim 0.4\lambda_g$ at 12GHz, hence a lower broadside gain of $\sim 7.6\text{dBic}$ has been achieved at this frequency. Figure 6 presents the reflection coefficient of the layered DRA with a close agreement between simulated and measured bandwidths of $\sim 21\%$ and $\sim 18.5\%$, respectively. This represents a

significant bandwidth enhancement compared to that of a single layer DRA. In addition, it is evident from these results that the layered DRA supports a multi-mode operation where the $TE_{11,11}$ and $TE_{11,13}$ modes have been excited at 11.3 and 12GHz, respectively, which also contributes to the bandwidth enhancement.

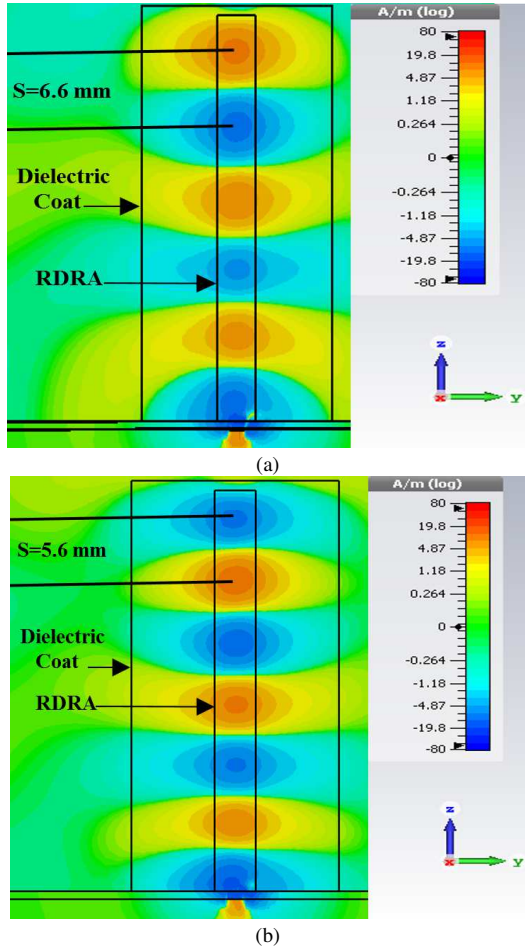


Fig. 5 Magnetic field distribution inside the layered DRA that operates in the (a) $TE_{11,11}$ at 11.3GHz and (b) $TE_{11,13}$ at 12GHz resonance modes.

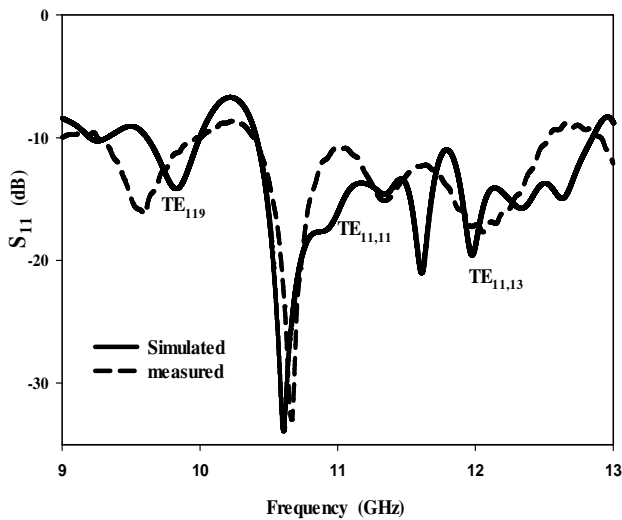


Fig. 6 Reflection coefficient of a layered RDRAs operating in multi-higher order modes.

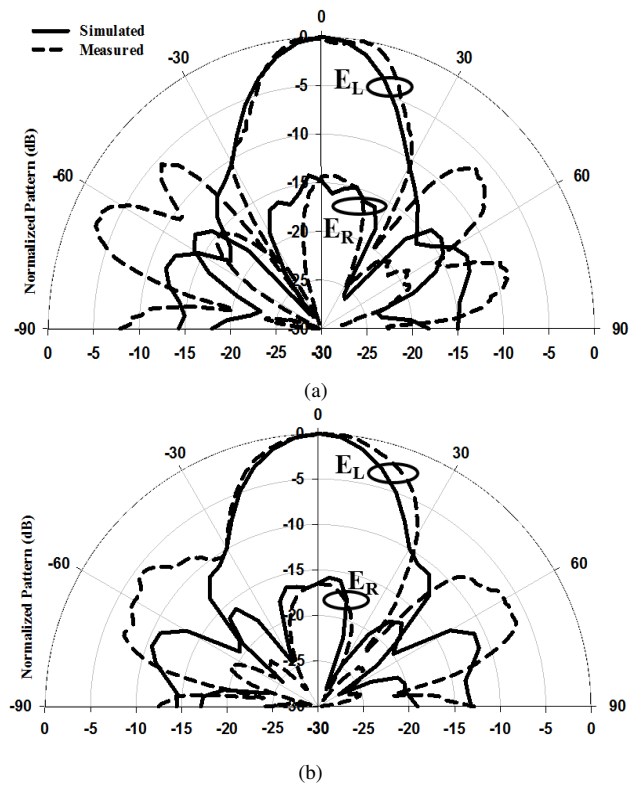


Fig. 7 Radiation patterns of a layered DRA excited in the $TE_{11,11}$ mode at 11.3GHz a) $\phi=0$ b) $\phi=90$.

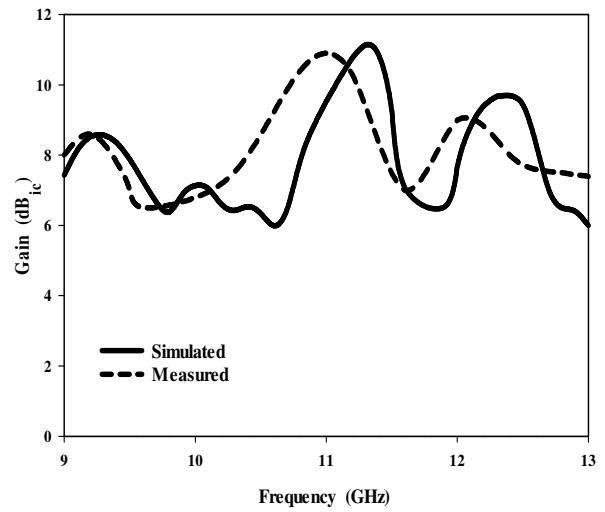


Fig. 8 Gain for a higher order mode layered RDRAs.

Figure 7 illustrates a reasonable agreement between the measured and simulated radiation patterns of the layered DRA at 11.3GHz, where it can be noticed that a left hand CP radiation has been achieved since E_L is greater than E_R by 15dB. The measured and simulated gains are presented in Figure 8 with close agreement. However, a slight drop in the measured gain to ~ 10.6 dBic can be observed compared to a maximum simulated gain of 11.1dBic, which may be attributed to experimental errors as well as the existence of un-eliminated air-gaps spots between the DRA and the dielectric coat. In addition, the permittivity of the dielectric coat could have been slightly altered during the 3D printing process,

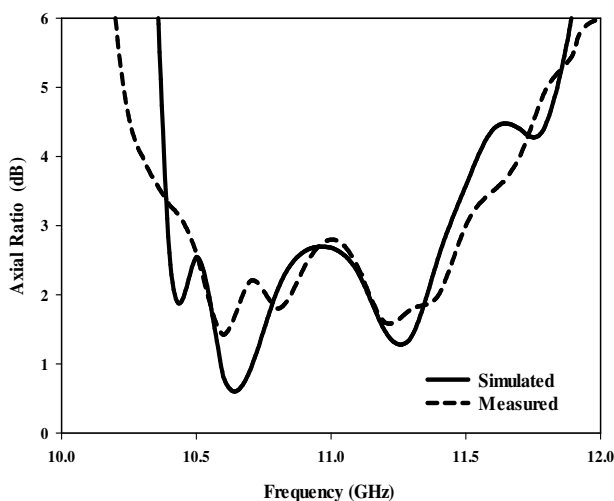


Fig. 9 Axial ratio of a higher order mode layered RDRA.

which may contribute to this discrepancy. The simulated and measured axial ratio of the layered DRA are depicted in Figure 9, where it can be observed that a CP radiation has been achieved over a frequency range of 10.4 to 11.44GHz, which corresponds to a 3dB AR bandwidth of 9.5% compared to a measured counterpart of 9.1%. It is worth mentioning that the length of the slots have been altered slightly to $l_{s1}=4$ mm and $l_{s2}=5.6$ mm in order to achieve a wider CP bandwidth.

V. CONCLUSIONS

A singly fed higher order mode CP RDRA have been considered theoretically and experimentally, where a dielectric coat has been incorporated in the configuration. As expected, the inclusion of a dielectric coat increases the impedance bandwidth considerably. This is combined with a significant enhancement in the far field characteristics such as AR bandwidth and gain. For example, a two-layer RDRA operating in the $TE_{11,11}$ mode offers respective impedance and 3dB AR bandwidths of ~21% and 9.5%. Additionally, the $TE_{11,11}$ mode provided a higher gain of 11.1dBic compared to 7.5dBic for the single layer DRA operating in the $TE_{11,17}$ mode, which also offers narrower impedance and AR bandwidths. Furthermore, the presence of the second dielectric layer improves the mechanical robustness of the configuration since a long and thin ceramic DRA can be fragile. In addition, a close agreement has been achieved between the measured and simulated results. Although the DRA has been designed at the X frequency band, the demonstrated high gain and wide bandwidths represent appealing radiation characteristics for applications in the mm-wave and terahertz higher frequency bands.

ACKNOWLEDGMENT

The authors would like to thank Dr. Candice Majewski and Ms. Wendy Birtwistle at the Centre of Advanced Additive Manufacturing (AdAM), University of Sheffield, for granting access to their facilities and their technical assistance with the laser sintering process.

REFERENCES

[1] A. Petosa, A. Ittipiboon, Y. Antar, D. Roscoe, and M. Cuhaci, "Recent advances in dielectric-resonator antenna technology," *IEEE Antennas Propagat. Mag.*, vol. 40, pp. 35-48, 1998.
 [2] K. M. Luk, K. W. Leung, K. Luk, and K. Leung, "Dielectric resonator antennas," 2002.

[3] L. Z. Thamae and Z. Wu, "Broadband bowtie dielectric resonator antenna," *IEEE Trans. Antennas Propagat.*, vol. 58, pp. 3707-3710, 2010.
 [4] G. Makwana and D. Ghodgaonkar, "Wideband stacked rectangular dielectric resonator antenna at 5.2GHz," *Int. J. of Electromagnetics and Applications*, vol. 2, pp. 41-45, 2012.
 [5] R. W. Heath Jr, R. C. Daniels, and J. N. Murdock, *Millimeter wave wireless communications*: Pearson Education, 2014.
 [6] J. S. Martin, Y. Antar, A. Kishk, A. Ittipiboon, and M. Cuhaci, "Dielectric resonator antenna using aperture coupling," *Elec. Lett.*, vol. 26, pp. 2015-2016, 1990.
 [7] A. Petosa Petosa and S. Thirakoune, "Rectangular dielectric resonator antennas with enhanced gain," *IEEE Trans. Antennas Propag.*, vol. 59, pp. 1385-1389, 2011.
 [8] Y. M. Pan, K. W. Leung, and K.-M. Luk, "Design of the millimeter-wave rectangular dielectric resonator antenna using a higher-order mode," *IEEE Trans. Antennas Propag.*, vol. 59, pp. 2780-2788, 2011.
 [9] S. Maity and B. Gupta, "Closed Form Expressions to Find Radiation Patterns of Rectangular Dielectric Resonator Antennas for Various Modes," *IEEE Trans. Antennas Propag.*, vol. 62, pp. 6524-6527, 2014.
 [10] M. B. Oliver, Y. M. M. Antar, R. K. Mongia, and A. Ittipiboon, "Circularly polarized rectangular dielectric resonator antenna," *Elec. Lett.*, vol. 31, pp. 418-419, Mar. 16, 1995.
 [11] L. Chu, D. Guha, and Y. Antar, "Comb-shaped circularly polarised dielectric resonator antenna," *Elec. Lett.*, vol. 42, pp. 785-787, 2006.
 [12] H. San Ngan, X. S. Fang, and K. W. Leung, "Design of dual-band circularly polarized dielectric resonator antenna using a higher-order mode," *IEEE-APS Topical Conference on Antennas and Propag. in Wireless Comm.*, pp. 424-427, 2012.
 [13] B. Li, C.-X. Hao, and X.-Q. Sheng, "A dual-mode quadrature-fed wideband circularly polarized dielectric resonator antenna," *IEEE antennas and wireless propagat. lett.*, vol. 8, pp. 1036-1038, 2009.
 [14] X.-C. Wang, L. Sun, X.-L. Lu, S. Liang, and W.-Z. Lu, "Single-fed dual-band circularly polarized dielectric resonator antenna for CNS applications," *IEEE Trans. Antennas Propagat.*, Vol. 65, pp. 4283 - 4287, 2017.
 [15] K. W. Leung and K. K. So, "Theory and experiment of the wideband two-layer hemispherical dielectric resonator antenna," *IEEE Transact. Antennas Propagat.*, vol. 57, pp. 1280-1284, 2009.
 [16] R. K. Chaudhary, K. V. Srivastava, and A. Biswas, "Two-layer embedded half-split cylindrical dielectric resonator antenna for wideband applications," *9th European Radar Conference (EuRAD)*, pp. 489-491, 2012.
 [17] X. S. Fang and K. W. Leung, "Design of wideband omnidirectional two-layer transparent hemispherical dielectric resonator antenna," *IEEE Trans. Antennas Propagat.*, vol. 62, pp. 5353-5357, 2014.
 [18] Y. Sun, X. Fang, and K. W. Leung, "Wideband two-layer transparent cylindrical dielectric resonator antenna used as a light cover," *IEEE Int. Conf. on Computational Electromagnetics*, pp. 286-287, 2015.
 [19] CST Reference Manual. Darmstadt, Germany, Computer Simulation Technology, 2017.
 [20] R. D. Maknikar and V. G. Kasabegoudar, "Circularly polarized cross-slot-coupled stacked dielectric resonator antenna for wireless applications," *Int. Journal of Wireless Comm. and Mobile Computing*, vol. 1, pp. 68-73, 2013.
 [21] G. Almpanis, C. Fumeaux, and R. Vahldieck, "Offset cross-slot-coupled dielectric resonator antenna for circular polarization," *IEEE Microwave and Wireless Comp. Lett.*, vol. 16, pp. 461-463, 2006.
 [22] K. W. Leung, "Conformal strip excitation of dielectric resonator antenna," *IEEE Trans. Antennas Propagat.*, vol. 48, pp. 961-967, 2000.