

Historical Developments of Pyrolysis Reactors: A Review

J.A. Garcia-Nunez¹, M.R. Pelaez-Samaniego², M.E. Garcia-Perez³, I. Fonts^{4,5}, J. Abrego⁵,
R.J.M. Westerhof⁶, M. Garcia-Perez^{7*}

¹*Colombian Oil Palm Research Centre, Cenipalma, Bogotá, Colombia*

²*Faculty of Chemical Sciences, Universidad de Cuenca, Cuenca, Ecuador*

³*Facultad de Químico Farmacobiología, Universidad Michoacana de San Nicolas de Hidalgo,
Morelia, Mich., Mexico*

⁴*Centro Universitario de la Defensa-AGM, Zaragoza, Spain*

⁵*Grupo de Procesos, Termoquímicos - Universidad de Zaragoza, Spain*

⁶*Sustainable Process Technology Group, University of Twente, Netherlands*

⁷*Department of Biological Systems Engineering Department, Washington State University,
Pullman, WA, USA*

Abstract: This paper provides a review on pyrolysis technologies, focusing on reactor designs and companies commercializing this technology. The renewed interest on pyrolysis is driven by the potential to convert lignocellulosic materials into bio-oil and biochar and the use of these intermediates for the production bio-fuels, biochemicals and engineered biochars for environmental services. This review presents slow, intermediate, fast and microwave pyrolysis as complementary technologies that share some commonalities in their designs. While slow pyrolysis technologies (traditional carbonization kilns) use wood trunks to produce char chunks for cooking, fast pyrolysis systems process small particles to maximize bio-oil yield. The realization of the environmental issues associated with the use of carbonization technologies and the technical difficulties to operate fast pyrolysis reactors using sand as heating media and large volumes of carrier gas, as well as the problems to refine resulting highly oxygenated oils, are forcing the thermochemical conversion community to rethink the design and use of these reactors. Intermediate pyrolysis reactors (also known as converters) offer opportunities for the large scale balanced production of char and biooil. The capacity of these reactors to process forest and agricultural wastes without much preprocessing is a clear advantage. Microwave pyrolysis is an option for modular small autonomous devices for solid waste management.

1
2
3
4
5 Herein, the evolution of the pyrolysis technology is presented from a historical perspective; thus,
6 old and new innovative designs are discussed together.
7
8
9

10 **Keywords:** Pyrolysis reactors, carbonization reactors, thermochemical reactors, bio-oil, char
11
12

13 *Corresponding Author
14

15 Manuel Garcia-Perez
16

17 Department of Biological Systems Engineering
18

19 Washington State University
20

21 Pullman, WA, 99164
22

23 Phone number: 509-335-7758
24

25 e-mail: mgarcia-perez@wsu.edu
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1. Introduction

The practice of carbonizing wood to manufacture char has existed for as long as human history has been recorded¹⁻⁵. Initially, producing char was the sole objective of wood carbonization^{2,4,5}. In fact, char is the first synthetic material produced by mankind^{6, 7}. However, new byproducts (tars, acetic acid, methanol, acetone) were obtained from wood as the civilization progressed and new reactors and bio-oil recovery systems were designed. The ancient Egyptians used pyrolytic liquid products such as fluid wood-tar and pyroligneous acid to embalm their deads⁵. According to the writings of Theophrastus, the Macedonians obtained wood tar from burning biomass in pits⁴. At the end of the eighteenth century, technologies to recover and utilize the condensable pyrolysis products were relatively well developed^{3,4,8}. This resulted in brick kilns to recover the condensable gases that were normally lost in the pits. Iron retorts (vessels) followed brick kilns. In the 19th century the “acid-wood industry”, also known as the “wood distillation industry” was established⁹ to produce charcoal and liquid by-products (e.g. acetic acid, methanol and acetone). The historical development of carbonization industry is one of the most fascinating in the annals of the Industrial Chemistry^{1,4}. The hardwood distillation industry is frequently considered the precursor of the modern petrochemical industry¹⁰. The rise of the petroleum industry at the beginning of the twentieth century, with cheaper products, caused the decline of the pyrolysis industry. However, the oil crisis during the 1970’s forced to reconsider biomass pyrolysis as a technology that could contribute to reduce our dependency on fossil oil. The “fast” pyrolysis reactors were introduced at that time, aiming at maximizing liquid products¹¹⁻¹⁹. Recent advances in bio-oil hydrotreatment^{20,21}, bio-oil fractionation²²⁻²⁵ and new bio-oil derived products (e.g., transportation fuels, phenol formaldehyde resins, carbon fibers) are catalyzing the development of bio-oil refineries. Figure 1 shows important developmental milestones of pyrolysis technology.

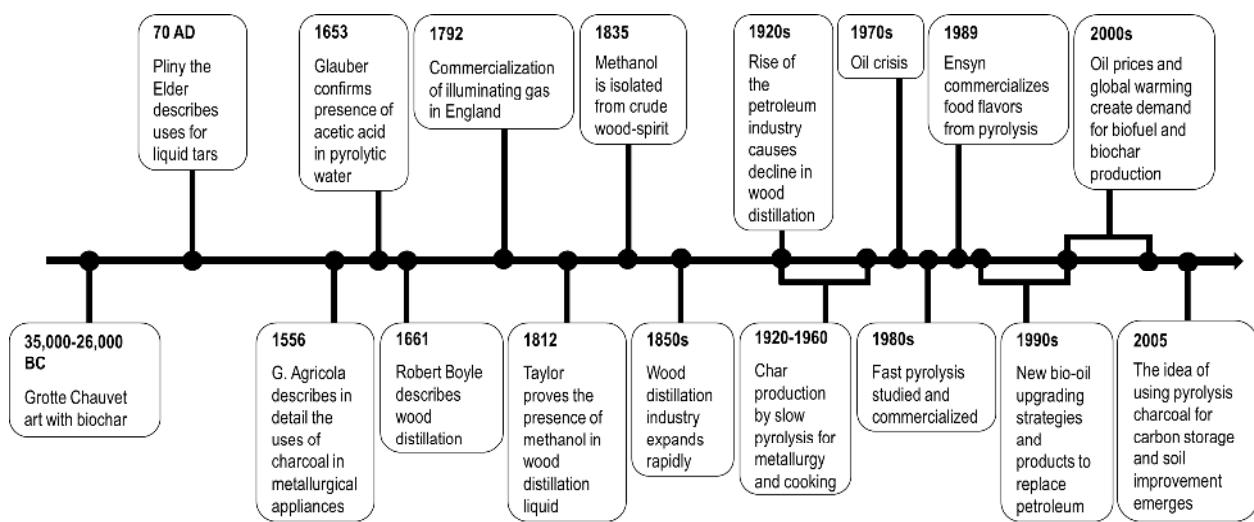


Figure 1. Some important milestones in the development and use of pyrolysis (Adapted from:^{2,4,5)}

The social and economic impact of wood carbonization in today's world is significant²⁶. The wood used as fuelwood and charcoal is about half of the wood extracted from forest, generating income for 40 million people worldwide²⁶. The world's top producers of charcoal are (in descendent order): Brazil, Nigeria, Ethiopia, India, the Democratic Republic of Congo, Ghana, Tanzania, China, Madagascar and Thailand²⁶. Today this industry contributes with an estimated \$ 650 million to Tanzania's economy (300 000 people involved in production and trade)²⁶. The Food and Agriculture Organization (FAO) of the United Nations, estimated that 2.4 billion people in developing nations use charcoal as domestic fuel²⁶⁻³¹. Approximately, 3 billion people still lack access to clean fuels and technologies for cooking²⁶. According to the FAO³² more than 52 Mt of charcoal were produced worldwide in 2015 (Africa 62 %, Americas: 19.6 % and Asia: 17 %)²⁶, showing an increase of close to 20 % since 2005. Since current char yields a mere 20 wt. % of the original biomass, it can be estimated that more than 260 Mt of wood are currently processed worldwide to produce charcoal. Between 1 and 2.4 GT CO_{2eq} of greenhouse gases are emitted annually in the production and use of fuelwood and charcoal which represents 2-7 % of global anthropogenic emissions^{26,33}. Charcoal produced using sustainable managed resources and improved pyrolysis technologies has the potential to reduce emissions by 80 %²⁶. Therefore, there are huge opportunities to improve the environmental performance of current carbonization

1
2
3
4 units³⁴⁻³⁶. The potential use of char as a means to fight global warming is also attracting renewed
5 interest on pyrolysis³⁷. Char has the capacity to increase soil fertility and sequester carbon³⁸⁻⁴¹.
6 Sustainable char technology could offset up to 130 Gt CO_{2eq} emissions during the first century of
7 adoption³⁹. Greening the pyrolysis value supply chain (with sustainable sourcing, production,
8 transport, and distribution) is critical to supporting livelihoods and providing energy security in
9 developing nations²⁶. The International Energy Agency forecasted that by 2030 charcoal will
10 become a \$ 12 billion industry²⁷.
11
12
13
14
15
16
17
18

19 According to Scopus, the number of research papers with the keyword “carbonization reactors
20 (CR)” and “fast pyrolysis reactors (FP)” have been steadily growing: 1980-1990 (CR:59 and
21 FP:63 papers), 1990-2000 (CR:86 and FP:88 papers), 2000-2010 (CR:306 and FP:371 papers),
22 2010-2017 (CR:340 and FP:840 papers). Despite the growing interest to produce bio-oil and
23 char, the disperse information on pyrolysis technologies and manufacturers hinders the
24 development of this industry. There is a vast diversity of factors affecting the pyrolysis process
25 (different feedstocks, scale, capacity, use of mobile or stationary units) which makes it very
26 difficult to find an exclusive design that is sustainable across all the potential feedstocks and
27 applications.
28
29
30
31
32
33
34
35

36 Although there are excellent reviews on fast pyrolysis technologies^{13-19,42}, on conventional
37 carbonization reactors^{5, 6,41,43}, and microwave pyrolysis^{44, 45} there are only few reviews on the
38 converters and retorts^{1,4,9,46}. Lynch and Joseph⁴⁷, published a guideline for the development and
39 testing of pyrolysis plants for char production. Interestingly, some companies are reproducing
40 old concepts to design new pyrolysis reactors. Thus, the main goal for this paper is to provide a
41 comprehensive overview of pyrolysis reactors. Herein, we describe designs, operating
42 conditions, scale, and yields to help those involved in the development of pyrolysis projects
43 identifying robust flexible designs for their business models. This work is an attempt to present
44 all pyrolysis reactors in a single document within a historical perspective intending that the
45 knowledge and experience generated through centuries could serve as inspiration for the
46 development of new designs.
47
48
49
50
51
52
53
54
55
56
57
58
59
60

2. Fundamentals of biomass pyrolysis

The main factors on the operation of pyrolysis reactors affecting the yield and composition of products are: (1) Biomass pyrolysis temperature⁴⁸, (2) Particle size⁴⁹⁻⁵¹, (3) Alkali content⁵²⁻⁵⁴, (4) Residence time in vapor phase⁵⁵⁻⁵⁷, (5) Pressure⁵⁸⁻⁶⁰, (6) Pretreatment temperature^{61, 62} and (7) Heating rate^{55, 56, 63}. Other factors such as feedstock composition, use of additives, and condensation conditions are outside the scope of this review.

Thermochemical depolymerization reactions are important between 250 and 600 °C⁶³. When biomass is heated, thermal cracking of bonds in biomass constituents (cellulose, hemicellulose and lignin) happens. These primary thermal depolymerization reactions happen in the solid. When biomass macromolecules are heated, some fractions can crosslink and form a solid product^{63, 64} and others can depolymerize into light oxygenates that can be easily evaporated⁶⁵ or into oligomeric products that can form a liquid intermediate⁶⁶⁻⁶⁸. This liquid intermediate is acidic which enhances dehydration and polycondensation reactions⁶⁹. Most of the pyrolytic water is formed in the liquid intermediate⁶⁹. The oligomeric molecules in the liquid intermediate may be removed from the hot reaction environment in the form of aerosols by thermal ejection^{66, 67}.

Biomass particle size has a direct impact on heating rate and the release of aerosols, and ultimately on the product distribution of pyrolysis. Indeed, the evacuation of the aerosols formed during the pyrolysis reaction can proceed in two distinct ways depending on the particle size. When very small particles (mostly formed by cell walls) are used, aerosols formed in the pyrolysis reaction can be easily ejected and pyrolysis vapors can be removed without travelling inside the cell cavities^{50, 51}. Mass transfer limitations increase with particle size. The second regime involves aerosol formation inside cell walls. An important part of these aerosols is retained from escaping through the cell walls and will eventually contribute to the formation of extra char through secondary reactions. Volatile pyrolysis products are also formed inside the particles and will react on their way out of the biomass particle and of the reactor^{49, 50}. Secondary reactions are typically called intra- and extra- particle homogeneous and heterogeneous reactions^{49, 57, 70, 71}.

The temperature and hydrodynamics of the gaseous reaction environment, the presence of a secondary heating medium (e.g. sand, steel balls, reactor walls, heating tubes) and the size of the biomass particle determine the total conversion time by controlling internal particle heat transfer and reaction kinetics⁷². External heat transfer is determined by the reactor type and its heating method. These factors together define the traditional distinction between slow and fast pyrolysis reactors. The heat transfer in carbonization units operating with logs is controlled by the heat transfer rate inside the wood pile (bed) and inside the logs (typically low heating rates are achieved: less than 100 °C/min). Fast pyrolysis reactors typically operate with very small particles to achieve high heating rates (>1000°C/s) inside the particles and high bio-oil yields.

Although there are few studies on the effect of these parameters for all the reactors covered in this review, a discussion for the specific case of fluidized bed reactors is instructive to gain insights on their potential impact in other reactors. Fluidized beds are designed to maximize bio-oil yields; thus, in order to obtain an adequate gas-solid heat transfer for this purpose, the biomass particles should be very small. This is due to the poor thermal conductivity of biomass (typically around 0.1 W/mK along the grain and around 0.05 W/mK across the grain). A thin reaction layer may achieve a temperature increase of 10,000 °C/s, but the low thermal conductivity of wood will prevent this heating rate to occur throughout the entire particle. As the size of the particle increases, secondary reactions within the particle become increasingly significant, leading to the reduction of liquid yields¹¹.

Figure 2 shows the effect of some operational parameters on the yield of pyrolysis products in fluidized beds. These studies clearly show that to achieve high bio-oil yields: (i) the pyrolysis temperature should be between 450 and 550 °C, (ii) very small particle sizes should be used, (iii) the residence time of pyrolysis vapors inside the reactor should be minimized, and (iv) alkaline content in biomass should be low^{48-50, 54, 55, 73, 74}. Data from this figure also suggest that: a) the type of reactor is only one of the several factors controlling product yields, and b) a careful control of the operating conditions (temperature, particle size, ash content) of systems that are not traditionally considered fast pyrolysis reactors could dramatically improve the yield of desirable products. This is especially relevant since most of the literature on fast pyrolysis from

the 1980s and 90s focused on identifying the very stringent operational conditions that maximize bio-oil yields, while assuming that char should be combusted to provide the energy needed for the process. Instead, currently there is a growing research interest towards the design and use of simpler systems for combined production of bio-oil and char, both presently regarded as valuable products^{20,75}. The design of reactors resulting in oils with lower oxygen content and higher yields of gases by taking advantage of the secondary homogeneous reactions in gas phase warrant further investigation.

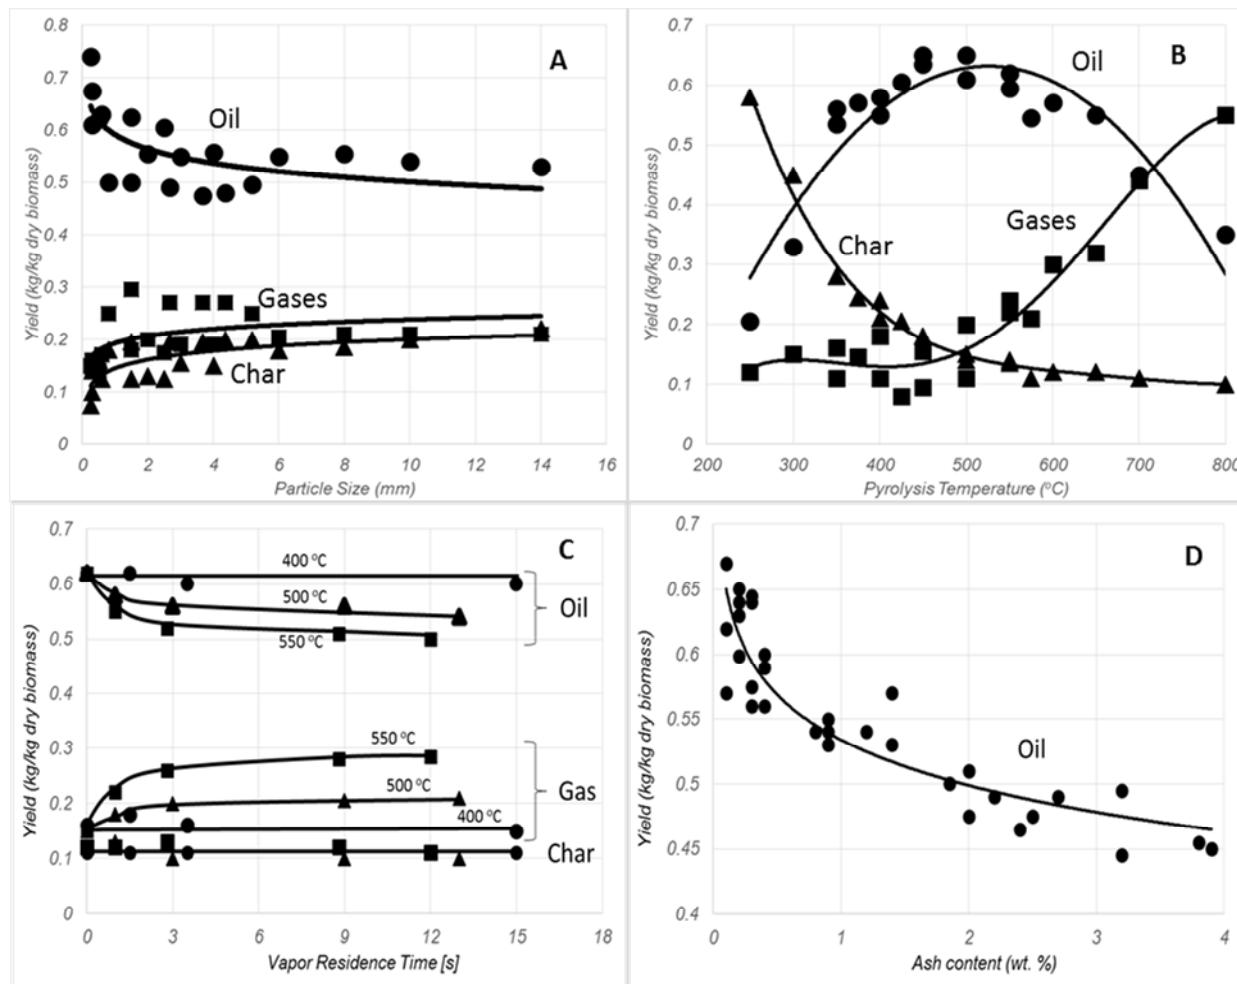


Figure 2. Effect of operational parameters on the yield of products during fast pyrolysis: **A:** Effect of particle size (Adapted from:^{49, 50}) (Feedstock: Mallee wood⁴⁹, Beech wood⁵⁰), **B:** Effect of Pyrolysis temperature (Adapted from^{48, 74}) (Feedstock: Pine, Beech, Bamboo, Demolition wood⁴⁸, Malee Wood⁷⁴), **C:** Effect of vapor residence time (Adapted from⁵⁵) (Feedstock: Pine wood⁵⁵), **D:** Effect of ash content (Adapted from⁵⁴).

The interest in reactors capable of producing both char and bio-oil, has resulted in a growing number of designs for the balanced production of both products^{76, 77}. Figure 3 shows the effect of the temperature on the yield of products obtained when pellets and small particles are processed in a rotary drum and in an auger pyrolysis reactor respectively^{76, 77}. Although, bio-oil yields in the auger and rotary drum reactors were lower than for fluidized beds (see Figure 2), these

reactors are easier to operate (use less carrier gas and do not use sand) and do not consume the charcoal for their energy needs. The higher gas yields could help to satisfy an important fraction of the energy needs of these systems. Moreover, pyrolysis gas produced in Auger and rotary drums is less diluted in the carrier gas than in bubbling or circulating fluidized beds, making it more plausible their combustion in conventional boilers and gas engines.

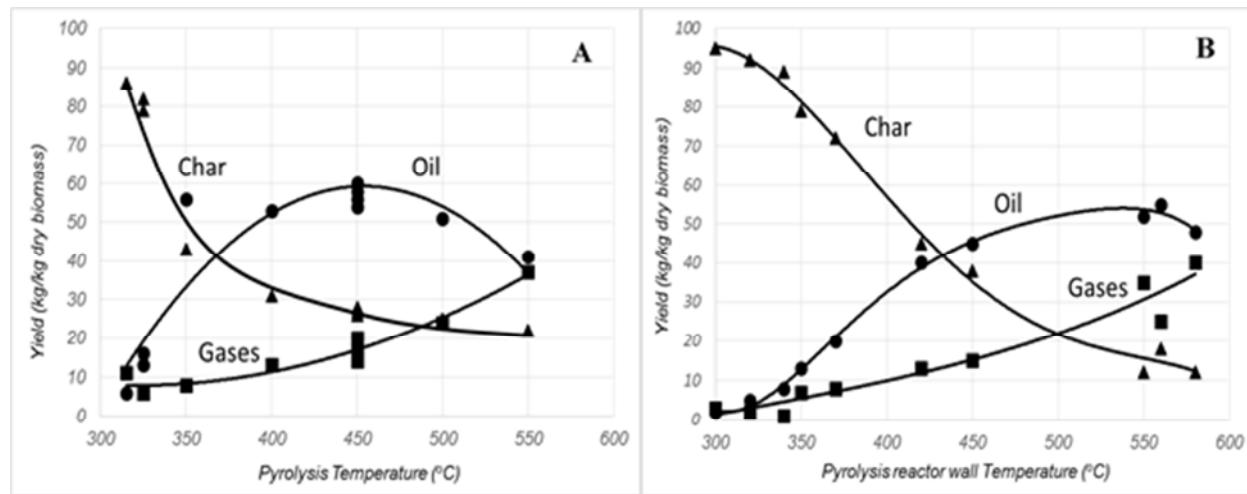


Figure 3. Yield of products in (A) rotary drum (Feedstock: Arbor Pellet⁷⁶) and (B) an auger pyrolysis reactor (Feedstock: Douglas Fir Wood⁷⁷)

3. Types of pyrolysis reactors

There are hundreds of pyrolysis reactors designs⁷⁸. Reviewing all of them is out of the scope of this review. Therefore, in this paper we will focus on the reactors most commonly employed. Bridgwater¹⁶ classified the pyrolysis reactors based on the vapors residence time (VRT) inside the reactor and the time the biomass particle takes to reach final temperature (or heating rate) into: fast (final temperature: 500 °C, particle diameter below 2 mm, VRT: 1 s), Intermediate (final temperature: 500 °C, small particles, VRT: 1 s), Slow (final temperature: 500 °C, logs or chips, VRT: days). The term “*fast pyrolysis reactors*” refers to reactors designed to maximize the yields of bio-oil and typically use powdery biomass as feedstock. Emrich⁵ sub-classified the slow pyrolysis (carbonization) reactors as: kilns, retorts, and converters. The term “*kiln*” is used to

describe traditional char making equipment, solely employed to produce char from wood logs. Industrial reactors capable of recovering char and products from volatile fractions (liquid condensates and syngas) are herein referred to as “*retorts or converters*.” The term “*retort*” refers to a reactor able to pyrolyze pile-wood, or wood logs over 30 cm long and over 18 cm in diameter⁵. “*Converters*” produce char by carbonizing small particles of biomass such as chipped or pelletized wood. The converters using small particles, operate at conditions comparable to the intermediate pyrolysis reactors described by Bridgwater¹⁶. In this review we use the heating mechanism to group the pyrolysis reactors intro: Slow pyrolysis (Kiln, retort), intermediate pyrolysis (converters), fast pyrolysis and microwave pyrolysis reactors^{5, 16, 44, 45}. Classification of reactors can also be based on: (1) the final products targeted (oil, char, heat, electricity, gases), (2) the reactor’s mode of operation (batch or continuous), (3) the manner in which it is heated (direct or indirect heating, auto-thermal, microwave), (4) the heat source used (electric, gas heater, biomass combustion), (5) the method used to load the reactor (by hand, mechanical), (6) the pressure at which the unit operates (vacuum, atmospheric, pressurized), (7) the material used for the construction of the reactor (soil, brick, concrete, steel), (8) reactor portability (stationary, mobile) and (9) the reactor’s position. More information on the classification of pyrolysis reactors can be found elsewhere⁷⁹.

Although the type of pyrolysis reactor and its operating conditions greatly determine the quality of the final targeted products, there is limited information on the open literature linking reactor type, operating conditions and product quality. For charcoal, proximate analysis gives a good indication of its quality. According to Antal and Gronli⁶, fixed carbon content of charcoal for domestic cooking should have volatile matter contents of less than 30%, whereas those of metallurgical charcoal should be <15%. Ash contents should be between 0.5 and 5%. These values correspond to calorific values between 28 and 33 MJ/kg. For the use of charcoal as biochar (soil amendment), the International Biochar Initiative provides a standardized definition of its characteristics⁸⁰. A common issue in carbonization reactors, especially in batch systems, is the inhomogeneous quality of charcoal due to temperature gradients inside the reactor, uneven gas circulation, partial combustion and heterogeneous wood particle sizes. Thus, in terms of product quality, a good temperature control is a key factor for well-designed retorts or

converters⁵. The type of reactor is also one of the factors that define bio-oil quality, together with biomass feedstock composition, particle size and condensation system⁸¹. The desired bio-oil characteristics will differ depending on the targeted final use, i.e, use as a fuel, further upgrading, or use as a product source. From the point of view of bio-oil as a fuel, the multiphase nature of bio-oil is a critical issue⁸¹. The bio-oil obtained by the fast pyrolysis of relatively dry materials is a homogeneous single-phase oil. The liquid obtained from intermediate, slow and microwave pyrolysis processes is typically formed by a decanted oil and an aqueous phase¹⁶. The formation of separated phases depends on the relative quantities of the polar compounds (water, sugars, pyrolytic humins), the non-polar compounds (pyrolytic lignin) and the solvents (organic compounds of low molecular weight, such as: methanol, hydroxyacetaldehyde and acetol)^{54, 81}. Most of the research on bio-oil properties has focused on fast pyrolysis. Thus, more studies are needed to understand how the type of intermediate and slow pyrolysis reactor and their operational conditions affect bio-oil composition⁸¹⁻⁸⁵ and its multiphase behavior^{54, 81, 86}.

4. Kilns (Carbonization methods)

This section covers examples of the main groups of “kilns”: earth (mound, pit) and brick/concrete/metal (Brazilian, Argentine, Missouri, TPI) (Figure 4). There are excellent reviews and books covering these reactors^{5,87, 88}. Therefore, this section will focus on the generalities and recent publications related with these reactors. Since, the number of recent publications on these reactors is limited, the information herein reported relates mostly with operating conditions of reactors in real settings.

Earth kilns (mound pit) have been used for centuries; and are still very popular in some developing countries⁴¹. Soil is used as a barrier for oxygen attack to prevent high levels of oxidation. The liquids (condensates) released during carbonization on the soil and the vapors released to the atmosphere are important sources of pollution. Two types of earth kilns are distinguished: pit kilns and mound kilns (sometimes referred to as earth-mound kiln) (Figure 4). When the soil is well drained, deep and easy to excavate pit kilns are preferred⁸⁹. The main advantage of these kilns is their low capital investment. However, the circulation of air is

difficult to control and are harmful to the environment with the emission of vapors to the atmosphere and the condensation of oils in soils⁸⁹.

Mound kilns can be classified into three types: vertical mound kiln, horizontal mound kiln, and improved mound kiln designs (the Casamance mound kiln)⁹⁰. Casamance-type kilns, which use oil drums as chimneys, are the result of improvements made during the 1970's and 1980's. The Casamance kiln can typically produce up to 1.7 times more charcoal than a traditional earth kiln (i.e., reaching efficiencies from 20 wt. % in pit kilns to 34 wt. %)^{27, 29, 90, 91}. A number of factors, such as location of kilns, conditions and type of wood, as well as qualification of operators, greatly affect the carbonization efficiency of earth mound kilns. This explains why some publications present different yields for similar types of kilns operating in different places. For example, Mangue²⁷ reports efficiencies from 12 to 16 % in Mozambique. Schenkel et al.⁹⁰ show tables comparing efficiencies of similar kilns operated in other latitudes, with efficiencies varying from 12 to 34%. Kammen and Lew²⁹ show the charcoal energy yield as a function of the kiln size for traditional kilns and the Casamance kiln, noticing a better efficiency of the latter. The average energy efficiency is around 18 % for the traditional kiln and 32% for the Casamance kiln²⁹. Menemencioglu⁹² reported data on wood charcoal production in Turkey. The author collected data from 44 kilns ranging from 25 to 45 m³, which were built by 23 adults. Typically, 1 kg of charcoal was obtained from every 5 to 6 kg of biomass, using 1350 tons oak and having 255 tons of charcoal. The average productivity was 11 t of charcoal per adult for the 7 month production season. The wholesale price was \$0.7 kg⁻¹ resulting in an average income of \$7,761 per season (7 months)⁹².

The main advantage of earth mound kilns is that they are simple, made of earth and can be built in the same area that the biomass is available. This technology is well suited to operate with logs. Its final product (charcoal chunks) can be easily commercialized as domestic fuel in some developing nations. No special equipment is required and the initial investment is low (\$ 27/t⁸⁷). This kiln is easy to operate and very flexible with regards to capacity⁸⁹. Its main disadvantages are: high labor demand, char is dirtied by the covering, sensitiveness to weather conditions, very poor control of carbonization, low efficiency, difficulty to carbonize small size agricultural

wastes and the release of very large quantities of organic pollutants⁸⁹. A detailed description on the construction and operation of earth kilns can be found elsewhere^{10, 88, 89}. Some of the main characteristics of these kilns are presented in Table 1.

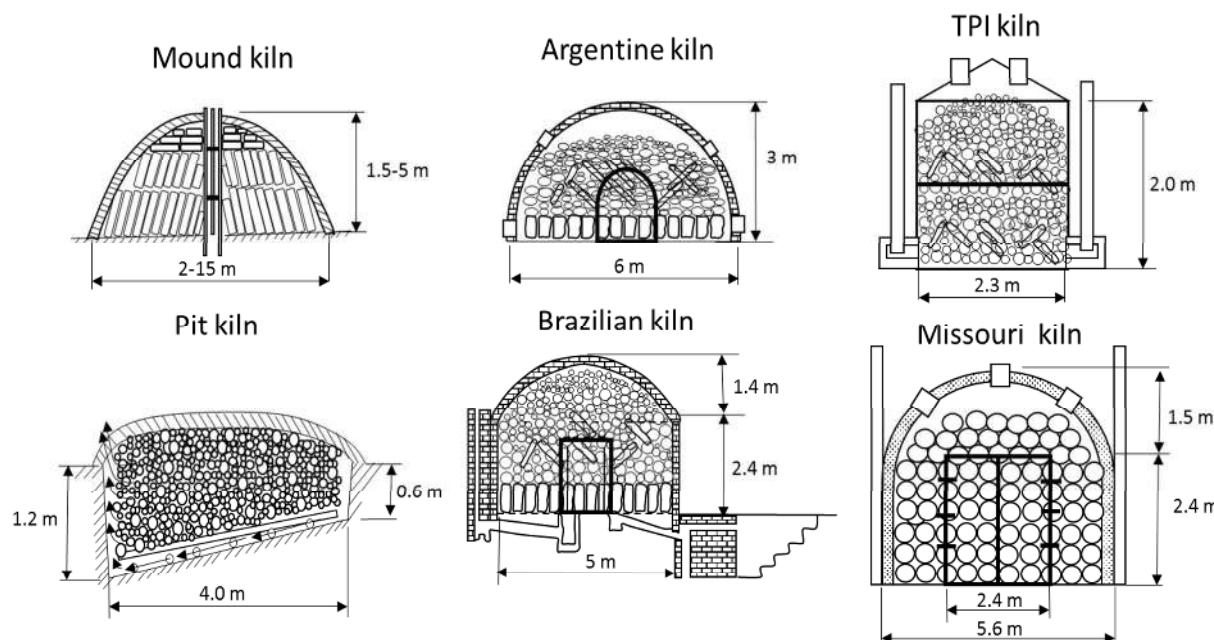


Figure 4. Schematic representation of typical kilns. Dimensions are presented for reference only
(Adapted from:^{5, 88, 89}).

Table 1. Characteristics of kilns for charcoal production

	Earth kiln	Cinder block, brick and metal kilns
Types/Representative kilns	Pit kilns and Mound kilns	Brazilian beehive and Half orange kiln, Argentine beehive kiln, Adam retort, TPI kiln, New Hampshire, Connecticut kiln, Missouri kiln
Construction materials	Earth	Cinder/brick/concrete/Iron bands ⁴⁴
Portability	Built in place	Stationary
Carbonization duration	1-5 weeks ⁸⁹	10-30 days ^{43, 89}
Capacity****	Mound: 50-32,000 kg (3-330 m ³) ⁹³ Casamance: 50-1,000 kg ⁸⁷	Brazilian: 20 t ⁸⁷ Argentine: 30 t ⁸⁷ Missouri: 80 t ⁸⁷
Charcoal yields reported	Pit kiln: 12–30 wt. % ²⁹ ; 12–16 wt. % ²⁸ Mound: 2 – 42 wt. % ²⁹ Casamance: 30 wt. % ⁸⁷	Brick: 12-33 wt. % ²⁹ Portable Steel (TPI): 19-31 wt. % ²⁹ Missouri: 33 % ²⁹
Loading and discharge methods	Manual	Manual/Mechanical
Dimension of reactor	Pit kiln: depth 0.6-1.2; length: 4.0 m, capacity: 1-30 m ³ Mound kiln: diameter: 2-15 m; height: 1-5 m (volumes: 8-156 m ³)	Brazilian/Argentine: diameter: 5-7 m, high: 2-3 m producing Missouri kiln: wide: 7 m, length: 11-13 m, height: 3.5-4 m, TPI kiln: diameter: 2.3 m, high: 2 m
Reactor capital cost	Mound: \$27/t charcoal ⁸⁷ Casamance: \$ 200 ⁸⁷	Brazilian: \$ 150-1,500 ⁸⁷ Missouri: \$ 15,000 ⁸⁷
Charge ignition method	Small kindled wood at midpoint	Small kindle wood/burning oil/gas fired torch
Process control	Observing color of produced vapors	Observing color of produced vapors or temperature measurements
Raw material used	Cordwood	
Final product targeted	Char	
Heat transfer rate achieved	Slow Pyrolysis	
Mode of operation	Batch operation	
Heating method	Partial combustion of foliage (auto-thermal process)	
Pressure	Atmospheric	

Brick/concrete/metal: The four main kilns reviewed in this section are: Brazilian, Argentine, Missouri and the TPI kilns (Figure 4). In the US, during the 19th century, earth kilns were replaced by the so called “beehive kilns”^{8, 94}. The basic difference between earth kilns and cinder block and brick kilns is the construction material (Table 1). These kilns have a long lifespan and several types have proved their economic viability. Cinder block and brick kilns can be differentiated by their shape: hangar kilns, with rectangular or square shape, and round brick kilns⁵. The main advantages of brick kilns are the use of local materials, higher yields than mound and pit kilns, good quality charcoal, good thermal isolation, easy operation, lifespan of 6 to 10 years and they are not sensitive to climate conditions⁸⁹. These kilns can operate with logs and the final products (charcoal chunks) can be easily commercialized as domestic fuel. The

1
2
3
4 main disadvantages of brick kilns are associated with the need of skilled workers for their
5 construction, fixed location, long production cycle (on average 15 days, the cooling process is
6 slow), and higher construction and operating costs than mound and pit kilns. These kilns are also
7 responsible for important air pollution⁵. The most commonly used round brick kilns are: the
8 Argentinean half-orange kiln and the Brazilian beehive kiln (see Figure 4). The most commonly
9 used hangar kilns is the Missouri kiln (See Figure 4). All these kilns are auto-thermal and operate
10 by burning part of the charge within the kiln.
11
12
13
14
15
16

17
18 The *Brazilian brick kiln* is an internally heated, fixed, batch-type kiln widely operated in Brazil,
19 especially in the state of Minas Gerais and in the Amazonian region, with a typical capacity of 45
20 m³⁴³. Thousands of them are used to produce charcoal for the Brazilian iron and steel industry^{5,}
21⁹⁵. A detailed description of the methods to build and operate these kilns can be found
22 elsewhere^{88, 96}. A typical operational cycle consists of 8 hours for loading/discharging, 80 hours
23 for carbonization and 70 hours for cooling⁴³. Some of the most advanced modifications to the
24 Brazilian kilns are the attachment of an external heating chamber and the reduction of the
25 number of smoke stacks⁵. Branches, brushwood, and other residual materials, which are not
26 suitable for charcoal production and would be otherwise wasted, are used to heat the kiln. The
27 raw material used for carbonization is typically cordwood, obtained from dedicated plantations
28 or from forest clear cutting^{5, 96}. These kilns can be modified to recover pyroligneous water and
29 decanted oil. Only few research papers describe the operation and yield of products from
30 Brazilian kilns⁹⁷.
31
32
33
34
35
36
37
38
39
40
41
42
43

44 The *Argentine kiln* is also generally referred to as the “half-orange-kiln” due to its hemispherical
45 shape. This kiln, like many others, can be built in various sizes. Unlike the Brazilian kiln,
46 Argentine kilns are built completely out of bricks with no iron parts⁵. A detailed description on
47 how to build and operate a half-orange kiln can be found elsewhere⁸⁸.
48
49
50
51
52

53 *Missouri-type kilns* are sometimes referred to as concrete kilns³⁸ or batch-type charcoal kilns⁹⁸.
54 They can be built with volumes up to 350 m³ (typically between 150 and 200 m³)^{27,31,43,98}, thus,
55 requiring mechanized loading and unloading^{10,31}. The operational cycle consists of 4 days of
56
57
58
59
60

1
2
3
4 loading/discharging, 6 days of carbonization and 20 days of cooling⁴³. The Missouri charcoal
5 kiln, which was developed at the beginnings of the 1950s by V. Wulff in the Ozark County
6 (Missouri)²⁷, is a well proven kiln^{5,10, 38, 99}. Missouri-type kilns are still used in Missouri, United
7 States^{41, 98, 99} and are responsible for an important fraction of the charcoal produced in the USA^{98,}
8 ^{100, 101}. Several improvements have been made to the original design. For instance, using
9 thermocouples within the kiln contributes to the identification of cold ports and controlling
10 airflow³⁸. Additionally, the environmental impact of these kilns can be reduced by using
11 afterburners^{78, 98, 100, 102} More information on the design and operation of this kiln can be found
12 elsewhere^{5, 10, 31}.
13
14
15
16
17
18
19
20
21

22 The *TPI kiln* is a small size kiln developed by the Tropical Products Institute (TPI) (Figure 4).
23 This kiln is built with two interlocking cylindrical sections and a conical cover with ports to
24 release vapors^{38, 88}. Eight channels located at the perimeter of the base section support the kilns
25 and serve as air inlets or smoke stacks. Compared to earth kilns, air inlet and gas outlet are easy
26 to control, with less supervision needed. All the carbon produced can be recovered. These
27 reactors can be transported to the place the feedstock is collected. They produce high charcoal
28 yields with relatively short carbonization times (around three days). These kilns can be easily
29 operated in high rainfall regions. However, they have important air pollution issues^{38,88}. Other
30 disadvantages include: higher capital costs compared with earth kilns, the need to cut and split
31 biomass to fit inside the kiln, difficult transportation in hilly terrain, and a relatively short
32 lifespan (only 2-3 years)⁸⁹.
33
34
35
36
37
38
39
40
41
42
43

44 The emission of gases and particulates from charcoal production in rural areas using medium-
45 sized traditional and improved kilns has been studied by Sparrevik et al¹⁰³. They reported the
46 following average emission levels: 1,950 g CO₂/kg charcoal, 157 g CO/kg charcoal, 6.1 g non-
47 methane organic volatile compounds/kg charcoal, 24 g CH₄/kg charcoal, 24 g solid particles/kg
48 charcoal and 1.8 g NO_x/kg charcoal¹⁰³.
49
50
51
52
53
54
55
56
57
58
59
60

Other important kilns reported in the literature not discussed in this section include: *New Hampshire kiln*^{104,105}, *Connecticut kiln*^{10,104,106,107}, *Black Rock Forest kiln*,^{5,10,106,107}, *Rima Contained kiln (RCK)*⁹³, the *Adam retort*^{103, 108, 109}, and the *European Schwartz kiln*⁵.

5. Retorts

While kilns are typically closed containers releasing gas and vapor to the atmosphere, the retorts condense the vapors and make good use of the energy content of gases^{89, 110}. The main reactors discussed in this section are: the wagon reactor, Lambotte French SIFIC (<http://www.lambotte.com/>), the Lurgi Process¹¹¹ and the Carbon Twin Retort¹¹² (Figure 5). All these systems operate with logs. Their main characteristics are listed in Table 2. The main advantages of these systems are associated with the high charcoal yield and high charcoal quality. Additionally, the by-products from the vapors can be recovered. The main disadvantages are related with the high capital costs, attrition problems, the need of external sources of energy and the fact that most of these systems are not portable and require a concentrated supply of raw materials⁸⁹.

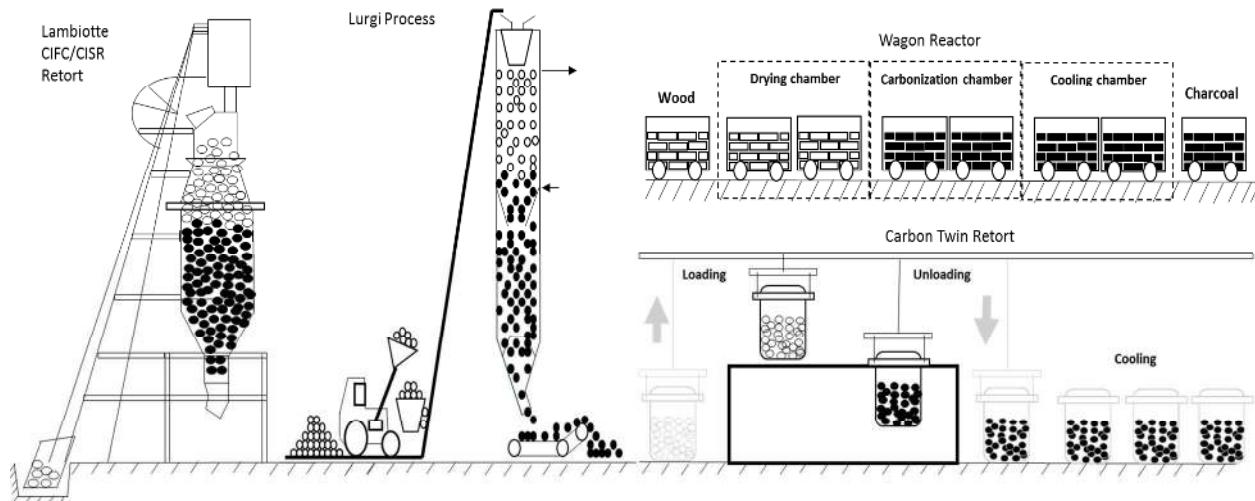


Figure 5. Schematics of Retorts (Adapted from^{88, 110-112})

Table 2. Characteristics and operational details of some retorts operating with logs

	Lurgi	Lambotte French SIFIC	The wagon retort	Carbo Twin Retort
Final product targeted	Char			
Heat transfer rate achieved	Slow pyrolysis			
Capacity	6.2 t wood/h ¹¹¹ (per unit) 13,000 t charcoal/year (per unit)	2,000-6,000 t/year ⁸⁷ (per unit)	6,000 t/year ⁸⁷	900 t/year per furnace ¹¹²
Production per unit reaction volume	10 t/year/m ³	16 t/year/m ³		70 t/year/m ³
Carbonization time	n/a	n/a	25-35 h	8 h (carbonization), 24-48 h (cooling)
Heating method	Contact with heat gases		External heat & volatile combustion, an oil burner (or LPG) is used to provide heat for the initial start-up	
Dimensions	Height: 27 m Diameter: 3 m Woodfeed size: 150 mm x 150 mm x 250 mm	Height: 16.3 – 18 m ¹¹⁰ D= 3-4.3 m ⁴³ Volume: 600 m ³ ¹¹⁰	Trolleys: 12 m ³ Length: 8-16 m Diameter: 2.5 m Tunnel capacity: 35-60 m ³ Length: 45 m long	Volume per Vessel: 5 m ³ Six vessels are needed to keep the system running
Construction materials	Steel			
Portability	Stationary			
Reactor Position	Vertical	Vertical	Horizontal	Vertical
Raw material used	Cordwood	Cordwood	Cordwood	
Loading and discharge methods	Mechanical	Mechanical	Use of wagons	
Process control	Direct measurement of temperature			
Mode of operation	Continuous			Semi-continuous
Pressure	Atmospheric			
Efficiency	30-40 %	35 %		30 %
Pretreatment needed	Pre-dried			
Cost	Capital cost: \$ 10 million (1989) Operating cost: EUR 320/t charcoal	Capital cost: 0.5-2 million dollars Capital cost: EUR 360/t charcoal		Capital cost: 480,000 EUR ¹¹² Char sales price: 250 EUR/t ¹¹² Operating cost: EUR 380/t charcoal
Yields reported		Char: 30-35 wt. %	Char: 30 – 33 wt. % Pyroligneous acid: 20 – 25%	Char: 33 wt. % ¹¹²

The Wagon Retort: These retorts consist of the following components: (a) a steel horizontal carbonizing chamber fitted with either a fixed cover at one end and a door at the other, or doors at both ends⁴. One or two vapor outlets provided on the side, top, or at one end of the chamber and a rail-track for running retort cars through, (b) a furnace for the heating process, (c) a condenser connected to the retort, (d) a steel chamber with a door at each end for cooling char placed in front of the retort and fitted with a similar rail-track, (e) a section of rail that connects the retort with the char cooler that can be moved as needed, (f) mechanical equipment for moving the cars, and (g) retort-cars. A length of 8 to 9 m with a diameter up to 2.5 m is standard for retorts¹¹³. Retorts usually require gradual cooling of the carbonization products, generally by heat release to the surroundings at room temperature². Compared to other methods, the wagon retort required a substantial amount of manpower^{5,114}. This retort commonly used raw material made up of round wood and split round wood with an average length between 1.0 and 1.2 m. A limited quantity of shorter pieces was also charged^{5, 114}. These reactors were able to produce charcoal with efficiencies up to 36%, tar and oils with efficiency varying from 5 to 20%, crude pyroligneous water varying from 30 to 50%, and non-condensable gases varying from 20 to 30%, depending on the composition of wood^{4,8}. According to Klar⁴, these units were able to obtain between 2.3 and 10.5 wt. % of acetate of lime (80 % purity), between 0.6 and 2.5 wt. % crude naphtha, between 5 and 20 wt. % tars, and between 0.4 and 8 wt. % pine-oil. Charcoal was mainly used in the iron industry. Burning of gases and tar in boilers was a common practice⁸.

A wagon retort system was recently in operation by Impianti Trattamento Biomasse (an Italian company). In 2010, this company had plants in Milazzo and Mortera (Italy) producing up to 6,000 t/y of charcoal¹¹⁵. The process was called O.E.T. Calusco (former Carbolisi) but it does not seem in operation currently¹¹⁵. Alterna Biocarbon, a company with head office in Prince George, BC, Canada, recently commercialized an upgraded design of the wagon retort⁸⁷ (the company is not currently in operation). The main products targeted by this company were energy pellets, activated carbon, products for mercury recovery and chars for soil applications.

The Lambiotte Retort has proven to be a successful technology for the production of char. As a result of several attempts to simplify the SIFIC process, the CISR Lambiotte Retort was

1
2
3
4 developed (See Figure 6)⁴³. The pre-dried wood enters by the top of the retort through a lock
5 controlled electronically to keep the retort always full. The retort has four zones (cooling zone,
6 carbonization, drying and torch)¹¹⁰. The charring wood section is where the wood decomposes
7 into char, vapors and gases. Carbonization usually proceeds at a narrow temperature range (547-
8 560 °C). The gases released from this section are drawn upward by a fan. The energy needed for
9 carbonization is provided by the hot flue gases coming from combustion of part of the pyrolysis
10 vapors in an external chamber^{5, 93}. Once the char is discharged, it is loaded on the converter
11 plenum and carried away for storing. Since the lower segment of the retort acts as the first step in
12 the cooling process, there is no need for separating char in the cooler⁵. The surplus combustible
13 vapors can easily be used for steam or electricity generation (Table 2). These plants have been
14 running commercially for several years. Balt Carbon Ltd. is the supplier of Lambiotte retorts for
15 Russia and other East European and Central Asian Countries. The company has built a 2,000 t
16 charcoal per year unit in Kaplava (Eastern Latvia) and an 8,000 t charcoal per year in Ugale
17 (Western Latvia)²⁷. Char Solutions Inc (<http://www.biocharsolutions.com/>), from Colorado, has
18 built a reactor using similar principles (continuous downdraft pyrolysis reactor) but using chips
19 or pellets. This system is a mobile downdraft auto-thermal gasifier able to convert up to 225 kg/h
20 of biomass into synthesis gas and char. The main advantages of the Lambiotte system compared
21 with other retorts are: (1) high labor efficiency due to high level of automation, (2) higher
22 charcoal yield, (3) good product quality, (4) it is possible to use the vapors produced for co-
23 generation²⁷. A disadvantage of the system is its sensitivity to biomass moisture content.
24 Biomass with high moisture content reduces the capacity and in some cases may it require
25 burning auxiliary (oil) fuel. Attrition with the consequent production of fines happens due to the
26 vertical movement of the load. These retorts are also prone to corrosion by acetic acid²⁷.

27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47 The operation of the *Lurgi reactor* is similar to the Lambiotte reactor. The Lurgi reactor (Figure
48 5) also has an upper carbonization zone and a lower cooling zone, each one with its own re-
49 cycling gases^{43, 111}. The reactor has an air-lock hopper fed with a skip hoist that elevates dry
50 wood blocks to the top of the reactor¹¹¹. The combustion of pyrolytic vapors and gases in a
51 staged external incinerator provides the heat for carbonization. In the first stage, the retort gas is
52 burnt at near stoichiometric conditions. In the second stage, more air is added to ensure complete
53
54
55
56
57
58
59
60

1
2
3
4 combustion before releasing to the atmosphere. Up to 6,000 Nm³/h of gas at 600 °C is used for
5 heating the retort¹¹¹. The largest Lurgi charcoal plant forms part of the Silicon Metal Complex
6 (SIMCOA) in Bunbury, (<http://simcoa.com.au>), Western Australia, and produces 27,000 t of
7 charcoal every year in two retorts from local hardwood^{43, 111}.
8
9
10
11
12

13 The *Carbo Twin Retort* was initially developed in the 1990's in the Netherlands. The twin
14 system was formed by two retorts placed in an insulated oven, with a monorail and overhead
15 crane that enables the placement of retort vessels into and out the carbonization unit. The
16 pyrolysis vapors released by the pyrolysis reactions taking place inside the vessel are combusted
17 outside to provide the heat supply needed for heating up the system¹¹². The system is equipped
18 with an internal afterburner furnace with an excess of air to burn all the organic compounds²⁷.
19 One of the main advantages of this system is the low labor requirements: one worker per shift
20 can operate (load and discharge) and supervise a battery of ten twin retorts²⁷. Other advantages
21 of this system are: high energy efficiency, high char yield, superior product quality, straight
22 forward operation, easy scaling up with modular designs, low emissions, flexible operation and
23 control, and continuous operation¹¹². Carbo Twin Retorts have been installed in Almelo (The
24 Netherlands), Parnu (Estonia), Manso Amenfi (Ghana) and Hailin (China)²⁷. Similar twin reactor
25 concepts have been developed also in The Netherlands by VMR Systems⁴³, Charbon
26 Engineering and Clean Fuels BV and also in Portugal by Ibero Massa Florestal.
27
28
29
30
31
32
33
34
35
36
37
38
39

40 Other important retorts not reviewed in detail in this section are: *the Reichert Converter*^{5,114}, *the*
41 *Rima Container Kiln (RCK)*⁹³, and the *CML France Batteries*^{43,93}. Although not commercialized,
42 the innovative concept of the Flash Carbonization process developed by Antal⁷ (*in situ* partial
43 burning of the pyrolysis vapors inside the reactor with air at high pressure) is worth mentioning.
44
45
46
47
48

49 6. Converters (also known as intermediary pyrolysis reactors)

50
51
52
53
54
55
56
57
58
59
60

The carbonization techniques described in the previous section are used for logs and are not
suitable for the small particles and chips found in agricultural and forest logging residues. If one
of the large kilns is charged with small waste particles such as sawdust, the particles will tend to

pack much more tightly, thus promoting insufficient penetration of gases unless the cargo is continuously rotated or moved^{4,5}. This section reviews reactors able to handle chips and pellets, as well as deliberately crushed or chopped material such as sugarcane bagasse, bark, twiglets, olive stones or coconut shells. The reactors herein reviewed are: *the Herreshoff furnaces, rotary drums, auger reactors, paddle kiln and moving beds* (Figure 6). The main operational features of these reactors are shown in Table 3.

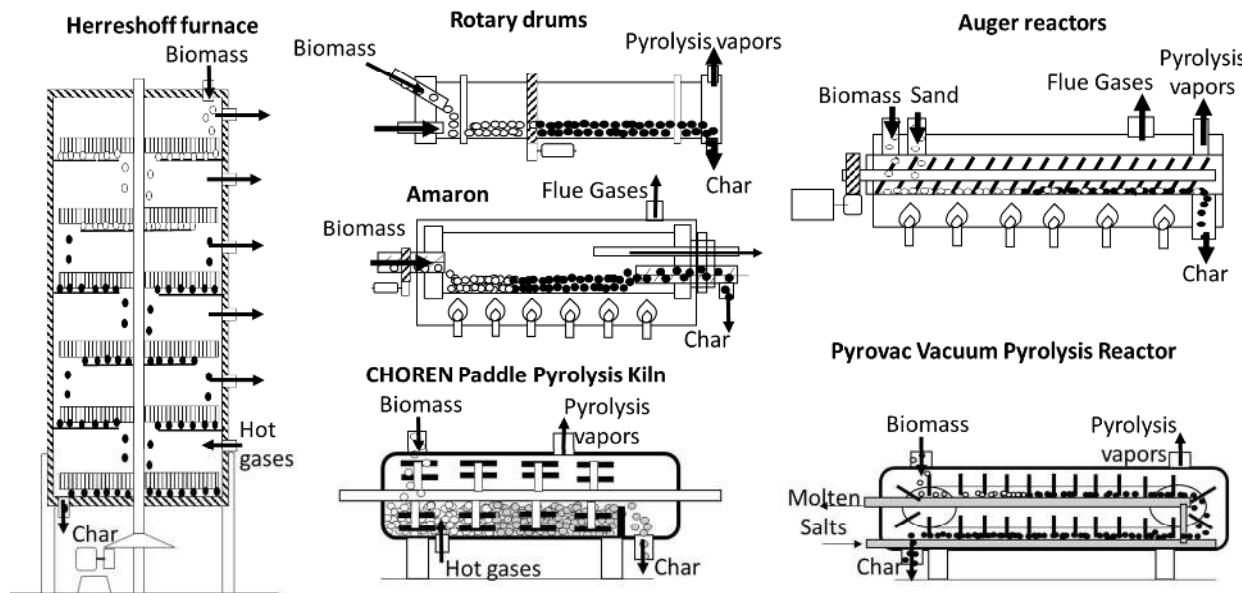


Figure 6. Scheme of common converters for processing wood chips and other small biomass particles (Adapted from:^{5, 76, 88, 116})

Table 3. Characteristics of converters for wood chips processing.

	Herreshoff furnace	Rotary drums	Auger reactor	Moving agitated bed	Paddle pyrolysis kiln						
Final product targeted	Char/bio-oil/heat										
Heat transfer rate achieved	Commonly slow/medium heating rates depending on particle size										
Mode of operation	Continuous										
Capacity	Up to 96 t/d	Up to 288 t/d	Up to 50 t/d ⁴²	84 t/d ¹⁶	-						
Heating method	Direct contact with hot gases	Direct contact with hot gases or indirect heating	Direct contact with hot gases/using a hot heat carrier/indirect heating	Indirect heating							
Construction materials	Metal										
Portability	Stationary	Stationary/Portable	Stationary/Portable	Stationary							
Reactor Position	Vertical	Horizontal									
Raw material used	Chips/shells/fine particles										
Loading and discharge methods	Mechanical										
Size of the reactor	Large	Large/Medium /Small	Small/Medium	Medium/Large	Small/Medium						
Charge ignition method	Combustion of pyrolysis gases and/or of auxiliary fuels	Combustion of auxiliary fuels and direct or indirect contact of combustion gases		External oven heating a hot sand heat carrier	External heater						
Process control	Direct measurement of temperature										
Pressure	Atmospheric/Vacuum			Atmospheric / Vacuum	Atmospheric						
Yield of carbon	25-30 wt. % ⁸⁷	-	-	-	-						
Pretreatment needed	Ground in chips/ fine particles										

The Herreshoff multiple hearth furnace was patented in 1921 by R.D. Pike. It consists of 4-10 circular hearths or plates located one above another inside a refractory lined steel shell²⁷. A vertical rotating shaft (1-2 rpm) with radial arms located in the center of the shell moves the feed from the top of the hearth to the bottom using a spiral of teeth across each hearth. The shaft in the center rotates at 1-2 rpm. This converter was designed for converting raw materials in the form of sawdust, shavings, or milled wood and bark into charcoal. The system is typically heated up to 500-600 °C using external gas or oil burners²⁷. The yield of dry char for this process is about 25 wt.%. Automatic oxygen monitoring is used to minimize power draw and fuel demand. The first carbonization Herreshoff furnace was used in 1984, and by 1985 there were about 16 Herreshoff furnaces in use in the South of US, producing over half of the total char produced

from wood and bark²⁷. This type of reactor has also been used in vacuum conditions^{117, 118}. Currently, a mobile Herreshoff pyrolysis reactor is commercialized by BIG Char, a company with headquarters in Queensland, Australia. This company is commercializing a patented mobile multiple heart furnace, producing char and heat with capacities up to 1 t/h of biomass. The char produced is available in a briquetted form (<http://www.bigchar.com.au>). The major advantage of a Herreshoff furnace is its ability to efficiently and flexibly use fine-grained materials of little economic value. One disadvantage is the need for briquetting of charcoal powder before it can be commercialized. The capital cost is high.

The *rotary drum* reactor is a very reliable system for carbonizing biomass. Figure 6 presents the two main types of rotary drum designs (directly heated and indirectly heated). The residence time of the biomass particles in these systems are controlled by the angle of the drum and the rotation speed. A converter of this type consists of: (1) an internal concentric steel tube and a cylindrical internally insulated mantle that makes up the rotary part. A sequence of radial steel fins is supported by the mantle which has a solid connection to the steel tube, (2) the solid and gaseous products are charged and discharged by two fixed parts at the end of the rotary. This furnace provides the heat required for the carbonization process by burning gases and pyrolysis vapors. Table 4 shows the yield of liquid, char and gases reported for tests with rotary drums. This type of reactor is able to achieve a good balance between oil (between 37 and 62 wt. % of liquid product) and char yield (19-38 wt. %).

The European Union¹¹⁹ and Japan¹²⁰ have extensively used these reactors for tires, sewage sludge, municipal solid waste, and plastics. Examples of these systems are: a 2.2 MW_{el} pyrolysis plant operating since 1983 in Burgau-Unterknöringen, Germany, a 100,000 t/year pyrolysis plant at the VEW Energie AG (VEW) power station Westfalen in Hamm-Uentrop, Germany, and other systems that combine gasification with pyrolysis or pyrolysis with combustion¹¹⁹. Specific concepts of interest are: the ConTherm® technology by RWE Energie AG (RWE), the Serpac technology, the EDDITH process, The PYROPLEQ® process, Gibros PEC Process or PKA technology, SIEMENS Schwel-Brenn technology, THERMOSELECT process¹¹⁹. Most of those reactors could be easily adapted to work with biomass.

In 2009 Amaron Energy designed, constructed and began testing a unique indirectly-heated rotary kiln for pyrolysis of biomass to produce bio-oil and char^{121, 122}. Amaron has achieved char yields and bio oil yields close to those from fast pyrolysis fluid beds (Figure 6). The Amaron rotary reactor consists of: (1) a cylindrical reaction section heated by multiple high intensity gaseous fueled burners located and controlled to optimize heat transfer into the materials being heated, (2) a feed section with an auger arrangement that suppresses heating of the material until the particles reach the area where optimized heat transfer begins, (3) a withdrawal section with a char outlet below the end of the rotating reaction section, (4) a stationary end closure supporting a withdrawal pipe for vapors and gases. The vapors are condensed in multiple units designed to operate without problems caused by condensation of tars in the interconnecting piping.

Table 4. Yield of products obtained from rotary kilns

Biomass specie and reactor	Capacity	T (°C)	Char (wt. %)	Bio-oil (wt. %)	Gas (wt. %)	References
Olive stones		500	26	38	35	[123]
Pinon-Juniper wood	0.5 t/h	500	30	59	11	[122]
Black liquor	0.5 t/h	500	38	37	25	[122]
Fir pellets	0.5 t/h	500	23	62	16	[122]
Fir fines	0.5 t/h	500	19	59	22	[122]
Lemna	0.5 t/h	500	28	44	28	[122]
Pine shredded	0.5 t/h	500	30	58	12	[122]
Pine bark	0.5 t/h	500	34	36	30	[122]
Aspen	0.5 t/h	500	28	43	29	[122]

The *auger reactor* is typically fed at one end through a hopper or a feeding screw^{116, 124}. A screw then gradually carries the biomass to the hot zone of the reactor where it is carbonized, and the gases and vapors are extracted and led to a condenser⁴⁶. The residence time of the hot vapors in these reactors can vary, in average from 5 to 30 s¹⁶. These reactors can be operated with and without using hot sand, steel or ceramic balls as heat carriers^{124, 42}. The discharging of char and heat carriers happen by gravity⁹⁴. Table 5 shows the yield of products obtained under different operational conditions using auger pyrolysis reactors. Experimental studies with woody biomass show yields of char between 17 and 30 wt. % and yields of oil between 48 and 62 wt. %⁴². The bio-oil yield is slightly lower than that of fluidized bed reactors and contains more water 30-55 %⁴². As expected, the oil yield of agricultural residues was much lower due to the high ash content of this feedstock. Although difficult to compare, it seems that the yields obtained with sand heat carrier is slightly higher than those obtained without. ABRI-Tech in Canada has sold several 1 t/day units⁴². Auburn University (USA), KIT (FZK) (Germany), Mississippi State University (USA), Michigan State University (USA), Texas A&M (USA) and Washington State University (USA)⁶¹ have active research programs on this technology¹⁶.

Table 5. Auger pyrolysis results

Biomass specie	Capacity.	T (°C)	Char (wt. %)	Bio-oil (wt. %)	Gas (wt. %)	Reference
Without heat carrier						
Oak	1 kg/h	450	18-20	50-56		[125]
Pinewood sawdust	1 kg/h	450	18-20	49-55		[125]
Pinewood chips	1.5 kg/h	500	30	58	12	[61]
Pinewood chips	15 kg/h	500	20	57	25	[126]
Miscanthus	7 kg/h	425		60		[127]
Pinewood sawdust	7 kg/h	450	19	54		[128]
Douglas fir wood	1 kg/h	400	12	48	40	[77]
Corn stover	7 kg/h	450		35		[130]
Switchgrass	7 kg/h	450		33		[130]
Cassawa stalk		450		32		[130]
Peanut shell		450		33		[130]
Rice husk				35		[130]
Rice straw	60 g/h	500	45	26	13	[131]
With heat carrier						
Eucalyptus grandis	10 kg/h	500		60.3		[129]
Wheat straw (twin screw, Biolq)	500 kg/h	500	23-28	50-55	22	[132]
Wheat straw (twin screw, Biolq)	10 kg/h	500	24	51	24	[133]
Wheat bran (twin screw, Biolq)	10 kg/h	500	18	60	22	[133]
Softwood (twin screw, Biolq)	10 kg/h	500	15	69	16	[133]
Hardwood (twin screw, Biolq)	10 kg/h	500	15	66	18	[133]

In *moving agitated bed* reactors biomass is conveyed by patented mixers over a horizontal surface heated by molten salts. These reactors have been used in vacuum conditions^{134, 135}. The molten salt used is a mixture of potassium nitrate, sodium nitrate, and sodium nitrite¹³⁶. The size (height) of an industrial moving bed (few cm) is comparable with the height of fixed bed of most of the laboratory tests (also few cm). In fact, the scaling up of this reactor was typically conducted with the aid of fixed bed reactors operating in vacuum. In this section, we report results obtained with fixed bed at laboratory scale (Table 6). Bio-oil yields over 50 wt. % are obtained with woody biomass in most vacuum tests.

Table 6. Fixed bed reactor

Biomass specie and reactor	Capacity	T (°C)	Char (wt. %)	Bio-oil (wt. %)	Gas (wt. %)	References
Rice husk and fixed bed	180 g	100 - 500 °C/min	42-48	28-35		[137]
Switch grass and 100 psi (fixed bed)			42	27	10	[138]
Pine chips	1.4 kg	500	31	50	18	[60]
Hardwood rich in fiber (Aspen poplar, white birch) (vacuum in fixed bed)	4.2 kg (15 dm ³ reactor)	500	26	54	20	[60]
Softwood bark residue (white spruce, balsam fir, larch) (vacuum in moving bed)	15 kg/h (total 1050 kg pyrolyzed)	500	28	45	27	[60]
Sugarcane bagasse and vacuum pyrolysis	Pilot (20 kg) Laboratory (80 g)	530 500	26 19	51 62	22 18	[59]
Rape straw and vacuum reactor		500		43		[139]
Palm oil decanter cake and vacuum reactor		500	39	41	20	[140]
Rice husk and vacuum reactor	10 g	500	38	49	13	[141]
Rice straw and vacuum reactor	10 g	500	35	47	18	[141]
Empty fruit bunch and vacuum reactor	10 g	500	26	54	20	[141]
Douglas fir (fixed bed)	800 mg	500	22	66	8	[142]
Pine and vacuum	500 g	500		52	25	[143]
Pine sawdust and vacuum reactor		500	20	50	30	[143]
Red oak	800 mg	500	24	67	8	[142]
Camphorwood sawdust and vacuum		474	20	50	30	[144]
Eucalyptus and vacuum	10 g	500	26	62	17	[144]
Teng wood and vacuum	10 g	500	30	58	12	[144]
Rubberwood and vacuum	10 g	500	30	51	19	[144]

The *Paddle Pyrolysis reactor* (See Figure 6)¹⁴⁵ are characterized by the use of internal mechanisms to move and mix the biomass and thus to increase heat transfer. This kind of reactors have been used by companies such as BEST Energies, currently part of Pacific Pyrolysis Inc., (<http://pacificpyrolysis.com/technology.html>), and was also part of the design of Choren¹⁴⁶.

Other important reactors in this category not included in this review are the *Shelf reactors*^{4, 46} and the *Stafford-Badger retort*¹⁰. The converters are the reactors with more potential for the balanced production of char and oil. However, more research is needed to understand the potential of these reactors.

7. Fast pyrolysis reactors for high yields of bio-oil production

This section reviews the most common fast pyrolysis reactors (rotating cone, ablative, conical spouted bed, bubbling fluidized bed and circulating bed) (Figure 7) that have been developed intending to optimize the yields of bio-oil. There are very good literature reviews in fast pyrolysis reactors^{15, 16, 19, 136, 147}. Thus, this section will only focus on recent developments. The main characteristics of the reactors studied in this section are discussed in Table 7.

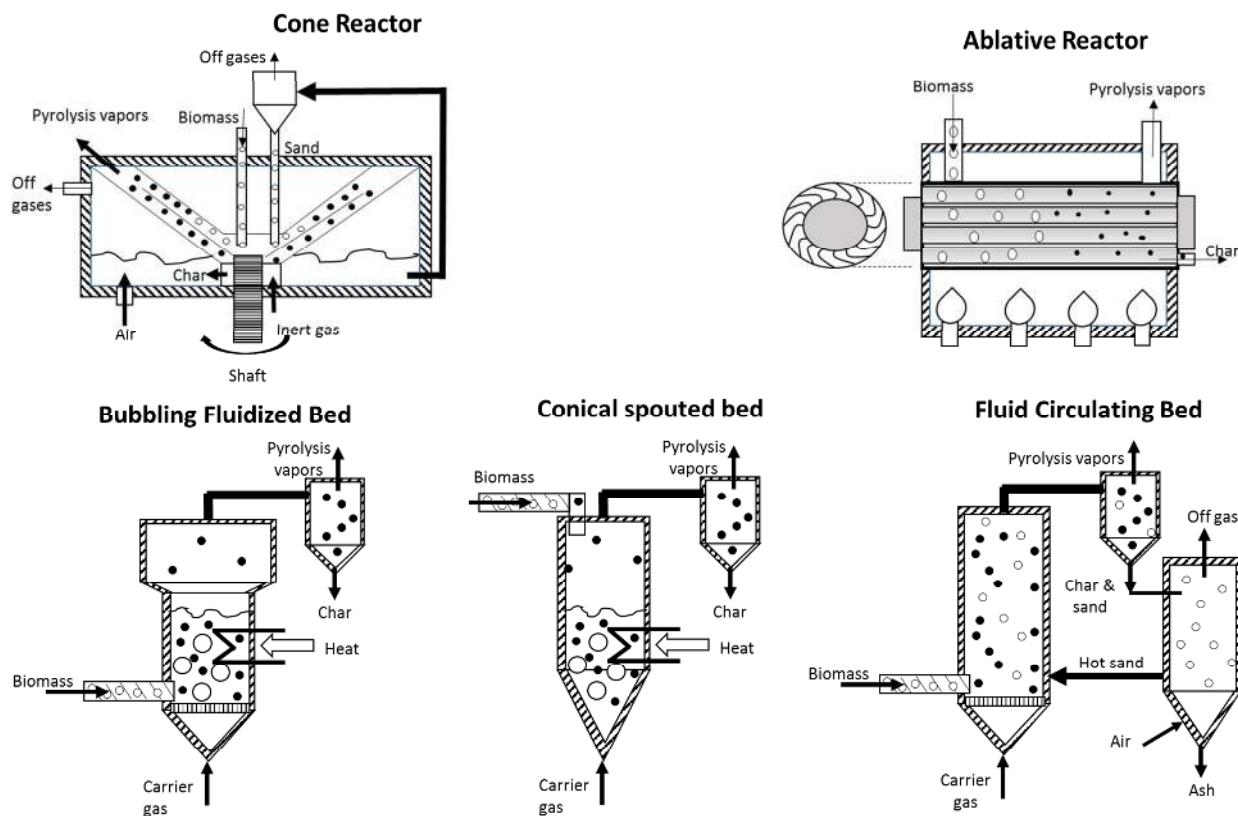


Figure 7. Schemes of Fast Pyrolysis Reactors (Adapted from¹³⁶)

Table 7. Characteristics of some fast pyrolysis reactors

	Bubbling fluidized bed reactor	Circulating bed reactor	Ablative pyrolysis	Rotating cone
Final product targeted	Bio-oil		Bio-oil/char	Bio-oil
Heat transfer rate achieved	Fast pyrolysis			
Mode of operation	Continuous			
Heating method	Direct and indirect heat/sand		Indirect heating	Direct and Indirect heating
Construction materials	Metal			
Portability	Stationary			
Reactor Position	Vertical		Horizontal	Vertical
Raw material used	Fine particles (less than 2 mm)		Chips	Fine Particles
Loading and discharge methods	Mechanical			
Ind. reactor capacity built	0.5-200 t/day ¹⁶	9.6-96 t/day ¹⁶	6 t/day ¹⁶	50 t/day ¹⁶
Charge ignition method	External combustion chamber to heat the carrier gases			
Process control	Direct measurement of temperature			
Complexity*	Medium		High	High
Status*	Demonstration	Commercial	Pilot	Demonstration
Industrial companies	Agritherm Canada ¹⁶ , Biomass Engineering Ltd ¹⁶ , UK, Dynamotive, Canada ¹⁶ , RTI, Canada ¹⁶ , Avello Bioenergy, USA	Ensyn, Canada ¹⁶ , Metso/UPM Finland ¹⁶	PyTec, Germany ¹⁶	BTG, Netherland ¹⁶
Pressure	Atmospheric			
Pretreatment needed	Particle milling and pre-drying		None	Particle milling
Yields reported (wt. %)	Up to 70% of bio-oil ¹⁴⁷			

The bubbling fluidized bed reactors use a mixture of convection and conduction to transfer heat from a heat source (hot sand) to the biomass particle. Although most of the literature suggest that fast pyrolysis should be operated with particles with diameters 2-3 mm¹⁶ to obtain high liquid yields (over 65 %), the particles must be smaller (typically below 0.5 mm)^{49, 50} to avoid the retention of aerosols inside the particle and to achieve high heat transfer rates. One of the best-known examples of using a fluidized bed reactor was Dynamotive, company that was a result of the pioneering job conducted by the University of Waterloo^{11, 12, 148}. In the design of most fluidized bed reactors in operation the char is entrained by carefully controlling the difference between the sizes and densities between biomass particles and the sand. Char particles obtained

from the pyrolysis of raw materials with very high ash content such as, sewage sludge, usually abandons the bubbling fluidized beds by overflow. The heat used in bubbling fluidized beds is generated from the combustion of pyrolysis gases and chars and is typically transferred to the fluidized bed by heating coils and by heating the carrier gas (in industrial conditions typically a recirculated pyrolytic gas). Given the low heat transfer rates between combustion gases and the bed (100-200 W/m²K) at least 10 to 20 m² of surface area is required to transfer the heat required to pyrolyze 1 t/h of biomass. These heat transfer surfaces are very susceptible to attrition from the sand¹³⁶. Several main features of this type of reactors are: the ability to accurately control temperature, the use of entrainment for the separation of the char, the use of cyclone separation, the easy scaling, the technology is well known and understood, small particles are required, and there must be a large scale heat transfer to the bed. Dynamotive developed bench-scale plants, a 15 t/day pilot plant, a 130 t/day plant in West Lorne, and a 200 t/day plant in Guelph, Ontario, Canada¹⁴⁹ that are currently not operating. Tables 8-10 show the yield of products obtained from the pyrolysis of grass and agricultural residues, softwood, and hardwood species in fluidized beds. When processing grasses and other agricultural wastes the conversion yield to liquid bio-oil, solid char and non-condensable gas are in the ranges of 35-68.7 wt. %, 12.9-45.7 wt. % and 3-25.7 wt. %, respectively, on an as fed basis (Table 8). This broad range of values is mostly due to the wide range of ash contents in these materials. When processing of softwoods result in 59-78.1 wt. % bio-oil, 10-15.7 wt. % char and 7.8-28 wt. % non-condensable gas. Comparable yields were also obtained for hardwood species (char: 9.8-20.7 wt. %, bio-oil: 59-77 wt. %, gases: 9.3-24.6 wt. %). Lower oil yields (35-73 wt. %) and higher char yields (13.4-45.7 wt. %) are obtained with some grasses, likely due to higher ash content in some of these materials.

Table 8. Pyrolysis of grasses and agricultural residues using fluidized bed reactors.

Biomass specie	Capacity	T (°C)	Char (wt %)	Bio-oil (wt %)	Gas (wt. %)	Reference
Corn stover	100 g/h	450	46	35	11	[12]
Corn stover	100 g/h	550	34	50	14	[12]
Corn stover	100 g/h	600	28	50	13	[12]
Rice husk	120 kg/h	475	-	50		[150]
Rice husk	<150 kg/h	450	30	50	20	[151]
Rice husk	7.32 kg/h	450	29	56	15	[152]
Rice husk	60 g/h	500		55		[153]
Rice straw	300 g/h	500	27	43	23	[131]
Rice straw	60 g/h	500	31	53	15	[153]
Corn cob	60 g/h	500	20	62	17	[153]
Sugarcane bagasse	60 g/h	500		67		[153]
Sugarcane bagasse	2 – 5.3 kg/h	500	23	73	4	[154]
Sugarcane bagasse	100 g/h	510	19	69	12	[148]
Barley straw	1 kg/h	525		54		[155]
Timothy	1 kg/h	525		61		[155]
Switchgrass	1 kg/h	510	19	60	16	[156]
Switchgrass	2.5 kg/h	480	13	61	11	[157]
Switchgrass			20	58		[158]
Miscanthus	1 kg/h	505	29	51	12	[156]
Wheat straw	1 kg/h	525	27	38	26	[156]
Wheat straw	1.5 kg/h	525	22	61	17	[158]
Wheat straw	100 g/h	550	24	54	24	[148]
Wheat chaff	100 g/h	515	18	67	16	[148]
Sorghum bagasse	100 g/h	510	13	69	12	[148]
Sunflower hulls	100 g/h	500	23	57	20	[148]

Table 9. Pyrolysis of softwood species using fluidized bed

Biomass specie	Capacity	T (°C)	Char (wt.%)	Bio-oil (wt.%)	Gas (wt%)	References
Pine-wood chip and pellets	1 kg/h	530	10	59	28	[159]
Pitch pine (debarked, dp< 5 mm)	Non-cont. feed	500	16	64	21	[160]
Pine sawdust	1 kg/h	525		67-71		[155]
Douglas - fir	220 g/h	500		52		[161]
Douglas - fir	3-5 kg/h	480	12	64	24	[162]
Spruce	300 g/h	465-470	14	61	27	[163]
Japanese Cedar (debarked, dp<0.5 mm)	Non-cont. feed	500	13	66	22	[160]
Pine sawdust	1 kg/h	525		67-71		[155]
Spruce sawdust	100 g/h	500	12	78	8	[148]

Table 10. Pyrolysis of hardwood species using fluidized bed reactors

Biomass specie	Capacity	T (°C)	Char (wt. %)	Bio-oil (wt. %)	Gas (wt. %)	References
Red oak	6 kg/h	400	21	67	13	[164]
Red oak	6 kg/h	500	19	63	18	[164]
Red oak	1.5 kg/h	450-500	25	62	13	[165]
Eucalyptus grandis	700 g/h	500		69		[166]
Eucalyptus grandis	0.1 kg/h	500		69		[129]
Eucalyptus grandis woodchips	1 kg/h	500		62		[129]
Eucalyptus (debarked)	0.85 kg/h	500		62		[167]
Eucalyptus loxophleba wood	0.15 kg/h	500	14	61	25	[160]
Eucalyptus loxophleba wood	2 kg/h	500	14	62	12	[49]
Eucalyptus wood	1 kg/h	450	17	64		[168]
Eucalyptus grandis woodchips	1 kg/h	500	18	59	23	[169]
Eucalyptus loxophleba wood	0.1 kg/h	450	14	71	14	[170]
Beech	1 kg/h	510	13	72	9	[171]
Beech	1 kg/h	512	13	67	12	[156]
Beech	300 g/h	465-470	10	70	23	[163]
Beech	1 kg/h	500	10	71	15	[50, 62]
Poplar sawdust	100 g/h	504	12	77	11	[148]

10 t/day mobile pyrolysis units with a fluidized bed reactor have been developed by Agritherm at the University of Western Ontario (<http://agri-therm.com>)^{16, 42}. An important feature of the design proposed by this company is a compact design in which the pyrolysis reactor is built using an annulus with a burner at the core providing the energy needed for the pyrolysis process. Avello Bioenergy in the State of Iowa (US) is another company commercializing fast pyrolysis technologies (<http://www.avellobioenergy.com>). This company specializes in the development of fractionation strategies to obtain different products from bio-oils. Bioware is a Brazilian company commercializing auto-thermal fluidized bed reactors¹⁷² to produce bio-oil, char and phenolic resins (<https://www.bioware.com.br>). Nettenergy BV is a private company from the Netherlands (<http://www.nettenergy.com/index.php/en/>) that built a 100 kg/h mobile unit with a unique multi-stage compact separation design⁴².

Circulating fluidized beds: Research performed by the University of Western Ontario in the late 1970s and early 1980s spawned the Rapid Thermal Processing (RTP)TM technology commercialized and developed by Ensyn. Before feeding this system's reactor, the biomass is comminuted to approximately 6 mm, and then dried to a moisture content of 10% or less. The hot recirculated biomass and sand enter in an up-flowing transported bed reactor. Once the

products have passed through two cyclones that separate both solids from the produced vapors, they experience a rapid cooling and quenching in multiple stages¹⁴. The residence time of the solids and vapors in these reactors is almost the same¹⁶. The recirculation of gases from secondary char combustion is the main heat source¹⁶. RTP is the only pyrolysis technology in the world that has operated on a long-term commercial basis (<http://www.ensyn.com>, <https://www.envergenttech.com>). Larger scale units include: ENEL plant build by Ensyn in Italy (15.6 t/day), several 40 t/day units at Red Arrow (USA) operating for the production of smoke aromas and the Ensyn 50 t/day unit at their R&D center in Renfrew Canada¹⁶. Some features of the transported bed reactor include: precise temperature control within the reactor, the ability to use large size particles, suitability for very large throughputs, and well understood technology¹⁶. Some of the main disadvantages of these technologies are: (1) use of large volumes of inert carrier gases causes a dilution of the pyrolytic gases making bio-oil recovery very difficult (2) many fast pyrolysis reactors use sand as a heat carrier, (3) complex hydrodynamics, (4) high velocities lead to higher levels of attrition, and the separation of the char and the sand from the vapors with a “cyclone”, (5) careful control is needed for the closely integrated combustion, and a large scale heat transfer to the bed is required (6) Char and sand attrition is an important issue. Table 11 shows the yield of bio-oil reported in the literature for different feedstocks. Bio-oil yields between 54 and 71 wt. % have been reported.

Table 11. Pyrolysis of biomass using circulating fluidized bed reactors.

Biomass specie	Capacity	T (°C)	Bio-oil (wt. %)	References
Timothy	20 kg/h	520	54	[155]
Rapeseed straw	20 kg/h	520	60	[155]
Pine saw dust	20 kg/h	520	74	[155]
Green forest residue (86% spruce, 9% pine, 5% birch)	20 kg/h	520	64	[155]
Brown forest residue (80% spruce, 10% pine, 10% birch)	20 kg/h	520	58	[155]
Eucalyptus chips	20 kg/h	520	71	[155]

A similar technology, with the use of catalysts instead of inert sand is being developed by KIOR, now Inaeris Tech (<http://www.inaeristech.com/>), a company located in Houston, Texas. The company uses a proprietary catalyst system to produce a deoxygenated bio-oil in a Fluid Catalytic Cracking (FCC) reactor. Metso, UPM and Fortum constructed and has operated since

1
2
3
4
5 2013 a 400 kg/h circulating bed pyrolysis reactor coupled with a condensation system in Joensuu
6 (Finland). The bio-oil produced is combusted in a fluidized bed power boiler¹⁶. CPERI (Greece),
7 Guangzhou Inst. Energy Conversion (China), U. Birmingham and U. Nottingham (UK) and VTT
8 (Filand) have active research programs on this technology¹⁶.
9
10
11
12

13 *Rotating Cone:* This technology was developed by the University of Twente and is
14 commercialized by BTG-BTL (Biomass Technology Group-Biomass to Liquid, Netherlands)
15 (<http://www.btgworld.com/en/>)¹⁶. The centrifugal force effectively develops a transported bed
16 without the need for large volumes of carrier gas¹⁶. The hot sand and the biomass are transported
17 up in a conical bed by the centrifugal forces created by rotation of the cone¹⁶. This process has
18 been successfully applied in Malaysia for the conversion of empty fruit bunches from palm oil
19 trees in a demonstration plant of 50 t/day capacity¹⁶⁵. This technology has been also used by
20 Empyro for the construction of a plant that operates from 2015 in Hengelo (The Netherlands).
21 This plant converts 5 t/h of wood residues into pyrolysis oil, process steam and electricity. In
22 both plants, gas and char are burned to heat the sand, which is recycled back to the pyrolysis
23 reactor¹⁶.
24
25
26
27
28
29
30
31
32
33
34

35 *Ablative pyrolysis:* This process entails a heated surface in which wood is pressed against and
36 moved rapidly leaving an oily film that then evaporates¹⁶. Larger particles of wood can be used
37 for this process and the limiting factor is typically the rate of heat supplied to the reactor. These
38 reactors can process large amounts of biomass in a little volume, are compact and do not require
39 carrier gases or recirculation^{70, 71}. The rate of reaction is proportional to the force exerted on the
40 biomass in contact with the wall and the available heat transfer surface¹⁶. An important feature of
41 ablative heat transfer is that when the biomass contacts the hot solid, ablation occurs and
42 subsequently exposes new fresh biomass to the hot surface. This, in theory, allows for no
43 limitations in particle size. NREL (Golden, Colorado, USA) and CNRS laboratories (France)
44 conducted most of the pioneering studies on ablative reactors¹⁶. In the 90s, BBC from Canada
45 built and operated an ablative reactor with a capacity between 10-25 kg/h¹³⁶ (this company is not
46 in operation today). The University of Hamburg built three plants using ablative reactors. The
47 first plant was conceived for research and has a capacity of 20 kg/h; the second one, is a pilot
48 plant.
49
50
51
52
53
54
55
56
57
58
59
60

plant of 250 kg/h and the third is a demonstration unit with capacity of 2 t/h^{16, 136}. Reed and Cowdrey constructed an ablative pyrolysis reactor testing bone dry wood at a feeding rate of 0.2 kg/h¹⁴. Biomass-to-oil (BTO) process was developed by PYTEC, Germany. The process is based on the ablative pyrolysis principle. Biomass wood (including chips of 60x40x5 mm) is put in direct contact with a rotating hot metal surface that melts the wood and produces oil¹⁷³. The crude bio-oil produced is combusted in a CHP unit running on a 300 MW_e diesel engine¹⁷³. Compared with the fluidized bed, the main advantages of ablative reactors are: (1) no milling efforts needed for biomass, (2) compact design because of ideal heat transfer with high heating rates at relatively small contact surfaces, (3) energy and cost efficiency as no heating and cooling of fluidized bed is required, (4) condensation units with small volume can be installed, requiring less space and lower cost¹⁷⁴. The main downsides are that these reactors require a heated surface area control system, operates with moving parts at high temperatures increasing their complexity, and induces an inevitable wear and tear on the moving components¹⁷⁵. Table 12 reports the yields obtained in ablative reactors using wood and wheat straw. The yields of char, oil and gases are comparable with those obtained with similar feedstock with fluidized bed reactors. Aston University (UK), Institute of Engineering Thermophysics (Ukraine), Latvian State Institute (Latvia) and the Technical University of Denmark have active programs on this technology^{16, 42}.

Table 12. Experiences on biomass fast pyrolysis using ablative pyrolysis reactors

Biomass specie	Capacity	T (°C)	Char (wt. %)	Bio-oil (wt. %)	Gas (wt. %)	Reference
Barley or wheat straw	10 kg/h	549	32	50	12	[176]
Wheat straw	Lab-scale pyrolysis centrifuge reactor	525	23-32	40-47	27-30	[177]
Wood	250 kg/h	650	6	60	34	[174]

Spouted fluid bed reactor: The viability of the spouted bed technology for pyrolysis was studied by the Chemical Engineering Department of the University of the Basque Country (Spain). A pilot plant at Ikerlan-IK4 facility with capacity to process up to 25 kg/h of biomass is now operational^{16, 178}. The yield of products shown in Table 13 is comparable and even higher to those reported for fluidized bed reactors for similar feedstocks. The Anhui University of Science & Technology is also developing this technology¹⁶.

Table 13. Biomass pyrolysis results using a conical spouted bed

Biomass specie	Capacity	T (°C)	Char (wt.%)	Biooil (wt.%)	Gas (wt. %)	Reference
Rice husk	60 g/h	450	26	70	4	[179]
50% Cytisus multiflorus and 50% Spartium junceum	200 g/h	500	17	80	4	[180]
Pterospartum tridentatum	200 g/h	500	20	75	5	[180]
Misanthus	Lab-scale	500	38	40	20	[181]
Pine saw dust	200 g/h	500	17	75	8	[182]
Pine saw dust	5 kg/h	480	14	73	13	[183]
Acacia dealbata (Silver wattle)	200 g/h	500	23	72	5	[180]
Eucalyptus	200 g/h	500	18	75	6	[184]

8. Microwave Pyrolysis

There are excellent reviews on microwave pyrolysis^{44,45, 185, 186}. Von Hippel developed the basic understanding of the macroscopic microwave-matter interactions⁴⁴. Microwave wavelengths falls between infrared and radio regions (from 0.3 to 300 GHz)^{44, 45}. Heating is due to molecular friction during dipolar molecules rotation induced by the electromagnetic radiation. Conversely to conventional heating, microwave heating is a volumetric heating, so an opposite temperature gradient is established⁴⁴. Tech-En Ltd in Hainault (UK) developed microwave pyrolysis in the mid-nineties^{185, 187, 188}. In this process, the feedstock is thoroughly mixed with a highly microwave-adsorbent material (often char), which absorbs enough microwave energy (typically at 915 MHz or 2.45 GHz)¹⁸⁵. Although microwave penetration is typically 1-2 cm, penetration depth varies depending on the properties of the materials and radiation frequency (oil palm fiber: 10.2 cm (at 5.8 GHz), oil palm shell: 5.5 cm (5.8 GHz), biochar: 8.5 cm (5.8 GHz), paper and cardboard: 20-60 cm (2.54 GHz), wood: 8-350 cm (2.54 GHz))⁴⁴. While, microwave heating favors solid phase reactions, or heterogeneous reactions, conventional heating has higher effect on gas-phase reactions⁴⁴. Table 14 shows product yields obtained with these reactors.

Table 14. Results of Biomass microwave pyrolysis.

Biomass specie	Reactor	T (°C)	Char (wt. %)	Bio-oil (wt. %)	Gas (wt. %)	Reference
Wheat straw	Mass: 5-30 g, N ₂ : 3 L/min, 3 kW at 2.45 GHz	400-600			17-22	[189]
Larch (<i>Lalix leptolepis</i> GORDON) Cylindrical blocks (d: 60–300 mm; weight: 80–12000 g)	1.5-3 kW at 2.45 GHz, exposition time: 3-12.5 min		18-50	15-30		[190]
Microalgae (<i>Chlorella vulgaris</i>) particle size < 200μm	Mass:30 g, power: 0.75-2.25 kW at 2.45 GHz, N ₂ : 300 mL/min, catalysts: activated carbon, CaO, SiC	200 600 775	90 30 25	0 36 22	10 34 52	[191]
Douglas fir sawdust pellet (diameter: 6 mm, length: 10 mm)	Mass:400 g, 0.7 kW, reaction time: 10–20 min	350-450	31-61	31-54	8-15	[192]
Sewage sludge	Mass: 100 g, 25 g of graphite (1x1 mm) as microwave absorber, N ₂ : 100 mL/min, Power 0.4-0.6 kW at 2.45 GHz	490-570	39-40	48-50	11-12	[193]
Rice straw	Mass: 3-5 g, N ₂ : 50 mL/min, 0.2-0.5 kW	280-500			< 70	[194]
Oil palm fiber (OPF) (0.3–0.6 mm),and oil palm shell (OPS) (0.001 to 0.1 m)	Ratio sample: microwave absorber (1:0.25, 1:0.5, and 1:1), power 0.45 kW at 2.45 GHz, exposure time: 25 min	400-1300	OPS 45-70 OPF 50-80	OPS 10-20 OPF 5-25	OPS 20-30 OPF 10-28	[195]
Microalgae (<i>Chlorella sp</i>)	Mass: 30 g, 6 g of char as microwave absorber, N ₂ : 500 mL/min, Power 0.5-1.25 kW at 2.45 GHz, exposition time: 20 min	460-630	25-28	Oil 18-28 Water 20-22	24-35	[196]
Sewage sludge	Mass: 3.5 kg, N ₂ : 5-20 L/min, power: 6.4-8.0 kW at 2.45 GHz, time: 120 min	350-500		30.4% of organic fraction		[197]
Rice straw (0.425-0.850 mm)	3-5 g sample, N2 flow: 50 mL/min, 0.2-0.5 kW	400	28	23	49	[198]
Oil palm shell (OPS) < 0.850 mm)	Mass: 150 g, ratio sample: microwave absorber (1:0.25, 1:0.5, and 1:1), power 0.45 kW at 2.45 GHz, exposition time: 25 min	450-925	40-65	10-17	25-47	[199]
Corn stover	Mass:50 g, power: 0.3-0.9 kW at 2.45 GHz			30 (0.9 kW)	47 (0.9 kW)	[200]
Rice husk (RH) (0.149–0.297 mm, 0.149–0.074 mm and < 0.074 mm) Sugar cane residues (SCR)	Mass: 7-10 g , 0.15-0.4 kW at 2.45 GHz, exposition time: 4-30 min	280-600	RH: 33-50 SCR:s 25-67			[201]

The main advantages of microwave pyrolysis compared to conventional technologies are: (1) it provides rapid heating¹⁸⁵ (2) it is much cleaner and easier to control¹⁹⁵ (3) it can be easily modularized for small applications (these processes can be developed for on-site processing reducing transportation cost) (4) heat is generated within the material (the particles are heated from the center), allowing the surface of the reactor to operate at lower temperatures, (5) high conversion efficiencies of energy to heat (80-85 %) are obtained and (6) higher power densities are used¹⁸⁵.

The main challenges and barrier for microwave pyrolysis are: (1) limited information is available on waste materials microwave relevant properties¹⁸⁵ (2) uneven heating can lead to poor product quality control, (3) electricity is expensive and often produced from fossil fuels by Rankine cycles (with efficiency typically between 20 and 30 %), (4) electrical hazard that should be contained with an appropriate Faraday cage, (5) the presence of metals generate arcing that may damage the equipment, (6) the microwave heating systems are more expensive than traditional heating systems¹⁸⁵. Some of the institutions with active programs in microwave pyrolysis are: The Chinese Academic of Sciences, the National Institute of Advanced Industrial Science and Technology of Japan, the Shandong University of China, the Technical University of Vienna (Austria), the University of Malaysia Sarawak (Malaysia), the University of Minnesota (USA), Washington State University (Tri-cities), the University of Mississippi (USA), the University of Nottingham (UK), the University of York (UK) and the Ecole Politehnique de Montreal (Canada)^{16, 42}.

9. Design and scale up of Pyrolysis units

Business models: There are very few reports with information on the development of business models, technical design and techno-economic evaluation of pyrolysis units^{47, 202, 203}. The technical design of the pyrolysis unit will depend on the business model selected²⁰³. The International Biochar Initiative (<http://www.biochar-international.org/commercialization>) has identified a number of business models for bio-char production including the characteristics of the feedstock, sustainability issues, associated production technology, potential co-products,

economic and social challenges. The main business models discussed by the IBI and the technologies associated were: (1) Restoration site (e.g. forest, wetland) (mobile pyrolysis, charring piles in situ), (2) Managed forest (mobile pyrolysis, hog fuel for co-generation, feedstock for pellets and briquettes), (3) Forest product processing waste (Co-gen pyrolysis or gasification, feedstock for pellet or briquettes), (4) Biomass plantation (Co-gen pyrolysis or gasification, feedstock for pellets or briquettes), (5) Urban forestry and landscaping (Biochar, process heat, electricity, home heat), (6) Agricultural Waste-Industrial (Mobile pyrolysis, co-gen, pyrolysis or gasification), (7) Agricultural waste subsistence (Stoves, kilns feedstock for briquettes), (8) Municipal Solid Waste (MSW) (Co-gen pyrolysis or gasification)²⁰³.

Reactor Sizing: Although companies designing and building pyrolysis reactors may have developed scale up criteria and methodologies for sizing these equipment, the authors were not able to find systematic methodologies for the design of pyrolysis reactors in the open literature. Therefore, the design of pyrolysis reactors is still an art. For this reason, in this section we will briefly present a strategy based on our own experience. The design of pyrolysis reactors can be conducted following these steps: (1) Select throughput capacity, (2) Determine the biomass particle size to be used, (3) In the case of fluidized bed reactors select the appropriate sand/biomass particles size ratio, (4) Select the carrier gas to be used and quantify the carrier gas to be used (for fluidized bed reactors it is recommended 2.75 kg carrier gas/kg dry biomass²⁰⁴); (5) Specify reaction temperature (in the case of fast pyrolysis typically 500 °C) and conduct pyrolysis tests at lab or pilot facilities (6) Conduct a mass balance with the yield of products obtained experimentally (see information in tables 5, 6, 7, 8, 10); (7) Conduct energy balances to calculate how much heat has to be removed or supplied to the reactor. Thermodynamic information for the overall energy balance of pyrolysis reactors can be found elsewhere²⁰⁵⁻²⁰⁸. (8) Calculate the residence time of the biomass particle to achieve a targeted conversion. Information on experimental and modeling strategies (single particle models) to calculate conversion as a function of residence time can be found elsewhere^{72, 75, 209-211}. (9) Calculate the solid hold up in the reactor. The residence time of the solid in the reactor depend on the hydrodynamic and the mechanic design of these reactors. In the case of rotary drums, it depends on the slope of the reactor, kiln rotational speed and the length and diameter of the reactor²¹². For

1
2
3
4 fluidized beds, the retention of the solid is controlled by the terminal velocity of the converted
5 biomass particle in the free board, (10) In the case of fluidized bed calculate or determine
6 experimentally the minimum fluidization velocity (typically use 2 to 3 times the minimum
7 fluidization velocity)^{213, 214}, (11) Calculate the cross sectional area and diameter of the reactor²¹³,
8 (12) In the case of fluidized bed reactors calculate volume of expanded fluidized bed (sand and
9 char particles)^{213, 215}, (13) If designing fluidized bed reactors calculate the length and the
10 diameter of the free board²¹³, (14) Select the heating or cooling method to be used (e.g. indirect,
11 direct or microwave heating) and calculate the heat transfer area needed to supply or remove the
12 heat calculated in the energy balances²¹³, (15) In the case of the fluidized bed reactors size the
13 distribution grate²¹³.
14
15
16
17
18
19
20
21

22 10. Challenges for the implementation of pyrolysis

23

24 The development of pyrolysis technologies must overcome two major hurdles. The first one is
25 associated with the lack of markets for pyrolysis oils and the second one with the lack of biochar
26 derived products with well-defined performance characteristics. Consequently, it is imperative to
27 accelerate the development and deployment of bio-oil refineries and the development and
28 commercialization of engineered bio-char for environmental services. Developing flexible
29 designs for pyrolysis units to produce high yields of both bio-oil and char is a technological
30 challenge facing the thermochemical community.
31
32
33
34
35
36
37
38
39

40 The selection of pyrolysis technologies, their operational conditions, and the feedstocks to be
41 used will depend mostly on economic tradeoffs²¹⁶. The results presented in this review clearly
42 show that there are multiple operational conditions and designs to obtain a wide range of
43 products yields. Most of fast pyrolysis reactors reviewed are operated at conditions (500 °C,
44 small particles (below than 2 mm), use of heat carrier (sand) and residence time of vapors below
45 2 s (use of a carrier gas)) for maximizing bio-oil yields with little regard for the quality of the
46 product. The use of high volumes of carrier gas and the heat carrier reduce the energy efficiency
47 of these processes, create important sand attrition problems, and makes it very difficult to
48 condense the diluted vapors, requiring very large surface areas and considerable cooling power.
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4 Most of fast pyrolysis designs combust the char to satisfy the energy needs of the process. The
5 difficulties to refine fast pyrolysis oils with high oxygen content is the main reason for the
6 growing interest in catalytic pyrolysis for the production of bio-oils with lower oxygen content.
7 The catalytic cracking strategies to reduce bio-oil oxygen content typically result in an increase
8 in gas yield and coke formation. The converters reviewed are flexible enough to operate in
9 conditions where bio-oil and biochar production is possible. More studies are needed to explore
10 designs that take advantage of homogeneous secondary reactions in gas phase for oxygen
11 removal from pyrolysis oils.
12
13
14
15
16
17
18
19

20 There is a vast diversity of situations in which pyrolysis can be applied (different feedstocks,
21 scale, capacity, use of mobile or stationary units) as well as the diversity of products that can be
22 obtained. This makes it very difficult to find an exclusive design that is sustainable across all the
23 potential applications. Table 15 is an attempt to summarize the type of reactor suitable for a
24 specific cases. A balanced investment in the creation of new knowledge (i.e., Science), in the
25 design, testing and scale up of new technologies (for pyrolysis reactors and for rural bio-oil
26 refineries) (i.e., Technology) and in the development of new products (from bio-oil and char)
27 (i.e., Market) to build a shared vision that take advantage of existing infrastructure and is
28 achievable in small steps are all critical for the deployment of a viable biomass based economy
29 on pyrolysis technologies.
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Table 15. Summary of the technology status of pyrolysis reactors

Type of reactor	Companies/Institutions ^a	Technology status	Remarks	References
Kilns using Trunks of cordwood or Logs				
Earth kiln, traditional methods	Families for household income, farmers, communities	Commercial	Widely used in developing nations	[115, 217]
Cinder block, brick and metal kilns (Brazilian and Brazilian beehive and Half orange, TPI kiln, New Hampshire, Connecticut, Missouri kiln)	Families for household income, farmers, communities, multiple small companies -	Commercial	Widely used in developing nations	[87, 115]
Retorts using trunks of cordwood or Logs				
Small metal kilns and retorts	Applied Gaia Corporation (US) Carbon Compost Co. Ltd (UK) Pressvess (UK) CarbonZero, (Switzerland) Ithaka Institut (Switzerland)	Commercial	Multiple designs, Some can include liquid recovery	http://appliedgaia.com http://www.carboncompost.co.uk http://www.pressvess.co.uk http://www.carbonzero.ch http://www.ithaka-institut.org/en/kon-tiki
Adam retort	Adam + Partner (Ethiopia)	Commercial		[108, 109]
Wagon retorts	O.E.T. Calusco (Imperiati Trattamento Biomass) Alterna Biocarbon	Commercial	No operating units ^b	[4, 5, 43, 115]
Reichert converter	Evonik (Germany, formerly Degussa)	Commercial		[5, 218]
French SIFIC Process (CISR Lambiotte retort)	Lambiotte (France) Balt Carbon (Latvia)	Commercial		http://www.lambiotte.com [43, 115]
Lurgi carbonization retort (Lurgi Umwelt GmbH)	Simcoa (Australia) Lurgi LR (Germany)	Commercial		http://www.simcoa.com.au [43, 16]
Twin type retorts	Charbon Engineering (Carbon-Twin) (Netherlands) Clean Fuels (Netherlands) VMR Systems (Netherlands) CG2000 Carboniser Ibero Massa Florestal (Portugal)	Commercial	Some designs can include liquid recovery	http://www.charbon-engineering.eu http://www.cleanfuels.nl , http://www.vmrsystems.co.m , http://www.imflorestal.co.m [43, 112, 115, 219]]
Flash Carbonization	University of Hawai'i	Pilot Plant		[6, 43]

Table 15. Summary of the technology status (Continuation....)

Type of reactor	Companies/Institutions ^a	Technology status	Remarks	References
Converters using chips and pellets				
Herreshoff multiple hearth furnaces	(BigChar) Pyrocal Pty Ltd (Australia) CSE Hankin Environmental System (USA)	Commercial		http://www.bigchar.com.au , http://hankines.com [115, 119]
Autogenous pyrolysis reactor	CSIRO (Australia)	Pilot Plant		[220]
Auger reactors	BioGreen Spirajoule (France) Genesis Industries (USA) BioMaCon GmbH (Germany) Karr Group (USA) Polvax (Ukraine) Pro-Natura (France)	Commercial	Multiple designs and companies offering auger reactors	http://www.biogreen-energy.com , http://egenindustries.com http://www.biomacon.com http://karrgroupco.com http://www.pyrolysis.net http://www.pronatura.org/?page_id=521&lang=en , [115]
	Bioliq, Karlsruher Institute für Technologie (Germany), Energy Farmers (Australia) ABRITech (Canada) Renewable Oil International LLC (USA)	Demonstration		http://www.energyfarmers.com.au http://www.abritechinc.com , http://demoplants21.bioenergy2020.eu/projects/displaymap/twhWVt http://www.renewableoil.com [221, 16]
	Thermo-catalytic reforming (Fraunhofer UMSICHT & Susteen Technologies, Germany), Alternative Energy Solutions Ltd (New Zealand) Renewable Oil Int, (USA)	Pilot Plant		http://www.susteen-tech.com [16, 222]
Indirectly heated Rotary kilns	Amaron Energy (USA) Mitsubishi Heavy Industries (Japan) Ansac Anergy Ltd 3R Environmental Technologies Group Mitsui R21 ITC	Commercial	Multiple plants for waste treatment (MSW, sludge) are adaptable to biomass pyrolysis.	http://www.amaronenergy.com http://www.mhicc.co.jp/en/products/water/sludge/contents/sludge_carbonization_facility.html [222]
	University of Perugia (Italy)	Pilot Plant		[223]

Table 15. Summary of the technology status of pyrolysis reactors (Continuation....)

Type of reactor	Companies/Institutions ^a	Technology status	Remarks	References
Fast/intermediate Pyrolysis Reactors using chips				
Moving Agitated bed (Pyrovac)	Pyrovac	Demonstration		[134, 135]
Shelf reactors		Commercial	No operating units ^b	[4, 46]
Paddle pyrolysis kiln	BEST	Demonstration	-	BEST website not working
Ablative pyrolysis Pytec, German	Pytec	Demonstration	Web site is not working-	[16]
Rotating cone	BTG-BTL, Netherlands	Commercial		http://www.empyroproject.eu , http://www.btgworld.com/en/[16]
Fast Pyrolysis using fine particles (catalytic and non-catalytic processes)				
Bubbling Fluidized bed reactors.	Anellotech (USA) Valmet - Fortum (Finland) Agritherm (Canada) RTI (USA) Avello Bioenergy (USA) Bioware, (Brasil) Biomass Engineering Ltd (BEL), UK Nettenergy BV (Netherlands)	Commercial / Demonstration	Static/Mobile	http://anellotech.com http://www.fortum.com http://agri-therm.com http://www.rti.org/energy http://www.avellobioenergy.com https://www.bioware.com.br http://www.nettenergy.com/index.php/en/ [16, 42]
Circulating bed reactors	Rapid Thermal Processing: Ensyn, (USA), Envergent Technologies (USA) Metso (Finland) Anaeris Technology (former Kior)	Commercial / Demonstration		http://www.ensyn.com , https://www.envergenttech.com http://www.inaeristech.com/ [149, 16]
Spouted bed	Ikerlan (Spain)	Pilot Plant		[16, 178]
Microwave pyrolysis				
Microwave pyrolysis	Carbonscape (New Zealand) Beijing Sino-Green Technology Co., Ltd (China) Bioenergy 2020 + gmbh (Austria)	Pilot Plant		http://carbonscape.com , [186, 16]

11. Conclusions

The number of publications on slow and fast pyrolysis reactors has been growing steadily in the last thirty years. The community interested in these reactors is formed by researchers interested on char production and those interested on bio-oil production. This paper reviews slow, intermediate, fast and microwave pyrolysis intending that companies and academic institutions, researching, designing and commercializing pyrolysis/carbonization reactors can take advantage of the technological solutions shown. Very little progress has been made in the last century in the design of kilns. The release of large quantities of pyrolysis vapors to the atmosphere and/or their condensation in soils are major sources of pollution that need to be urgently addressed. Several of the *retorts* used today were developed and commercialized by the “wood distillation industry”. These units were designed for the carbonization of logs. However, deforestation issues and the limited availability of logs for carbonization are major hurdles for their widespread deployment in today’s world. The *converters* are receiving growing attention for their capacity to convert forest and agricultural residues in the form of chips and shredded materials into bio-oil and charcoal. These systems do not require the use of large volumes of carrier gas or a heat carrier (sand). Nevertheless, the lack of commercial interest for fine chars produced by these systems has been a major hurdle for the commercialization of this technology. The growing interest on using char as soil amendments and the development of technologies for the production of char pellets and briquettes from these fines are catalyzing new companies commercializing these designs. The current design and operation of *fast pyrolysis reactors* is based on conditions maximizing bio-oil yields with little regard for the quality of the bio-oil produced. High bio-oil yield is achieved at 500 °C, using small particles (less than 1 mm) a heat carrier (sand) and using high volumes of carrier gas to reduce the residence time of vapors below 2 s. The energy need of these reactors is typically satisfied by char combustion. Consequently, most of these processes do not commercialize char as one of their products. The lack of commercial bio-oil refineries is the main barrier for the commercialization of these reactors. Problems with fast pyrolysis oil refining are catalyzing interest on strategies to produce oils with lower oxygen content. Most of these strategies result in high gas yield, which is an opportunity to explore the use of the gases to satisfy part of the energy needed of the system, without scarifying

char production. Microwave pyrolysis is a promising technology for the development of small convenient systems for waste management.

Acknowledgements: M.G-P acknowledges the Waste to Fuel program from the Washington State Department of Ecology, Washington State Agricultural Research Center (NIFA-Hatch-WNP00701) and the National Science Foundation (CBET-1434073, CAREER CBET-1150430) for their financial support.

References:

1. Withrow J: The Chemical Engineering of the Hardwood Distillation Industry. *Ind. Eng. Chem. Res.* (1915), Vol. 7, No II, p. 912
2. Brown N.C: The hardwood distillation industry in New York. The New York State College of Forestry at Syracuse University. January 1917.
3. Bunbury, H. M., The destructive distillation of wood, Benn Brothers, Ltd., London, 1923.
4. Klar M, Rule A: The Technology of Wood Distillation. London Chapman & Hall LTD, 1925.
5. Emrich W., Handbook of charcoal Making. The Traditional and Industrial Methods, D. Reidel Publishing Company, 1985
6. Antal, MJ, Grønli M., The Art, Science, and Technology of Charcoal Production, *Ind. Eng. Chem. Res.* 2003, 42, 1619–1640.
7. Antal MJ, Mochidzuki K, Paredes LS: Flash Carbonization of Biomass. *Ind. Eng. Chem. Res.*, 2003, 42 (16), 3690-3699.
8. Veitch, F.P., Chemical Methods for Utilizing Wood. Including destructive distillation, recovery of Turpentin, rosin and pulp, and the preparation of alcohols and oxalic acid. USDA, 1907
9. Canham, H. O., The wood chemical industry in the Northeast: An old industry with new possibilities, Northern Woodlands, February 8th 2010, <http://www.faqs.org/photicdict/phrase/10393/kilns.html>
10. Massengale R, Black gold:A history of charcoal in Missouri, Author House, Bloomington, 2006

- 1
2
3
4
5 11. Scott DS, Piskorz J, The Continuous Flash Pyrolysis of Biomass. *Can. J. Chem. Eng.* 1984,
6 62 (3), 404-412.
7
8 12. Scot DS, Piskorz J, Radlein D. Liquid products from the continuous flash pyrolysis of
9 biomass. *Ind. Eng Chem Process Des Dev.*, 1985, 24, 581-888.
10
11 13. Bridgwater AV, Czernik S, Piskorz J: The status of biomass fast pyrolysis. In: Bridgwater
12 AV, editor. Fast pyrolysis of biomass a handbook, Vol. 2. Newbury, UK, CPL Press, 2002,
13 p. 1-22.
14
15 17.Bridgwater AV, Peacocke GVC, Fast Pyrolysis Processes for Biomass. *Renewable and*
16 *Sustainable Energy Reviews*, 2000, 4, 1-73
17
18 15. Czernik S, Bridgwater A.V., Overview of Applications of Biomass Fast Pyrolysis Oil.
19 *Energy & Fuel*, 2004, 18, 2, 977-997
20
21 16. Bridgwater AV, Review of fast pyrolysis of biomass and product upgrading. *Biomass and*
22 *Bioenergy*, 38, 2012, 68-94
23
24 17. Diebold J.P., Bridgwater A.V., Overview of Fast Pyrolysis of Biomass for the Production of
25 Liquid Fuels. *Fast Pyrolysis of Biomass. A Handbook*, Eds. Bridgwater A et al. CPL press,
26 1999, 14-32.
27
28 18. Kersten SRA, Wang X, Prins W, van Swaaij WPM: Biomass pyrolysis in a fluidized bed
29 reactor. Part 1: literature review and model simulations. *Ind Eng Chem Res.*, 2005, 44:
30 8773-85.
31
32 19. Mohan D, Pittman CU, Steele PH: Pyrolysis of Wood/Biomass: A critical review. *Energy*
33 &*Fuels*, 2006, 20 (3), 848-889.
34
35 20. Elliott DC: Historical developments in hydroprocessing bio-oils. *Energy&Fuels*, 2007, 21:
36 1792-1815
37
38 21. Elliott D: Advancement of Bio-oil Utilization for Refinery Feedstock. Presented at the
39 Washington Bioenergy Research Symposium. November 8, 2010, Seattle, Washington State
40 ([http://www.pacificbiomass.org/documents/Elliott%20\(C1\).pdf](http://www.pacificbiomass.org/documents/Elliott%20(C1).pdf)).
41
42 22. Kumar S, Lange J-P, Van Rossum G, Kersten SRA: Bio-oil fractionation by temperature-
43 swing extraction: Principle and Application. *Biomass and Bioenergy*, 2015, 83, 96-104
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 23. Ijmker HM, Gramblicka M, Kersten SRA, van der Ham AGJ, Schuur B: Acetic Acid
6 extraction from aqueous solutions using fatty acids. *Separation and Purification technology*
7 125, 2014, 256-263.
8
9
10 24. Li X, Luque-Moreno LC, Oudenhoven SRC, Rehmann L, Kersten SRA, Schuur B:
11 Aromatics extraction from pyrolytic sugars using ionic liquid to enhance sugar
12 fermentability. *Bioresource Technology*, 2016, 216, 12-18.
13
14 25. Li X, Kersten SRA, Schuur B: Extraction of acetic acid, glycoaldehyde and acetol from
15 aqueous solutions mimicking pyrolysis oil cuts using ionic liquid. *Separation and*
16 *Purification technology*. 175, 2017, 24, 498-505
17
18 26. FAO 2017. The charcoal transition: greening the charcoal value chain to mitigate climate
19 change and improve local livelihoods, by J. van Dam. Rome, Food and Agricultural
20 Organization of the United Nations. <http://www.fao.org/3/a-i6935e.pdf>
21
22 27. Stassen HE: Chapter 14: Current Issues in Charcoal Production and Use. In: Biomass power
23 for the world. Edited Wim PM van Swaaij, Kersten SRA, Palz W, 2015.
24
25 28. Mangue, P. D., Review of the existing studies related to fuelwood and/or charcoal in
26 Mozambique, Project GCP/INT/679/EC, EC-FAO Partnership Programme, 2000
27
28 29. Kammen DM, Lew DJ: Review of Technologies for the Production and Use of Char. Energy
29 and Resources Group & Goldman School of Public Policy. UC Berkley and NREL, 2005
30
31 30. Seidel A, Charcoal in Africa. Importance, Problems and Possible Strategies. Eschborn, 2008.
32
33 31. FAO, Simple technologies for Charcoal Making, FAO Forestry paper **41**, 1983. Available at:
34 <http://www.fao.org/docrep/X5328e/X5328e00.htm>
35
36 32. FAO (2017), FAOSTAT, Forestry Production and Trade, Retrieved February 17th, 2017,
37 from: <http://www.fao.org/faostat/en/#data/FO>
38
39 33. Chidumayo EN, Gumbo DJ: The environmental impacts of charcoal production in tropical
40 ecosystems of the world: A synthesis, 2013, 17, 2, 86-94
41
42 34. Bailis R, Rujanavech C, Dwivedi P, de Oliveira Vilela A, Chang H, Carneiro de Miranda R:
43 Innovation in charcoal production: A comparative life-cycle assessment of two kiln
44 technologies in Brazil. *Energy for Sustainable Development*, 2013, 17, 2, 189-200
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 35. Kituyi E: Towards sustainable production and use of charcoal in Kenya: exploring the
6 potential in life cycle management approach. *Journal of Cleaner Production*, 2004, 12,
7 1047-1057
8
9 36. Norgate T, Langberg D: Environmental and Economic Aspects of Charcoal Use in
10 Steelmaking. *ISIJ International*, 2009, 49, 4, 587-595
11
12 37. Amonette J: Biochar and Bioenergy: What Can they Do to Help Mitigate Climate Change.
13 Washington State Bioenergy Research Symposium, Seattle, WA, 8 November 2010.
14 [http://www.pacificbiomass.org/documents/Amonette%20\(C1\).pdf](http://www.pacificbiomass.org/documents/Amonette%20(C1).pdf)
15
16 38. Lehmann, J., Stephen, J., Char for Environmental Management: An Introduction, In: Biochar
17 for Environmental Management. Science and Technology, Earthscan Publishers Ltd, 2009
18
19 39. Woolf D, Amonette J, Stree-Perrot A, Lehmann J, Joseph S: Sustainable biochar to mitigate
20 global change. *Nature Communications*, August 2010 OPEN ACCESS online at:
21 www.nature.com/naturecommunications
22
23 40. Ogawa, M., Okimori, Y., Pioneering works in biochar research, Japan, *Australian Journal of*
24 *Soil Research*, 2010, 48, 489–500
25
26 41. Trossero M, Domac J, Siemons R: Industrial Char Production. TCP/CRO/3101 (A)
27 Development of a sustainable char industry. FAO, June 2008, Zagreb, Croatia
28
29 42. Meier D, van de Beld B, Bridgwater AV, Elliott D, Oasmaa A, Preto F: State of the art of fast
30 pyrolysis in IEA bioenergy member countries. *Renewable and Sustainable Energy Reviews*
31 20 (2013) 619-641
32
33 43. Grønli, M., 2010, Pyrolysis and Charcoal,
34 <http://www.bioforsk.no/ikbViewer/Content/71499/Biokarbonseminar%20%20%C5s%2011-03-2010%20Morten%20Gr%F8nli.pdf>; Retrieved February 26, 2017,
35
36 44. Motasemi F, Afzal MT: A review on the microwave-assisted pyrolysis technique. *Renewable*
37 *and Sustainable Energy Reviews*, 2013, 28, 317-330
38
39 45. Mushtaq F, Mat R, Nasir-Ani F: A review on microwave assisted pyrolysis of coal and
40 biomass for fuel production. *Renewable and Sustainable Energy Reviews* 39, 2014, 555-
41 574
42
43 46. Dumesny P, Noyer J Wood Products. Distillates and Extracts. Part I. The Chemical Products
44 of Wood distillation. Part II. Dyeing and tanning extracts from wood. London, Scott,
45

- 1
2
3
4 Greenwood & Son. "The oil and colour Trates Journal "Offices & Broadway, Ludgate Hill,
5 E.C.1908.
6
7 47. Lynch J, Joseph S: Guidelines for the Development and Testing of Pyrolysis Plants to
8 Produce Char. International Biochar Initiative, IBI 2010. [http://www.biochar-](http://www.biochar-international.org/sites/default/files/IBI_Pyrolysis_Plant_Guidelines.pdf)
9 [international.org/sites/default/files/IBI_Pyrolysis_Plant_Guidelines.pdf](http://www.biochar-international.org/sites/default/files/IBI_Pyrolysis_Plant_Guidelines.pdf) Retrieved February
10 26, 2017,
11
12 48. Wang X, Kersten SRA, Prins W, van Swaaij WPM: Biomass Pyrolysis in a Fluidized bed
13 reactor. Part 2: Experimental Validation of Model results. *Ind. Eng. Chem. Res.* 2005, 44,
14 8786-8795
15
16 49. Shen J, Wang X-S, Garcia-Perez M, Mourant D, Rhodes MJ, Li C-Z: Effects of particle size
17 on the fast pyrolysis of oil mallee woody biomass. *Fuel*, 2009, 88, 1810-1817
18
19 50. Westerhof RJM, Nygard HS, van Swaaij WPM, Kersten SRA, Brilman DWF. Effect of
20 Particle Geometry and Microstructure on Fast Pyrolysis of Beech Wood. *Energy & Fuels*,
21 2012; 26, 4, 2274
22
23 51. Zhou S, Garcia-Perez M, Pecha B, McDonald AG, Westerhof RJM: Effect of particle size on
24 the composition of lignin derived oligomers obtained by the fast pyrolysis of beech wood.
25 *Fuel*, 2014, 125, 15-19
26
27 52. Patwardhan PR, Satrio J, Brown RC, Shanks BH: Influence of inorganoic salts on the
28 primary pyrolysis products of cellulose. *Bioresource Technology*, 2010, 101, 4646-4655
29
30 53. Mourant D, Wang Z, He M, Wang XS, Garcia-Perez M, Ling K, :Li C-Z: Mallee wood fast
31 pyrolysis: Effects of alkali and alkaline earth metallic species on the yield and composition
32 of bio-oil. *Fuel*, 2011, 90, 2915-2922
33
34 54. Oasmaa A, Sundqvist T, Kuoppala E, Garcia-Perez M, Solantausta Y, Lindfors C:
35 Controlling Phase Stability of Biomass Fast Pyrolysis Bio-oils. *Energy&Fuels*, 2015, 29, 7,
36 4373-4381
37
38 55. Hoekstra E, Westerhof RJM, Brikman W, Van Swaaij WPM, Kersten SRA, Hogendoorn
39 KJA: Heterogeneous and Homogeneous Reactions of Pyrolysis Vapors from Pine Wood.
40 *AiChE Journal*, 2012, 58, 9, 2830-2842
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 56. Hoekstra E, Van Swaaij WPM, Kersten SRA, Hogendoorn KJA: Fast Pyrolysis in a novel
6 wire-mesh reactor: Decomposition of pine wood and model compounds. *Chemical*
7 *Engineering Journal*, 2012, 187, 172-184
8
9 57. Zhou S, Garcia-Perez M, Pecha B, McDonald A, Kersten SRA, Westerhof RJM: Secondary
10 Vapor Phase Reactions of Lignin-Derived Oligomers Obtained by Fast Pyrolysis of Pine
11 Wood. *Energy&Fuels*, 2013, 27, 3, 1428-1438
12
13 58. Mok S. W., Antal, M. J., Szabo, P., Varhegyi, G., Zelei, B., Formation of Charcoal from
14 Biomass in a Sealed Reactor, *Ind. Eng. Chem. Res.* 1992, 31, 1162-1166.
15
16 59. Garcia-Perez M, Chaala A, Roy C: Vacuum pyrolysis of sugarcane bagasse. *J. Anal. Appl.*
17 *Pyrolysis*, 2002, 65, 111-136
18
19 60. Garcia-Perez M, Chaala A, Pakdel H, Kretchmer D, Roy C: Vacuum pyrolysis of softwood
20 and hardwood biomass. Comparison between product yields and bio-oil properties. *J. Anal.*
21 *Appl. Pyrolysis*, 2007, 78, 104-116
22
23 61. Liaw S-S, Zhou S, Wu H, Garcia-Perez: Effect of Pretreatment Temperature on the Yield and
24 Properties of Bio-Oils obtained from the Auger Pyrolysis of Douglas Fir Wood. *Fuel*, 2013,
25 103, 672-682
26
27 62. Westerhof RJM, Brilman DWF, Garcia-Perez M, Wang Z, Oudenhoven SRG, Kersten SRA.
28 Stepwise fast pyrolysis of pine wood. *Energy&Fuels*, 2012; 26, 12, 7263.
29
30 63. Montoya J, Pecha B, Roman D, Chejna-Janna F, Garcia-Perez M: Effect of temperature and
31 heating rate on product distribution from the pyrolysis of sugarcane bagasse in a hot plate
32 reactor. *J. Anal. Appl. Pyrolysis* 123, 2017, 347-362
33
34 64. Wooten J.B., Seeman J.I., Hajaligol M.R. 2004. Observation and Characterization of
35 Cellulose Pyrolysis Intermediates by C CPMAS NMR. A New Mechanistic Model¹³ *Energy*
36 & *Fuels*, 2003, 18, 1.
37
38 65. Westerhof RJM, Oudenhoven SRG, Marathe PS, Englen M, Garcia-Perez M, Wang Z,
39 Kersten SRA: The Interplay between Chemistry and Heat/Mass Transfer during Fast
40 Pyrolysis of Cellulose. *Reaction Chemistry & Engineering*, 2016, 1, 555.
41
42 66. Dauenhauer PJ, Colby JL, Balonek CM, Suszynski WJ, Schmidt LD: Reactive boiling of
43 cellulose for integrated catalysis through an intermediate liquid. *Green Chem.* 2009, 11,
44 1555-1561
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 67. Montoya J, Pecha B, Chejne-Janna F, Garcia-Perez M: Micro-explosion of liquid
6 intermediates during the fast pyrolysis of sucrose and organosolv lignin. *J. Anal. Appl.*
7 *Pyrolysis*, 2016, 122, 106-121
8
9
10 68. Pelaez-Samaniego MR, Yadama V, Garcia-Perez M, Lowell E, McDonald AG: Effect of
11 temperature during wood torrefaction on the formation of lignin liquid intermediates. *J.*
12 *Anal. Appl. Pyrolysis*. 2014, 109, 222-233
13
14
15 69. Mamleev V, Bourgigot S, Le Bras M, Yvon J: The facts and hypotheses relating to the
16 phenomenological model of cellulose pyrolysis: Interdependence of the steps. *J. Anal. Appl.*
17 *Pyrolysis*, 2009, 84, 1-17.
18
19
20 70. Graham RG, Bergougnou MA, Overend RP: Fast Pyrolysis of Biomass. *J. of Anal. Appl.*
21 *Pyrolysis*, 6, 1984, 95-135.
22
23
24 71. Graham R.G., Bergougnou M.A., Freel B.A. The kinetics of vapor phase cellulose fast
25 pyrolysis reactions. *Biomass and Bioenergy*, 1994, 7, 1-6, 33-47
26
27
28 72. Pyle DL, Zaror CA: Heat transfer and kinetics in the low temperature pyrolysis of solids.
29 *Chemical Engineering Science*, 1984, 36, 1, 147-158,
30
31
32 73. Di Blasi C, Galgano A, Branca C: Effects of Potassium Hydroxide Impregnation on Wood
33 Pyrolysis. *Energy & Fuels*, 2009, 23, 1045-1054
34
35
36 74. Garcia-Perez, M., Xiao Shan Wang, Jun Shen, Martin J. Rhodes, Fujun Tian, Woo-Jin Lee,
37 Hongwei Wu, and Chun-Zhu Li, Fast Pyrolysis of Oil Mallee Woody Biomass: Effect of
38 Temperature on the Yield and Quality of Pyrolysis Products, *Ind. Eng. Chem. Res.* 2008, 47,
39 1846-1854
40
41
42 75. Kersten SRA, Garcia-Perez M: Recent developments in fast pyrolysis of lingo-cellulosic
43 materials. *Current Opinion in Biotechnology*, 2013, 24: 414-420
44
45
46 76. Coates R, Gardner T: Mobile Pyrolysis Process for Conversion of Biomass into Energy
47 Products. Amaron Energy. Presentation at the 2014 Washington Demonstration.
48 <http://www.pacificbiomass.org/documents/Amaron.pdf>, Accessed on Feb 26, 2017
49
50
51 77. Liaw S-S, Wang Z, Ndegwa P, Frear C, Ha S, Li C-Z, et al. Effect of pyrolysis temperature
52 on the yield and properties of bio-oils obtained from the auger pyrolysis of Douglas Fir
53 wood. *J. Anal. Appl. Pyrolysis*, 2012;93, 52.
54
55
56
57
58
59
60

- 1
2
3
4
5 78. Rousset P: From biomass to fuel, power and chemicals. Brazilian charcoal-based pig iron.
6 Cirad. Presentation at the Department of Aeronautics and Astronautics, National Cheng
7 Kung University, Taiwan, ROC, November, 6th, 2014
8 <http://agritrop.cirad.fr/578836/1/taiwan%20nov%202014%20ver2%20OK.pdf> Accessed on
9 Feb. 26, 2017
- 10
11
12
13 79. Boateng AA, Garcia-Perez M, Masek O, Brown R, del Campo B: Chapter 4: Biochar
14 production technology. In: Biochar for Environmental Management. Science, Technology,
15 and implementation. Edited by Johannes Lehmann and Stephen Joseph. Second Edition
16 2015, 63
- 17
18
19 80. International Biochar Initiative. Standardized Product Definition and Product Testing
20 Guidelines for Biochar That Is Used in Soil. 2015 [http://www.biochar-](http://www.biochar-international.org/characterizationstandard)
21 [international.org/characterizationstandard](http://www.biochar-international.org/characterizationstandard)
- 22
23
24 81. Oasmaa A, Fonts I, Pelaez-Samaniego MR, Garcia-Perez ME, Garcia-Perez M: Pyrolysis Oil
25 Multiphase behavior and Phase Stability: A Review. *Energy & Fuels* 2016, 30, 6179-6200
- 26
27
28 82. Garcia-Perez M, Chaala A, Pakdel H, Kretschmer D, Roy C: Characterization of bio-oils in
29 Chemical families. *Biomass and Bioenergy* 2007, 31, 222-242
- 30
31
32 83. Stankovikj F, Garcia-Perez M: TG-FTIR Method for the Characterization of Bio-oils in
33 Chemical Families. *Energy and Fuels*, 2017, 31, 1689-1701.
- 34
35
36 84. Stankovikj F, McDonald A, Helms GL, Olarte MV, Garcia-Perez M: Characterization of the
37 Water Soluble Fraction of Biomass Pyrolysis Oils. *Energy Fuels*, 31, 2017, 1650-1664
- 38
39
40 85. Stankovikj F, McDonald A, Helms GL, Garcia-Perez M: Quantification of Bio-oil Functional
41 Groups and Evidence of the Presence of Pyrolytic Humins *Energy & Fuels*, 2016, 30, 6505-
42 6524
- 43
44
45 86. Garcia-Perez M, Chaala A, Pakdel H, Kretschmer D, Rodrigue D, Roy C: Multiphase
46 Structure of Bio-oils. *Energy & Fuels*, 2006, 20 (1), 364-375
- 47
48
49 87. Ruiji Lohri C, Mtoro Rajabu H, Sweeney DJ, Zurbrugg C: Char fuel production in
50 developing countries- A review of urban biowaste carbonization. *Renewable and*
51 *Sustainable Energy Reviews*, 2016, 59, 1514-1530
- 52
53
54 88. FAO, Simple technologies for charcoal making, FAO Forestry paper 41, 1987. Retrieved
55 November 20th, 2010, from: <http://www.fao.org/docrep/x5328e/x5328e00.htm#Contents>
- 56
57
58
59
60

- 1
2
3
4
5 89. Seboka Y: Chapter 6. Chacoal Production: Opportunities and barriers for improving
6 efficiency and sustainability. In: Bio-carbon opportunities in eastern & southern Africa.
7 Harnessing Carbon, Finance to Promote Sustainable Forestry, agro-forestry and Bio-energy.
8 UNDP 2009. [http://www.environmentportal.in/files/Bio-](http://www.environmentportal.in/files/Bio-carbon%20in%20Africa.pdf#page=113)
9 carbon%20in%20Africa.pdf#page=113
10
11
12
13 90. Schenkel, Y., Bertaux, P., Vanwijnbsergh, S., Carre, J., An evaluation of the mound kiln
14 carbonization technique, *Biomass and Bioenergy*, 1998, 14, 5/6, 505-516.
15
16 91. Nahayo A, Ekise I, Mukarugwiza A: Comparative Study on Charcoal Yield Produced by
17 Traditional and Improved kilns: A study of Nyaruguru and Nyamagabe Districts in Southern
18 Province of Rwanda. *Energy and Environment Research*, 2013, 3, 1.
19
20
21 92. Menemencioglu K: Traditional wood charcoal production labor in Turkish forestry (Cankiri
22 sample). *Journal of Food, Agriculture & Environment*, 2013, 11, 2, 1136-1142
23
24 93. De Oliveira Vilela A, Silva Lora E, Roman-Quintero Q, Antonio-Vicintin R, da Silva e
25 Souzo TP: A new Technology for the combined production of charcoal and electricity
26 through cogeneration. *Biomass and Bioenergy*, 2014, 69, 222-240
27
28 94. Toole AW, Lane PH, Arbogast C, Smith WR, Peter R, Locke E, Beglinger E, Erickson
29 E.C.O.: Char Production, Marketing and Use. Forest Products Laboratory, Madison
30 Wisconsin. USDA-Forest Service, University of Wisconsin. Report 1961, July 1961.
31
32 95. Pelaez-Samaniego M.R., Garcia-Perez M, Cortez LB, Rosillo-Calle F, Mesa J: Improvements
33 of Brazilian carbonization industry as part of the creation of a global biomass economy.
34 *Renewable and Sustainable Energy Reviews*, 2008, 12 1063-1086.
35
36 96. Brito, J. O., Princípios de produção e utilização de carvão vegetal de madeira, Documentos
37 florestais, Piracicaba (9): 1 –19, mai. 1990
38
39 97. Bustamante-Garcia V, Carrillo-Parra A, Gonzalez-Rodriguez H, Ramirez-Lozano RG,
40 Corral-Rivas JJ, Garza-Ocanas F: Evaluation of a charcoal production process from forest
41 residues of *Quercus sideroxyla* hum, & Bpnpl. In a Brazilian beehive kiln. *Industrial Crops*
42 and products, 2013, 42, 169-174.
43
44 98. Yronwode, P., From the hills to the grills, Missouri Resources Magazine, Spring 2000
45
46 99. Lemieux, P. M., Emissions of Air Toxics from a Simulated Charcoal Kiln Equipped with an
47 Afterburner (Project Summary), EPA, March 2001
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4 100. Braun S., Missouri Charcoal-Makers Agree to Clean Their Kilns, August 14 1997, Los
5 Angeles Times, Retrieved January 27th, 2011, from:
6 <http://articles.latimes.com/1997/aug/14/news/mn-22314>
- 7
8 101. Campbell R.R., A revolution in the heartland: Changes in rural culture, family and
9 communities 1900-2000, Columbia (MO), 2004, Retrieved January 27, 2011, from:
10 <http://web.missouri.edu/~campbellr/Book/Chapter28.htm#E11>
- 11
12 102. Fink, R. J., Fink, R. L., An assessment of biomass feedstock availability in Missouri, Final
13 Report, Contract No. SEBSRP-SSEB-2004XX-KLP-001, April, 2005
- 14
15 103. Sparrevik M, Adam C, Martinsen V, Jubaedah, Cornelissen G: Emissions of gases and
16 particles from charcoal/biochar production in rural areas using medium-sized traditional and
17 improved “retort” kilns. *Biomass and Bioenergy*, 2015, 72, 65-73
- 18
19 104. Baldwin, H I., The New Hampshire charcoal kiln, Concord, New Hampshire, 1958.
- 20
21 105. VT, 2010, Design and instructions for making a New Hampshire-style metal charcoal kiln
22 from readily-available materials, Adaptation of New Hampshire kilns, at:
23 <http://www.forestry.vt.edu/charcoal/documents/kiln-design.pdf>
- 24
25 106. Skok, R.A., Beazley, R., Small kiln charcoal production possibilities in Minnesota,
26 Minnesota Forestry Notes, April 15, 1955
- 27
28 107. Simmons, F. C., Charcoal from portable kilns and fixed installations, An international
29 journal of forestry and forest industries, Vol. 17, 1963, Retrieved January 27th, 2011, from:
30 <http://www.fao.org/docrep/00950e/00950e07.htm#TopOfPage>
- 31
32 108. Adam+Partner, 2010, Accessed November 15th, 2010, from:
33 <http://www.biocoal.org/index.html>
- 34
35 109. Adam JC: Improved and more environmentally friendly charcoal production system using a
36 low cost retort-kiln (Eco-charcoal). *Renewable Energy*, 2009, 34, 1923-1925
- 37
38 110. Klavina K, Klavins J, Veidenbergs I, Blumberga D: Charcoal production in a continuous
39 operation retort. Experimental data processing. *Energy Procedia*, 2016, 95, 208-215
- 40
41 111. Szymkowski CJ, Bultitude-Paull JM: The Production of High quality Silicon Metal at
42 Simcoa. INFACON 6, Proceedings of the 6th International Ferroalloys Congress, Cape
43 Town, Volume 1. Johannesburg, SAIMM, 1992, 185-191.
- 44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 112. Reumerman PJ, Frederiks B: Carbon Production with Reduced Emissions. 12th European
6 Conference on Biomass for Energy, Industry and Climate Protection, Amsterdam, 2002,
7 [http://www.cleantfuels.nl/Sitepdfs/Charcoal%20Production%20with%20Reduced%20Emissi
8 ons%20\(paper\).pdf](http://www.cleantfuels.nl/Sitepdfs/Charcoal%20Production%20with%20Reduced%20Emissions%20(paper).pdf)
- 9
10 113. Bates JS: Distillation of hardwoods in Canada. Forestry Branch-Bulletin # 74, Department
11 of the Interior, Canada. 1922.
- 12
13 114. FAO, Industrial Technologies for Charcoal Making, FAO Forestry paper 63, 1985.
14 Available at: <http://www.fao.org/docrep/x5555e/x5555e00.htm#Contents>
- 15
16 115. Siemons R. Industrial Charcoal production, 2008, FAO TCP/CRO/3101 (A) Development
17 of a sustainable Charcoal industry.
- 18
19 116. Mura E, Debono O, Villot A, Paviet F: Pyrolysis of biomass in a semi-industrial scale
20 reactor: Study of the fuel-nitrogen oxidation during combustion of volatiles. *Biomass and*
21 *Bioenergy*, 2013, 59, 187-194
- 22
23 117. Pakdel H, Roy C: Chemical Characterization of Wood Pyrolysis oils obtained in a Vacuum-
24 Pyrolysis Multiple-Hearth Reactor. In: ACS Symposium Series, Vol. 376, Pyrolysis Oils
25 from Biomass. Chapter 19, 1988, 203-219
- 26
27 118. Lemieux R, Roy C, de Caumia B, Blanchette D: Preliminary Engineering Data for Scale up
28 of a Biomass vacuum pyrolysis reactor. ACS Division of Fuel Chemistry, Reprints, 1987,
29 32, 2, 12-20.
- 30
31 119. Malkow, T., Novel and innovative pyrolysis and gasification technologies for energy
32 efficient and environmentally sound MSW disposal, *Waste Management*, 2004, 24, 53–79
- 33
34 120. Fukushima, M., Wu, B., Ibe, H., Wakai, K., Sugiyama, E., Abe, H., Kitagawa, K., et al.,
35 Study on dechlorination technology for municipal waste plastics containing polyvinyl
36 chloride and polyethylene terephthalate, *J Mater Cycles Waste Manag*, 2010, 12, 108–122.
- 37
38 121. Coates R.L., Eddings E.G., Coates B.R. Bio-oil yields from pyrolysis in a novel rotary
39 reactor. Symposium on Thermal and Catalytic Sciences for Biofuels and Biobased Products.
40 Iowa State University, September 21-23, 2010
- 41
42 122. Coates R, Gardner T, Eddings E: Mobile Pyrolysis Process for Conversion of Biomass Into
43 Energy products. Presentation at the 2013 North American Biochar Symposium, October
44 13-16, 2013. <file:///C:/Users/mgarcia-perez/Downloads/F&P%20Amaron%20Energy.pdf>
- 45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 123. Sangines P, Dominguez MP, Sznchez F, San Miguel G. Slow pyrolysis of olive stones in a
6 rotary kiln: Chemical and energy characterization of solid, gas, and condensable products.
7 *Journal of Renewable and Sustainable Energy*, 2015;7,4, 043103.
- 8
9 124. Brown, J.N., Brown, R.C.. Process optimization of an auger pyrolyzer with heat carrier
10 using response surface methodology. *Bio resource Technology*, 2012, 103, 405-414
- 11
12 125. Ingram L, Mohan D, Bricka M, Steele P, Strobel D, Crocker D, et al. Pyrolysis of wood and
13 bark in an auger reactor: Physical properties and chemical analysis of the produced bio-oils.
14 *Energy&Fuels*, 2008;22, 1, 614-625.
- 15
16 126. Puy N, Murillo R, Navarro MV, López JM, Rieradevall J, Fowler G, et al. Valorisation of
17 forestry waste by pyrolysis in an auger reactor. *Waste Management* 2011;31, 6, 1339.
- 18
19 127. Gajjela SK, Mitchell B, Li Q, Hassan EBM, Steele PH. Production of bio-fuels from giant
20 miscanthus. 11AIChE - 2011 AIChE Spring Meeting and 7th Global Congress on Process
21 Safety, Conference Proceedings; 2011
- 22
23 128. Wang H, Srinivasan R, Yu F, Steele P, Li Q, Mitchell B. Effect of acid, alkali, and steam
24 explosion pretreatments on characteristics of bio-oil produced from pinewood. *Energy&*
25 *Fuels*, 2011, 25, 8, 3758.
- 26
27 129. Joubert JE, Carrier M, Dahmen N, Stahl R, Knoetze JH. Inherent process variations
28 between fast pyrolysis technologies: A case study on Eucalyptus grandis. *Fuel Processing*
29 *Technology* 2015, 131, 389.
- 30
31 130. Wang H, Srinivasan R, Yu F, Steele P, Li Q, Mitchell B, et al. Effect of Acid, Steam
32 Explosion, and Size Reduction Pretreatments on Bio-oil Production from Sweetgum,
33 Switchgrass, and Corn Stover. *Applied Biochemistry and Biotechnology*, 2012;167, 2, 285-
34 297.
- 35
36 131. Nam H, Capareda SC, Ashwath N, Kongkasawan J. Experimental investigation of pyrolysis
37 of rice straw using bench-scale auger, batch and fluidized bed reactors. *Energy* 2015, 93,
38 2384-2394.
- 39
40 132. Pfitzer C, Dahmen N, Troger N, Weirich F, Sauer J, Gunther A, et al. Fast Pyrolysis of
41 Wheat Straw in the Bioliq Pilot Plant. *Energy & Fuels*, 2016;30, 10, 8047-8054.
- 42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 133. Henrich E, Dahmen N, Weirich F, Reimert R, Kornmayer C. Fast pyrolysis of
6 lignocellulosics in a twin screw mixer reactor. *Fuel Processing Technology*, 2016;143, 151-
7 161.
8
9 134. Roy C., Blanchette D., korving L., Yang J., de Caumia B., Development of a Novel
10 Vacuum Pyrolysis Reactor with improved heat transfer Potential. In: Developments in:
11 Thermochemical Biomass Conversion. A.V. Bridgwater and D.G.B. Boocock, Eds., Blackie
12 Academic and Professional, London, UK, 1997, 351-367.
13
14 135. Roy C., Lemieux S., de Caumia B., Pakdel H., Vacuum Pyrolysis of Biomass in a Multiple
15 Heat Furnace. *Biotechnology and Bioenergy Sym.* No 15, 1985, 107.
16
17 136. Venderbosch RH, Prins W., Fast Pyrolysis technology development. *Biofuels, Bio-products*
18 and *Biorefining*, 2010, 4, 178-208
19
20 137. Tsai WT, Lee MK, Chang YM. Fast pyrolysis of rice husk: Product yields and
21 compositions. *Bioresource Technology*, 2007;98, 1,:22.
22
23 138. Imam T, Capareda S. Characterization of bio-oil, syn-gas and char from switchgrass
24 pyrolysis at various temperatures. *J. Anal. Appl. Pyrolysis* 2012;93, 170.
25
26 139. Fan Y, Cai Y, Li X, Yin H, Yu N, Zhang R, et al. Rape straw as a source of bio-oil via
27 vacuum pyrolysis: Optimization of bio-oil yield using orthogonal design method and
28 characterization of bio-oil. *J. Anal. Appl. Pyrolysis*, 2014;106, 63.
29
30 140. Dewayanto N, Isha R, Nordin MR. Use of palm oil decanter cake as a new substrate for the
31 production of bio-oil by vacuum pyrolysis. *Energy Conversion and Management* 2014, 86,
32 226.
33
34 141. Fukuda S. Pyrolysis investigation for bio-oil production from various biomass feedstocks in
35 Thailand. *International Journal of Green Energy*, 2015, 12, 3, 215.
36
37 142. Le Brech Y, Jia L, Cissé S, Mauviel G, Brosse N, Dufour A. Mechanisms of biomass
38 pyrolysis studied by combining a fixed bed reactor with advanced gas analysis. *J. Anal.*
39 *Appl. Pyrolysis*, 2016, 117, 334.
40
41 143. Xu Y, Wang T, Ma L, Zhang Q, Chen G. Technology of bio-oil preparation by vacuum
42 pyrolysis of pine straw. *Nongye Gongcheng Xuebao/Transactions of the Chinese Society of*
43 *Agricultural Engineering*, 2013, 29, 1, 196.
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 144. Fan YS, Cai YX, Li XH, Yu N, Chen L. Comparison of the products in vacuum pyrolysis
6 vapors derived from non-catalytic and catalytic upgrading of camphorwood sawdust.
7 *Chemistry and Industry of Forest Products*, 2015, 35, 1, 70.
8
9
10 145. Li R., Deng X. S., Gou J. S., Lv Z. L.: Vacuum Paddle Fast Pyrolysis Reactor Design and
11 Internal Heat Transfer Investigation, *Materials Science Forum*, 2012, Vols. 704-705, 468-
12 474
13
14
15 146. Rudloff M. Biomass to Liquid Fuels (BtL) Presentation made by Choren. Process,
16 Environmental Impact and Latest Developments. Automobile & Environment at Beograd
17 Congress, May 2005.
18
19
20 147. Meier D, Faix O: State of the art of applied fast pyrolysis of lignicellulosic materials—a
21 review. *Bioresour Technol* 1999, 68, 71–77.
22
23
24 148. Scott,D., Majerski, P., Piskorz, J., Radlein,D., A second look at fast pyrolysis of biomass—
25 the RTI process, *J. Anal. Appl. Pyrolysis*, 1999, 51, 23–37
26
27 149. DynaMotive Energy _ Systems Corporation, BioTherm™, A System for Continuous
28 Quality, Fast Pyrolysis BioOil, Fourth Biomass Conference of the Americas, Oakland,
29 California, September 1, 1999
30
31
32
33 150. Lu Q, Yang X-l, Zhu X-f. Analysis on chemical and physical properties of bio-oil pyrolyzed
34 from rice husk. *J. Anal. Appl. Pyrolysis*, 2008;82, 2, 191.
35
36 151. Heo HS, Park HJ, Dong J-I, Park SH, Kim S, Suh DJ, et al. Fast pyrolysis of rice husk
37 under different reaction conditions. *Journal of Industrial and Engineering Chemistry*,
38 2010;16, 1,27
39
40
41 152. Ji-lu Z. Bio-oil from fast pyrolysis of rice husk: Yields and related properties and
42 improvement of the pyrolysis system. *J. Anal. Appl. Pyrolysis*, 2007;80, 1, 30.
43
44
45 153. Phan BMQ, Duong LT, Nguyen VD, Tran TB, Nguyen MHH, Nguyen LH, et al.
46 Evaluation of the production potential of bio-oil from Vietnamese biomass resources by fast
47 pyrolysis. *Biomass and Bioenergy*, 2014;62, 74.
48
49
50 154. Montoya JL, Valdes C, Chejne F, Gomez CA, Blanco A, Marrugo G, Osorio J, Castillo E,
51 Aristobulo J, Acero J: Bio-oil production from Colombian bagasse by fast pyrolysis in a
52 fluidized bed: An experimental study. *J. Anal. Appl. Pyrolysis*, 2015, 112, 379-387
53
54
55
56
57
58
59
60

- 1
2
3
4
5 155. Oasmaa A, Solantausta Y, Arpiainen V, Kuoppala E, Sipilä K. Fast pyrolysis bio-oils from
6 wood and agricultural residues. *Energy & Fuels*, 2010; 24, 2, 1380.
7
8 156. Greenhalf CE, Nowakowski DJ, Harms AB, Titiloye JO, Bridgwater AV. A comparative
9 study of straw, perennial grasses and hardwoods in terms of fast pyrolysis products. *Fuel*,
10 2013;108, 216.
11
12 157. Boateng, A.A., Daugaard, D.E., Goldberg, N.M., Hicks, K.B., Bench-Scale Fluidized-Bed
13 Pyrolysis of Switchgrass for Bio-Oil Production. *Ind. Eng. Chem. Res.* 2007, 46, 1891-1897
14
15 158. Jendoubi N, Broust F, Commandre JM, Mauviel G, Sardin M, Lédé J. Inorganics
16 distribution in bio oils and char produced by biomass fast pyrolysis: The key role of
17 aerosols. *J. Anal. Appl. Pyrolysis*, 2011;92, 1, 59.
18
19 159. Westerhof RJM, Brilman DWF, van Swaaij WPM, Kersten SRA: Effect of temperature in
20 fluidized bed fast pyrolysis of biomass: oil quality assessment in tests units. *Ind. Eng. Chem*
21 *Res*, 2010, 49, 1160-1168
22
23 160. Kim KH, Kim T-S, Lee S-M, Choi D, Yeo H, Choi I-G, et al. Comparison of
24 physicochemical features of biooils and biochars produced from various woody biomasses
25 by fast pyrolysis. *Renewable Energy* 2013;50, 188.
26
27 161. Soysa R, Choi SK, Jeong YW, Kim SJ, Choi YS. Pyrolysis of Douglas fir and coffee
28 ground and product biocrude-oil characteristics. *J. Anal. Appl. Pyrolysis*, 2015;115, 51.
29
30 162. Wu S-R, Chang C-C, Chang Y-H, Wan H-P. Comparison of oil-tea shell and Douglas-fir
31 sawdust for the production of bio-oils and chars in a fluidized-bed fast pyrolysis system.
32 *Fuel*, 2016;175, 57.
33
34 163. Azeez AM, Meier D, Odermatt J, Willner T. Fast pyrolysis of African and European
35 lignocellulosic biomasses using Py-GC/MS and fluidized bed reactor. *Energy&Fuels*
36 2010;24, 3, 2078.
37
38 164. Rover MR, Johnston PA, Whitmer LE, Smith RG, Brown RC. The effect of pyrolysis
39 temperature on recovery of bio-oil as distinctive stage fractions. *J. Anal. Appl. Pyrolysis*
40 2014;105, 262.
41
42 165. Mullen CA, Boateng AA, Goldberg NM. Production of deoxygenated biomass fast
43 pyrolysis oils via product gas recycling. *Energy&Fuels*, 2013;27, 7, 3867.
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 166. Torri IDV, Paasikallio V, Faccini CS, Huff R, Caramão EB, Sacon V, et al. Bio-oil
6 production of softwood and hardwood forest industry residues through fast and intermediate
7 pyrolysis and its chromatographic characterization. *Bioresource Technology*, 2016;200, 680.
8
9 167. Carrier M, Joubert JE, Danje S, Hugo T, Görgens J, Knoetze JH. Impact of the
10 lignocellulosic material on fast pyrolysis yields and product quality. *Bioresource*
11 *Technology*, 2013;150, 129.
12
13 168. He M, Mourant D, Gunawan R, Lievens C, Wang XS, Ling K, et al. Yield and properties of
14 bio-oil from the pyrolysis of mallee leaves in a fluidised-bed reactor. *Fuel*, 2012;102, 506.
15
16 169. Chang S, Zhao Z, Zheng A, Li X, Wang X, Huang Z, et al. Effect of hydrothermal
17 pretreatment on properties of bio-oil produced from fast pyrolysis of eucalyptus wood in a
18 fluidized bed reactor. *Bioresource Technology*, 2013;138, 321.
19
20 170. Heidari A, Stahl R, Younesi H, Rashidi A, Troeger N, Ghoreyshi AA. Effect of process
21 conditions on product yield and composition of fast pyrolysis of Eucalyptus grandis in
22 fluidized bed reactor. *Journal of Industrial and Engineering Chemistry*, 2014;20, 4,2594.
23
24 171. Atsonios K, Panopoulos KD, Bridgwater AV, Kakaras E. Biomass fast pyrolysis energy
25 balance of a 1kg/h test rig. *International Journal of Thermodynamics*, 2015;18, 4, 267.
26
27 172. Mesa-Pérez JM, Cortez LAB, Marín-Mesa HR, Rocha JD, Pelaez-Samaniego MR,
28 Cascarosa E. A statistical analysis of the auto thermal fast pyrolysis of elephant grass in
29 fluidized bed reactor based on produced charcoal. *Applied Thermal Engineering*, 2014, 65,
30 1-2, 322–329.
31
32 173. Faix, A., Schweinle, J., Schöll, S., Becker, G., Meier, D., (GTI-tbiomass) Life-Cycle
33 Assessment of the BTO_-Process (Biomass-to-Oil) with Combined Heat and Power
34 Generation, *Environmental Progress & Sustainable Energy*, 29, 2, 2010.
35
36 174. Meier, D., Schöll, S., Klaubert, H., Markgraf, J., (n.d.), Practical results from Pytec's
37 biomass to-oil (BTO) process with ablative pyrolyser and diesel CHP plant, Success &
38 Visions for Bioenergy, http://www.pytecsite.de/pytec_eng/publikationen.htm
39
40 175. Bridgwater AV, Meier D, Radlein D: An overview of fast pyrolysis of biomass. *Organic*
41 *Geochemistry*, 30, 1999, 1479-1493.
42
43 176. Schulzke T, Conrad S, Westermeyer J. Fractionation of flash pyrolysis condensates by
44 staged condensation. *Biomass and Bioenergy*, 2016, 95, 287-295

- 1
2
3
4
5 177. Bech N, Larsen MB, Jensen PA, Dam-Johansen K. Modelling solid-convective flash
6 pyrolysis of straw and wood in the Pyrolysis Centrifuge Reactor. *Biomass and Bioenergy*,
7 2009; 33, 6–7, 999.
8
9 178. Makibar J, Fernandez-Akarregi AR, Amutio M, Lopez G, Olazar M. Performance of a
10 conical spouted bed pilot plant for bio-oil production by poplar flash pyrolysis. *Fuel
11 Processing Technology*, 2015;137, 283.
12
13 179. Alvarez J, Lopez G, Amutio M, Bilbao J, Olazar M. Bio-oil production from rice husk fast
14 pyrolysis in a conical spouted bed reactor. *Fuel*, 2014;128, 162.
15
16 180. Amutio M, Lopez G, Alvarez J, Moreira R, Duarte G, Nunes J, et al. Flash pyrolysis of
17 forestry residues from the Portuguese Central Inland Region within the framework of the
18 BioREFINA-Ter project. *Bioresource Technology*, 2013;129, 512.
19
20 181. Du S, Sun Y, Gamliel DP, Valla JA, Bollas GM. Catalytic pyrolysis of miscanthus ×
21 giganteus in a spouted bed reactor. *Bioresource Technology*, 2014;169, 188.
22
23 182. Amutio M, Lopez G, Artetxe M, Elordi G, Olazar M, Bilbao J. Influence of temperature on
24 biomass pyrolysis in a conical spouted bed reactor. *Resources, Conservation and Recycling*
25 2012;59, 23.
26
27 183. Chen M, Yao Y, Ren Z, Li T, Guo X, Yan Y. Preparation of liquid fuel through pyrolysis of
28 biomass in a conduit-spouting fluidized reactor. Proceedings of the 2003 5th International
29 Symposium on Coal Combustion; 2003, 272.
30
31 184. Amutio M, Lopez G, Alvarez J, Olazar M, Bilbao J. Fast pyrolysis of eucalyptus waste in a
32 conical spouted bed reactor. *Bioresource Technology*, 2015; 194, 225.
33
34 185. Lam SS, Chase HA: A review on Waste to Energy Processes using Microwave Pyrolysis.
35 Energies, 2012, 5, 4209-4232
36
37 186. Li J, Dai J, Liu G, Zhang H, Gao Z, Fu J, He Y, Huang Y: Biochar from microwave
38 pyrolysis of biomass: A review. *Biomass and Bioenergy*, 94 (2016), 228-244
39
40 187. Holland KM, Apparatus for Waste Pyrolysis, US Patent 5,387,321, 7 February 1995
41
42 188. Holland KM, Process for Destructive Distillation of Organic Materials. U.S. Patent
43 5,330,623, May 1994
44
45 189. Zhao X, Wang M, Liu H, Li L, Ma C, Song Z: A microwave reactor for characterization
46 of pyrolyzed biomass. *Bioresource Technology*, 2012, 104, 673-678
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5 190. Miura M, Kaga H, Sakurai A, Kakuchi T. Rapid pyrolysis of woof block by microwave
6 heating. *J. Analytical and applied Pyrolysis.* 71, 2004, 187-199
7
8 191. Hu Z, Ma X, Chen C. A study on experimental characteristic of microwave assisted
9 pyrolysis of microalgae. *Bioresource Technology*, 2012, 107, 487-493
10
11 192. Ren S, Lei H, Wang L, Bu Q, Chen S, Wu J, et al. Biofuel production and kinetics analysis
12 for microwave pyrolysis of Douglas fir sawdust pellet. *Journal of Analytical and Applied*
13
14 Pyrolysis 2012; 94: 163–169
15
16
17 193. Tian Y, Zuo W, Ren Z, Chen D. Estimation of a novel method to produce biooil from
18 sewage sludge by microwave pyrolysis with the consideration of efficiency and safety.
19 *Bioresource Technology* 2011;102:2053–61
20
21
22 194. Huang YF, Kuan WH, Lo SL, Lin CF. Hydrogen-rich fuel gas from rice straw via
23 microwave-induced pyrolysis. *Bioresource Technology* 2010;101: 1968–73
24
25
26 195. Salema AA, Ani FN. Microwave induced pyrolysis of oil palm biomass. *Bioresource*
27
28 *Technology* 2011;102: 3388–3395.
29
30
31 196. Du Z, Li Y, Wang X, Wan Y, Chen Q, Wang C, et al. Microwave-assisted pyrolysis of
32 microalgae for biofuel production. *Bioresource Technology* 2011;102: 4890–4896
33
34
35 197. Lin Q, Chen G, Liu Y. Scale-up of microwave heating process for the production of bio-oil
36 from sewage sludge. *Journal of Analytical and Applied Pyrolysis* 2012;94: 114–119.
37
38
39 198. Huang YF, Kuan WH, Lo SL, Lin CF. Total recovery of resources and energy from rice
40 straw using microwave-induced pyrolysis. *Bioresource Technology* 2008; 99: 8252–8258
41
42
43 199. Salema AA, Ani FN. Microwave-assisted pyrolysis of oil palm shell biomass using an
44 overhead stirrer. *Journal of Analytical and Applied Pyrolysis* 2012; 96: 162–72
45
46
47 200. Yu F, Ruan R, Steele P. Microwave pyrolysis of corn stover. *Transactions of the American*
48
49 *Society of Agricultural and Biological Engineers* 2009; 52: 1595–601
50
51
52 201. Wang MJ, Huang YF, Chiueh PT, Kuan WH, Lo SL. Microwave-induced torrefaction of
53 rice husk and sugarcane residues. *Energy* 2012; 37: 177–84
54
55
56 202. Mesa-Perez JM, Fonseca-Felfli: Chapter 9: Technical and Marketing Criteria for the
57 Development of Fast Pyrolysis technologies. In: Innovative Solutions and Fluid-Particle
58 Systems and Renewable energy Management. Editor: Katia Tannous (Unicamp Brazil),
59
60 2015

- 1
2
3
4
5 203. Garcia-Perez M, Garcia-Nunez JA, Pelaez-Samaniego MR, Kruger C, Fuchs MR, Flora G:
6 Sustainability, Chapter 10. Business Models and Techno-economic Analysis of Biomass
7 Pyrolysis Technologies. In: Innovative Solutions and Fluid-Particle Systems and Renewable
8 energy Management. Editor: Katia Tannous (Unicamp Brazil), **2015**
- 9
10 204. Jones SB, Valkenburg C, Walton C, Elliott DC, Holladay JE, Stevens DJ, Kinchin C,
11 Czernik S: Production of gasoline and Diesel from biomass via fast pyrolysis, hydrotreating
12 and hydrocracking: A dessign case. Prepared for the U.S. Department of Energy under
13 Contract DE-AC05-76RL01830. PNNL-18284 Rev. 1, June 2009
- 14
15 205. Daugaard DE, Brown RC: Enthalpy of pyrolysis for several types of biomass. Energy &
16 Fuels, 2003, 17, 934-939
- 17
18 206. Catoire L, Yahyaou M, Osmont A, Gokalp I: Thermochemistry of Compounds Formed
19 during Fast Pyrolysis of Lignocellulosic Biomass. Energy & Fuels 2008, 22, 4265-4273
- 20
21 207. Auber M: Effect catalytique de certains inorganiques sur la selectivite des reactions de
22 pyrolyse rapide de biomasses et de leurs constituants. PhD thesis. Institut National
23 Polytechnique de Lorraine. 2009
- 24
25 208. Yang H, Kudo S, Huo H-P, Norinaga K, Mori A, Masek O, Hayashi J-I: Estimation of
26 Enthalpy of Bio-oil Vapor and Heat Required for Pyrolysis of Biomass. Energy & Fuels
27 2013, 27, 2675-2686
- 28
29 209. Janse AMC, Westerhout RWJ, Prins W: Modelling of flas pyrolysis of a single wood
30 particle. Chemical Engineering and Processing 39 (2000), 239-252
- 31
32 210. Wang X, Kersten S.R.A., Prins W, van Swaaij W.P.M: Biomass Pyrolysis in a Fluidized
33 Bed Reactor. Part 2: Experimental Validation of Model Results. Ind. Eng. Chem. Res. 2005,
34 44, 8786-8795
- 35
36 211. Thunman H, Lecker B: Thermal conductivity of wood-models for different stages of
37 combustion. Biomass and Bioenergy 23 (2002) 47-54
- 38
39 212. Boateng AA: Rotary Kilns. Transport Phenomena and Transport Processes. Butterworth-
40 Heinemann, 2008
- 41
42 213. Basu P: Combustion and Gasification in Fluidized beds. Taylor & Francis. 2006.
- 43
44 214. Zhong W, Jin B, Wang X, Xiao R: Fluidization of Biomass Particles in a Gas-Solid Fluid
45 Bed. Energy & Fuel 2008, 22 (6), 4170-4176
- 46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4 215. Bruni G, Solimene R, Marzocchella A, Salatino P, Yates JG, Lettieri P, Fiorentino M: Self-
5 segregation of high-volatile fuel particle devolatilization in a fluidized bed reactor. *Powder*
6 *Technology* 128 (2002) 11-21
7
8 216. Yoder J, Galinato S, Granatstein D, Garcia-Perez M: Economic tradeoff between biochar
9 and bio-oil production via pyrolysis. *Biomass and Bioenergy*, 2011, 35, 5, 1851-1862
10
11 217. Bailis R: Modeling climate change mitigation from alternative methods of charcoal
12 production in Kenya. *Biomass and Bioenergy*, 2009, 33, 11, 1491-1502
13
14 218. Ronsse F, Nachenius R, Prins W: Carbonization of Biomass. In: Recent advances in
15 thermochemical conversion of biomass. Edited by: Pandey A, Bashkar T, Stocker M,
16 Sukumaran R, 2015, 293-324
17
18 219. Siemons, R., Baaijens, L. An Innovative Carbonisation Retort: Technology and
19 Environmental Impact. *Termotehnika*, 2012, 38, 2, 131-138.
20
21 220. Jahanshaki S, Mathieson JG, Somerville MA, Haque N, Norgate TE, Deev A, Pan Y, Xie
22 D, Ridgeway P, Zulli P: Development of low-emission Integrated Steelmaking Process.
23 *Journal of Sustainable Metallurgy*, 2015, 1, 1, 94-114
24
25 221. N. Dahmen, E. Dinjus, E. Heinrich, The Karlsruhe Process bioliq®:Synthetic Fuels from
26 the Biomass. In: Renewable Energy: Sustainable Energy Concepts for the Future, R.
27 Wengenmayr (Editor), T. Bührke (Editor). Wiley, 2008. ISBN: 978-3-527-40804-7
28
29 222. Jager N, Conti R, Neumann J, Apfelbacher A, Daschner R, Binder S, Hornung A: Thermo-
30 Catalytic Reforming of Wood Biomass. *Energy&Fuels*, 2016, 30, 10, 7923-7929
31
32 223. Moriconi N, Laranci P, D'Amico M, Bartocci P, D'Alessandro B, Cinto G, Baldinelli A,
33 Discepoli G, Bidini G, Desideri U, Cotana F, Fantozzi F: Design and preliminary operation
34 of a Gasification Plant for Micro-CHP with Internal Combustion engine and SOFC. *Energy*
35 *Procedia*, Vol. 81, 2015, 298-308, 69th Conference of the Italian Thermal Engineering
36 Association, ATI 2014.

Graphical abstract