



RESEARCH ARTICLE

10.1002/2015WR017196

Impact of sample geometry on the measurement of pressure-saturation curves: Experiments and simulations

M. Moura¹, E.-A. Fiorentino², K. J. Måløy¹, G. Schäfer³, and R. Toussaint²

¹Department of Physics, University of Oslo, Norway, ²Institut de Physique du Globe de Strasbourg, University of Strasbourg, France, ³Laboratoire d'Hydrologie et de Géochimie de Strasbourg, University of Strasbourg, France

Key Points:

- For large porous media, slow drainage happens at a constant capillary pressure
- Boundary effects can lead to changes in the invasion pattern and P-S curves
- A simplified analytical expression for the P-S curve is obtained

Correspondence to:

M. Moura,
marcel.moura@fys.uio.no

Citation:

Moura, M., E.-A. Fiorentino, K. J. Måløy, G. Schäfer, and R. Toussaint (2015), Impact of sample geometry on the measurement of pressure-saturation curves: Experiments and simulations, *Water Resour. Res.*, 51, 8900–8926, doi:10.1002/2015WR017196.

Received 7 MAR 2015

Accepted 15 OCT 2015

Accepted article online 21 OCT 2015

Published online 14 NOV 2015

Abstract In this paper, we study the influence of sample geometry on the measurement of pressure-saturation relationships, by analyzing the drainage of a two-phase flow from a quasi-2-D random porous medium. The medium is transparent, which allows for the direct visualization of the invasion pattern during flow, and is initially saturated with a viscous liquid (a dyed glycerol-water mix). As the pressure in the liquid is gradually reduced, air penetrates from an open inlet, displacing the liquid which leaves the system from an outlet on the opposite side. Pressure measurements and images of the flow are recorded and the pressure-saturation relationship is computed. We show that this relationship depends on the system size and aspect ratio. The effects of the system's boundaries on this relationship are measured experimentally and compared with simulations produced using an invasion percolation algorithm. The pressure build up at the beginning and end of the invasion process are particularly affected by the boundaries of the system whereas at the central part of the model (when the air front progresses far from these boundaries), the invasion happens at a statistically constant capillary pressure. These observations have led us to propose a much simplified pressure-saturation relationship, valid for systems that are large enough such that the invasion is not influenced by boundary effects. The properties of this relationship depend on the capillary pressure thresholds distribution, sample dimensions, and average pore connectivity and its applications may be of particular interest for simulations of two-phase flow in large porous media.

1. Introduction

Fluid flow in porous media is an ubiquitous phenomenon. The subject is important to a broad class of professionals, ranging from engineers interested in increasing the recovery rates of oil reservoirs, to environmentalists concerned about the possible damages associated with liquid waste disposal and even to baristas wishing to make the perfect cup of espresso. Whether intended to improve the economy, protect nature, or please the senses, the study of fluid dynamics inside a porous medium has received considerable attention from the scientific community. The practical relevance of the subject was long ago highlighted in (and motivating to) the fundamental experimental work of Henry Darcy [Darcy, 1856; Brown, 2002], where the connection between the flow rate inside a porous sample and the imposed pressure head difference was first described. In addition to its inherent practical importance, interest in the theoretical aspects of porous media flow phenomena has also led the physics community to extensively analyze (theoretically, numerically, and experimentally) the morphology of the phenomenon [Måløy et al., 1985; Lenormand and Zarcane, 1985; Lenormand et al., 1988; Lenormand, 1989] and its dynamics [Furuberg et al., 1988; Måløy et al., 1992; Furuberg et al., 1996]. Those studies address the problem at various length scales, from the microscopic (pore-level) to the macroscopic (reservoir scale, for example) and different numerical/analytical tools and experimental techniques are employed in each of them [Løvoll et al., 2005; Toussaint et al., 2012; Erpelding et al., 2013].

Two-phase flow is encountered widely in the fields of hydrology, among other reasons, because soil and groundwater pollution by dense nonaqueous phase liquids (DNAPL), such as chlorinated solvents (e.g., trichloroethylene (TCE)) constitute a large and serious environmental problem [Cohen and Mercer, 1993]. Identification of pollution sources is difficult due to the fact that organic pollutants can rapidly migrate down to the bottom of the aquifer and/or along flow paths that differ from the water [Jellali et al., 2001; Bohy et al., 2006; Dridi et al., 2009; Nsir et al., 2012]. In addition, in both soil and groundwater, they are subject to natural attenuation.

© 2015. The Authors.

This is an open access article under the terms of the Creative Commons Attribution-NonCommercial-NoDerivs License, which permits use and distribution in any medium, provided the original work is properly cited, the use is non-commercial and no modifications or adaptations are made.

When a nonwetting low-viscosity fluid displaces a wetting high-viscosity one in a porous medium, the displacing fluid tends to channel through the paths of lower flow resistance, thereby forming pronounced fingers, which evolve in a branching structure inside the porous network leaving a characteristic macroscopic invasion pattern [Måløy et al., 1985; Chen and Wilkinson, 1985; Lenormand, 1989]. The formation of such patterns in porous media flow is a long-ranged consequence of the random nature of the porous network and the forces governing the dynamics at the microscopic scale (pore level). Capillary, viscous, and gravitational forces are typically the main contributors to such dynamics [Birovljev et al., 1991; Løvoll et al., 2005; Toussaint et al., 2005, 2012], and their interplay is usually characterized by a set of dimensionless parameters such as the Bond number (ratio of gravitational to capillary forces) and the capillary number (ratio of viscous to capillary forces). Together with some fluid dependent properties, such as the wettability, viscosity, and density ratios (in the case of two-phase flow), these parameters determine the typical flow regime (stable displacement, capillary fingering, or viscous fingering) [Lenormand, 1989; Lenormand and Zarcone, 1989] with immediate consequences for the macroscopic transport properties.

While the efforts of the physics community have been mostly directed toward characterizing and understanding displacement patterns and local flow properties, hydrogeologists and soil scientists, on the other hand, have studied such systems with the goal of finding empirical laws relating saturation and capillary pressure at the Darcy scale, a mesoscale in which the medium and the flow are described by continuous mathematical fields. The description of multiphase flows at this mesoscopic scale requires the use of two constitutive relationships: relative permeabilities as function of saturation, $k_r = f(S)$ and capillary pressure as function of saturation, $p_c = f(S)$ (in this paper called a pressure-saturation curve, or P-S curve, but also known as water retention curve or moisture content curve). The saturation S of a given phase is understood as the ratio between the volume occupied by that phase in the porous medium and the total pore volume. The capillary pressure p_c is defined as the difference between the pressures of each phase, i.e., for two-phase flow,

$$p_c = p_{nw} - p_w, \tag{1}$$

where p_{nw} and p_w are, respectively, the pressures of the nonwetting and wetting phases.

Direct measurements of the relation $k_r = f(S)$ for unsaturated porous media are challenging to perform and it is frequently preferred to estimate this quantity using numerical models, such as the van Genuchten-Mualem model [Mualem, 1976]. This model uses the relation $p_c = f(S)$ as an input and it is known to be particularly sensitive to the shape of this pressure-saturation curve [Vogel and Cislserova, 1988; Vogel et al., 2000]. As a consequence, simulations using the van Genuchten-Mualem parameters may have both their stability and final results affected by differences in the relation $p_c = f(S)$, as shown by [Ippisch et al., 2006]. Additionally, in simulations of fluid flow in porous media, particularly in the ones that require the integration of the extension of Darcy equations to multiphase flows [Scheidegger, 1974], the relation $p_c = f(S)$ is also necessary to give closure to the total set of equations governing the dynamics. Because of these and related aspects, the problem of understanding the functional behavior of the pressure-saturation curve has attracted a considerable attention over the years (for further aspects regarding finite capillary numbers and dynamic effects, see [Løvoll et al., 2011]).

The extension of Darcy equations used in multiphase flows form a highly nonlinear system, due to the nature of the permeability and capillary pressure functions needed to give closure to the equations. Numerical treatment of this system of equations is discussed extensively in the literature [Ewing and Heinemann, 1984; Durlofsky, 1993; Helmig, 1997; Nayagum et al., 2004; di Chiara Roupert et al., 2010]. Alternative forms of governing flow equations have been investigated, such as the fractional flow formulation, where the immiscible displacement of air and water can be expressed in terms of two coupled equations, a mean pressure (or global pressure) equation, and a saturation equation [Chavent, 1986; Binning and Celia, 1999].

Two models are typically used to describe the capillary pressure-saturation relationship: the Brooks-Corey model [Brooks and Corey, 1964] and the van Genuchten model [van Genuchten, 1980]. The capillary pressure-saturation relationship of Brooks-Corey is given by:

$$p_c = p_d S_e^{-1/\lambda}, \tag{2}$$

where $S_e \equiv \frac{S_w - S_{wr}}{1 - S_{nr} - S_{wr}}$ is the effective saturation of the wetting phase (water), S_w and S_{wr} are, respectively, the saturation and residual saturation of the wetting phase, S_{nr} is the residual saturation of the nonwetting

phase (air), $\lambda[-]$ is the so-called pore size index and $p_d[\text{Pa}]$ is the entry pressure which corresponds to the minimum pressure needed by the air phase to displace the water phase. The capillary pressure-saturation relationship of van Genuchten is expressed by:

$$p_c = \frac{1}{\alpha} \left[S_e^{\frac{n}{1-n}} - 1 \right]^{\frac{1}{n}}, \quad (3)$$

for $p_c > 0$, where $\alpha[\text{Pa}^{-1}]$ and $n[-]$ are the so-called van Genuchten parameters.

In this paper, we will focus on the experimental and numerical quantification of the capillary pressure-saturation curve, $p_c = f(S_{nw})$, in a synthetic porous medium. We have decided to measure this quantity as a function of S_{nw} , the saturation of the nonwetting phase (air) for convenience, as opposed to water retention curves which are usually measured as function of the saturation of the wetting phase $S_w = 1 - S_{nw}$. We will report results of experiments and simulations on two-phase flow in a quasi-2-D porous network with quenched disorder, i.e., having a static random distribution of pore throats. We will focus on the importance of boundary effects on the flow patterns and on how these effects can lead to changes in the measurement of $p_c = f(S_{nw})$. It will be shown that the curvature of the pressure saturation curve toward zero saturation and toward final saturation are essentially due to boundary effects associated with two main processes: around the inlet, this curvature reflects how an initially flat air-liquid interface gradually acquires the morphology of the boundary of a capillary invasion cluster. Around the outlet, the curvature is associated to the gradual pressure buildup in response to the invasion of narrower pores in the vicinity of an outlet filter (a semipermeable membrane).

We want to stress out here that the aforementioned boundary effects may bring unphysical features to the P-S curves (due to the so-called “end effects” or “capillary end effects,” mentioned on [Bear, 1972, p. 453]) and, more importantly, that similar effects may also be present in the results of core sample tests (with 3-D natural porous media) widely employed in the field, such as the ones produced using the “porous diaphragm method” [Bear, 1972; Dullien, 1979]. In this technique, the core sample is placed in contact with a porous diaphragm, a semipermeable membrane that plays a similar role to the filter at the outlet of our experiments, letting the liquid (wetting phase) to pass through but not the air (nonwetting phase). The use of such outlet membranes may artificially induce the invasion of narrower pores in its vicinity that would not be reached in an unbounded porous medium. The water-retention curves resulting from such tests (analog to the P-S curves in the current work) are usually fitted to parametric equations such as the Brooks-Corey and van Genuchten models equations (2) and (3) [Brooks and Corey, 1964; van Genuchten, 1980]. We make the claim that the result of these data fits may be considerably affected by the unphysical boundary effects discussed, very particularly in the initial and final phases of the porous medium invasion (where the invasion front is close to the inlet and outlet boundaries). Since the P-S curve is used as a closure relation for the integration of two-phase flow equations to model situations where each REV is directly connected to its neighbors (and not separated from them by semipermeable membranes), care must be taken into assuring that the features of such curves are realistic and not influenced by the experimental apparatus employed to obtain them.

Significant deviations in the measurements of capillary pressures in 3-D systems with and without filters have been reported previously [Oung and Bezuije, 2003; Bottero et al., 2011]. The exact shape of the P-S curve at the entire system scale is dependent on the relative sizes of the inlet and outlet boundaries with respect to the system size. However, in real underground systems in a reservoir simulation, no semipermeable membranes are present between adjacent representative elementary volumes (REV), and the interface between the two fluids does not particularly adopt a planar shape when it reaches the virtual boundaries between these REV. For the purpose of obtaining relationships valid in large-scale reservoir simulations, and not relationships characteristic of finite size artifacts in the measurement tests, we will thus focus on extracting from the experimental and numerical results, a behavior representative of flow in natural conditions, without such semipermeable or straight faces boundary conditions. By analyzing the P-S curves away from the boundaries (a situation representative of flow in the bulk of a porous medium), we show that the P-S curve reduces to a simplified step-like function, characterized by a single entrance threshold (a statistically constant macroscopic capillary pressure), and a final saturation. These two characteristic values are entirely determined analytically: the macroscopic capillary pressure at nonzero saturation is computed directly from the capillary pressure thresholds distribution of the pore-throats and the average pore connectivity, and the

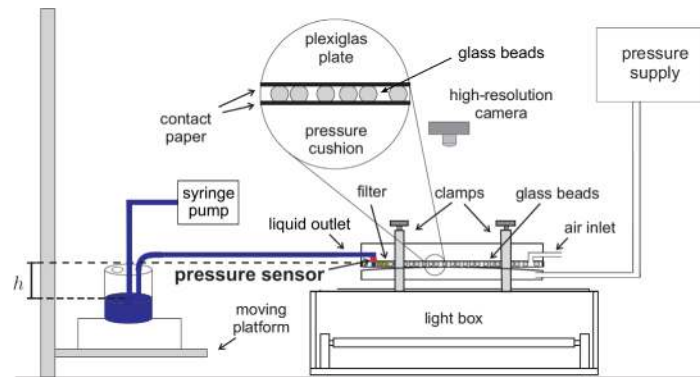


Figure 1. Diagram of the experimental setup. Additional details in Appendix A.

visualization of the flow. Only very recently real-time pore-scale events in a porous rock were directly imaged, using high-speed microtomography [Berg et al., 2013]. The use of quasi-2-D porous networks allows for a simplified experimental setup with the benefit of immediate visualization of the flow structures and real-time dynamics. A series of experimental studies has been performed in such systems using Hele-Shaw cells [Hele-Shaw, 1898] and variants to ensure the quasi-2-D geometry of the flow [Måløy et al., 1985; Méheust et al., 2002; Løvoll et al., 2005; Toussaint et al., 2005].

Figure 1 shows a diagram of the experimental setup. The porous matrix employed is composed by a single layer of glass beads having diameters \varnothing in the range $1 \text{ mm} < \varnothing < 1.18 \text{ mm}$ that are placed onto the sticky side of a contact paper sheet. Silicon glue is used to define the in-plane boundaries of the model and another contact paper sheet is placed on top of it (with the sticky side facing the beads). The essential geometry of the model is thus defined by the silicon boundary (around it) and the contact paper sheets (above and below). In order to give robustness to the system and ensure that the quasi-2-D geometry will be kept during the experiment, the porous matrix formed is pushed from below by a pressure cushion against a rigid Plexiglas plate placed on the top. The cushion ensures that the beads will be kept in place, despite the fluctuations in bead diameters. The Plexiglas plate has been previously milled to define channels for the inlets and outlets. Cuts were made in the upper contact paper sheet such that the liquid can be injected into and withdrawn from the porous network through the channels in the Plexiglas plate. In the experiments performed, the porous matrix was initially filled with a wetting viscous liquid composed of a mixture of glycerol (80% in weight) and water (20% in weight) whose kinematic viscosity and density were measured to be, respectively, $\nu = 4.25 \cdot 10^{-5} \text{ m}^2/\text{s}$ and $\rho = 1.205 \text{ g/cm}^3$. The tabulated value for the surface tension at 25°C is $\gamma = 0.064 \text{ N}\cdot\text{m}^{-1}$ [Glycerine Producers' Association, 1963]. Since the medium is initially completely wet by the liquid, the contact angle is always found to assume low values, although its exact value varies during a pore invasion due to dynamical effects.

The system also includes a filter placed in between the glass beads and the liquid outlet, at the end of the porous network. The filter is made of a sponge with pores much smaller than the typical pore size of the network itself and is intended to mimic the function of similar filters present in the apparatus typically used in the determination of P-S curves for core rock and soil samples (e.g., in the so-called "porous diaphragm method") [Bear, 1972; Dullien, 1979].

The cell is positioned horizontally. Two pressure sensors (Honeywell 26PCAFG6G) were positioned at the outlet of the model and images were recorded from the top by a digital camera (NIKON D7100). A thermistor was placed in the liquid phase, in order to monitor its temperature. The air saturation is obtained from the analysis of the images. The outlet of the model is connected via tubing to a liquid reservoir which is placed on a translation stage (see Figure 1). The stage is controlled by a step motor which allows for precise changes in the height of the liquid reservoir. Since the liquid in the reservoir is connected to the liquid in the porous medium, by changing the height of the reservoir one can effectively control the pressure in the liquid phase inside the porous network. During the course of an experimental run the position of the reservoir is lowered, which reduces the pressure in the liquid initially saturating the porous medium. The model inlets are open to the atmosphere and, once the pressure in the liquid phase is low enough, the capillary

final saturation is shown to depend only on the REV scale chosen, in direct consequence of the fractal nature of the capillary invasion air cluster.

2. Methodology

2.1. Description of the Experiment

2.1.1. Experimental Setup

Real-time 3-D experiments of flow in porous media are challenging to perform due to the natural difficulty involved in the

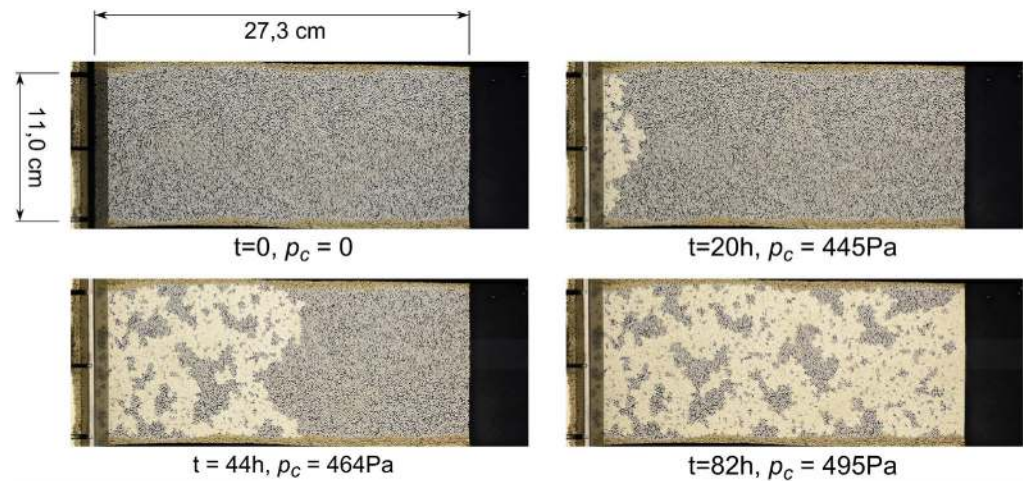


Figure 2. Images from the drainage process. The time t of each image is shown in hours and the instantaneous capillary pressure p_c in pascals. The porous medium is positioned horizontally to avoid gravitational effects. It is initially saturated with the liquid phase (blue) which is then gradually displaced by the invading air phase (white).

pressure (see equation (1)) becomes sufficiently large to overcome the minimum threshold value that is needed to invade the largest pore-throat available to the air-liquid interface. The air phase then starts to displace the liquid phase, initiating the invasion process. The capillary pressure threshold value is defined by the local pore geometry and the fluids wetting properties. It corresponds to the minimum difference in pressure between the phases necessary to drive the invasion of a given pore-throat. In accordance with Young-Laplace law [Bear, 1972], larger pore-throats have lower values of capillary pressure thresholds and are, therefore, invaded earlier.

We are interested in studying flow in the capillary regime, in which the capillary forces dominate over viscous ones. Therefore, the fluid invasion must happen very slowly in order to avoid viscous effects. The typical duration of each experiment is more than 3 days, and, for such long experiments, evaporation effects may play an important role and they had to be taken into account in the design of the experiment. Very particularly, the evaporation of liquid from the external reservoir had to be considered, since that could change the imposed pressure difference in the long-run (evaporation increases the height difference h between the porous model and the liquid level in the reservoir, thus increasing the imposed pressure difference). Another effect that had to be taken into account was the fact that the displaced liquid volume that leaves the porous medium also goes into the liquid reservoir (decreasing the height difference h and thus decreasing the imposed pressure difference). This second effect could possibly have been easily solved by using a reservoir large enough to make the change in the liquid level negligible during the course of an experiment. Nevertheless increasing the cross-sectional area of the reservoir does not solve the first issue because the evaporation rate also increases with this area. The solution that best suited us to handle both issues was to construct an overflowing mechanism into a specially designed liquid reservoir, which we describe in details in Appendix A.

Figure 2 shows a typical invasion process. The time difference between the first and last images is about 82 h. The air inlet is on the left and the filter is the black stripe on the right. The time and instantaneous capillary pressure corresponding to each snapshot are shown under each image. Figure 3 shows a spatiotemporal evolution of the whole invasion process. The colormap indicates the time in hours.

2.1.2. Control of the Experiments

A computer running a Python code controls the experiment. A Keythley 2000 multimeter connected to the computer reads the signals from the pressure sensors and thermistor. One of the objectives in mind in designing the current experiment was to probe a response as quasistatic as possible, i.e., to be able to control the imposed pressure (by lowering the liquid reservoir) in such a manner that the capillary pressure (pressure difference between the air and liquid phases) would be just slightly above the lowest capillary pressure threshold defined by the geometry of the largest pore-throat available to the air-liquid interface.

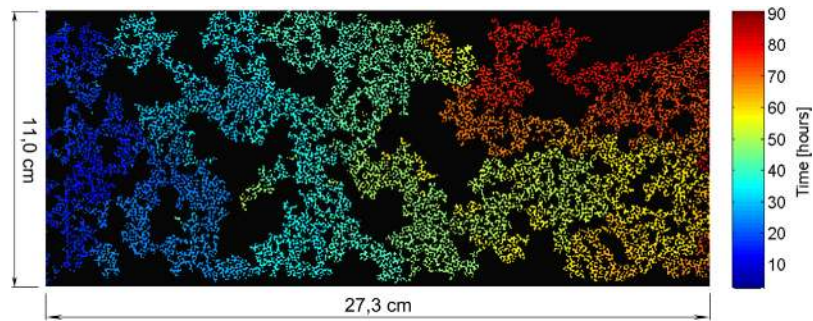


Figure 3. Experimentally measured spatiotemporal evolution of the drainage process for the same sample and experimental run as shown in Figure 2. The colormap corresponds to the invasion time in hours.

By doing so, one reduces the interference of dynamical viscous effects in the measurements (the P-S curves are known to be influenced by these effects [Løvoll *et al.*, 2011]). In order to achieve this, a feedback control loop was designed in which the imposed pressure in the liquid phase is decreased (thus increasing the capillary pressure) only when the system reaches an equilibrium configuration, i.e., when no pore is invaded for a certain amount of time in the whole model. Therefore, the code employed not only sends commands to the multimeter (to read pressure and temperature), step motor (to lower the liquid reservoir position), and camera (to capture images) but does so in an integrated manner, in which the current state of the experiment is used as an input to decide the next action. The procedure is as follows: pressure and temperature measurements are taken continuously and pictures are taken at fixed time intervals (~15 s). At each fifth picture taken (5th, 10th, 15th . . .) the computer performs the image analysis to check whether the system is in equilibrium or not, i.e., to check if air is invading new pores or not. If the invasion process is still going on, the area of the air phase in, say, picture number 15 will be larger than the area in picture number 10, and the imposed pressure is left unchanged (no action is taken with respect to lowering the liquid reservoir). Conversely, if the area does not increase, the system is assumed to be in equilibrium and the imposed pressure difference is increased by a small amount (the liquid reservoir is lowered), see Figure 4. The amount dh by which the reservoir is lowered is one of our control parameters. During the initial phase of the experiment, the liquid level in the reservoir is at the same height as the porous medium and the system needs to build up a considerable pressure until the invasion starts, therefore, we have chosen a larger $dh = dh_{max}$ for this initial process and a smaller $dh = dh_{min}$ to be used after the invasion has started (after the invading phase area reaches a certain small threshold). The values used were $dh_{max} = 0.01$ cm and $dh_{min} = 0.001$ cm corresponding to respective increments in the imposed capillary pressure of approximately $dp_{max} = 1.2$ Pa and $dp_{min} = 0.12$ Pa.

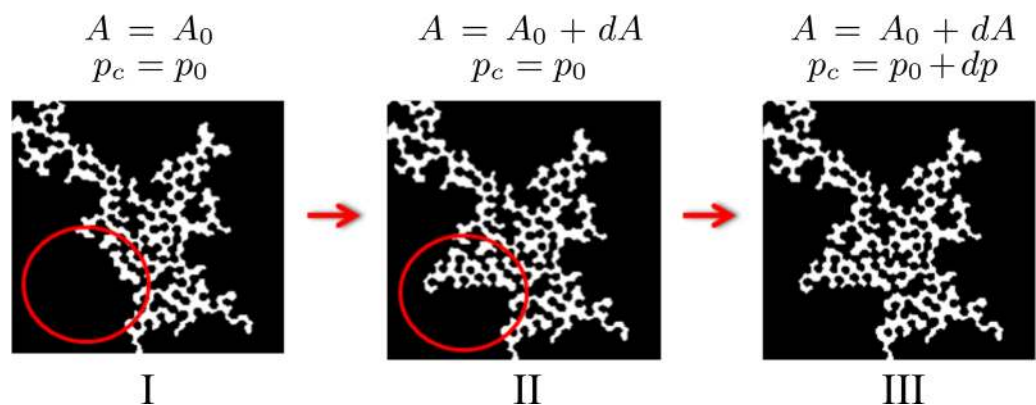


Figure 4. Feedback loop used to control the imposed capillary pressure in the experiments. The figure shows a detail from the black and white thresholded image, where the air phase is white and the liquid phase together with the porous medium are black. From I to II, the area of the air phase has grown from A_0 to $A_0 + dA$, so the capillary pressure is kept constant at p_0 (no change in the liquid reservoir position). From II to III, the area of the air phase does not change, which means the capillary pressure must be increased from p_0 to $p_0 + dp$ (by lowering the liquid reservoir and thus decreasing the pressure in the liquid phase by a positive amount dp). This analysis is done “on the fly” as the experiment is performed.

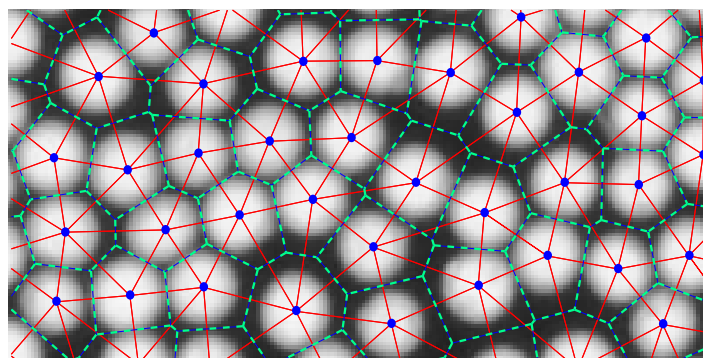


Figure 5. Pore-scale analysis used in the experimental determination of the capillary pressure thresholds distribution. Blue dots indicate the center of the beads, solid red lines show the Delaunay triangulation, and the dashed green lines are the Voronoi lattice (dual graph to the Delaunay triangulation). The vertices of the Voronoi lattice mark the centers of the pores and the points at which the lines from the Delaunay triangulation and Voronoi lattice intersect are the centers of the pore-throats. The bead diameter is ~ 1 mm.

2.2. Image-Based Estimation of the Capillary Pressure Thresholds Distribution

The use of a high-resolution camera allows us to analyze the images down to the pore scale. We have used the first image (in which the porous network is completely saturated with the liquid) to experimentally access the pore-throat size distribution. Initially we have identified the position and average radius of each bead in the network, next we employed a Delaunay triangulation algorithm [Lee and Schachter, 1980] to find the distance between the centers of

consecutive beads. By excluding the radius of each of the beads from the vector with all the pairwise distances between consecutive bead centers, we can directly access the size distribution of pore-throats. Figure 5 shows a zoomed in image of the procedure employed. The Voronoi lattice, (dual graph of the Delaunay triangulation) [Voronoi, 1908] is also shown. Each cell in the Voronoi lattice identifies the set of points in space that are the closest to the point in the center of the cell. Those central points are, by construction, the center of the glass beads. The vertices of the Voronoi lattice can be understood as the centers of the pores and the points at which the lines from the Delaunay triangulation and Voronoi lattice intersect are the centers of the pore-throats.

Figure 6 shows the image-based estimation of the capillary pressure thresholds distribution. In the inset, it is also shown the distribution of pore-throat sizes d , i.e., the in-plane throat diameters (the out-of-plane throat diameter is assumed to be constant and equal to 1 mm, the gap or height of the model). The capillary pressure thresholds distribution was estimated by considering the normalized histogram of the inverse of the pore-throat sizes $1/d$. In order to get to the actual capillary pressure distribution, it would be necessary to multiply $1/d$ by the surface tension γ of the liquid-air interface (according to the Young-Laplace law) and correct it by (i) a multiplicative geometrical factor, to account for the angle of contact between the air-liquid interface and the solid, dynamical wetting properties and local pore geometry and (ii) an additive factor to account for the (constant) contribution of the out-of-plane curvature to the capillary pressure. As a first-order approximation, we neglect such corrections here. They would lead to a rescaling and a translation

of the horizontal axis in Figure 6, but would not significantly change the shape of the distribution.

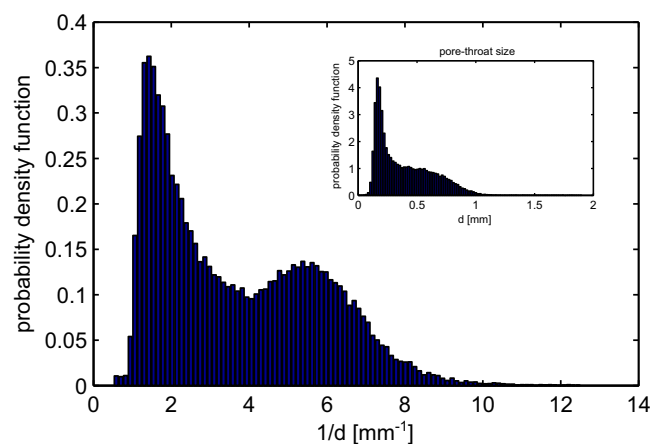


Figure 6. Image-based estimation of the capillary pressure thresholds distribution. The distribution of pore-throat sizes d (in-plane throat diameters) is shown in the inset.

2.3. Description of the Simulation Procedure

2.3.1. Invasion Percolation Model

The simulation procedure is based on the invasion percolation model developed in Wilkinson and Willemsen [1983]. The idealized porous medium is a network of pores connected by throats. We work on a square lattice of sites oriented at 45° from the main flow direction: each site alternately representing the pore spaces or the rock, like in a chessboard. The length and width of the grid will be called,

respectively, l and w , and those will be expressed in number of lines and columns. To make the connection with the experiments clear, notice that the length is measured between the inlet and the filter at the outlet, whereas the width is measured in the direction perpendicular to this one.

Each pore is connected to its four closest neighboring pores by throats (also called necks, in other works, or bonds, in the percolation theory literature). The throat diameter fixes the capillary pressure threshold that is needed to make the injected fluid (air) jump from one site to the following through that connecting throat. Each time a site is invaded, its neighbors become available to the invading fluid. The capillary pressure threshold of a throat is randomly drawn from a uniform distribution inside the interval $[p_{min} p_{max}]$. We chose $p_{min} = 200$ Pa and $p_{max} = 608$ Pa, giving $r_{max} = 0.64$ mm and $r_{min} = 0.21$ mm by the Young-Laplace law:

$$p_c = \frac{2\gamma}{r_m} \tag{4}$$

where $\gamma = 0.064 \text{ N}\cdot\text{m}^{-1}$ is the surface tension of the air-liquid interface [Glycerine Producers' Association, 1963] and r_m the curvature radius of the duct.

Viscous forces are assumed to be negligible in comparison to capillary forces in the regime studied (low capillary numbers). At the initial state, the medium is completely filled with liquid, with the exception of the first row of pores that is filled with air. The displaced volume of liquid exits the network from one side of the lattice (opposite to the side where air enters the medium). A selection rule at this exit side mimics the effect of the filter in the experiments, blocking the passage of air but allowing the liquid to flow through.

Narrower pore-throats have larger capillary pressure thresholds and are, therefore, harder to invade. Since the invasion is governed by the values of capillary pressure thresholds associated to the throats (or bonds), this problem is partially similar to bond percolation [Stauffer, 1994], although in that case, differently from the invasion percolation model, all throats with associated capillary pressure thresholds smaller than a given value would be invaded at once. In order to define which pore-throat will be invaded in the invasion percolation model, one has to perform a search in the available set of pore-throats (the ones that are at the liquid-air interface) and look for the throat with the lowest capillary pressure threshold p_{ct} . The pressure increment with respect to the instantaneous capillary pressure p_c that is needed to invade this pore-throat is $\Delta p = p_{ct} - p_c$. Then, p_c is incremented by Δp and the pore connected through this throat is turned from the liquid state into the air state, making its neighboring pores available for the next step.

The choice of the invaded pore is also constrained by the incompressibility of the displaced liquid. When regions of the liquid happen to be completely surrounded by air or stuck between air and a wall, they become trapped, disconnected from the outlet, and these surrounded sites must be removed from the list of potential invasion candidates. Not incorporating this feature would lead, in the long-term, to thoroughly filling the medium with air. The simulations stop when all the sites that are on the edge of the filter (exit side) contain air, blocking the flow of liquid outside of the model. The liquid left inside the porous network is found to be broken into a set of clusters that are disconnected from the exit side.

In the simulations, the two fluids are incompressible, so that the regular changes of pressure difference between the two phases equally represent a situation where air pressure is kept constant and water pressure is changed, or the contrary. In the experiments, in order to avoid effects due to air compressibility, the choice was made to reduce the pressure in the liquid instead of rising the air pressure.

2.3.2. Capillary Pressure Thresholds: Mapping Between Different Distributions

We have chosen to work with a uniform distribution for the capillary pressure thresholds, but, due to the nature of the simulation procedure involved, we will show that drawing the pressure thresholds from another type of distribution would not change the geometry of invasion pattern—although it would affect the P-S curve of the system. We will compare the outcome of the simulations that use a uniform distribution to the one produced by a distribution that was estimated empirically from the direct experimental measurement of the pore-throat sizes, as described in section 2.2. In order to do so, we must first produce a mapping linking the capillary pressure thresholds withdrawn from the uniform distribution to the ones following the experimentally estimated distribution, as explained next.

In probability theory, the cumulative distribution function (CDF) $F(x)$ associated with a random variable X is defined as the probability that $X < x$, i.e.,

$$F(x) = \int_{-\infty}^x f(x') dx', \tag{5}$$

where the random variable X follows a distribution given by the probability density function (PDF) $f(x)$. In the context of percolation theory [Stauffer, 1994], the CDF $F(x)$ is also known as the occupancy probability.

Let us call $F_{unif}(p_{unif})$ the CDF of the capillary pressure thresholds following a uniform distribution and $F_{emp}(p_{emp})$ the CDF of the capillary pressure thresholds following the empirically measured distribution. The set of capillary pressure thresholds uniformly distributed is generated using a standard random number generator, its PDF and CDF being given, respectively, by

$$f_{unif}(p_{unif}) = \frac{1}{p_{max} - p_{min}} \text{ and} \tag{6}$$

$$F_{unif}(p_{unif}) = \frac{p_{unif} - p_{min}}{p_{max} - p_{min}}, \tag{7}$$

where p_{min} and p_{max} are the minimum and maximum values attainable by the pressure. The capillary pressure thresholds distributed according to the empirically measured distribution are generated using a rejection sampling method, which is well described in the literature [see Press, 1992, for instance]. Since we do not have access to analytical forms for the empirical PDF $f_{emp}(p_{emp})$, we infer this quantity experimentally, as described in section 2.2 and shown in Figure 6, by normalization of the measured histogram of entry pressures (determined from the pore-throat geometries). The calculation of the empirical CDF $F_{emp}(p_{emp})$ is done, via numerical integration using equation (5).

As stated, the change in distribution of the capillary pressure thresholds does not affect the invasion pattern in the simulations. This happens because air follows the path of least resistance, which does not depend on the particular values of the pressure thresholds themselves, but only on their rank in the ordering from the smallest to the largest capillary pressure threshold. Such a rank remains unchanged by a change in the distribution. This property is used to define a correspondence between pressure values in the uniform and empirical distributions: since the rank is unchanged, $F_{unif}(p_{unif}) = F_{emp}(p_{emp})$, therefore $p_{emp} = F_{emp}^{-1}(F_{unif}(p_{unif}))$.

3 Results and Discussion

3.1. Measurements of P-S Curves

3.1.1. Experiments

Figure 7 shows an experimentally measured P-S curve for the model depicted in Figures 2 and 3. Two kinds of pressure measurements are seen in this figure. The thick red line represents the capillary pressure head imposed to the model obtained by multiplying the liquid's specific weight $\rho g = 11.83 \text{ kN/m}^3$ by the height difference h between the porous network and the liquid reservoir (see Figure 1). The thin green line corresponds to the pressure measured at the model's outlet using an electronic pressure sensor. In a static situation, the two curves coincide. The difference seen between those curves is due to viscous pressure drops arising from dynamical effects during the pore invasion events: once the capillary pressure is large enough to overcome the capillary pressure threshold imposed by the largest pore-neck in contact with the front, the invasion of that pore takes place, with air displacing the filling fluid. The motion of the fluid sets in viscous stresses which lead to the pressure drops seen in the green curve. This dynamics happens in an avalanche manner during which the invasion of one pore may trigger the invasion of other pores in the neighborhood and it has been extensively studied in the literature [Haines, 1930; Måløy et al., 1992; Furuberg et al., 1996]. In the current paper, we neglect these dynamical effects and focus only on the quasistatic situation. For the experiments reported next, we have decided to employ pressure measurements obtained from the height difference between the model and the liquid reservoir, like the one in the thick red curve in Figure 7. One of the reasons that has led us to chose this approach is the fact that this method seems to be more closely related to the kind of procedure employed in the field tests, for example in the "porous diaphragm method" using core rock or soil samples [Bear, 1972; Dullien, 1979].

The properties of such pressure-saturation curves are certainly influenced by the characteristics of the porous medium, such as its porosity and local connectivity, but are in no sense uniquely determined by

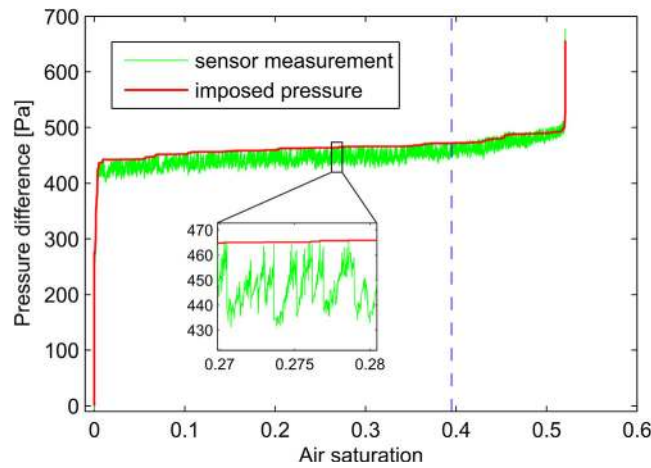


Figure 7. Experimental P-S curve obtained for the model depicted in Figures 2 and 3. The thick red curve is the imposed capillary pressure obtained by multiplying the height difference h between the model and the liquid reservoir by the liquid's specific weight $\rho g = 11.83 \text{ kN/m}^3$. The thin green curve shows direct pressure measurements at the outlet of the system made with a pressure sensor. The inset is a zoomed in section showing the viscous pressure drops that follow each pore invasion event. The dashed blue line indicates the breakthrough saturation $S_b = 0.395$, i.e., the saturation at which the air phase first percolates through the model, reaching the filter at the outlet.

them. In fact, some features of the curves can be highly influenced by the effects of the boundaries of the model. The extent to which these boundary effects influence the overall P-S curve depends on the size and dimensionality of the porous medium itself. We have observed that the invasion close to the inlet and outlet of the model are particularly subjected to boundary effects. For the sake of clarity, we have decided to divide the flow into three parts: *building regime* (close to the inlet), *propagation regime* (central part of the model), and *clogging regime* (close to the outlet). In order to scrutinize in details the impact of the boundary effects in each regime, we have performed the analysis to produce P-S curves using measuring subwindows located inside the model in a set of regions either very close or very far from the boundaries. Figure 8 shows

the resulting P-S curves for three of those subwindows each one corresponding to a particular invasion regime.

1. *Building regime*: in the subwindow close to the inlet, one can see the pressure building up phase as the invading front evolves from the initial flat interface to the ramified fractal profile characteristic of slow drainage processes in porous media [Lenormand and Zarcone, 1989; Måløy et al., 1992], see Figure 2. Initially the easiest (largest) pores are invaded and then, as the front progresses inside this subwindow, it is

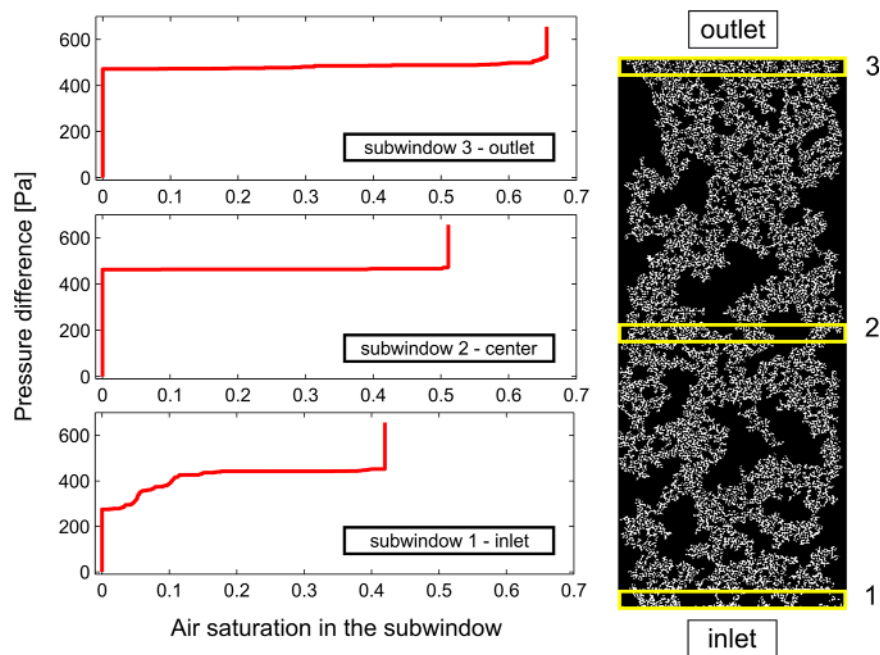


Figure 8. Experimental P-S curves obtained for three different measuring subwindows inside the model. The subwindows were chosen in order to emphasize the distinct effects caused by the boundaries on the curves. From bottom to top, they correspond to the building regime (subwindow 1), propagation regime (subwindow 2), and clogging regime (subwindow 3).

necessary to increase the capillary pressure to give access to harder (narrower) pores, since all the easy ones available to the front were already filled. This evolution progresses and is seen in the left part of the lower P-S curve (Figure 8, bottom curve, subwindow 1—inlet).

2. *Propagation regime*: after the invading front has progressed a certain characteristic distance inside the model, the imposed pressure becomes large enough, such that only minor increments from this value are necessary to keep driving the invasion through most of the central part of the model. By measuring the P-S curve using a subwindow in the middle of the porous network, one can thus see a much flatter profile (Figure 8, middle curve, subwindow 2—center). The regions of pressure building up are constrained to the extreme left and right of the curve, as vertical lines, which means they happen, respectively, before and after the invasion front has reached this subwindow. In the central portion of the model, where boundary effects are negligible, the air-liquid interface propagates steadily at a statistically constant capillary pressure p_{crit} . We will later characterize this critical value of the pressure and show how it depends on the medium and fluids' properties.
3. *Clogging regime*: for the subwindow close to the outlet, the presence of the filter forces the air phase to spread sideways, leading to an increase in the final air saturation inside this subwindow as can be seen in the upper P-S curve in the figure (Figure 8, top curve, subwindow 3—outlet). This happens because the typical pore sizes of the filter are much smaller than the pore sizes of the matrix, constraining the air invasion to remain inside the matrix. As the capillary pressure is increased, smaller pores become available and are invaded thus leading to the higher final saturation in this subwindow and the upward curvature in the P-S curve. The invasion of these narrower pores in the vicinity of the filter is, therefore, a direct consequence of the presence of the filter itself and would not occur in an unbounded system. Once all the pores connected to the filter are invaded by air, the filter is said to be clogged and the liquid within it is disconnected from the porous medium. Increasing the pressure even further does not lead to any additional invasion as can be seen by the final vertical line in the P-S curve.

In the following section, we will make use of computer simulations to stress these boundary effects more clearly.

3.1.2. Simulations

We have used the Invasion Percolation algorithm described in section 2.3.1 to simulate the invasion process. Assuming that a numerical site represents a 0.5 mm size pore, we perform simulations with sizes similar to those of the experimental cell in Figure 2 by defining a grid with dimensions $l = 546$ lines and $w = 220$ columns, representing, respectively, its length and width. The resulting P-S curve is shown in Figure 9a (left). The black curve shows the successive values of capillary pressure thresholds of the invaded pores, drawn from a uniform distribution. Notice that this curve goes up and down intermittently, reflecting the fact that there is no imposed spatial correlation between the threshold values: after invading a given pore, the following pore may have a larger or lower capillary threshold. In the experimental situation, since the capillary pressure is set externally by the level of the liquid reservoir (see Figure 1), the invasion of an easier pore (larger, with lower pressure threshold) that immediately follows a harder one (narrower, with higher pressure threshold) happens in a sudden burst fashion, leaving the signature pressure drops depicted in the green curve in Figure 7. As explained in section 3.1.1, in the experiments, we use the measurements from the imposed pressure, a strictly nondecreasing function. In order to simulate this quantity numerically, we define a pressure envelope curve, shown in red in Figure 9a, which marks the value of the highest capillary pressure threshold reached so far, thus mimicking the behavior of the imposed pressure in the experiments. The continuous increase of this pressure envelope indicates the necessity of invading harder pores as air propagates through the medium. We have noticed in our simulations that the breakthrough marker (Figure 9a, dashed blue line) coincides with the inflexion point of the pressure envelope. This indicates that the presence of the external filter is responsible for the curvature inversion, i.e., that in an open medium, in the absence of any outside filter, there should be no upward increase of slope of this envelope. We remind that the breakthrough is defined as the moment in which the air phase first reaches the filter, forming a sample-spanning cluster of invaded pores [Stauffer, 1994].

Next, we have made use of the mapping technique discussed in section 2.3.2 to visually analyze the effects of the underlying capillary pressure thresholds distribution in the simulation of the P-S curves. Figure 10 shows the P-S curve (green line) associated with the empirically measured distribution from section 2.2, together with the underlying pressure thresholds (black line). We compare this curve with another one

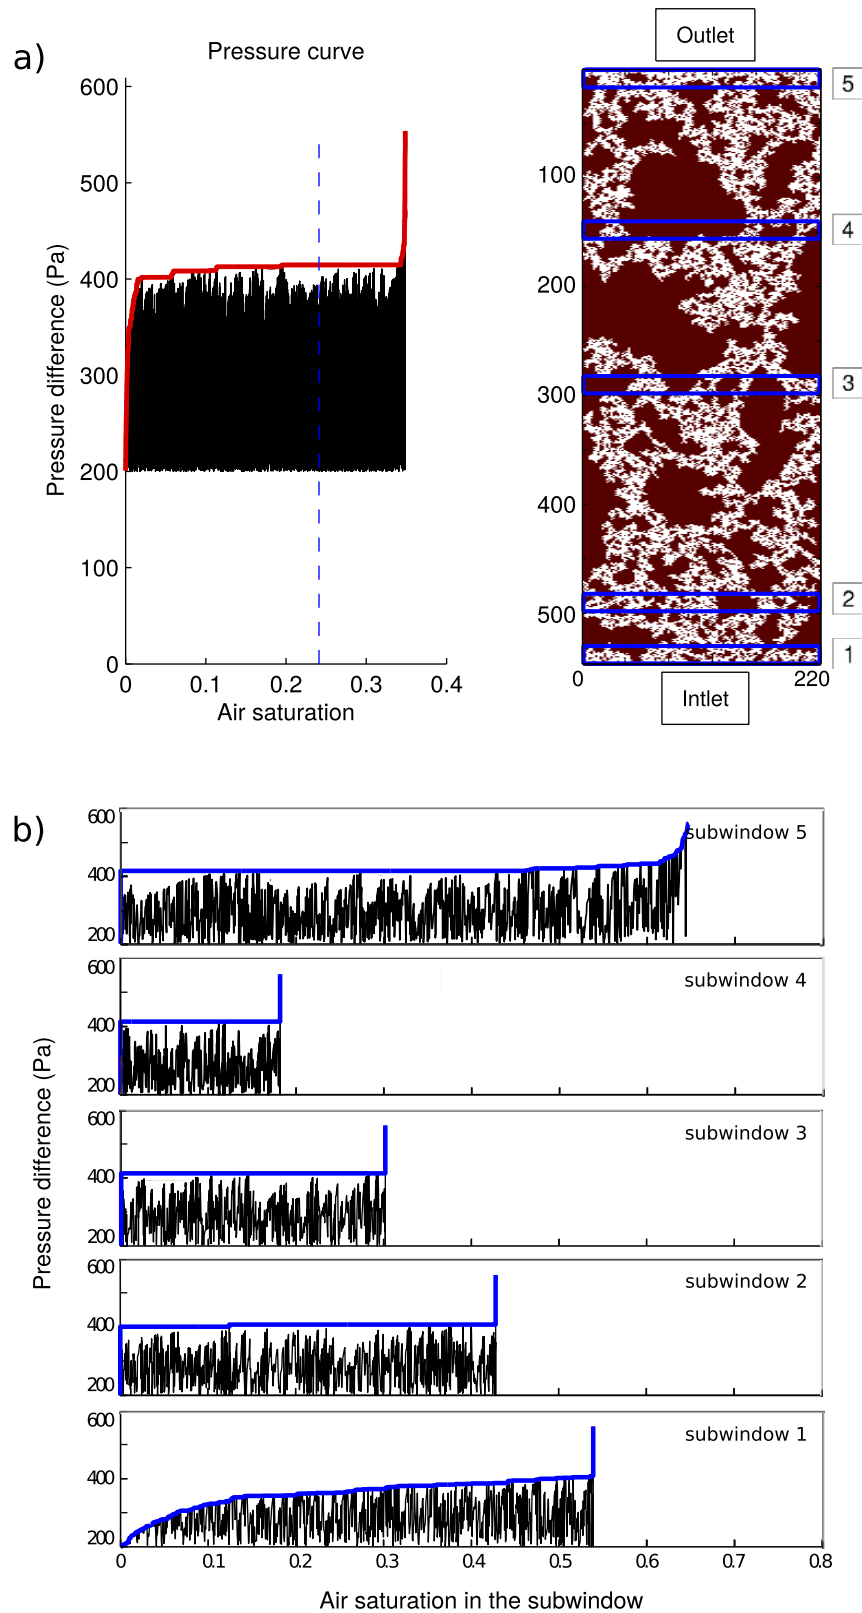


Figure 9. (a) P-S curve for the simulation of a system of size $w = 220$ columns and $l = 546$ lines. The capillary pressure thresholds values (drawn from a uniform distribution) are shown in black and the pressure envelope (P-S curve) in red. The breakthrough saturation S_B is marked by the dashed blue line. The network image to the right shows air in white, liquid in brown, and the subwindows positions in blue. (b) P-S curves measured inside the subwindows.

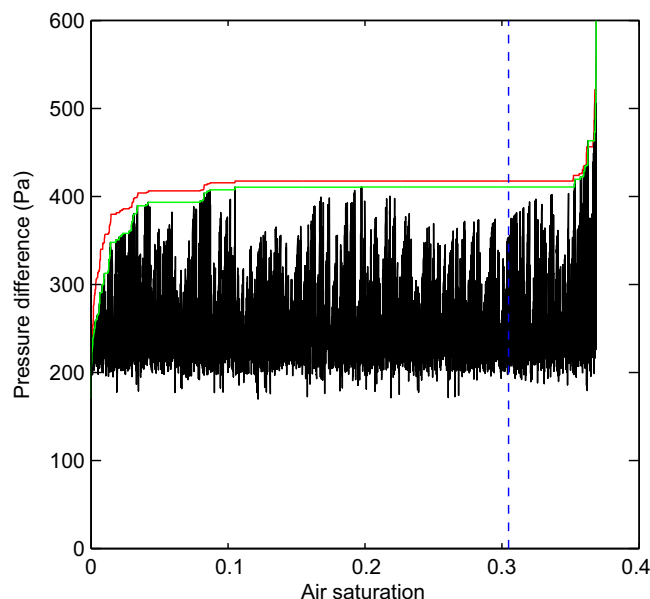


Figure 10. P-S curve (green line) simulated for a system of size $w = 220$ columns and $l = 273$ lines, having capillary pressure thresholds (black line) following the empirically measured distribution. The P-S curve obtained for a uniform distribution (red line) is shown for comparison. The amount by which these curves differ depends on how unequal the underlying distributions are. The breakthrough marker (blue-dashed line) is the same for both curves, since the invasion order is not affected by the mapping between the distributions.

results from our simulations reinforce the experimental observations of the previous section. We can directly observe that the phases of initial pressure build up are restricted to the region close to the inlet, as shown by the rise in the pressure envelope in subwindow 1, where the air front evolves from the initial straight line to the capillary fingering ramified pattern, characterizing the *building regime*. The *clogging regime*, with the final rise in pressure due to the invasion of narrower pores in the vicinity of the filter at the outlet is shown in subwindow 5. For the subwindows placed far from the boundaries, we see the much flatter pressure envelope from the *propagation regime*, also in accordance with what was observed in the experiments, see for example, subwindow 3. The phases of pressure building up appear as vertical lines in the extreme left and right of the curve, meaning, as stated earlier, that they occur before and after the invading front has reached the subwindow area. In the interior of the subwindow, the invasion happens at an essentially constant capillary pressure, thus producing a flat plateau in the P-S curves for these areas. Our numerical results, supported by experimental confirmation, yield the conclusion that when boundary effects are negligible, the invasion happens at a statistically constant capillary pressure p_{crit} . In this region (that for a large enough sample would correspond to the majority of the flow), the P-S curve is reduced to a very simple function, needing only two values for its characterization: the critical value of the pressure p_{crit} and the final saturation S_f . We proceed to a deeper numerical analysis of these quantities, starting from the latter.

3.2. Analysis of the Final Air Saturation

Let S_f denote the final air saturation, corresponding to the air saturation at the end of the experiment, i.e., when all the sites connected to the exit side are invaded by air and no additional displacement is possible. Due to the fractal nature of the capillary invasion process [Mandelbrot, 1982; Feder, 1988; Lenormand and Zarcone, 1989], the final saturation is expected to be a function of the system's geometry. In order to analyze this dependency, an extensive numerical study was performed in which the dimensions (length l and width w , expressed, respectively, in number of lines and columns) were separately changed.

Let us initially analyze the evolution of the P-S curves for different values of l and w . In Figure 11a, P-S curves are produced for systems with different lengths l and same width $w = 60$ (for the sake of clarity, we omit here the actual pressure threshold values and show only the pressure envelopes). We observe that for systems in which the length l (distance between inlet and outlet) is too small, boundary effects dominate the

where a uniform capillary pressure threshold distribution was used (red curve). We notice that, although the invasion pattern is left unchanged by the change in the distribution (due to the nature of the invasion percolation algorithm, as described in section 2.3.2), the P-S curves are sensitive to this change (as they should in a realistic scenario). The amount by which they differ depends on how unequal the distributions used are. In producing the P-S curve for the empirically measured distribution, we have tuned the minimum and maximum values of the pressure, p_{min} and p_{max} , to get results in the same order of magnitude as in the uniform case.

In order to emphasize the boundary effects to the P-S curves, we select a set of subwindows, as shown in Figure 9a (right), and measure the P-S curves inside of them, leading to Figure 9b (in a similar fashion to what was done experimentally in Figure 8). From the analysis of Figure 9b, we see that the

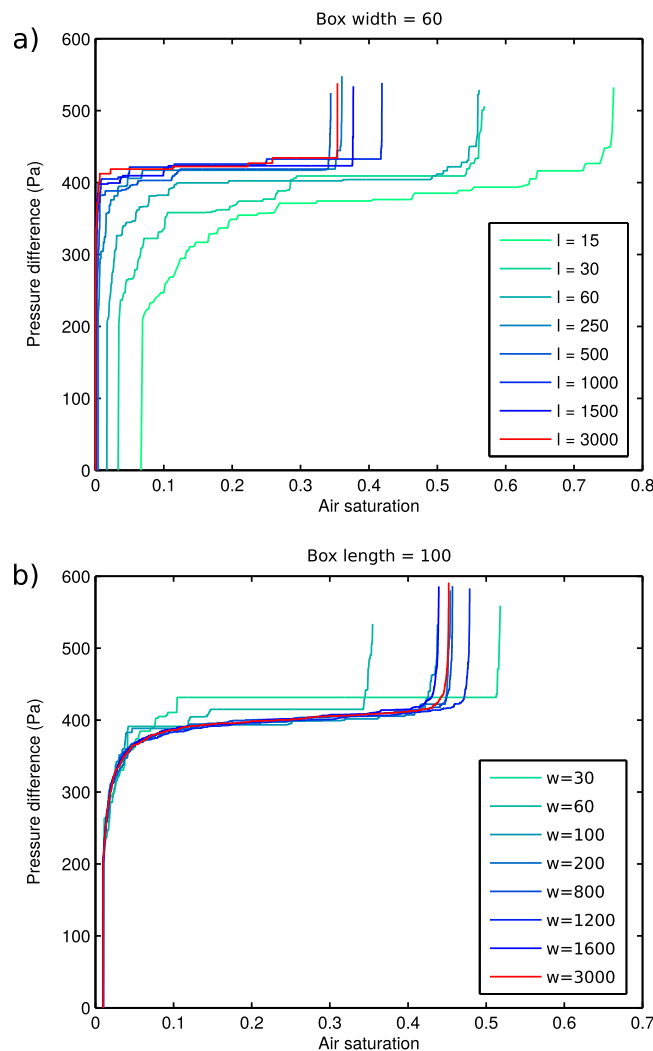


Figure 11. Simulations of P-S curves for various system sizes. (a) Curves for several lengths l with width fixed to $w = 60$ columns. (b) Curves for several widths w with length fixed to $l = 100$ lines.

same length $l = 100$. One can observe in this figure the convergence of the final air saturation as the width is increased but, for small widths, the dispersion in the saturation does not seem to be as pronounced as in the case of small lengths (compare with Figure 11a). Putting it in a different way: samples with small distance l between inlet and outlet seem to have their final air saturation more affected by boundary effects than samples with small distance w between the lateral boundaries. One possible explanation for such result lies in the fact that the final saturation is increased in the vicinity of the outlet boundary, due to the invasion of narrower pores induced by the filter in that region. When the sample length is reduced, the relative importance of this region close to the outlet is increased, thus increasing the overall saturation as described previously. Taking these observations into account, we shall next analyze the behavior of the final saturation as the length l of the system is gradually changed for a given set of fixed system's widths w . Additional analysis for the air saturation are included in Appendix B: the variation of the final saturation as the width w of the system is gradually changed, for a given set of fixed system's lengths l , can be found in section B1 and similar considerations regarding the dependence of the breakthrough saturation on the system geometry can be found in sections B2 and B3.

3.2.1. Variation of the Final Air Saturation With the System's Length

Figure 12a shows an extensive numerical study produced to analyze the dependency of the final saturation on the system's length l . Each point in this figure is obtained by (1) fixing a geometry for the grid (length and width); (2) letting the invasion take place according to the invasion percolation algorithm described in

whole invasion process: there is a tendency toward larger final saturations and the P-S curves do not reach a flat plateau. The initial curvature (related to the flow close to the inlet) seems to extend longer in the P-S curves than the final curvature (related to the flow close to the outlet). This is particularly noticeable in the systems with shorter lengths in Figure 11a. Therefore, when it comes to the influence on the overall shape of the P-S curve, the boundary effects coming from the flow close to the inlet (building regime) are more important than those coming from the flow close to the outlet (clogging regime), and require a longer system length l to fade out. As l is increased, the final saturation is reduced, and the phases of pressure building up are restricted to the regions close to the inlet and outlet. For long enough systems, most of the invasion happens at an essentially constant capillary pressure (the propagation regime dominates), which is reflected as the plateau observed in the P-S curves for large l . Notice that for those long systems, the fraction of pores in the vicinity of the boundaries is small therefore their P-S curves resemble the ones in subwindow 3 in Figure 9 where the measurements are taken at the center of the model (far from the boundaries).

In Figure 11b, P-S curves are produced for systems with different widths w and

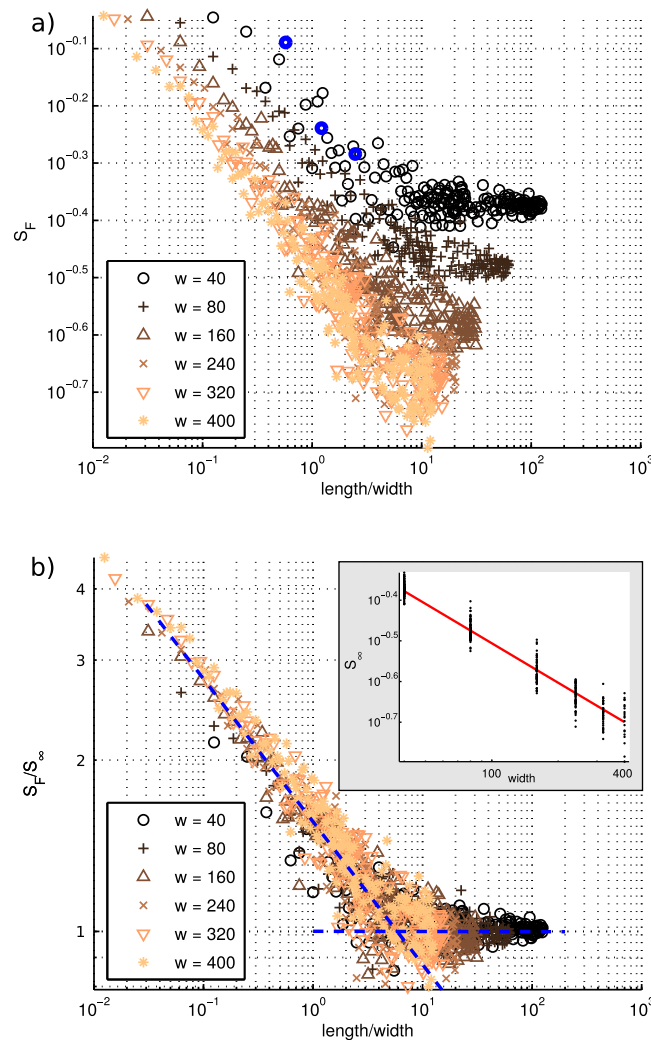


Figure 12. Simulations. (a) Final air saturations as a function of l/w for several widths with l varying from 5 to 5000. The blue points are from the experimental data in Figure 13. (b) Same curves divided by S_∞ , the average value of S_F at large l/w . The dashed blue line corresponds to the linear regression giving the exponent $D_c \approx 1.75 \pm 0.10$. The inset corresponds to $S_\infty \propto w^{(D_c^\infty - D)}$ with $D_c^\infty \approx 1.68 \pm 0.10$ and $D = 2$.

$S_F(r, w)$ at large r . The result is shown in Figure 12b. The data collapse shown in this figure indicates that S_F/S_∞ is indeed a function of r only and, therefore, equations (8) and (9) seem to provide a reasonable description. The exponent D_c in equation (8) was measured from Figure 12b as the slope of the dashed linear regression at $r < 5$, and found to be $D_c \approx 1.75 \pm 0.10$. The dependency of S_∞ with w was also studied and we estimate that $S_\infty \propto w^{(D_c^\infty - D)}$ with $D_c^\infty \approx 1.68 \pm 0.10$ and $D = 2$, see the inset in Figure 12b. From Figure 12b, we can also give a more reasonable definition for the terms “small r ” and “large r ” used in equation (9): from the collapsed data, we can say that $r \approx 5$ marks the approximate turning point for the crossover function (corresponding to the crossing point of the two asymptotic regimes shown in blue-dashed lines). Therefore, we can say that in the case of our 2-D model, the system’s final saturation becomes roughly independent of its length when this length is more than 5 times larger than the system’s width.

There is an intuitive reasoning behind such kind of behavior for the final saturation: far enough from the boundaries, the system becomes, in a statistical sense, translationally invariant along the inlet-outlet direction. That is to say, there is no reason to believe that one portion of the system would present a saturation pattern different from another portion located a bit further (as long as these areas are far from the inlet and outlet boundaries). As the length l of the system is increased, this translationally invariant area also increases

section 2.3.1; and (3) computing the final air saturation. For several widths w (shown in the legend in the figure), the length l of the grid is chosen in the interval from $l = 5$ to $l = 5000$, with a step of 5 from 5 to 100, 10 from 100 to 1000, and 50 from 1000 to 5000. For each fixed width, the final saturation as a function of the ratio $r = l/w$ is plotted in Figure 12a, different colors and symbols being used for different widths. We observe evidence of scaling behavior up to a certain crossover region after which the final saturation seems to remain constant. This observation leads us to postulate the scaling law

$$S_F(r, w) = r^{(D_c - D)} f(r) S_\infty(w), \quad (8)$$

where D_c is the fractal dimension [Mandelbrot, 1982] of the invasion pattern, $D = 2$ is the Euclidean geometrical dimension, $f(r)$ is a crossover function, and $S_\infty(w)$ is the final saturation for a model with width w and length $l \rightarrow \infty$. The crossover function is defined as

$$f(r) = \begin{cases} C & \text{for small } r \\ r^{-(D_c - D)} & \text{for large } r \end{cases} \quad (9)$$

where C is a dimensionless constant, numerically determined as $C \approx 1.56$ by a linear regression in the bilogarithmic plot shown in Figure 12a, over the ensemble of simulations at $r < 5$. In order to test our assumption for the functional dependency of S_F , we divide the data in Figure 12a by the corresponding value of $S_\infty(w)$, determined by averaging simulation values of

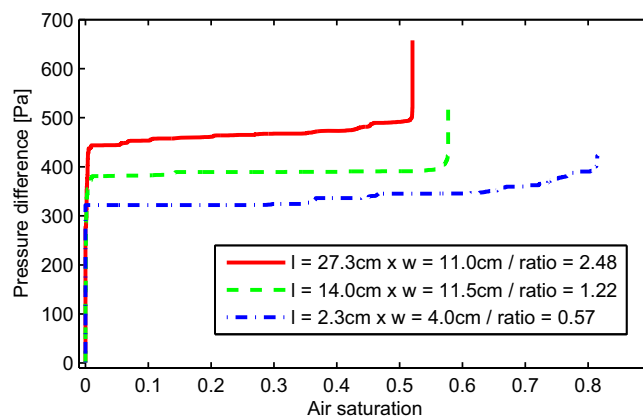


Figure 13. Experimental P-S curves for three different models (the models' geometries are stated in the legend). The lower curve extends longer to the right, indicating that for this model the residual saturation in air is much higher. This is due to the fact that the boundary effects are enhanced by the smaller height of the model, see text. Additionally, we notice that the values of capillary pressures driving the invasion are different for each model. This difference arises from the fact that the distribution of pore-throat sizes is not exactly the same for every model, since the porous medium is rebuilt for each case.

and becomes dominant for l larger than a given value (5 times the width in our case). Although the experiments and simulations presented here are performed in a 2-D model, the intuitive reasoning just presented is also valid in 3-D. The numerical value for the cross-over might be different, but the overall behavior for the saturation must be similar, and its scaling with the sample's length must follow a rule like equation (8).

3.2.2. Direct Comparison Between Simulations and Experiments

Figure 13 shows the experimentally measured P-S curves for three different models (with dimensions shown in the legend of the figure). The number of model geometries tested experimentally is much lesser than the amount of numerical tests, due to the natural difficulties in having to physically reconstruct the models for each different geometry. Therefore, we cannot extract the functional dependency of the saturation with the model's dimensions from the experiments (our data set is not large enough). Nevertheless, from the analysis of this figure, one can at least say that experiments and simulations show similar trends: the residual saturation is influenced by the system size and, in particular, the model with smaller length presents a residual saturation in air much higher than the others, i.e., proportionally less liquid is left trapped inside the porous medium at the end of the experiment. The experimental values corresponding to the measurements in Figure 13 are shown in Figure 12a as thick blue points.

We notice also that there are differences between the values of capillary pressures driving the invasion of the different systems shown in Figure 13. These differences arise from the fact that the distribution of pore-throat sizes may vary from one sample to another, since the porous medium is rebuilt for each experiment. The continuous red curve in Figure 13 is the measured P-S curve corresponding to the longest model used, whose flow images are shown in Figure 2 and having the pore-throat sizes distribution shown in the inset of Figure 6. Differences in pore-throat sizes are reflected in the respective capillary pressure thresholds and further translated into the critical value p_{crit} of the capillary pressure necessary to drive the invasion, as will be discussed in section 3.3. Additional details on the different capillary pressure thresholds distributions for the models in Figure 13 are given in Appendix C.

3.2.3. Final Air Saturation in Square Subwindows

Due to the fractal nature of the capillary invasion process, the air saturation depends on the size of the sample, as observed in section 3.2. We can also notice a similar size dependency by measuring the saturation using subwindows of different sizes inside a given sample. In this section, we perform a numerical study considering square subwindows centered in the middle of the network, with sizes s being a fraction q of the system's width w : $s = qw$, where q will take the values: 0.1, 0.25, 0.5, 0.75, and 1 (the latter corresponding to having a square subwindow spanning the whole width of the grid). Figure 14 shows the outcome of these simulations for two different grid dimensions, the one on the left having width and length, respectively, $w = 220$ and $l = 273$ and the one on the right having $w = 220$ and $l = 1330$. The final saturations are represented by the black points, which are scattered around an average value S_{ave} marked by a red circle for each subwindow size. This scattering is expected: it originates from the fact that the capillary pressure thresholds are drawn randomly at the beginning of each numerical experiment and, therefore, the invasion pattern differs from one realization to another. It is possible, for example, to have a measurement in which the saturation inside the subwindow is $S_f = 0$, meaning simply that the invasion front has bypassed the area of that subwindow. The probability of this happening is of course higher for smaller subwindows. The blue squares represent the typical maximum saturation S_{max} that can be expected for a system of size s , i.e.,

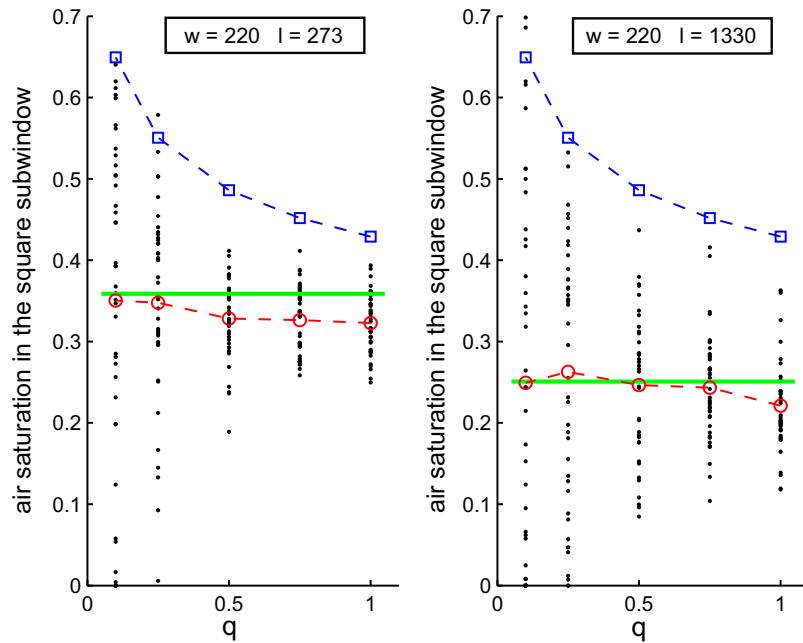


Figure 14. Final air saturation in the square subwindows of size s as function of its relative size $q = s/w$ for 40 simulation processes in two different systems with width w and length l given in the legend. The blue line is the expected maximum air saturation in the subwindow, the red line is the mean final air saturation over all the processes in each subwindow, and the green horizontal line is the average of the final air saturation in the whole system.

$S_{max} = \alpha s^{(D_c - D)}$. If the actual dimension of the square subwindow is L (in, say, centimeters) and the typical distance between adjacent pores is d (measured in the same length unit as L), S_{max} is given by

$$S_{max} = \alpha \left(\frac{L}{d} \right)^{(D_c - D)}, \tag{10}$$

with $D_c = 1.82$, the value of the fractal dimension of a capillary fingering pattern as in *Wilkinson and Willemsen* [1983], and $\alpha = 1.0$ for the data in Figure 14. The green horizontal line corresponds to the average of the macroscopic final saturation S_F in the whole system. We expect the average final saturation S_{ave} inside a subwindow of a given size s (red circles) to coincide with the average of the macroscopic final saturation S_F (green line) in the limit of a very long system. This is expected, since the average saturation in the subwindows is an intensive quantity, i.e., not dependent on the system size. Considering that the macroscopic saturation is governed by the smallest dimension between the width and the length, we have

$$S_{ave} = \alpha; \left(\frac{\min(w, l)}{d} \right)^{(D_c - D)}. \tag{11}$$

In the case of our simulations, we see that the final saturation S_F (green line) is generally higher than the average final saturation S_{ave} inside the subwindows (red circles) because of the more compact air invasion close to the boundaries of the model (which lie outside the subwindows).

3.3. Analysis of the Capillary Pressure

As stated earlier, for a system that is long enough such that the influences of the boundaries to the flow are negligible, two parameters are essential to define the pressure-saturation relationship: the final saturation S_F and the critical capillary pressure p_{crit} . We have analyzed the behavior of S_F in the previous section and now we turn our attention to p_{crit} .

We start by defining a set of useful quantities. Let y denote the distance from the inlet of the most advanced tip of the air front inside the model. If we think of the pressure as a function of this position, i.e.,

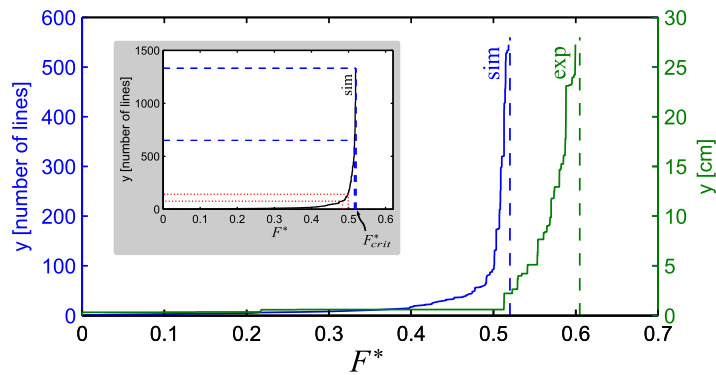


Figure 15. Maximum position y of the air-liquid interface as function of the imposed capillary pressure p_c expressed in terms of the CDF value via $F^* = F(p_c)$ (for universality regarding the type of pore-throat distribution). Results for simulations (blue, left) and experiments (green, right). The experimental measurements were made in the system shown in Figure 2. In the simulations, for each distance y the corresponding applied pressure is obtained by averaging the result over 10 realizations. The dimensions of the simulations were $w = 220$ columns and $l = 546$ lines in order to keep the same proportions of the experimental cell, having $w = 11.0$ cm and $l = 27.3$ cm. We observe in both cases the diverging behavior of maximum air front position y as the pressure CDF approaches the critical value F_{crit}^* , measured to be $F_{crit}^* = 0.52$ in the simulations (connectivity 4) and $F_{crit}^* = 0.605$ in the experiments (average connectivity between 3 and 4). In the inset we show simulations made in order to point the diverging behavior more clearly. The dashed and dotted lines locate the pressure CDF when air arrives at the middle of the model and at the filter (breakthrough) for two different system sizes: $w = 220, l = 150$ (dotted red lines) and $w = 220, l = 1330$ (dashed blue lines). As the length of the model increases, the values of $F^*(l/2)$ and $F^*(l)$ tend to converge approaching the critical value F_{crit}^* .

$$p_c = p_c(y), \tag{12}$$

then, if the system's length is l , $p_c(l)$ is the pressure at breakthrough and $p_c(l/2)$ is the pressure when the invasion front is halfway through the model's length. Next, let

$$F^* = F(p_c) \tag{13}$$

be the value of the cumulative distribution function F associated with a given distribution of capillary pressure thresholds, calculated at the pressure p_c . We remind that F^* varies in the interval $0 \leq F^* \leq 1$ and its numerical value corresponds to the probability of having a capillary pressure smaller than or equal to p_c in the given distribution, see section 2.3.2.

Let us focus now on the inverse of equation (12), $y = y(p_c)$. This function gives the distance to the inlet of the most advanced tip of the air phase, as a function of the imposed capillary pressure. The plateau in the P-S curve is reflected in the curve $y = y(p_c)$ as a vertical asymptote at a given pressure, the critical pressure p_{crit} . When this pressure is reached the invasion of the air phase happens continuously making the tip position y to advance inside the model. One could plot such function and evaluate p_{crit} but such numerical value would be particular to the distribution of capillary pressure thresholds in use, and, therefore, uninteresting from a more general perspective. In order to overcome this, we have decided to consider instead the functional composition

$$y = y(p_c(F^*)), \tag{14}$$

where we make use of the inverse of equation (13), to obtain the capillary pressure as a function of the CDF value, i.e., $p_c = F^{-1}(F^*)$. Due to the nature of the invasion percolation model, in which the invasion depends on the ranking of the capillary pressure threshold values and not on the values per se (see section 2.3.2), the dependency of y on F^* is robust, in the sense that, apart from statistical fluctuations (that can be removed by averaging over several simulations), the curve $y(F^*)$ is independent of the particular capillary pressure thresholds distribution used and depends only on the connectivity of the underlying grid.

In Figure 15, we have plotted in blue (left) the curve $y(F^*)$ obtained by averaging the results from 10 numerical simulations in a system of width $w = 220$ and length $l = 546$ to keep the same proportions of the model shown in Figure 2. As anticipated, this curve presents the vertical asymptotic behavior at a given value F_{crit}^* , measured to be $F_{crit}^* = 0.52$. In order to verify this divergence more explicitly, we have also plotted the function $y(F^*)$ for a longer system having width $w = 220$ and length $l = 1330$. The resulting curve is shown as an

Table 1. Bond Percolation Thresholds for Different Lattice Types in 2 and 3 Dimensions^a

Lattice Type	Connectivity	F_{crit}^*
2-D honeycomb	3	$1 - 2\sin(\pi/18) \approx 0.6527$
2-D square	4	$1/2 = 0.50$
2-D triangular	6	$2\sin(\pi/18) \approx 0.3473$
3-D diamond	4	0.3880
3-D cubic (simple)	6	0.2488
3-D cubic (BCC)	8	0.1803
3-D cubic (FCC)	12	0.1190

^aThe connectivity is understood as the number of nearest neighbors to each pore in the lattice (adapted from Stauffer, [1994]).

inset in Figure 15, where the divergence at $F_{crit}^* = 0.52$ can be more clearly seen. We notice that this value is very close to 0.50, the bond percolation threshold for an infinite square network [Stauffer, 1994], the difference being possibly due to the fact that the system's width $w = 220$ is not too large. We raise the claim that for large enough systems (such that the boundary effects can be neglected), the invasion far from the system's boundaries happens at a statistically constant capillary pressure, whose value can be estimated by

$$p_{crit} = F^{-1}(F_{crit}^*), \quad (15)$$

in which F_{crit}^* is the bond percolation threshold [Stauffer, 1994] associated with a network having the same average connectivity as the sample, and F is the cumulative distribution function associated with the values of the capillary pressure thresholds in the sample. Values of the bond percolation threshold are tabulated for several different types of lattices and we present some of them in Table 1.

Equation (15) condenses, in a single simplified form, the influence to the critical capillary pressure from several material properties of the porous medium and fluids involved. The pore-size distribution of the medium, wetting properties of the fluids and surface tension between the phases are encoded in the function F and the average pore connectivity is used in the computation of F_{crit}^* . This means that knowledge of the fluids' wetting properties and the medium's geometry are sufficient to produce an estimation of the critical pressure p_{crit} prior to any empirical test. Such information could be of much value, for example, for professionals interested in the modeling of two-phase flows in the bulk of large reservoirs (where the influence of the boundaries may be neglected). Additionally, a priori knowledge of the numerical value of p_{crit} could also be of interest for oil recovery, specifically in the so-called secondary recovery stage in which a fluid is injected into the reservoir in order to increase its pressure and drive the oil flow. Overpressurizing a porous medium during drainage may lead to faster flows, with the appearance of viscous effects which can considerably increase the residual saturation of the wetting phase [Løvoll et al., 2011] and reduce the oil recovery. Beforehand estimation of the value of p_{crit} may, therefore, be useful in avoiding such overpressurizing.

To characterize the importance of the system's dimensions in the current analysis, we have used the inverse of equation (14) to plot on the inset of Figure 15 lines corresponding to the values of $F^*(l)$ and $F^*(l/2)$ in which the invasion front maximum position is $y = l$ (breakthrough) and $y = l/2$ (halfway through the model's length). Two model dimensions were considered: $w = 220, l = 150$ (dotted red lines) and $w = 220, l = 1330$ (dashed blue lines). One can see that, as the length of the model increases, the values of $F^*(l/2)$ and $F^*(l)$ tend to converge approaching the critical value F_{crit}^* . It is in this limit that the capillary pressure is essentially constant during the invasion and well estimated by equation (15).

In order to verify experimentally our results, we have decided to produce the experimental curve $y(F^*)$ for the invasion shown in Figure 2. To obtain this curve, we have measured the distance y from the images of the flow and used the inverse of equation (13) to relate the imposed capillary pressure p_c to the experimental CDF value F^* . Notice that this requires the experimental determination of the actual capillary pressure thresholds distribution (from which the cumulative distribution F used in equation (13) is then calculated). Since our image-based method from section 2.2 allows us to find only the distribution of $1/d$, the inverse of pore-throat sizes (see Figure 6), we needed to produce a calibration curve to relate p_c and $1/d$. In an ideal scenario, one would expect from the Young-Laplace law [Bear, 1972] a linear relationship between p_c and $1/d$. In a more realistic case, dynamical effects such as contact angle hysteresis can make such a relationship more complicated. We have estimated this relationship using a separate experiment in which we have employed the same porous medium shown in Figure 2, but this time driven under a constant (slow) withdrawal rate. The choice of this boundary condition was motivated by the fact that, in this case, the oscillations in the measured pressure signal are not as pronounced as in the system driven with the constant imposed pressure, thus yielding a more accurate measurement of the pressure. A linear fit to our data in

the region close to critical pressure gives $p_c = 4.0 \cdot 10^1 \text{ Pa} \cdot \text{mm} (1/d) + 3.1 \cdot 10^2 \text{ Pa}$. Since the majority of the invasion happens at pressures close to this value (in the propagation regime defined previously), this linearization procedure is justifiable in this context.

By using this relationship, we have been able to produce the experimental curve $y(F^*)$, shown in green in Figure 15 (right). We notice that the divergence of y at a given value of F_{crit}^* is also observed in the experimental case, the critical value measured being $F_{crit}^* = 0.605$. The diverging nature of $y(F^*)$ was expected from the plateau in the experimental P-S curve in Figure 7. The value of F_{crit}^* presented here can only be given up to a precision of ± 0.060 , due to limitations in both our method of estimating the distribution of $1/d$ (described in section 2.2) and in the determination of the calibration curve linking $1/d$ and p_c . Nevertheless, the difference between the experimental and numerical values of F_{crit}^* is expected because the connectivity of the grid in the simulations is 4 (square lattice) whereas in the experiments, it assumes an average value between 3 and 4, as can be seen from Figure 5. From Table 1, we therefore expect a critical value in the interval $0.5 < F_{crit}^* < 0.6527$, i.e., bounded by the values of F_{crit}^* corresponding to the square lattice (connectivity 4) and the honeycomb lattice (connectivity 3).

4. Conclusions

In the current work, we have analyzed, both numerically and experimentally, the first drainage in a two-phase flow inside a porous medium. We have focused our attention on the influence of boundary effects to the measurement of pressure-saturation curves in such systems and our results indicate that some features of the P-S curves can indeed be highly influenced by these effects. The invasion can be divided into three regimes that, for convenience, we call here building, propagation, and clogging regimes.

In the building regime, the air-liquid front evolves from the flat profile (in which the invasion within the porous network starts) to the ramified fractal structure characteristic of flows in the capillary regime. This evolution in the front morphology is responsible for the initial pressure build up in the P-S curve and it happens through a certain distance near the inlet of the system. This distance increases with the size of the inlet boundary itself (the width w in our analysis).

Once the invasion front has attained its ramified fractal structure (typical of slow invasion governed by capillary forces), the front propagates at a capillary pressure fluctuating around a statistically constant value p_{crit} . This characterizes the propagation regime, which dominates the dynamics in the limit of large systems, in which the boundary effects are negligible. The particular value of the critical capillary pressure p_{crit} is dependent on material properties of the fluids (such as wettability and surface tension), and the geometry and topology of the medium (via its pore-size distribution and average pore connectivity). Our work establishes a method for directly estimating the value of p_{crit} . This is done via equation (15) and such estimation may be useful for a wide range of practical applications. We particularly stress its possible use in the simulations of two-phase flows in the bulk of large porous networks. As described earlier, P-S curves are used to give closure to the extension of Darcy equations to multiphase flows employed in such simulations.

The clogging regime takes place once the air-liquid interface percolates through the model reaching the filter at the outlet (breakthrough). In the clogging regime, narrower pores in the vicinity of the filter are invaded, leading to the rise of the capillary pressure from the critical level p_{crit} of the propagation regime. This process happens until the clogging of the filter, the moment in which air completely fills the outlet boundary and the liquid in the filter gets disconnected from the porous medium. The invasion of narrower pores in this regime is induced by the presence of the filter itself: since its typical pore-sizes are much smaller than the pore sizes in the model, the air front is constrained to remain inside the porous medium. The final pressure build up is, therefore, a direct result of the artificial placement of a filter at the outlet boundary.

We emphasize that the boundary effects observed here can also happen in actual measurements of P-S curves (or, alternatively, water-retention curves) in real soil and rock samples. Since the measurements are typically performed inside closed setups, commonly with a filter at the outlet (such as in the porous diaphragm method), boundary effects are reflected in the resulting curves and an analyst using the experimental data must take into consideration the extent to which these effects might influence the resulting analysis. In a realistic invasion

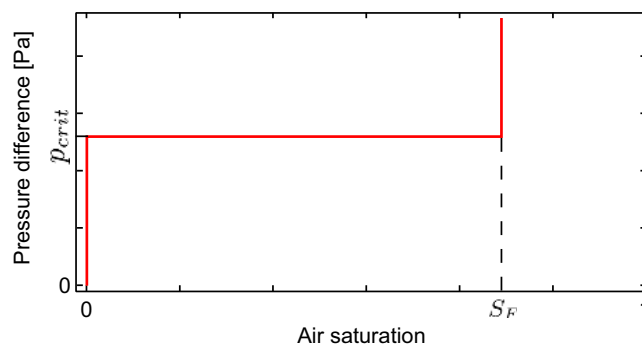


Figure 16. The pressure-saturation relationship for a system unaffected by boundary effects is specified simply by two parameters: a critical capillary pressure p_{crit} and a final air saturation S_F .

pattern inside a sample large enough, none of these boundary effects would be present. In 2-D, we believe our much simplified description in terms of two values only, a critical pressure p_{crit} and a final saturation S_F , holds a more reliable picture for such scenarios, see Figure 16. The critical pressure is $p_{crit} = F^{-1}(F_{crit}^*)$, equation (15), and the final saturation S_F is a random variable with an average value $S_{ave} = \alpha(w/d)^{(D_c - D)}$, equation (11), and a maximum value $S_{max} = \alpha(L/d)^{(D_c - D)}$, equation (10), for a system of REV of linear size L , and (smallest) macroscopic size w , where d is the typical distance between adjacent pores.

In 3-D systems both phases can percolate simultaneously, contrarily to the two dimensional case [Stauffer, 1994; Sahimi, 2011] where either one or the other percolates. This will result in emptying progressively portions of the defending fluid connected to the outlet after the first one percolates, and even in a large system, make the invasion happen not only at first percolation pressure, but also above—something closer to the upwards ramps seen in the Brooks-Corey and Van Genuchten models. Nonetheless, this can only happen as long as the defending spanning cluster is present. Once it gets disconnected, only finite size clusters are present, close to the outlet region in a semipermeable system. The invasion of these clusters would lead to a final increase in the capillary pressure—a finite size effect absent in an open system in 3-D. This precise point is interesting to study per se in future research. In a closed 3-D system with a filter (still neglecting gravitational effects), we expect that the difference in connectivity properties in percolation (as compared to the 2-D case) will yield for the P-S curve a plateau at $p_{crit1} = F^{-1}(F_{crit1}^*)$, corresponding to the growth of the percolating invasion cluster, followed by a rising function of saturation, going from $p_{crit1} = F^{-1}(F_{crit1}^*)$ to $p_{crit2} = F^{-1}(F_{crit2}^*)$, where F_{crit1}^* is the percolation threshold for the invading phase coming in, and F_{crit2}^* (that should be $1 - F_{crit1}^*$) is the percolation threshold of the defending phase at residual saturation. Once p_{crit2} is overcome, the large size defending cluster disconnects, and for large systems the saturation does not change significantly anymore if the pressure difference is increased beyond p_{crit2} . Hence, the modification from the 2-D behavior, for large open system, is the addition of a rising ramp for the P-S curve from p_{crit1} to p_{crit2} between the horizontal and final vertical asymptotes of Figure 16.

Additional effects that were not studied in the present work can also play an important role in the determination of P-S curves. For example, flow through corners in the porous medium [Lenormand and Zarcone, 1984; Tuller and Or, 2001] may increase the hydraulic continuity of the wetting phase, providing a pathway for the long-term drainage of clusters that would be otherwise completely trapped in the middle of the nonwetting phase. The extent of the region connected by corner flow depends on specific properties of the porous medium and fluids involved and this effect is particularly important in the case of angular pore spaces [Tuller et al., 1999]. For the system studied in the present work, corner flow is not so relevant due to the fact that the “corners” in which the wetting phase can accumulate correspond to the isolated points where the glass beads touch the upper and lower contact paper surfaces. Since these points are spatially localized, the formation of long pathways of regions hydraulically connected via corner flow is unlikely. In the case of tests to determine the P-S curves using real porous media, corner flow may be important depending on the particular porous medium and fluids employed. Nevertheless, if the sample is long enough, these corners or films could rupture/disconnect over large length and time (depending on the specific porous material and fluid pairs, for the many cases where none of the fluids is completely wetting the solid components). Therefore, the extent of the region of pores hydraulically connected to the outlet via corner flow could become negligible in comparison to the sample size and such effects can then also be seen as boundary effects associated to the flow close to the outlet. In this limit of a large enough sample, the results derived in this paper should remain applicable.

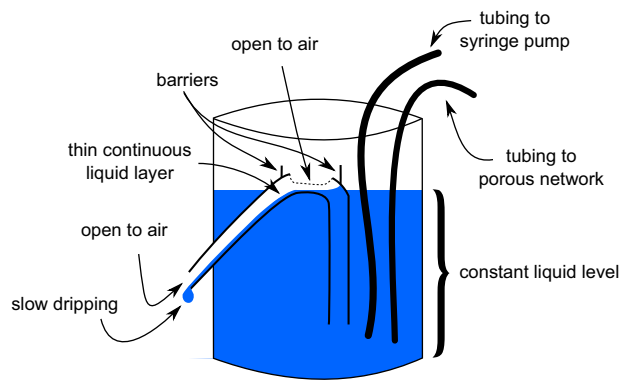


Figure A1. Diagram of the overflowing mechanism with the siphon-like tube constructed in the liquid reservoir. The width of the continuous liquid layer inside the inclined tube and the size of the droplet dripping from the left are both exaggerated for better visualization.

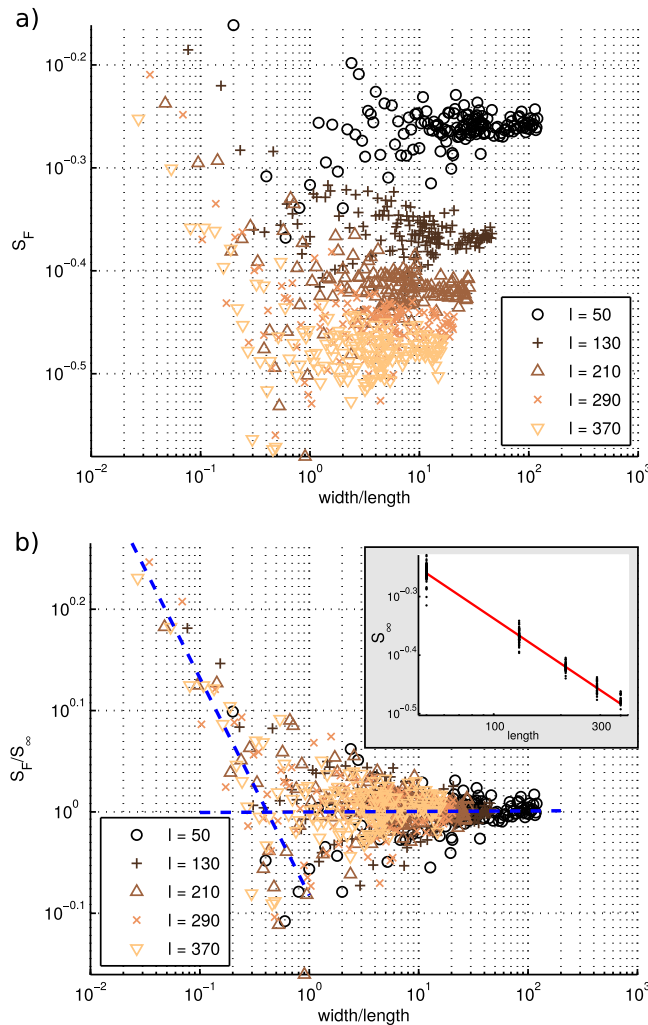


Figure B1. Simulations. (a) Final air saturations as a function of w/l for several lengths with w varying from 10 to 6000. (b) Same curves divided by S_∞ , the average value of S_f at large w/l . The dashed blue line corresponds to the linear regression giving the exponent $D_\epsilon \approx 1.79 \pm 0.10$. The inset corresponds to $S_\infty \propto l^{(D_\infty - D)}$ with $D_\infty \approx 1.74 \pm 0.10$ and $D = 2$.

Appendix A: Description of the Overflowing Mechanism

Figure A1 shows a detailed diagram of the overflowing mechanism built into the fluid reservoir used to control the imposed pressure in the experiments. A siphon-like tube is built with one inclined end going out from the side of the reservoir and a vertical end hanging inside of it. As the reservoir is filled with liquid, the vertical part of the tube is also filled while the inclined one remains with air. When the liquid level reaches a certain height, a thin liquid layer is formed on the top of the curved part of the tube and is guided through the inclined side to finally drip slowly outside of the reservoir. A hole is cut from the extreme top of the tube (dashed line in the diagram) in order to avoid the meniscus inside of it (on the right side of the hole in the diagram) to reach the other side, which could eventually lead to completely flushing out the liquid from the bottle (like an actual siphon). A small vertical barrier is built around the hole to avoid liquid from the reservoir to go into it. One tube connects the reservoir to the porous medium while another one connects it to an external syringe pump. Apart from the tubing, the whole structure is made of glass. Liquid is constantly pumped into this reservoir from the external syringe pump at a very low rate. The purpose of this inflow is two-folded: on one hand it overcomes the losses due to evaporation, on the other it ensures the stability and continuity of the thin liquid layer inside the siphon-like tube, avoiding any sort of intermittency effect in the meniscus inside of it. The intermittency mentioned is of the same kind as the one observed when one tries to slowly fill a glass with water up to the top. Before spilling, a meniscus is formed on the top of the glass, which grows up to a maximum size and then bursts, spilling the water out of the glass. This sudden behavior could cause abrupt changes in the height level of the order of 1 mm introducing

an error larger than 10 Pa in the imposed pressure. By guaranteeing the existence of the continuous liquid layer inside the curved tube, this problem is also avoided. The design of this reservoir is based on a modification of a very curious object called a Tantalus cup (or Pythagorean cup), which we highly recommend the interested reader to search for.

Appendix B: Further Analysis of the Air Saturation

B1. Variation of the Final Air Saturation With the System's Width

In this appendix section, we extend the analysis initiated in section 3.2 by considering the variation of the final air saturation as the width of the system is gradually changed. Figure B1a shows the evolution of S_F with $r' = w/l$ (inverse of $r = l/w$ used in section 3.2) when increasing w from $w = 10$ to 6000 with a step of 10 from 10 to 200, 20 from 200 to 2000, and 100 from 2000 to 6000. The procedure is repeated for several different lengths l (shown in the legend in the figure). After rescaling the data by dividing it by $S_\infty(l)$, i.e., the value of the final saturation for a system with given length l in the limit of very large width, we obtain the data shown in Figure B1b. Once again we postulate the scaling

$$S_F(r', l) = r'(D_c - D)h(r')S_\infty(l), \tag{B1}$$

where $h(r')$ is a crossover function, being defined similarly to equation (9):

$$h(r') = \begin{cases} C' & \text{for small } r' \\ r' - (D_c - D) & \text{for large } r', \end{cases} \tag{B2}$$

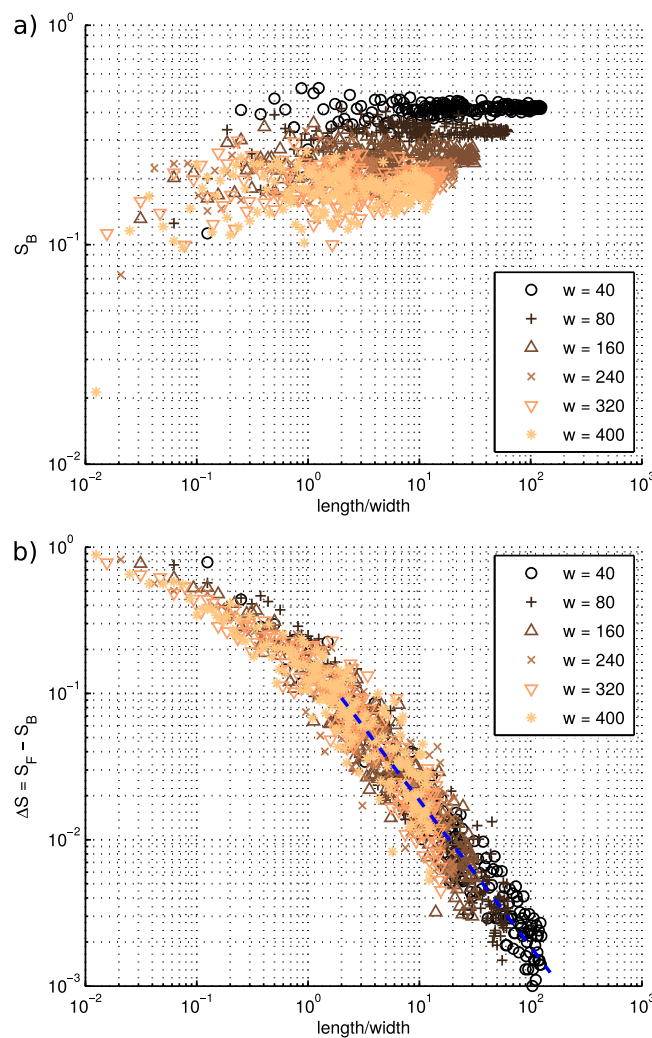


Figure B2. Simulations. (a) Breakthrough air saturations. (b) Difference between the final and the breakthrough air saturations. The dashed blue line shows the scaling $\Delta S \propto (l/w)^{-1}$.

where C' is again a dimensionless constant, numerically determined as $C' \approx 0.83$ by a linear regression in the bilogarithmic plot shown on Figure B1b, over the ensemble of simulations at $r' < 0.4$. From the slope of the curve fitting the small r' data in Figure B1b, we estimate the fractal dimension to be again $D_c \approx 1.79 \pm 0.10$. Additionally, $S_\infty(l)$ is found to scale as $S_\infty \propto l^{(D_c^\infty - D)}$ with $D_c^\infty \approx 1.74 \pm 0.10$ and $D = 2$ as before, see the inset in Figure B1b. The turning point for the crossover function happens approximately at $r' = 0.4$, i.e., when the length is about 2.5 times larger than the width. We would like to remark that the convergence to a flat plateau is expected, once again, due to the same symmetry arguments presented before. The only difference in the present case, being the fact that the statistical symmetry for the final saturation arises in the direction perpendicular to the inlet-outlet direction. If we consider two subwindows one next to the other in this direction, for large enough systems (large w), there is no reason to believe that the final saturation measured in one of these subwindows would be different than the

same quantity measured in the other (which is also the same as the saturation measured in a subwindow formed by the union of the two). This kind of statistical symmetry holds for the central region of the system, in which the effects from the side boundaries are negligible. As the width of the system is increased, this region grows and becomes dominant for large enough systems.

B2. Variation of the Breakthrough Saturation With the System’s Length

We recall that the breakthrough saturation S_B is defined as the saturation at the moment when air percolates for the first time, reaching the exit side and forming a connected sample-spanning cluster of invaded pores ($S_B < S_F$). We have plotted the breakthrough saturation S_B (Figure B2a) and the difference $\Delta S = S_F - S_B$ (Figure B2b) as functions of the ratio $r = l/w$, where again different colors and symbols are used for different values of w . The values of S_B at fixed w in Figure B2a are essentially constant, with some dispersion for systems with very small lengths. Yet again, the existence of the plateau is due to the translational invariance along the inlet-outlet direction described in section 3.2.1. In Figure B2b, the decrease of ΔS indicates that final and breakthrough saturation are only significantly different for small systems. This is also intuitively expected. The breakthrough saturation is measured at the moment in which air first percolates through the medium, reaching the filter at the outlet. After this instant, the pores in the vicinity of the filter start to be invaded, until the moment in which the filter gets clogged (which in the simulations corresponds to the moment in which the last line

of pores is completely filled with air). Therefore, the difference ΔS between the values of S_F and S_B is due to the invasion of those last pores in the vicinity of the filter. The number of pores in this region scales as $n_{filt} \propto w^2$ while the total number of pores in the system is proportional to the area of the porous matrix, i.e., $n_{tot} \propto wl$. In the limit of long systems, ΔS scales as the ratio n_{filt}/n_{tot} , therefore, $\Delta S \propto (l/w)^{-1}$. This scaling is shown in Figure B2b by the dashed blue line. As the system’s length gets longer, the fraction of pores in the region close to the filter becomes smaller as compared to the total number of pores, thus giving a minor contribution to the saturation. For such large systems, S_F is still larger than S_B , but not much. Conversely, for small l , the number of pores in the vicinity of the filter becomes relatively large in comparison to the total number of pores, thus the larger values for ΔS .

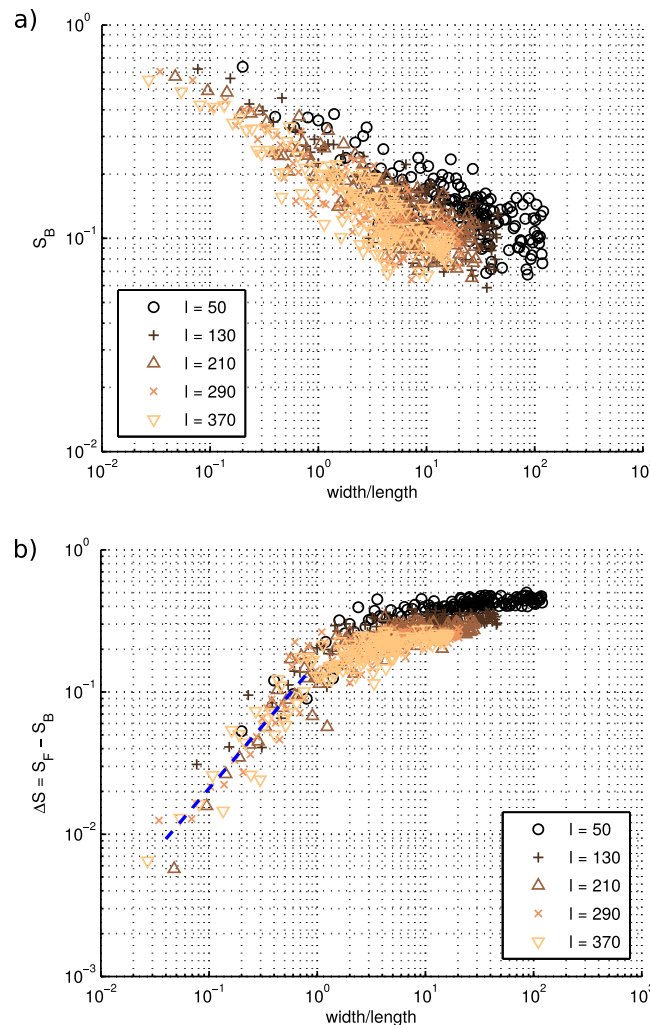


Figure B3. Simulations. (a) Breakthrough air saturations. (b) Difference between the final and the breakthrough air saturations. The dashed blue line shows the scaling $\Delta S \propto (w/l)^{-1}$.

B3. Variation of the Breakthrough Saturation With the System’s Width

Figure B3a shows that the value of S_B is reduced as the system gets wider. There is an intuitive reasoning behind this behavior: the larger

the system gets, the more probable it is for an easy path to exist (consisting of pores with low capillary threshold values) connecting the inlet to the outlet. The breakthrough can thus be reached at an earlier stage of invasion, leading to a lower value of S_B . Figure B3b shows the behavior of the difference $\Delta S = S_F - S_B$ with the ratio $r' = w/l$. The dashed blue line corresponds to the same scaling discussed in the previous section. Since the abscissa here is w/l , the exponent changes sign and $\Delta S \propto (w/l)^1$. The increase in this quantity as the system gets wider is due to the decrease in S_B with the width, as discussed.

Appendix C: Comparison Between the Image-Based Estimation of the Capillary Pressure Thresholds Distribution for Different Models

In Figure 13, we have noticed that the capillary pressure driving the invasion for the three models studied differed a bit from one model to another. We have argued that this difference came from the fact that the models were rebuilt for each experiment and therefore the pore-size distribution varied from one to another, which could then result in the observed differences. In order to clarify this point, we have performed the image-based estimation of the capillary pressure thresholds distribution for the other models, in a similar manner to what had been done previously for the longest model (see section 2.2).

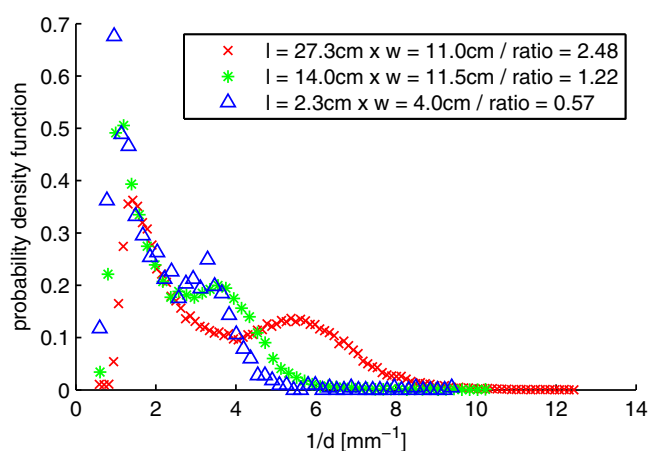


Figure C1. Image-based estimation of the capillary pressure thresholds distribution for the three models studied experimentally. The model's geometries are given in the legend. We observe that the longest model has narrower pores (higher values of $1/d$), which is reflected in the higher value of the entrance pressure seen in Figure 13.

another, which could then result in the observed differences. In order to clarify this point, we have performed the image-based estimation of the capillary pressure thresholds distribution for the other models, in a similar manner to what had been done previously for the longest model (see section 2.2).

Figure C1 shows the resulting distributions of $1/d$, the inverse of the pore-throat size, which gives an estimation of the capillary pressure according to Young-Laplace law as described in section 2.2. The colors in Figure C1 were chosen as to match the ones in Figure 13, different colors for different models. The models' geometries are given in the legend of the figure. The distribution

shown for the longest model (red crosses data) is the same as the one in Figure 6. We see that the smallest model (blue triangles data) has lower values of $1/d$ (wider pore-throats), which in its turn is reflected in the lower capillary pressure needed to drive the invasion, as observed in Figure 13. The model having intermediate size (green stars data) has a distribution lying in between the smallest and longest ones as shown in Figure C1. Notice that, the fact that the critical pressure p_{crit} seems to be increasing with model size in Figure C1 is a coincidence: the difference in the values of capillary pressure thresholds (and consequently p_{crit}) depend on the pore-throat size distribution but not necessarily on the sample dimensions.

Acknowledgments

The first and second authors contributed equally to this work. We would like to thank the support from the University of Oslo, University of Strasbourg, the Norwegian Research Council through the FRINAT grant 205486, the REALISE program, and the EU Marie Curie ITN FLOWTRANS network. This project has also received funding from the European Union's seventh framework programme for research, technological development, and demonstration, under grant agreement 316889, ITN FlowTrans. We acknowledge the support of the IDEX program through the award "Hope of the University of Strasbourg," and the University of Oslo through a guest researcher programme. Additionally, we thank Alex Hansen, Eirik Flekkøy, Rubens Juanes, Benjy Marks, René Castberg, and Mihailo Jankov for valuable discussions and technical support. The data used in this paper can be obtained upon request.

References

- Bear, J. (1972), *Dynamics of Fluids in Porous Media*, Elsevier, N. Y.
- Berg, S., et al. (2013), Real-time 3d imaging of haines jumps in porous media flow, *Proc. Natl. Acad. Sci. U. S. A.*, 110(10), 3755–3759, doi:10.1073/pnas.1221373110.
- Binning, P., and M. A. Celia (1999), Practical implementation of the fractional flow approach to multi-phase flow simulation, *Adv. Water Resour.*, 22(5), 461–478, doi:10.1016/S0309-1708(98)00022-0.
- Birovljev, A., L. Furuberg, J. Feder, T. Jssang, K. J. Mly, and A. Aharony (1991), Gravity invasion percolation in two dimensions: Experiment and simulation, *Phys. Rev. Lett.*, 67, 584–587, doi:10.1103/PhysRevLett.67.584.
- Bohy, M., L. Dridi, G. Schäfer, and O. Razakarisoa (2006), Transport of a mixture of chlorinated solvent vapors in the vadose zone of a sandy aquifer, *Vadose Zone J.*, 5, 539–553.
- Bottero, S., S. Hassanizadeh, and P. Kleingeld (2011), From local measurements to an upscaled capillary pressure-saturation curve, *Transp. Porous Media*, 88(2), 271–291, doi:10.1007/s11242-011-9739-4.
- Brooks, R. H., and A. T. Corey (1964), Hydraulic properties of porous media, *Hydrol. Pap.*, 3, Colorado State University, Fort Collins, Colo.
- Brown, G. O. (2002), Henry Darcy and the making of a law, *Water Resour. Res.*, 38(7), doi:10.1029/2001WR000727.
- Chavent, G. (1986), Mathematical models and finite elements for reservoir simulation single phase, multiphase, and multicomponent flows through porous media, in *Studies in Mathematics and Its Applications*, vol. 17, North-Holland Sole distributors for the U.S.A. and Canada, Elsevier Sci., Amsterdam, Netherlands.

- Chen, J.-D., and D. Wilkinson (1985), Pore-scale viscous fingering in porous media, *Phys. Rev. Lett.*, *55*, 1892–1895, doi:10.1103/PhysRevLett.55.1892.
- Cohen, R. M., and J. W. Mercer (1993), *DNAPL Site Evaluation*, edited by C. K. Smoley, 200 pp., Boca Raton, Fla.
- Darcy, H. (1856), *Les Fontaines Publiques de la Ville de Dijon*, Dalmont, Paris.
- di Chiara Roupert, R., G. Schäfer, P. Ackerer, M. Quintard, and G. Chavent (2010), Construction of three-phase data to model multiphase flow in porous media: Comparing an optimization approach to the finite element approach, *C. R. Geosci.*, *342*(11), 855–863.
- Dridi, L., I. Pollet, O. Razakarisoa, and G. Schäfer (2009), Characterisation of a DNAPL source zone in a porous aquifer using the partitioning interwell tracer test and an inverse modelling approach, *J. Contam. Hydrol.*, *107*, 22–44.
- Dullien, F. (1979), *Porous Media Fluid Transport and Pore Structure*, Elsevier Sci., Burlington.
- Durlofsky, L. J. (1993), A triangle based mixed finite element finite volume technique for modeling two phase flow through porous media, *J. Comput. Phys.*, *105*(2), 252–266, doi:10.1006/jcph.1993.1072.
- Erpelding, M., S. Sinha, K. T. Tallakstad, A. Hansen, E. G. Flekkøy, and K. J. Måløy (2013), History independence of steady state in simultaneous two-phase flow through two-dimensional porous media, *Phys. Rev. E*, *88*, 053004, doi:10.1103/PhysRevE.88.053004.
- Ewing, R., and R. Heinemann (1984), Mixed finite element approximation of phase velocities in compositional reservoir simulation, *Comput. Methods Appl. Mech. Eng.*, *47*(12), 161–175, doi:10.1016/0045-7825(84)90052-5.
- Feder, J. (1988), *Fractals*, Plenum, N. Y.
- Furuberg, L., J. Feder, A. Aharony, and T. Jøssang (1988), Dynamics of invasion percolation, *Phys. Rev. Lett.*, *61*, 2117–2120, doi:10.1103/PhysRevLett.61.2117.
- Furuberg, L., K. J. Måløy, and J. Feder (1996), Intermittent behavior in slow drainage, *Phys. Rev. E*, *53*, 966–977, doi:10.1103/PhysRevE.53.966.
- Glycerine Producers' Association (1963), *Physical Properties of Glycerine and its Solutions*, N. Y.
- Haines, W. B. (1930), Studies in the physical properties of soil. v. the hysteresis effect in capillary properties, and the modes of moisture distribution associated therewith, *J. Agric. Sci.*, *20*, 97–116, doi:10.1017/S002185960008864X.
- Hele-Shaw, H. S. (1898), The flow of water, *Nature*, *58*(1489), 34–36.
- Helmig, R. (1997), *Multiphase Flow and Transport Processes in the Subsurface: A Contribution to the Modeling of Hydrosystems*, Springer, Berlin.
- Ippisch, O., H.-J. Vogel, and P. Bastian (2006), Validity limits for the van Genuchten-Mualem model and implications for parameter estimation and numerical simulation, *Adv. Water Resour.*, *29*(12), 1780–1789, doi:10.1016/j.advwatres.2005.12.011.
- Jellali, S., P. Muntzer, O. Razakarisoa, and G. Schäfer (2001), Large scale experiment on transport of trichloroethylene in a controlled aquifer, *Transp. Porous Media*, *44*(1), 145–163, doi:10.1023/A:1010652230922.
- Lee, D., and B. Schachter (1980), Two algorithms for constructing a delaunay triangulation, *Int. J. Comput. Inform. Sci.*, *9*(3), 219–242.
- Lenormand, R. (1989), Flow through porous media: Limits of fractal pattern, *Proc. R. Soc. Lond. A*, *423*(1864), 159–16.
- Lenormand, R., and C. Zarcone (1984), Role of roughness and edges during imbibition in square capillaries, paper SPE 13264 presented at Annual Technical Conference and Exhibition, Society of Petroleum Engineers, Houston, doi:10.2118/13264-MS.
- Lenormand, R., and C. Zarcone (1985), Invasion percolation in an etched network: Measurement of a fractal dimension, *Phys. Rev. Lett.*, *54*, 2226–2229, doi:10.1103/PhysRevLett.54.2226.
- Lenormand, R., and C. Zarcone (1989), Capillary fingering: Percolation and fractal dimension, *Transp. Porous Media*, *4*(6), 599–612, doi:10.1007/BF00223630.
- Lenormand, R., E. Touboul, and C. Zarcone (1988), Numerical models and experiments on immiscible displacements in porous media, *J. Fluid Mech.*, *189*, 165–187, doi:10.1017/S0022112088000953.
- Løvoll, G., Y. Méheust, K. J. Måløy, E. Aker, and J. Schmittbuhl (2005), Competition of gravity, capillary and viscous forces during drainage in a two-dimensional porous medium, a pore scale study, *Energy*, *30*, 861–872.
- Løvoll, G., M. Jankov, K. Måløy, R. Toussaint, J. Schmittbuhl, G. Schäfer, and Y. Méheust (2011), Influence of viscous fingering on dynamic saturation-pressure curves in porous media, *Transp. Porous Media*, *86*(1), 305–324.
- Måløy, K. J., J. Feder, and T. Jøssang (1985), Viscous fingering fractals in porous media, *Phys. Rev. Lett.*, *55*, 2688–2691.
- Måløy, K. J., L. Furuberg, J. Feder, and T. Jøssang (1992), Dynamics of slow drainage in porous media, *Phys. Rev. Lett.*, *68*, 2161–2164, doi:10.1103/PhysRevLett.68.2161.
- Mandelbrot, B. (1982), *The Fractal Geometry of Nature*, W. H. Freeman, San Francisco.
- Méheust, Y., G. Løvoll, K. J. Måløy, and J. Schmittbuhl (2002), Interface scaling in a two-dimensional porous medium under combined viscous, gravity, and capillary effects, *Phys. Rev. E*, *66*, 051603, doi:10.1103/PhysRevE.66.051603.
- Mualem, Y. (1976), New model for predicting the hydraulic conductivity of unsaturated porous media, *Water Resour. Res.*, *12*(3), 513–522.
- Nayagam, D., G. Schäfer, and R. Mosé (2004), Modelling two-phase incompressible flow in porous media using mixed hybrid and discontinuous finite elements, *Comput. Geosci.*, *8*(1), 49–73, doi:10.1023/B:COMG.0000024446.98662.36.
- Nsir, K., G. Schäfer, R. di Chiara Roupert, O. Razakarisoa, and R. Toussaint (2012), Laboratory experiments on DNAPL gravity fingering in water-saturated porous media, *Int. J. Multiphase Flow*, *40*, 83–92.
- Oung, O., and A. Bezuije (2003), Selective pore pressure transducers for use in model tests to study two-phase flow in porous media, *Int. J. Phys. Modell. Geotech.*, *3*(10), 31–41.
- Press, W. (1992), *Numerical Recipes in FORTRAN: The Art of Scientific Computing*, Cambridge Univ. Press, Cambridge.
- Sahimi, M. (2011), *Flow and transport in porous media and fractured rock: From classical methods to modern approaches*, Wiley-VCH, Weinheim.
- Scheidegger, A. (1974), *The Physics of Flow Through Porous Media*, Univ. of Toronto Press, Toronto, Buffalo.
- Stauffer, D. (1994), *Introduction to Percolation Theory*, Taylor and Francis, London, U. K.
- Toussaint, R., G. Løvoll, Y. Méheust, K. J. Måløy, and J. Schmittbuhl (2005), Influence of pore-scale disorder on viscous fingering during drainage, *Europhys. Lett.*, *71*(4), 583–589, doi:10.1209/epl/i2005-10136-9.
- Toussaint, R., K. J. Måløy, Y. Méheust, G. Løvoll, M. Jankov, G. Schäfer, and J. Schmittbuhl (2012), Two-phase flow: Structure, upscaling, and consequences for macroscopic transport properties, *Vadose Zone J.*, *11*(3), doi:10.2136/vzj2011.0123.
- Tuller, M., and D. Or (2001), Hydraulic conductivity of variably saturated porous media: Film and corner flow in angular pore space, *Water Resour. Res.*, *37*(5), 1257–1276.
- Tuller, M., D. Or, and L. M. Dudley (1999), Adsorption and capillary condensation in porous media: Liquid retention and interfacial configurations in angular pores, *Water Resour. Res.*, *35*(7), 1949–1964.

- van Genuchten, M. T. (1980), A closed-form equation for predicting the hydraulic conductivity of unsaturated soils, *Soil Sci. Soc. Am. J.*, *44*, 892–898.
- Vogel, T., and M. Cislerova (1988), On the reliability of unsaturated hydraulic conductivity calculated from the moisture retention curve, *Transp. Porous Media*, *3*(1), 1–15, doi:10.1007/BF00222683.
- Vogel, T., M. van Genuchten, and M. Cislerova (2000), Effect of the shape of the soil hydraulic functions near saturation on variably-saturated flow predictions, *Adv. Water Resour.*, *24*(2), 133–144, doi:10.1016/S0309-1708(00)00037-3.
- Voronoi, G. (1908), Nouvelles applications des paramètres continus à la théorie des formes quadratiques. Deuxième mémoire. Recherches sur les parallélogrammes primitifs, *J. Reine Angew. Math.*, *134*, 198–287.
- Wilkinson, D., and J. F. Willemsen (1983), Invasion percolation: A new form of percolation theory, *J. Phys. A: Math. Gen.*, *16*(14), 3365–3376, doi:10.1088/0305-4470/16/14/028.