



AALBORG UNIVERSITY
DENMARK

Aalborg Universitet

Indoor Occupancy Detection and Estimation using Machine Learning and Measurements from an IoT LoRa-based Monitoring System

Adeogun, Ramoni Ojekunle; Rodriguez, Ignacio; Razzaghpour, Mohammad; Berardinelli, Gilberto; Christensen, Per Hartmann; Mogensen, Preben

Published in:
Global IoT Summit, GloTS 2019 - Proceedings

DOI (link to publication from Publisher):
[10.1109/GIOTS.2019.8766374](https://doi.org/10.1109/GIOTS.2019.8766374)

Publication date:
2019

Document Version
Early version, also known as pre-print

[Link to publication from Aalborg University](#)

Citation for published version (APA):
Adeogun, R. O., Rodriguez, I., Razzaghpour, M., Berardinelli, G., Christensen, P. H., & Mogensen, P. (2019). Indoor Occupancy Detection and Estimation using Machine Learning and Measurements from an IoT LoRa-based Monitoring System. In *Global IoT Summit, GloTS 2019 - Proceedings* [8766374] IEEE. <https://doi.org/10.1109/GIOTS.2019.8766374>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Indoor Occupancy Detection and Estimation using Machine Learning and Measurements from an IoT LoRa-based Monitoring System

Ramoni Adeogun*, Ignacio Rodriguez*, Mohammad Razzaghpour*, Gilberto Berardinelli*

Per Hartmann Christensen* and Preben Elgaard Mogensen*[†].

*Wireless Communication Networks Section, Department of Electronic Systems, Aalborg University, Denmark

[†] Nokia Bell Labs, Aalborg, Denmark

E-mail:[ra, irl, mor, gb, phc, pm]@es.aau.dk

Abstract—In this paper, we present results on the application of machine learning to the detection of human presence and estimation of the number of occupants in our offices using data from an IoT LoRa-based indoor environment monitoring system at Aalborg University, Denmark. We cast the problem as either binary or multi-class classification and apply a two-layer feed forward neural network to the data. The data used for training, validation and testing of the network comprises of environmental data from the IoT sensors and manual recordings of the door and window states. Results show that the classifier is able to correctly determine occupancy of our offices from the IoT sensor measurements with accuracy up to 94.6% and 91.5% for the binary (presence or absence of persons) and multi-class (no person, one person or two or more persons) problems, respectively. Our analysis also shows that occupancy detection with a network trained either in another room or with single environmental parameter is also possible but with less accuracy.

Index Terms—IoT, machine learning, indoor monitoring, occupancy detection, neural networks, sensor data

I. INTRODUCTION

The Wireless Communication Networks (WCN) Section of the Department of Electronic Systems at Aalborg University, Denmark in collaboration with a number of Danish local industrial partners and the municipality of Aalborg recently deployed an IoT LoRa-based indoor environment monitoring system [1]. An illustration of the system comprising of multi-sensor nodes, LoRa gateways, a back-end server and Grafana open platform based visualization dashboard is shown in Fig. 1.

The sensor nodes measure environmental parameters (including temperature, pressure, Carbon Dioxide (CO₂) and light intensity among others) and transmit same via the internet to the back-end server at AAU, where the data can be extracted and visualized using the dashboard. Following successful deployment of the wireless indoor environment monitoring system at different observation positions in Gigantium - a large sports and culture center in Aalborg municipality, Denmark [1], a number of sensor nodes were installed in office spaces at the FRB building in the Department of Electronic System, Aalborg University in November, 2018. These nodes were used to collect measurement of environmental parameters in our offices over two periods with three weeks duration each, in November and December, 2018.

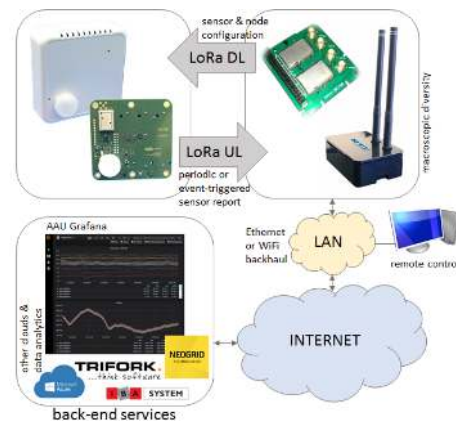


Fig. 1: The LoRa-based indoor monitoring system [1].

Equipped with data from the sensors, our goal is to measure utilization of our office spaces by determining the presence of occupants and estimating the number of persons at a given time. This utilization information can potentially be used to optimize usage of our allocated offices spaces. Moreover, occupancy estimates can also be used for indoor office automation [2]. For example, as input to indoor lighting control system [3], [4] and heat, ventilation and air conditioning systems [5], [6]. Environmental parameter measurements contain useful information about occupancy of an enclosed space since human beings affects their environment through, for example, heat generation, Carbon Dioxide (CO₂) emission [7], switching on/off of artificial lighting sources and sound/noise production. While visualization of the sensor data may reveal trends and temporal variations, it is often difficult, if not impossible, to relate these variations to human presence without utilizing data processing tools. Machine learning algorithms can therefore be used to analyze the sensor data and identify patterns. These patterns can then be used to determine occupancy and estimate the number of persons with some degree of accuracy.

In this paper, we investigate the potentials for occupancy detection using data from our environmental measurements. We cast the problem as either a binary or multi-class pat-

TABLE I: Statistics of IoT sensor environmental data.

	Node E2 (secretary office)			Node FD (4-persons office)		
	Min	Max	Mean	Min	Max	Mean
Temperature ($^{\circ}$ C)	22.10	24.10	22.70	18.98	23.40	21.80
Pressure (hPa)	1015.70	1040.10	1028.10	977.12	1040.30	1017.70
Humidity (%)	27.30	41.20	35.70	20.03	45.30	29.90
Light (Lux)	0	291.0	18.60	0	274.0	22.50
CO ₂ (ppm)	400	7832	2009.5	400	7469	1113.2
TVOC (ppb)	0	1132	244.69	0	1076	108.15
Sound Pressure (dB(A))	4	85	6.6	1	221	6.2

recognition algorithm to determine occupancy and predict the number of persons in the rooms. This step allows us to detect the presence of potential outliers, identify redundancies and generate data for training, validation and testing of the algorithm.

Based on the time stamps, we combined measurements from the sensor with the manually recorded data to form an augmented dataset. To eliminate potential bias, we removed all sensor recording between 6 pm and 6 am from the data. This elimination is done to avoid having too many instances with no occupants. The resulting augmented data contain 3136 and 4091 samples for nodes E2 and FD, respectively. Each sample has eleven input attributes: date and time, temperature, pressure, humidity, sound pressure, light intensity, motion detection, CO₂, TVOC, door and window status and a class attribute (number of persons).

We show similarities between the different parameters in the data in Fig. 4, where we plot the correlation coefficient among input attributes for sensor node E2 in Fig. 4a and the correlation between number of persons in the rooms (target attribute) and input attributes for both sensor nodes in Fig. 4b. We observe in Fig. 4a that CO₂ and TVOC measurements exhibit perfect correlation. This is expected, since the digital gas sensor estimates CO₂ from measurements of Volatile Organic Compounds (VOCs). Either of these attributes can therefore be eliminated from the data without impacting algorithm performance. Some other attributes are also seen to have correlations greater than 0.5. These include temperature and humidity, CO₂ and pressure and TVOC and pressure. The significance of these correlation and possibility for further reduction of the attributes is however, not explored in this work. Fig. 4b shows that all input attributes (measurements) exhibit some correlation with the class attribute (number of people) with light and motion detection measurements having the highest correlation. We further observe that the correlation for some of the attributes differ significantly for the two rooms. For instance, the correlation between number of people and light intensity is approximately 0.7 and 0.05 for sensor nodes FD and E2, respectively. A plausible explanation for this observation as well as the difference in data statistics in Table I is the variation in indoor environment condition in the rooms. These observations raise the question on whether room occupancy in a given room can be performed using machines trained with measurements from a different room.

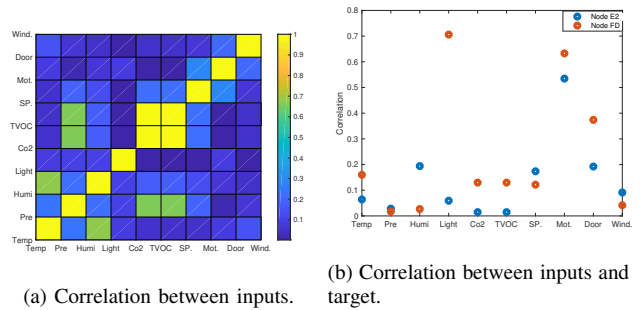


Fig. 4: Relationship among inputs and between inputs and target.

TABLE II: Classification accuracy of applying two-layer feed forward neural network to the data from sensor node FD for both binary and multi-class problems.

	Binary	Multi-class
Temperature ($^{\circ}$ C)	67%	55%
Pressure (hPa)	75.3%	57%
Humidity (%)	71.2%	58.7%
Light Intensity(Lux)	94.3%	73.9%
CO ₂ (ppm)	63%	52.2%
TVOC (ppb)	63.9%	53.2%
Sound Pressure (dB(A))	53.7%	47.8%
PaPIRMotion	66.1%	58.7%
Door Status	53.8%	50.3%
Window Status	53.7%	46.3%

IV. ROOM OCCUPANCY PREDICTION VIA MACHINE LEARNING

In the machine learning framework, a biologically inspired classification algorithm - a two-layer feedforward neural network (FNN) [8] with sigmoid output neurons, is used to process and learn from the data. The choice of FNN is motivated by the ability of neural networks to learn and model any kind of relationships including non-linear and complex relationships inherent in most real world problems. Except where stated otherwise, network creation, training, validation and testing are performed using MATLAB's neural network pattern recognition tool [9] with default parameters. For each of our experiments, the input data and associated features is randomly grouped into three: 70% for training and 15% each for validation and testing. We evaluate two possibilities for room occupancy detection: a binary problem, which involves detecting the presence or absence of occupants and a multi-class problem, which involves estimation of the actual number of occupants in the rooms.

For the binary problem, we grouped the target attributes (i.e., number of persons, N) into two classes: Class 1 corresponding to instances with $N = 0$ and Class 2 which includes all instances with $N \geq 1$. Since the datasets contain very few instances with 3 or 4 persons, we grouped the data into three classes: Class 1 ($N = 0$), Class 2 ($N = 1$) and Class 3 ($N \geq 2$) for the multi-class problem.

Output Class	1	1068 70.7%	69 4.6%	93.9% 6.1%	Output Class	1	1706 41.8%	38 0.9%	97.8% 2.2%	
	2	22 1.5%	351 23.2%	94.1% 5.9%		2	183 4.5%	2162 52.8%	92.2% 7.8%	
	Target Class	1	2	98.0% 2.0%		83.6% 16.4%	94.0% 6.0%	1	2	90.3% 9.7%

(a) Trained and tested in E2.

(b) Trained and tested in FD.

Fig. 5: Intra-room performance of binary room occupancy detection using data from both rooms.

Output Class	1	842 55.8%	184 12.2%	82.1% 17.9%	Output Class	1	1183 28.9%	1264 30.9%	48.3% 51.7%	
	2	248 16.4%	236 15.6%	48.8% 51.2%		2	708 17.3%	936 22.9%	56.9% 43.1%	
	Target Class	1	2	77.2% 22.8%		56.2% 43.8%	71.4% 28.6%	1	2	62.6% 37.4%

(a) Trained with FD and tested in E2.

(b) Trained with E2 and tested in FD.

Fig. 6: Inter-room performance of binary room occupancy detection using data from both rooms.

V. RESULTS AND DISCUSSION

We evaluate performance of the network using accuracy and miss rate metrics. Accuracy and miss rate show the percentage of entries that are correctly and incorrectly classified, respectively. Table II presents the accuracy of both binary and multi-class occupancy prediction with single input attributes using data from sensor node FD. It shows that accuracy of the network varies with each of the attributes (environmental parameters and door/window status) as input. For binary(multi-class) problem, light intensity and window status yield the highest, 94.3% (73.9%) and lowest, 53.7% (46.3%) accuracy, respectively. Table II also shows that all input attributes yield higher accuracy for the binary problem. We will now show network performance results with all attributes except TVOC measurements as input. TVOC measurements are eliminated considering the linear relationship with CO₂ measurements.

Fig. 5 presents the overall confusion matrix for the binary problem with all input attributes. The rows correspond to the output (i.e., estimated) class and the columns to the target (i.e., true) class. The diagonal and off-diagonal cells indicate the observations that are correctly and incorrectly classified, respectively. Each cell contains both the number of obser-

Output Class	1	1071 70.9%	74 4.9%	5 0.3%	93.1% 6.9%	Output Class	1	1706 41.7%	36 0.9%	4 0.1%	97.7% 2.3%			
	2	16 1.1%	284 18.8%	18 1.2%	89.3% 10.7%		2	150 3.7%	1096 26.8%	252 6.2%	73.2% 26.8%			
	3	3 0.2%	12 0.8%	27 1.8%	64.3% 35.7%		3	35 0.9%	192 4.7%	62 15.2%	73.2% 26.8%			
	Target Class	1	2	3	98.3% 1.7%		76.8% 23.2%	54% 46%	91.5% 8.5%	1	2	3	90.2% 9.8%	82.8% 17.2%

(a) Trained and tested in E2.

(b) Trained and tested in FD.

Fig. 7: Intra-room performance of multi-class room occupancy estimation using data from both rooms.

Output Class	1	837 55.4%	195 12.9%	6 0.4%	80.6% 19.4%	Output Class	1	1490 36.4%	856 20.9%	624 15.3%	50.2% 49.8%			
	2	112 7.4%	47 3.1%	21 1.4%	26.1% 73.9%		2	401 9.8%	447 10.9%	18 4.6%	43.1% 56.9%			
	3	141 9.3%	128 8.5%	23 1.5%	7.9% 92.1%		3	0 0.0%	21 0.5%	64 1.6%	75.3% 24.7%			
	Target Class	1	2	3	76.8% 23.2%		12.7% 87.3%	46.0% 54.0%	60.1% 39.9%	1	2	3	78.8% 21.2%	33.8% 66.2%

(a) Trained with FD and tested in E2.

(b) Trained with E2 and tested in FD.

Fig. 8: Inter-room performance of multi-class room occupancy estimation using data from both rooms.

ations and percentage of the total number of observations. The column on the far right shows the percentages of all the observations predicted to belong to each class that are correctly and incorrectly predicted. The row at the bottom shows the percentages of all observations in each class that are correctly and incorrectly classified. The bottom right cell (highlighted orange) gives the overall classification accuracy. Fig. 5 shows that the network prediction for the binary problem is very accurate with accuracy of 94% and 94.6% for sensor nodes E2 (secretary office) and FD (four-persons office), respectively.

In Fig. 6, we plot the confusion matrix for the binary problem with training and test samples from either of the two rooms. Fig. 6a (6b) shows the confusion matrix with data from node FD (E2) and E2 (FD) used for training and testing, respectively. Compared to Fig. 5, predictions from the network is less accurate with overall accuracy of 71.4% (51.8%) for a network trained with FD (E2) dataset and tested using observations from node E2 (FD). This appears reasonable considering the differences in statistics of observations from the two rooms in Table I and the correlation in Fig. 4b.

We show the performance of the network for multi-class classification in Fig. 7b, where we plot the confusion matrix

obtained with data from both sensor nodes. The classification accuracy is 91.5% and 83.6% for node E2 and FD, respectively. While this accuracy may be reasonable considering the limited amount of observations, the observed accuracy is slightly lower than that of the binary problem in Fig. 5. Fig. 7b also show that classification accuracy differs significantly for each of the three classes. For example, while class 1 ($N = 0$) has accuracy of 98.3% (90.2%), class 3 ($N \geq 2$) has much lower accuracy of 54% (70.8%) for node E2 (FD). A plausible explanation for this performance variation is the proportion of each class contained in the dataset.

Finally, we plot the confusion matrix for multi-class with the network trained and tested using data from different rooms. Compared to Fig. 7b where training and testing is done using data from the same room, the performance is much worse with accuracy of 60.1% (48.9%) for a network trained with FD (E2) and tested using E2 (FD) dataset.

VI. SUMMARY AND CONCLUSION

We have presented results on application of machine learning to indoor occupancy estimation using sensor data from a wireless IoT indoor monitoring system deployed at Aalborg University, Denmark. We combined multi-sensor measurements of eight parameters with manual recording of the number of persons, window position and door status to form an augmented data set. We cast the problem as either a binary or multi-class pattern recognition classification problem and applied a two-layer feed-forward pattern recognition network with sigmoid output neurons.

With both training and testing data from the same room, the network is able to correctly determine occupancy of

selected offices from the IoT sensor measurements with accuracy up to 94.6% and 91.5% for the binary and multi-class problems, respectively. Occupancy detection with a network trained either in another room or with single environmental parameter is also possible but with less accuracy. Further improvement in classification performance via for example, network optimization, larger training datasets and usage of other algorithms will be considered in our future work.

REFERENCES

- [1] I. Rodriguez, M. Lauridsen, G. Vasluianu, A. N. Poulsen, and P. Mogensen, "The Gigantium Smart City Living Lab: A Multi-Arena LoRa-based Testbed," in *2018 15th International Symposium on Wireless Communication Systems (ISWCS)*, Aug 2018, pp. 1–6.
- [2] Z. Han, R. X. Gao, and Z. Fan, "Occupancy and indoor environment quality sensing for smart buildings," in *2012 IEEE International Instrumentation and Measurement Technology Conference Proceedings*, May 2012, pp. 882–887.
- [3] M. T. Mulia, S. H. Supangkat, and N. Hariyanto, "A review on building occupancy estimation methods," in *2017 International Conference on ICT For Smart Society (ICISS)*, Sep. 2017, pp. 1–7.
- [4] "Energy intelligent buildings based on user activity: A survey," *Energy and Buildings*, vol. 56, pp. 244 – 257, 2013.
- [5] J. Ahmad, H. Larijani, R. Emmanuel, M. Mannion, and A. Javed, "Occupancy detection in non-residential buildings a survey and novel privacy preserved occupancy monitoring solution," *Applied Computing and Informatics*, 2018.
- [6] M. Jin, N. Bekiaris-Liberis, K. Weekly, C. J. Spanos, and A. M. Bayen, "Occupancy detection via environmental sensing," *IEEE Transactions on Automation Science and Engineering*, vol. 15, no. 2, pp. 443–455, April 2018.
- [7] B. Abade, D. Perez Abreu, and M. Curado, "A Non-Intrusive Approach for Indoor Occupancy Detection in Smart Environments," *Sensors*, vol. 18, no. 11, 2018.
- [8] J. Schmidhuber, "Deep learning in neural networks: An overview," *Neural Networks*, vol. 61, pp. 85 – 117, 2015.
- [9] MATLAB, "Classify Patterns with a Shallow Neural Network," <https://se.mathworks.com/help/deeplearning/gs/classify-patterns-with-a-neural-network.html#t9-48630>.