

# Influence of Drying Conditions on the Effective Moisture Diffusivity and Energy Requirements of Ginger Slices

Tinuade J. Afolabi<sup>1</sup>, Toyosi Y. Tunde-Akintunde<sup>2</sup> & Olusegun J. Oyelade<sup>2</sup>

<sup>1</sup> Dept. of Chemical Engineering, Ladoke Akintola University of Technology, Ogbomoso, Oyo State, Nigeria

<sup>2</sup> Dept. of Food Science and Engineering, Ladoke Akintola University of Technology, Ogbomoso, Oyo State, Nigeria

Correspondence: Toyosi Y. Tunde-Akintunde, Dept. of Food Science and Engineering, Ladoke Akintola University of Technology, Ogbomoso, Oyo State, Nigeria. Tel: 234-803-666-7935. E-mail: toyositunde@yahoo.co.uk

Received: November 13, 2013 Accepted: June 9, 2014 Online Published: July 30, 2014

doi:10.5539/jfr.v3n5p103

URL: <http://dx.doi.org/10.5539/jfr.v3n5p103>

## Abstract

The thin layer drying behaviour of ginger slices in a laboratory dryer was examined. The slices of 5 mm, 10 mm and 15 mm thicknesses were dried using heated ambient air at temperatures from 40 to 70 °C and air velocity of 1.5 m/s. The effects of drying air temperature and slice thickness on the drying characteristics, drying time and energy requirement of drying process was determined. The results have shown that an increase in the drying air temperature causes shorter drying times. Thinner slices also causes a shorter drying time. The effective moisture diffusivity values increased from  $3.36814 \times 10^{-10} \text{ m}^2/\text{s}$  to  $5.82524 \times 10^{-9} \text{ m}^2/\text{s}$  while the activation energy values for different slice thickness of ginger varied from 196.15 to 198.79 kJ/mol. The total needed energy varied from 735.3 to 868.5 kWh while the value of specific energy requirement varied from 3676.6 to 4342.4 kWh/kg respectively.

**Keywords:** drying, moisture diffusivity, energy requirements, ginger

## 1. Introduction

Ginger a tropical herb extensively grown for its pungently aromatic underground stem or rhizome is an important export crop in Nigeria valued for its powder, oil and oleoresin (NEPC, 1999). It possesses certain substances capable of imparting aromatic spices qualities and flavours on food and beverages. These aroma compounds partially contribute to the flavor of the fresh ginger rhizome however the oleoresin content plays an important role in the pungency of ginger (Bode & Dong, 2004). Ginger is generally sold commercially as a fresh vegetable locally without processing. However its high moisture content of about 83% makes ginger susceptible to deterioration during exportation and there if therefore the need for a preservation.

Open-air sun drying is a common means of preservation of food crops. A considerable part of dried fruits and vegetables utilized worldwide are sun dried in the open without technical aids (Murthy, 2008). However, sun drying of crops in the open air has its limits if used for large-scale production. This is because of some of the constraints of sun drying which include difficulty in the proper control of the drying process, weather variations, high labour costs, large land areas needed for drying, insect infestation, presence of contaminants like dust and other foreign materials to mention a few of the constraints. Solar and other forms of hot air drying have been proposed to help overcome the constraints of sun drying. Design, construction and operation of drying systems can only be done effectively if the drying kinetics of the food materials to be dried, models that can simulate the process and the energy requirements of the drying process are known.

Determination of physical and thermal properties of food crops is essential for dryer design. These properties which include moisture diffusion, energy of activation and energy consumption and their effect on the thin layer drying of food crops have been investigated for a number of fruits and vegetables which include figs, seedless grapes, tomatoes, pumpkin slices, plum, hazelnuts, grapes, candle nuts and apple pomace (Bablis & Belessiotis, 2004; Doymaz & Pala, 2002; Doymaz, 2007a, 2007b; Goyal et al., 2007; Ozdemir & Devres, 1999; Pahlavanzadeh et al., 2001; Tarigan et al., 2006; Wang et al., 2007). However, little or no work has been done to determine the drying kinetics and the energy requirements in thin-layer drying of ginger. This study is therefore

carried out to calculate and to evaluate the effect of the air temperature and slice thickness on the effective moisture diffusivity, energy of activation and energy consumption for thin-layer drying of ginger.

## 2. Material and Methods

### 2.1 Experimental Procedure

Fresh ginger (*Zingibar officinale*) was purchased at a local market in Ibadan, Nigeria. Care was taken to select ginger without any defect having of average thickness of  $15 \pm 0.2$  mm. The ginger rhizomes were washed in cold water to remove soil and dust particles. The washed ginger rhizomes were peeled and cut with knives into slices of 10 mm and 5 mm thickness. Some of the samples were peeled and dried whole which gave a mean slice thickness of 15 mm.

The peeled samples were placed in a locally fabricated drier preset at temperatures of 40, 50, 60 and 70 °C and a constant air velocity ( $1.5 \text{ ms}^{-1}$ ). The laboratory dryer consists of an airflow control unit, a heating and heating control unit, an electrical fan and drying chamber (Figure 1). For each experimental run, the dryer run for about 2 hours before the commencement of experiment to stabilize it at the specified air conditions before the drying of the samples began. The initial moisture content was determined using the method of Doymaz (2005) and an average initial moisture content of 72% wet basis was obtained.

Ginger samples were loaded into the drier and removed at regular intervals until the weight became constant after three consecutive weighing, indicating equilibrium conditions. Initially weighing of the samples was made at shorter intervals of approximately 30 min, and at later stages of drying the weighing intervals was increased to 1 h. Weighing was done using a precision digital balance (PH Mettler) with an accuracy of  $\pm 0.01$  g.

Drying of the samples continued until a constant weight was reached. The sample weights at different time intervals were recorded throughout the drying process. The weights recorded during drying and the initial moisture content (wet basis) was used as a basis to calculate the moisture contents (dry basis) for each drying time interval. These calculated moisture contents (d.b.) were used as the basic data for further analysis, rather than the actual weight of the sample. Drying experiments were done in triplicates and the average moisture content value for each pretreatment was used to calculate the moisture ratio.

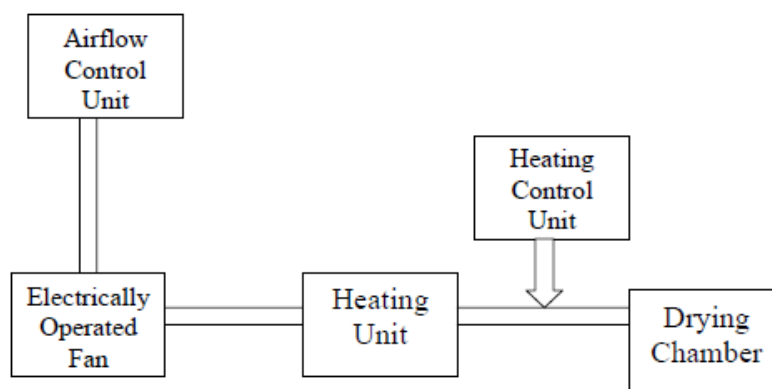


Figure 1. Schematic diagram of laboratory dryer

### 2.2 Theoretical Considerations

The graph of moisture ratio with drying time was used to represent the experimental drying data. This is because since the initial value for moisture ratio is one for each of the experiments, the moisture ratio curve will explain the drying behaviour better than that of moisture content curve. The moisture ratio was calculated using the equation below:

$$M_R = \frac{M - M_e}{M_0 - M_e} = \exp(-Kt) \quad (1)$$

where  $M$  is moisture content at any time  $t$ ,  $M_e$  is equilibrium moisture content and  $M_0$  is initial moisture content

The moisture ratio values were used to plot the drying curves of the dried ginger samples.

The Fick's diffusion equation developed for solid objects with slab geometry by Crank (1975) was applied to the experimental data on the assumption that there is uniform initial moisture distribution and negligible external resistance. The equation is in the form:

$$MR = \frac{(M - M_e)}{M_o - M_e} = \frac{8}{\pi^2} \exp\left(\frac{-\pi^2 D_{eff} t}{L^2}\right) \quad (2)$$

The slope of the plot of  $\ln [(M - M_e) / (M_o - M_e)]$  against time (t) was used to determine the moisture diffusivity for the different drying methods.

The energy of activation was calculated by using an Arrhenius type Equation,

$$D_{eff} = D_o \exp\left(-\frac{E_a}{R_g T_{abs}}\right) \quad (3)$$

where  $E_a$  is the energy of activation,  $R_g$  is universal gas constant (8.3143 kJ/mol),  $T_{abs}$  is absolute air temperature (K), and  $D_o$  is constant.

Equation (3) can be linearized by applying the logarithms as

$$\ln D_{eff} = \ln D_o - \frac{E_a}{R_g} \cdot \frac{1}{T_{abs}} \quad (4)$$

From Equation (4), a plot of  $\ln D_{eff}$  versus  $1/T_{abs}$  gives a straight slope of  $K_2$

$$K_2 = \frac{E_a}{R_g} \quad (5)$$

The coefficient of determination ( $R^2$ ) was determined by fitting the Equation 5 into the experimental data using linear regression analyses. The total needed energy for drying one charge of the heater and energy requirements for drying 1 kg of fresh ginger slices during each drying experiments was calculated as follows:

$$E_t = A v \rho_a c_a \Delta T D_t \quad (6)$$

where  $E_t$  is total needed energy for drying for each experimental condition;  $A$  is tray area;  $v$  is air velocity;  $\rho_a$  is air density;  $D_t$  is total drying time;  $\Delta T$  is temperature differences (difference between drying temperature and ambient temperature) and  $c_a$  is the specific heat of air

$$E_{kg} = \frac{E_t}{W_o} \quad (7)$$

where  $E_{kg}$  is specific energy requirement and  $W_o$  is initial weight.

### 3. Results and Discussion

#### 3.1 Drying Kinetics

The variation of moisture content with drying time for ginger slices 15 mm, 10 mm and 5 mm thick within the temperature range of 40 to 70 °C are indicated in Figure 2. The figures also show clearly that the drying time decreased with increase in drying air temperature. The drying time required to reach a moisture content of 0.5% dry basis (50 g water/100g DM) at drying temperatures of 40 and 50 °C was approximately twice and one and a half times that which is required for a drying temperature of 60 and 70 °C respectively. This is similar to the results for apples, celery and apricot (Meisami-asl & Rafiee, 2009; Román & Hensel, 2011; Mirzaee et al., 2010). The same trend was observed with increase in thickness of the ginger slices. Samples of 5 mm thickness had the lowest drying curves followed by 10 mm while samples 15 mm thick had the highest drying curve. This is an indication that thicker samples had lower drying rates. This is due to the distance moisture travels to the food surface which is more in the case of thicker slices hence drying is slower.

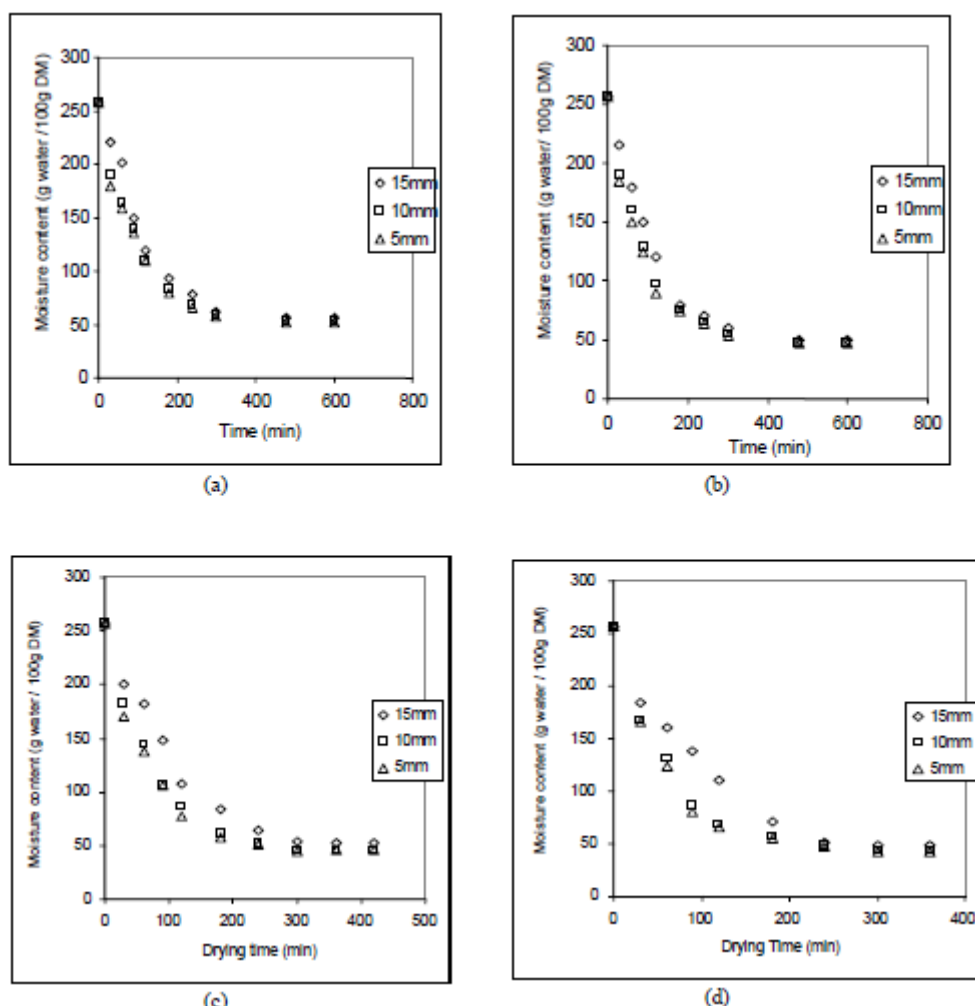


Figure 2. Drying curve of ginger dried at (a) 40 °C (b) 50 °C (c) 60 °C (d) 70 °C

The graphs of  $\ln(MR)$  against time for the different slice thickness and temperatures are shown in Figure 3 and the figure show graphs of straight lines. This is because the drying of ginger took place in the falling rate period thus indicating that the drying process is controlled by liquid diffusion. The increase in temperature is observed to increase the slope of the straight lines thus indicating an increase in effective moisture diffusivity as temperature increases. This is similar to the observations for cocoa, berberis fruit, red chillies, apples, tomatoes and kale (Ndukwu, 2009; Aghbashlo et al., 2008; Kaleemullah & Kailappan, 2005; Goyal et al., 2008; Doymaz, 2007a; Mwithiga & Olwal, 2005). The observation for slice thickness is similar, as the slice thickness decreased, the slope decreases thus decreasing effective moisture diffusivity. This is similar to the report obtained for potato and yam (Akpınar et al., 2003; Falade et al., 2007). The minimum value of moisture diffusivity was  $3.36814 \times 10^{-10} \text{ m}^2/\text{s}$  for slices of 5mm, dried at 40 °C while the maximum value of  $5.82524 \times 10^{-9} \text{ m}^2/\text{s}$  was obtained for slices of 15 mm thickness (whole) dried at 70 °C (Table 1). The effective moisture diffusivity is within the range of  $10^{-11}$  to  $10^{-9} \text{ m}^2/\text{s}$  for food materials. The values of  $De_{\text{eff}}$  plotted against temperature for the various slice thickness are shown in Figure 4. Linear equations were fitted for the calculated values of  $De_{\text{eff}}$ . Fitted equation and related  $R^2$  are reported in Table 2. In Figure 4 the minimum value of  $De_{\text{eff}}$  was obtained from the minimum drying temperature, while an increase in slice thickness increases the value of  $De_{\text{eff}}$  at constant drying temperature. The  $De_{\text{eff}}$  values obtained at 40 and 50 °C for all the thicknesses were not significantly different while the values obtained at the other drying temperatures considered were significantly different.

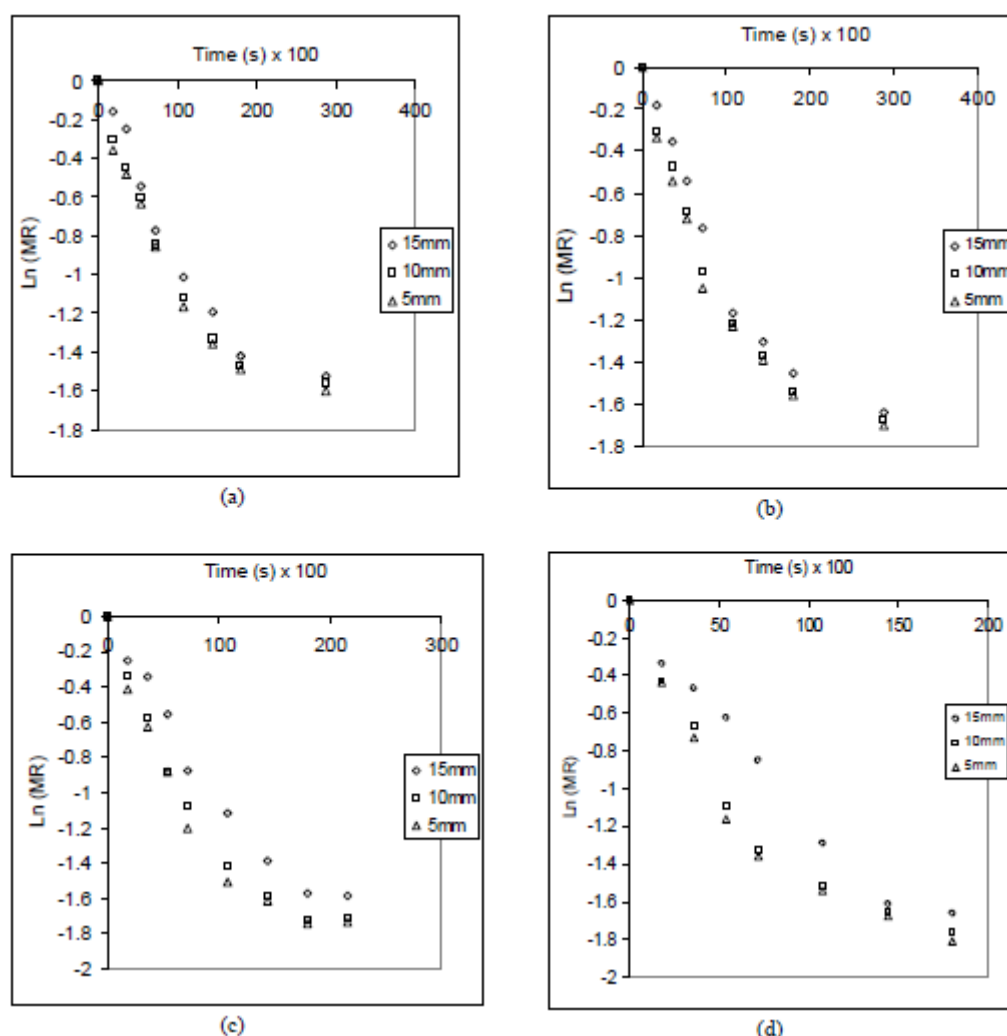


Figure 3. Ln (MR) against drying time (s) for thin-layer drying of ginger slices at (a) 40 °C (b) 50 °C (c) 60 °C (d) 70 °C

Table 1. Effective moisture diffusivity for the various drying experiments

Slice thickness (mm)	Temperature (°C)			
	40	50	60	70
15 mm	3.147 E-09c*	3.34 E-09c	4.789 E-09b	5.825 E-09a
10 mm	1.337 E-09c	1.424 E-09c	2.126 E-09b	2.459 E-09a
5 mm	3.368 E-10c	3.517 E-10c	5.235 E-10b	6.218 E-10a

\* Values with same superscript in the same row are not significantly different ( $P < 0.05$ ).

### 3.2 Activation Energy

A plot of Ln Deff versus  $1/T_{\text{abs}}$  is indicated in Figure 5 and activation energy,  $E_a$  is obtained from Equation 5. The  $E_a$  values for different slice thickness of ginger are reported in Table 2 and the values which are not significantly different (at  $p < 0.05$ ) varied from 196.15 to 198.79 kJ/mol. These values are higher than that of the  $E_a$  values for figs which varied from 30.8 to 48.47 kJ/mol (Babalís & Belessiotis, 2004), for apricots from 24.01 to 25.0 kJ/mol (Mirzaee et al., 2010) and that of berberis fruit which varied from 110.837 to 130.61 kJ/mol for different values of air velocities (Aghbashlo et al., 2008). The values obtained for ginger are however within the range of 146.40 to 232.45 kJ/mol obtained for Jerusalem artichoke tubers (Lili et al., 2013) and lower than of  $422.79 \pm 0.52$  kJ/mol obtained for taro (Abubakar et al., 2012). This is because water that exists in the form of chemical absorptions in

food materials (which is the case for ginger) requires more energy to exhaust than water that exists on the surface of food materials.

Table 2. Fitted equation for  $De_{eff}$  and Energy of activation value for ginger slices

Slice thickness (mm)	Equation	$R^2$	$E_a$ (kJ/mol)	$R^2$
15 mm	$De_{eff}=0.949T + 1.905$	0.9336	196.15a*	0.9317
10 mm	$De_{eff}=0.407T + 0.82$	0.9255	198.26a	0.9187
5 mm	$De_{eff}=0.1027T + 0.202$	0.9231	198.79a	0.9153

\* Values with same superscript in the same column are not significantly different ( $P < 0.05$ ).

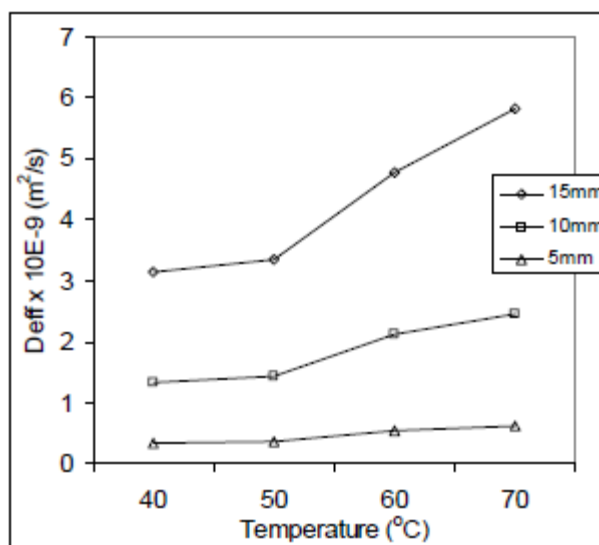


Figure 4.  $De_{eff}$  against drying temperature at different slice thickness for thin-layer drying of ginger

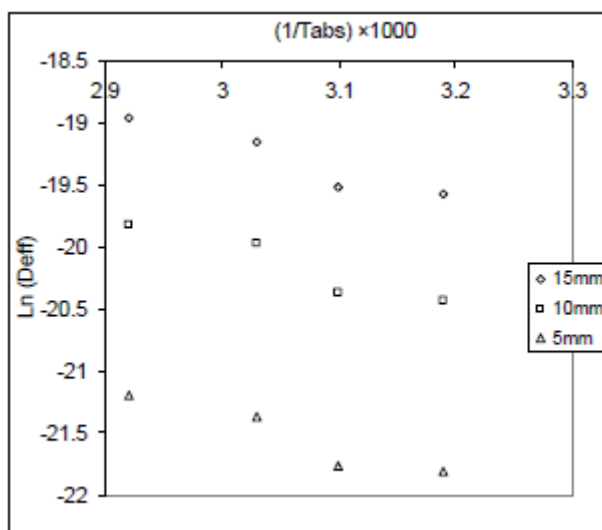


Figure 5.  $\ln(De_{eff})$  versus  $1/T_{abs}$  at different slice thickness for thin-layer drying of ginger

### 3.3 Energy Requirements

The total energy needed for drying at each condition of dryer condition was determined using Equation 6 and the energy requirements for drying 1 kg of ginger was determined for each experimental condition using Equation 7. The total needed energy (Figure 6) varied from 735.3 kWh to 868.5 kWh, the lowest value was obtained with ginger slices of 5 mm thickness at a drying air temperature of 70 °C and the highest value was from ginger slices of 15 mm thickness at a drying air temperature of 60 °C. The maximum and minimum value of specific energy requirement (Figure 7) of 4342.4 kWh/kg and 3676.6 kWh/kg for ginger drying was obtained at drying air temperature of 60 °C and 70 °C respectively. The highest total energy needed was obtained for thickest samples (i.e 15 mm) and the lowest was for 5mm samples. This is probably due to the fact that the energy utilized to transfer heat to the internal regions of the slice is higher since the heat transfer distance is higher. This will result in a longer drying time (since it is dependent on the drying time as indicated in Equation 6. The lowest total energy needed and minimum value of specific energy requirement was obtained from samples dried at 70 °C. This is probably as a result of the greater heat transfer and water vapour pressure deficit that occurs when drying is done at higher temperatures (Rayaguru & Routray, 2012). This gives rise to a greater uptake of air and evaporation is achieved in a shorter time thus reducing the amount of energy needed.

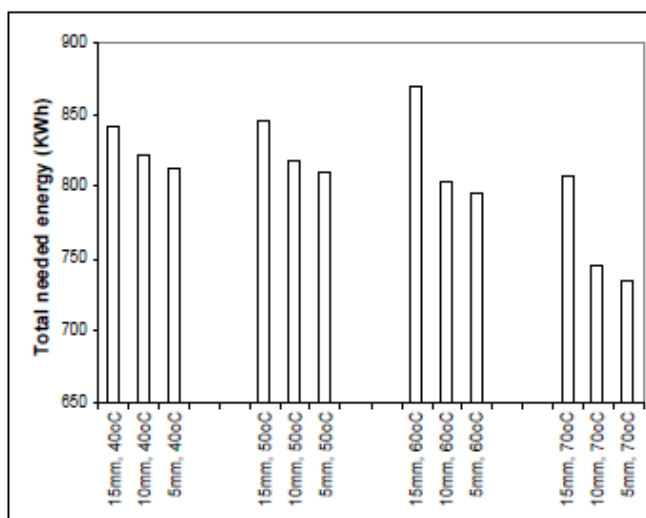


Figure 6. Total energy needed for drying of ginger slices

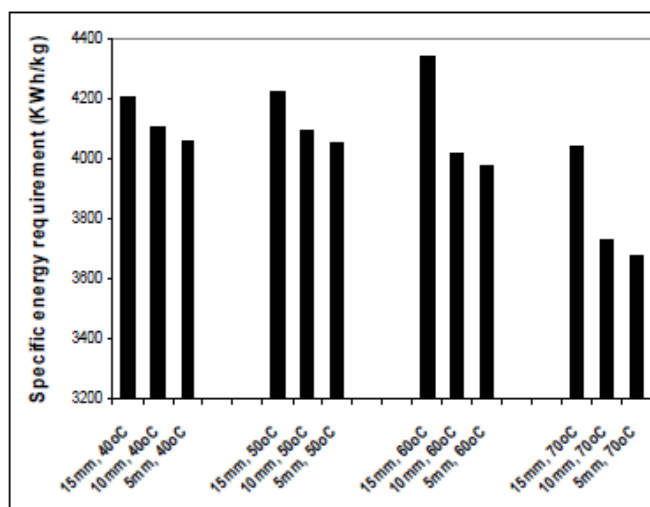


Figure 7. Energy requirements for drying 1 kg of ginger

#### 4. Conclusion

The drying time and rate decreased with increase in drying air temperature from 40 to 70 °C, while drying rate decreased with increase in slice thickness from 5 mm to 15 mm. The drying of ginger was observed to take place only in the falling rate period an indication that liquid diffusion controlled the drying process. The value of effective moisture diffusivity varied from  $3.36814 \times 10^{-10} \text{ m}^2/\text{s}$  to  $5.82524 \times 10^{-9} \text{ m}^2/\text{s}$  for ginger slices of thicknesses considered in this study. The value of effective moisture diffusivity increased with increase in temperature and decrease in slice thickness. The activation energy  $E_a$  for ginger slices varied from 196.15 to 198.79 kJ/mol. The value of total needed energy for thin-drying of ginger slices at different levels of air temperatures varied from 735.3 to 868.5 kWh for the experimental conditions considered. Specific energy requirement calculated for ginger slices varied from a minimum of 3676.6 to a maximum of 4342.4 kWh/kg.

#### References

- Aboubakar, B. C., Răpeanu, G., Njintang, N. Y., Mbofung, C. M., & Bahrim, G. (2012). Biochemical and Structural Changes of Taro (*Colocasia esculenta*) Tubers During Simple Thermal Treatments (Low Temperature) or in Combination with Chemicals. *Food and Bioprocess Technology*, 5(7), 2739-2747. <http://dx.doi.org/10.1007/s11947-011-0622-7>
- Aghbashlo, M., Kianmehr, M. H., & Samimi-Akhijahani, H. (2008). Influence of drying conditions on the effective moisture diffusivity, energy of activation and energy consumption during the thin-layer drying of berberis fruit (Berberidaceae). *Energy Conservation and Management*, 49, 2865-2871 <http://dx.doi.org/10.1016/j.enconman.2008.03.009>
- Akpınar, E., Midilli, A., & Bicer, Y. (2003). Single layer drying behaviour of potato slices in a convective cyclone dryer and mathematical modeling. *Energy Conservation and Management*, 44, 1689-1705. [http://dx.doi.org/10.1016/S0196-8904\(02\)00171-1](http://dx.doi.org/10.1016/S0196-8904(02)00171-1)
- Babalıs, S. J., & Belessiotis, V. G. (2004). Influence of drying conditions on the drying constants and moisture diffusivity during the thin-layer drying of figs. *Journal of Food Engineering*, 65, 449-58. <http://dx.doi.org/10.1016/j.jfoodeng.2004.02.005>
- Bode, A. M., & Dong, Z. (2004). Ginger In: *Herbal and Traditional Medicine. Molecular Aspects of Health*. In L. Packer, C. N. Ong & B. Halliwell (Eds.) (pp. 165-288). Florida: CRC Press. <http://dx.doi.org/10.1201/9780203025901.ch8>
- Crank, J. (1975). *Mathematics of Diffusion* (2nd Ed.). New York: Oxford University Press.
- Doymaz, I. (2005). Influence of pretreatment solution on the drying of sour-cherry. *Journal of Food Engineering*, 78, 591-596. <http://dx.doi.org/10.1016/j.jfoodeng.2005.10.037>
- Doymaz, I. (2007a). Air-drying characteristics of tomatoes. *Journal of Food Engineering*, 78, 1291-1297. <http://dx.doi.org/10.1016/j.jfoodeng.2005.12.047>
- Doymaz, I. (2007b). The kinetics of forced convective air-drying of pumpkin slices. *Journal of Food Engineering*, 79, 243-248. <http://dx.doi.org/10.1016/j.jfoodeng.2006.01.049>
- Doymaz, I., & Pala, M. (2002). The effects of dipping pretreatment on air-drying rates of seedless grapes. *Journal of Food Engineering*, 52, 413-417. [http://dx.doi.org/10.1016/S0260-8774\(01\)00133-9](http://dx.doi.org/10.1016/S0260-8774(01)00133-9)
- Falade, K. O., Olurin, T. O., Ike, E. A., & Aworh, O. C. (2007). Effect of pretreatment and temperature on air-drying of Dioscorea alata and Dioscorea rotundata slices. *Journal of Food Engineering*, 80, 1002-1010. <http://dx.doi.org/10.1016/j.jfoodeng.2006.06.034>
- Goyal, R. K., Kingsly, A. R. P., Manikantan, M. R., & Ilyas, S. M. (2007). Mathematical modeling of thin layer drying kinetics of plum in a tunnel dryer. *Journal of Food Engineering*, 79, 176-80. <http://dx.doi.org/10.1016/j.jfoodeng.2006.01.041>
- Goyal, R. K., Mujib, O., & Vinod, K. B. (2008). Mathematical Modeling of Thin Layer Drying Kinetics of Apple in Tunnel Dryer. *International Journal of Food Engineering*, 4(8). <http://dx.doi.org/10.2202/1556-3758.1233>
- Kaleemullah, S., & Kailappan, R. (2005). Drying Kinetics of Red Chillies in a Rotary Dryer. *Biosystems Engineering*, 92(1), 15-23. <http://dx.doi.org/10.1016/j.biosystemseng.2005.05.015>
- Li, L., Wang, G., Wang, S., & Qin, S. (2013). Thermogravimetric and kinetic analysis of energy crop Jerusalem artichoke using the distributed activation energy model. *Journal of Thermal Analysis and Calorimetry*, 114(3), 1183-1189. <http://dx.doi.org/10.1007/s10973-013-3115-2>



- Meisami-asl, E., & Rafiee, S. (2009). Mathematical Modeling of Kinetics of Thin-layer Drying of Apple (var. Golab). *Agricultural Engineering International: the CIGR Ejournal*. Vol. XI. Manuscript 1185.
- Mirzaee, E., Rafiee, S., & Keyhani, A. (2010). Evaluation and selection of thin-layer models for drying kinetics of apricot (cv. NASIRY). *Agricultural Engineering International: the CIGR Journal*, 12(2), 111-116.
- Murthy, M. V. R. (2008). A review of new technologies, models and experimental investigations of solar driers. *Renewable and Sustainable Energy Reviews*, 13(4), 835-844. <http://dx.doi.org/10.1016/j.rser.2008.02.010>
- Mwithiga, G., & Olwal, J. O. (2005). The drying kinetics of kale (*Brassica oleracea*) in a convective hot air dryer. *Journal of Food Engineering*, 71, 373-378. <http://dx.doi.org/10.1016/j.jfoodeng.2004.10.041>
- Ndukwu, M. C. (2009). Effect of Drying Temperature and Drying Air Velocity on the Drying Rate and Drying Constant of Cocoa Bean. *Agricultural Engineering International: the CIGR Ejournal*. Vol. XI, Manuscript 1091.
- NEPC (Nigerian Export Promotion Council). (1999). *Product profile of ginger*. B/K 312, Kumba St, Wuse, Zone, II, Abuja
- Ozdemir, M., & Devres, Y. O. (1999). The thin layer drying characteristics of hazelnuts during roasting. *Journal of Food Engineering*, 42, 225-33. [http://dx.doi.org/10.1016/S0260-8774\(99\)00126-0](http://dx.doi.org/10.1016/S0260-8774(99)00126-0)
- Pahlavanzadeh, H., Basiri, A., & Zarrabi, M. (2001). Determination of parameters and pretreatment solution for grape drying. *Drying Technology*, 19(1), 217-226. <http://dx.doi.org/10.1081/DRT-100001363>
- Rayaguru, K., & Routray, W. (2012). Mathematical modeling of thin layer drying kinetics of stone apple slices. *International Food Research Journal*, 19(4), 1503-1510.
- Román, F., & Hensel, O. (2011). Effect of air temperature and relative humidity on the thin-layer drying of celery leaves (*Apium graveolens* var. *secalinum*). *Agricultural Engineering International: the CIGR Journal*, 13(2), 1-8.
- Tarigan, E., Prateepchaikul, G., Yamseangsung, R., Sirichote, A., & Tekasakul, P. (2006). Drying characteristics of unshelled kernels of candle nuts. *Journal of Food Engineering*, 79, 828-33. <http://dx.doi.org/10.1016/j.jfoodeng.2006.02.048>
- Wang, Z., Sun, J., Liao, X., Chen, F., Zhao, G., & Wu, J. (2007). Mathematical modeling on hot air drying of thin layer apple pomace. *Journal of Food Engineering*, 40, 39-46. <http://dx.doi.org/10.1016/j.foodres.2006.07.017>

## Nomenclature

A	tray area (m <sup>2</sup> )
C <sub>a</sub>	specific heat of air (kJ/kg °C)
D <sub>eff</sub>	effective moisture diffusivity (m <sup>2</sup> /s)
D <sub>o</sub>	constant (dimensionless)
D <sub>t</sub>	total drying time (h)
E <sub>a</sub>	energy of activation (kJ/mol)
E <sub>kg</sub>	specific energy requirement (kWh/kg)
E <sub>t</sub>	energy needed (kWh)
K <sub>1</sub> , K <sub>2</sub>	slope of straight line
L	half of the slab thickness (m)
M <sub>e</sub>	equilibrium moisture content of sample (kg water/ kg dry solid)
M <sub>o</sub>	the initial moisture content (kg water/kg dry solid)
M	the moisture content at any time (kg water/kg dry solid)
M <sub>R</sub>	moisture ratio (dimensionless)
R <sub>g</sub>	universal gas constant (8.3143 kJ/mol)
T	air temperature (°C)

$T_{\text{abs}}$	absolute air temperature (K)
$W_0$	initial weight (g)
$t$	time of drying (s)
$R^2$	correlation coefficient
$\rho_a$	air density ( $\text{kg/m}^3$ )
$\Delta T$	temperature differences ( $^{\circ}\text{C}$ )

### Copyrights

Copyright for this article is retained by the author(s), with first publication rights granted to the journal.

This is an open-access article distributed under the terms and conditions of the Creative Commons Attribution license (<http://creativecommons.org/licenses/by/3.0/>).