

# Instrumentation and control of anaerobic digestion processes: a review and some research challenges

Julie Jimenez · Eric Latrille · Jérôme Harmand · Angel Robles · José Ferrer · Daniel Gaida · Christian Wolf · Francis Mairet · Olivier Bernard · Victor Alcaraz-Gonzalez · Hugo Mendez-Acosta · Daniel Zitomer · Dennis Totzke · Henri Spanjers · Fabian Jacobi · Alan Guwy · Richard Dinsdale · Giuliano Premier · Sofiane Mazhegrane · Gonzalo Ruiz-Filippi · Aurora Seco · Thierry Ribeiro · André Pauss · Jean-Philippe Steyer

Published online: 22 October 2015  
© Springer Science+Business Media Dordrecht 2015

**Abstract** To enhance energy production from methane or resource recovery from digestate, anaerobic digestion processes require advanced instrumentation and control tools. Over the years, research on these topics has evolved and followed the main fields of application of anaerobic digestion processes: from municipal sewage sludge to liquid—mainly industrial—then municipal organic fraction of solid waste and agricultural residues. Time constants of the

processes have also changed with respect to the treated waste from minutes or hours to weeks or months. Since fast closed loop control is needed for short time constant processes, human operator is now included in the loop when taking decisions to optimize anaerobic digestion plants dealing with complex solid waste over a long retention time. Control objectives have also moved from the regulation of key variables—measured on-line—to the prediction of overall process performance—based on global off-line measurements—to optimize the feeding of the processes. Additionally, the need for more accurate prediction of methane

**Electronic supplementary material** The online version of this article (doi:10.1007/s11157-015-9382-6) contains supplementary material, which is available to authorized users.

J. Jimenez · E. Latrille · J. Harmand · A. Robles · J.-P. Steyer (✉)  
INRA, UR0050, Laboratoire de Biotechnologie de l'Environnement, Avenue des Etangs, 11100 Narbonne, France  
e-mail: steyer@supagro.inra.fr

A. Robles · J. Ferrer  
IIAMA, Institut Universitari d'Investigació d'Enginyeria de l'Aigua i Medi Ambient, Universitat Politècnica de València, Camí de Vera s/n, 46022 València, Spain

D. Gaida · C. Wolf  
Department of Automation and Industrial IT, Cologne University of Applied Sciences, Steinmuellerallee 1, 51643 Gummersbach, Germany

F. Mairet · O. Bernard  
INRIA, BIOCORE, 2004 route des lucioles, 06250 Sophia-Antipolis, France

V. Alcaraz-Gonzalez · H. Mendez-Acosta  
Departamento de Ingeniería Química-CUCEI, Universidad de Guadalajara, Blvd. Marcelino García Barragán 1451, S. R., 44430 Guadalajara, Mexico

D. Zitomer  
Department of Civil, Construction and Environmental Engineering, Marquette University, PO Box 1881, Milwaukee, WI 53201-1881, USA

D. Totzke  
Applied Technologies, Inc., 16815 Wisconsin Avenue, Brookfield, WI 53005, USA

H. Spanjers  
Department of Water Management, Section Sanitary Engineering, Delft University of Technology, PO Box 5048, 2600 GA Delft, The Netherlands

production and organic matter biodegradation has impacted the complexity of instrumentation and should include a more detailed characterization of the waste (e.g., biochemical fractions like proteins, lipids and carbohydrates) and their bioaccessibility and biodegradability characteristics. However, even if in the literature several methodologies have been developed to determine biodegradability based on organic matter characterization, only a few papers deal with bioaccessibility assessment. In this review, we emphasize the high potential of some promising techniques, such as spectral analysis, and we discuss issues that could appear in the near future concerning control of AD processes.

**Keywords** Anaerobic digestion · Organic matter · Characterization · Instrumentation · Control · Diagnosis

### Abbreviations

AD	Anaerobic digestion	FTIR	Fourier transform infrared spectroscopy
ADM1	Anaerobic digestion model No 1	GASDM	General activated sludge and digestion model
AFM	Atomic force microscopy	GC/MS	Gas chromatography coupled with mass spectroscopy
BCA	Bicinchonic acid	GISCOD	General integrated solid waste co-digestion model
BD	Ultimate anaerobic biodegradability	HA	Humic acids
BMP	Biochemical methane potential	HPLC	High performance liquid chromatography
BOD	Biochemical oxygen demand	HRT	Hydraulic retention time
CH <sub>4</sub>	Methane	ICA	Instrumentation, control and automation
CLSM	Confocal laser-scanning microscopy	IWA	International water association
CO <sub>2</sub>	Carbon dioxide	LCFA	Long chain fatty acids
COD	Chemical oxygen demand	MPR	Methane production rate
Da	Dalton	MSW	Municipal solid waste
EPS	Extracellular polymeric substances	NIRS	Near infra-red spectroscopy
FOG	Fats, oils, and greases	NMR	Nuclear magnetic resonance spectroscopy
		OLR	Organic load rate
		PLS	Partial least square
		R <sup>2</sup>	Regression coefficient
		RI <sub>4</sub>	Respiration index 4 days
		SEM	Scanning electron microscopy
		STP	Standard conditions of temperature and pressure
		S/X	Substrate to biomass ratio
		TEM	Transmission electron microscopy
		TKN	Total kjeldahl nitrogen
		TOC	Total organic carbon
		TS	Total suspended solids
		VFA	Volatile fatty acids
		VS	Volatile solids
		XPS	X-ray Photoelectron spectroscopy
		3D-EEM	3D emission excitation matrix

F. Jacobi  
Fachgebiet IV.5 Erneuerbare Energien, Boden und Sekundärrohstoffe, Landesbetrieb Hessisches Landeslabor (LHL), Schlossstraße 26, 36251 Bad Hersfeld, Germany

A. Guwy · R. Dinsdale · G. Premier  
Sustainable Environment Research Centre, University of South Wales, Treforest, UK

S. Mazhegrane  
Veolia Recherche and Innovation, Chemin de la digue BP 76, 78603 Maisons Laffitte, France

G. Ruiz-Filippi  
Escuela de Ingeniería Bioquímica, Facultad de Ingeniería, Pontificia Universidad Católica de Valparaíso, General Cruz 34, Valparaíso, Chile

A. Seco  
Departament d'Enginyeria Química, Universitat de València, Avinguda de la Universitat s/n., 46100 Burjassot, València, Spain

T. Ribeiro  
Institut Polytechnique LaSalle Beauvais, Rue Pierre Waguet, BP 30313, 60026 Beauvais Cedex, France

A. Pauss  
Sorbonne Universités, EA 4297 TIMR UTC/ESCOM, UTC, CS 60319, 60203 Compiègne Cedex, France

## 1 Introduction

One of the key issues for global sustainable development is the energy consumption, particularly as fossil fuels, which represents up to 80 % of the global energy consumption. Moreover, fossil fuels are considered the main source of acidifying contaminants and greenhouse gasses, as well as the main factor contributing to global warming and climate change. Hence, one big challenge for this century is to develop new competitive sources of renewable energy, capable of replacing fossil fuels with a minimum impact on both the environment and society, while maintaining energy (electricity or gas) grid stability (Szarka et al. 2013). In this respect, alternative energy sources such as methane from organic residues must be considered.

Anaerobic Digestion (AD) is a biological process in which the organic carbon is converted through oxidation–reduction reactions to both its most oxidized state ( $\text{CO}_2$ ) and its most reduced form ( $\text{CH}_4$ ). The methane produced is an energy source that can be valorized as electricity, heat, biofuel or can be injected into the natural gas grid. In the context of a widely perceived energetic and climatic crisis, AD has become a very interesting alternative for organic waste disposal. For example, in France, wastewater treatment plant (WWTP) energy consumption is about 20 kWh per year per person equivalent, based on a 100,000 person equivalent plant. From these observations and the fact that wastewater sludge potentially contains a high amount of energy that can be recovered, it is clear that WWTPs of the future—or water resource reclamation facilities (WRRFs) as they are now called—should aim at a positive energy balance (Cao and Pawlowski 2012).

### 1.1 From municipal wastewater solids to industrial and agricultural wastes

AD has been used to stabilize municipal wastewater solids for over 80 years, probably with the first heated, mixed system being employed in Germany in 1927 (Imhoff 1938). During the last 30 years, the total number of papers on AD and industrial applications increased rapidly, mainly due to a favorable environmental policy: the Kyoto protocol (2005), national or international legislation promoting AD, special rates for selling electricity produced from biogas. The evolution of the market also led to a higher complexity of the substrates considered for AD valorization.

In the eighties, industrial wastewater treated by AD began to grow and worldwide, the overall number of anaerobic reactors treating industrial wastewater reached 2266 references in 2007 (van Lier 2008) and kept on increasing since then. The main focus of AD optimization has been about kinetics of soluble substrates, considering acetogenesis and methanogenesis as the limiting steps (Mata-Alvarez et al. 2000).

At the end of the eighties, AD applications focused on the conversion of solid waste began to increase. Solid wastes then included mainly municipal solid waste (MSW) and green wastes. The increasing production of solid waste combined with waste management policies aiming at reducing long-term environmental impacts of landfill disposal have created a need for alternative treatment. The use of AD to treat the organic fraction of municipal solid waste became a reality (De Baere 2000, 2008): from three plants in 1990 to 55 plants referenced in 2010 in Europe and at least 4 in North America today, for example. From a process control standpoint, the disintegration/hydrolysis step received considerable attention for solid waste since it is the rate-limiting step for substrates containing mainly particulates (Mata-Alvarez et al. 2000; Lauwers et al. 2013).

Concomitantly, farmers have become increasingly interested in the AD process, both as an additional source of revenue and as an alternative energy source without greenhouse gas emission to the atmosphere. AD is indeed one of the technologies that fulfil European criteria for second generation biofuel production (fuels manufactured from various types of complex organic carbon sources such as lignocellulose biomass or agricultural residues, e.g., manure). The case of Germany where more than 7850 plants generate over 3.5 GW of electricity is an example or in China where more than 35 million household digesters and 25,000 digesters for agricultural residues have been deployed (Fang 2012).

### 1.2 Biodegradability, bioavailability and bioaccessibility

Hydrolysis rate of complex substrates has been identified for a long time as an important factor for AD modelling and process optimization (Vavilin et al. 1997), especially considering substrate characterization

and hydrolysis kinetics. Modern dynamical models of AD are very useful for optimization of biogas production. For example, the IWA Anaerobic Digestion Model No 1 ADM1 (Batstone et al. 2002) has a detailed pathway description, but the model's main drawback is that it also needs detailed input variables and data that may not be available for a specific application (Astals et al. 2013a). Indeed, a key-point for the successful description of a bioprocess is appropriate influent characterization data (Huete et al. 2006; Buffiere et al. 2006; Kleerebezem and van Loosdrecht 2006).

Lately, three major concepts have been shown to be of prime importance to characterize organic matter biodegradation: biodegradability, bioavailability and bioaccessibility (Jimenez et al. 2014). Biodegradability is the ability of a substrate to be broken down by a microorganism into simpler compounds but this biodegradation is limited by molecule's bioavailability, complexity and/or toxicity. Bioavailability is defined as the direct access to the molecule to be degraded while Aquino et al. (2008) defined bioaccessibility as the possible access to the molecule depending on several factors such as the contact time between the substrate and the microorganism, the efficiency of hydrolytic activity or ultimately any pre-treatment applied to the waste. There is thus a notion of physical accessibility as in the case of the cellulose protection by lignin or vegetal walls acting as a barrier and needing chemical or physical break-up to make cellulose accessible to microorganisms (Motte et al. 2014, Reilly et al. 2015). Consequently, the bioavailable organic matter is included in the bioaccessible fraction such as the organic fraction able to be degraded by secreted exo-cellular enzymes (Jimenez et al. 2014).

In parallel, the control problem associated with anaerobic biological waste or wastewater treatment processes must involve—like in any aerobic processes—process configurations that remain robust against unpredicted perturbations (e.g., physicochemical, mechanical, etc.) and uncertainties in relation to: (a) initial conditions, (b) kinetic and hydrodynamic parameters, (c) yield coefficients, and (d) input concentrations. All these aspects strongly influence the overall objectives of instrumentation and control and are currently profoundly impacting the technical challenges and optimization criteria applied to AD processes.

## 2 Instrumentation of anaerobic digestion processes

The following section first focuses on classical instrumentation that is very often encountered in practice. On-line instruments that can be used in fast closed-loop control scheme and have proven to be very useful for monitoring any type of digester will be presented first (See also Spanjers and van Lier 2006 for additional information). Next, because of the development of the solid AD process—with long residence time—some techniques that are not yet available in an on-line context will be discussed. They can indeed provide very informative measurements that can help to optimize AD plants with long solid retention time, such as those dealing with municipal or agricultural waste. Sensor dynamics are likely to be less important than static characteristics and other cost benefit considerations in most cases, as the process dynamics are seldom challenging to the sensor technologies used.

### 2.1 On-line instrumentation

#### 2.1.1 Flow, temperature, pH and ORP

Instruments to monitor gas and liquid flows are ubiquitous in wastewater treatment. For example, Harremoës et al. (1993) provided an extensive overview of liquid flow measurement techniques and pointed out the importance of proper installation for guaranteed accuracy. Measurements are based on pressure differentials resulting from restrictions (venturi, orifice plates, and meshes) placed in the flow path. In addition, electromagnetic and ultrasonic sensors can also be applied.

Temperature is a rather important variable for anaerobic digesters and temperature control is often implemented. Three commonly used types of process measuring instruments are available for measuring temperature: resistance thermometer, thermo-element, and thermistor.

It is normal practice to install pH electrodes in a treatment plant. Immersion of these probes in 'sticky' sludge has encouraged the development of different cleaning strategies: hydraulic (water spray), mechanical (brush), chemical (rinsing with cleaning agent) or ultrasonic cleaning. With these techniques, longer periods without maintenance can be attained. Poor or

no automatic cleaning may indeed cause problems and self-diagnosis has been integrated in advanced systems. More sophisticated set-ups include automated checks of the impedance of the diaphragm and the glass electrode, while tests performed during (automatic) calibration may be used to indicate other sensor deficiencies. Although pH is a variable that is important in all biological processes, its value is especially critical in anaerobic digestion, eventually leading to acidification and process failure. Hence, its measurement and control are important. However, in the case of wastewaters with high buffering capacity, pH measurements may be rather insensitive to indicate process changes and are therefore not advisable for process supervision and control. In such cases, they may be replaced with bicarbonate and/or alkalinity measuring systems (Di Pinto et al. 1990; Hawkes et al. 1993 and Guwy et al. 1997—see also Sect. 2.1.3).

Oxidation–reduction potential (ORP) sensors are also sometimes installed since an increase in ORP indicates a possible presence of oxygen in the process. In this respect, it is recommended to maintain an ORP potential below  $-300$  mV relative to a standard hydrogen electrode (depending on the wastewater characteristics) in order to not adversely affect anaerobic methanogenic archaea activity. ORP is also sometimes used to monitor sulfate reduction in digesters and  $H_2S$  in the biogas through micro-aeration (Nghiem et al. 2014).

As biogas formation rate is one of the most commonly monitored variables in anaerobic digestion processes, gas flow sensors are very often part of digester instrumentation. Pressure measurements can be found in AD plants as well, especially for alarm functions.

### 2.1.2 Biogas composition

Gas composition measurements are also required in lab processes and full-scale plants. Typically, specific gas analyzers monitor the content of a component directly and infrared absorption measurements are used to determine carbon dioxide and methane concentrations. There are several of such sensors available today in the market. It has to be kept in mind that, although not always straightforward to predict from measurements in the gas phase, the corresponding concentrations of gasses in the liquid phase are important as they represent the environment the

microorganisms operate in. It is possible to use Henry's law to calculate equilibrium aqueous concentration, however it is necessary to know the gas composition and the Henry's constant for each component at the required temperature and in aqueous solutions of variable ionic strength. Also, gas–liquid partitioning in digesters is very dynamic and equilibrium conditions may not be present.

The presence of hydrogen sulphide in the gas and the explosive character of biogas also require careful precautions. Hydrogen sulphide measurement in the gas phase may be performed by monitoring the reaction of sulphide with a Pb-strip. Subsequently, the black PbS that is produced is quantified by colorimetry. No direct on-line measurement of hydrogen sulphide in the liquid phase has been reported though. Membrane inlet mass spectrometry (Ryhiner et al. 1992) is another method to directly measure a large number of dissolved gasses and volatile compounds. The MS membrane probe response is often linear over very large concentration ranges. For application of thin membranes—that are required for sufficiently fast response and high sensitivity—the analyzer should be protected because of the rather high risk of membrane rupture. A fast safety shut-off system including fast pressure measurement is thus advised to be installed.

Specific hydrogen ( $H_2$ ) analyzers have been developed—mainly in laboratories—based for example on electrochemical cells (Mathiot et al. 1992). Immersible sensors have been developed to measure dissolved hydrogen concentrations directly in the liquid phase down to partial pressures of 1 Pa ( $10^{-5}$  atm). Their reliability and long-term stability have been reported (Pauss and Nyns 1993). An inexpensive amperometric dissolved hydrogen probe has been used to determine the onset of digester failure by substrate overloading (Cord-Ruwisch et al. 1997). The measuring principle is based on the oxidation of hydrogen at a platinum black electrode at an adjusted potential. The current flowing to the electrode is directly related to the hydrogen concentration in the bulk liquid but  $H_2S$  has to be trapped and removed before the biogas flows into the hydrogen monitor. Björnsson et al. (2001a) applied a hydrogen-sensitive palladium–metal oxide semiconductor (Pd-MOS) sensor in combination with a Teflon membrane for liquid-to-gas transfer for the detection of dissolved hydrogen and the monitoring of a laboratory-scale anaerobic digestion process,

employing mixed sludge containing mainly food/industrial waste. The sensor gave valuable information about approaching process overload, and can serve as a good alternative for volatile fatty acids (VFA) monitoring. The sensor was stable and robust during 3 months of operation, and therefore it was concluded that hydrogen sulfide, which is known to poison the Pd-MOS sensor, could not penetrate the Teflon membrane.

### 2.1.3 Alkalinity

The incentive to measure the bicarbonate content of the mixed liquor indeed originates from the fact that imbalance in anaerobic digestion (due to the accumulation of volatile fatty acids, VFA) cannot easily be detected on the basis of pH measurements, especially when the alkalinity of the mixed liquor is high (Hawkes et al. 1993). Because the alkalinity is often mainly due to the bicarbonate buffer, it has been proposed since the early sixties that its measurement can be used in control strategies for anaerobic digesters (McCarty 1964). One way to do so is by titration. Such methods involve titrating the sample down to pH 3.5 to determine the bicarbonate content with a correction for the volatile fatty acids present [see for example Ripley et al. (1985) or Anderson and Yang (1992)]. The method is based on quantifying the gaseous carbon dioxide evolved from the sample as it is acidified. The volume of gas may be measured in two different ways. The overpressure in a closed constant volume vessel can be measured, or the gas volume produced can be measured with a sensitive gas flow meter in a constant pressure system. During titration, interferences from other weak acid/base constituents cannot be excluded and overestimation of VFA may sometimes occur (Purser et al. 2014).

### 2.1.4 Volatile fatty acids

Total VFA concentrations have been monitored for a long time as process performance indicators. It gives fast and reliable information of process status compared to other common indicators such as pH, alkalinity, gas production, and gas composition (Ahring et al. 1992; Björnsson et al. 2001b; Boe et al. 2007). Automated bicarbonate and total VFA instruments based on titrimetry have been developed and applied in practice for some years—see for

example Feitkenhauer et al. (2002) or Ruiz et al. (2005).

Compared to total VFA concentration, individual VFA (acetate, propionate, butyrate etc.) can provide more information of the process status. Several studies have highlighted the importance of individual VFA as an early warning of process imbalance (Boe et al. 2010; Pind et al. 2003; Pratt et al. 2003, 2012; Van Ginkel and Logan 2005). Ahring et al. (1992) suggested the overall level of n-butyric and iso-butyric was the best indicator of process stress. Boe et al. (2010) advised propionate as the most persistent parameter which was effective indicator of stress status of the process. Individual VFA are easily measured off-line using GC or HPLC, provided that all particulate matter has been removed from the sample.

However, only a few studies reported the development of an on-line individual VFA monitoring system because when dealing with anaerobic waste treatment, the presence of particulate matter is often high. Ryhiner et al. (1993) used GC for on-line analysis of acetic, propionic, butyric, valeric, and iso-valeric in a UASB reactor treating whey powder solution. The sample was purified by membrane filtration, acidified by phosphoric acid, and injected into the GC column by an auto-sampler with a specially constructed flow-through vial. However, no performance data was shown for this system. Zumbusch et al. (1994) used a HPLC for VFA monitoring in a UASB reactor treating baker's yeast wastewater using an ultra-filtration module for sample purification. The main problem of this process was membrane fouling requiring a high level of maintenance of the filtration system. Pind et al. (2003) used a GC for on-line analysis of VFA in a CSTR reactor treating manure and sample purification employed a three step filtration; pre-filtration by a rotating filter inside the reactor, ultra-filtration by a membrane cartridge, and a mini-filter for final purification. The system showed good correlation with the off-line measurement. However, membrane fouling was still the crucial problem and the membrane needed to be cleaned every 15–18 h to obtain sufficient flow. Boe et al. (2007) developed a new method to measure individual VFA based on headspace gas chromatography (HSGC). The method applies *ex situ* VFA stripping with variable headspace volume and gas analysis by gas chromatography-flame ionization detection (GC-FID). In each extraction, digester

sample was acidified with  $\text{H}_3\text{PO}_4$  and  $\text{NaHSO}_4$ , and then heated to strip the VFA into the gas phase. The system has been tested for on-line monitoring of a lab-scale CSTR reactor treating manure for more than 6 months and has shown good agreement with off-line analysis.

### 2.1.5 Spectral sensors

Spectral techniques—UV/visible spectroscopy (UV/vis), Mid InfraRed spectroscopy (MIR), Near Infra-Red spectroscopy (NIRS)—are beginning to provide very useful information about the complexity of organic matter.

UV/vis spectroscopic probes in the range of 190–750 nm are often used in wastewater treatment plants to measure COD, TOC and  $\text{NO}_3\text{-N}$  (Sarraguça et al. 2009). Wolf et al. (2013) developed a UV/vis spectroscopic system for VFA measurement ( $1.1\text{--}3\text{ g L}^{-1}$ ) in AD plants. An UV/vis probe from S.:CAN was used in combination with a custom-built dilution system to monitor the absorption of fully fermented sludge. To validate the approach, on-line measurements have been taken at a full-scale 1.3 MW industrial biogas plant. Results showed that VFA concentrations can be predicted with an accuracy of 87 %. Nevertheless, the necessary dilution system is a disadvantage compared to NIR and MIR spectroscopic systems.

NIRS presents great potential for monitoring the AD process. Holm-Nielsen et al. (2008) evaluated the use of NIRS technology on-line (Transflexive Embedded Near Infra-Red Sensor or TENIRS) to monitor a thermophilic digester treating manure and organic food industrial waste. Good correlation was obtained between on-line NIRS measurement of glycerol and VFA content in the anaerobic digester. Further works documented the potential to monitor VFA as well as VS in on-line installations at lab-scale and full-scale plants (Krapf et al. 2013; Jacobi et al. 2009).

Mid InfraRed (MIR) spectroscopy is another interesting technique to characterize waste organic matter. One major advantage against existing NIR sensors is that process variables such as VFA, total alkalinity (TA),  $\text{NH}_4\text{-N}$  and TS show distinctive peaks in the MIR spectrum between 1800 and  $800\text{ cm}^{-1}$ , which makes it easier to correlate peak intensity to actual concentrations. Provenzano et al. (2014) used Fourier Transform InfraRed (FTIR) and fluorescence

spectroscopy to characterize the organic matter evolution during AD and composting of pig slurry. Steyer et al. (2002) also used for several years a FTIR spectrometer for on-line measurements of COD, TOC, VFA, total and partial alkalinity of an AD fixed bed treating industrial wine distillery wastewater. Spanjers et al. (2006) applied the same technique at a full scale plant for the on-line monitoring of VFA, COD, alkalinity, sulphate, and, since aerobic post-treatment was considered, total nitrogen, ammonia and nitrate concentrations. Based on these studies, Wolf et al. (2014) developed an on-line MIR system with an FTIR probe using Polychrystalline-Infrared (PIR) fibres that allow for higher signal to noise ratio (S/N) ratios as well as longer fibres. Furthermore, a fully automated process interface for cleaning and recalibration was used in order to reduce maintenance to a minimum. Good calibration results were obtained for VFA ( $R^2 = 0.97$ , RMSE  $0.372\text{ g L}^{-1}$ ), TA ( $R^2 = 0.99$ , RMSE =  $0.259\text{ g L}^{-1}$ ) and  $\text{NH}_4\text{-N}$  ( $R^2 = 0.99$ , RMSE =  $0.11\text{ g L}^{-1}$ ). In spite of all advantages and advances in infrared spectroscopic on-line measurement systems, two main challenges remain: (1) despite the great interest in infrared spectroscopy on organic matter characterization, this technique is not sensitive enough for structural interpretation of complex molecules and does not account for the bioaccessibility of organic constituents; (2) prices for infrared spectroscopic measurement systems, NIR and MIR, are still far too expensive to be widely used in AD plants, so that financial feasibility is mostly not provided.

### 2.1.6 Other on-line instrumentation

Other examples of advanced instrumentation can be seen in electronic tongues and noses and microwave or acoustic chemometrics (Madsen et al. 2011). A gas chromatograph or mass spectrometer coupled to a sample preparation unit can also be used, but so far no full-scale applications for these methods have been reported.

Liquid phase electrical conductivity is defined as the ability of a solution to conduct electrical current and is directly proportional to ion concentrations. Moreover, it can be easily monitored on-line: a cell formed by two electrodes is placed in the sample and the current between both electrodes is measured by means of the application of a potential difference

(Colombié et al. 2007). Conductivity measurements could bring very informative measurements for monitoring and control of AD processes since ion concentrations are mainly affected by both VFA and bicarbonate concentrations (Hawkes et al. 1994), two of the most reliable indicators of AD process performance. Several studies have been published on the feasibility of electrical conductivity sensors for bioprocess monitoring (see, for instance, Hoffmann et al. 2000; Varley et al. 2004; Aguado et al. 2006; Ellison et al. 2007). However, there is still a lack of knowledge regarding its applicability to AD processes, despite some applications in dark fermentation processes for  $H_2$  production (Aceves-Lara et al. 2010).

## 2.2 Off-line instrumentation

With long HRTs or SRTs, off-line characterization of the waste and biomass can be considered as a way to provide operators with useful information to optimize AD plants, even though the data are yet not on-line. Several techniques exist and they are presented below.

### 2.2.1 Global characterization methodologies

From an analytical point of view, the performance of AD in wastewater or waste treatment is traditionally evaluated using parameters such as chemical oxygen demand (COD), total organic carbon (TOC) and biochemical oxygen demand (BOD). In order to optimize plant design and operation, Raunkjær et al. (1994) proposed to link COD fractions and biodegradability. Kayhanian (1995) showed that the content of biodegradable volatile solids (VS) impacted the prediction of biogas production rate and the computation of the organic loading rate and the carbon/nitrogen (C/N) ratio. Since the seventies, the most widely used indicator to assess the performance of digesters has been the amount of methane produced per unit of total solid (TS) or volatile solids (VS) of any given substrate (Chynoweth et al. 1993).

### 2.2.2 Biodegradability and organic matter characterization

One of the key issues in operating and optimizing AD plants is to assess the quantity of methane that can be produced from an organic residue. To this end, the most commonly used method to measure anaerobic

biodegradability is the biochemical methane potential (BMP) test (ISO 11734 1995).

*2.2.2.1 BMP data and use for process modeling* The BMP assay is a procedure developed to determine the methane yield of an organic material during its anaerobic decomposition by a mixed microbial community in a defined medium. The procedure was developed for a serum-bottle technique by Owen et al. (1979). Angelidaki and Sanders (2004) described the procedure and the calculations. The test ends when the cumulative biogas curve closely approaches an asymptote, usually after 30 days of incubation but it may be much longer for non-easily degradable material such as fibers. Therefore, the main inconvenience of the test is the long time required in its execution. Other negative points are the variability of the results obtained through the BMP tests and their ability to predict continuous digester performances. Concerning the first point, several studies made inter-laboratory assays to compare the BMP test results. Kinetic rates were widely different among different participating laboratories, standard deviations ranged from 57 to 68 % (Jensen et al. 2009). The relative standard deviation of BMP values ranged from 15 to 24 % and decreased to 10 % when outliers were not considered (Raposo et al. 2011). Currently, only one inter-laboratory (French Inter-laboratory assay 2013–2014) proposes new guidelines and protocol after 2 test rounds achieved on solid substrates. This last study has shown good intra-laboratory repeatability (equal to 4 %), reproducibility (between 5 and 7 %) and reproducibility (between 13 and 21 %)—see Cresson et al. (2014).

Concerning the second drawback, according to Jensen et al. (2009), the biodegradability and the bioaccessibility of hydrolysis-limited substrates could be defined by the parameters  $B_0$  and  $k$  calculated from the Gompertz equation applied to a BMP curve (cumulative methane production vs. time),  $B = B_0 \times (1 - e^{-kt})$ , where  $B$  is the cumulative methane production,  $B_0$  is the maximal methane production and  $k$  is the hydrolysis rate constant. However, the authors discuss the conservative feature of these parameters measured in a BMP test. Several opinions are found in the literature concerning the use of  $B_0$  and  $k$  parameters obtained in batch tests in order to model continuous digesters (see, for example, Val del Rio et al. 2011; Nielfa et al. 2015; Strömberg et al. 2015). Batstone



et al. (2009) found that the BMP test's parameters should not be used for dynamic modelling of continuous digesters. While the final value of BMP was found to be consistent with continuous data, these authors found that the hydrolysis rate parameter value was lower in a BMP test than in a continuous digester treating thermally a waste activated sludge (i.e., 0.15–0.25 vs.  $>5 \text{ day}^{-1}$ ). According to Labatut et al. (2011), the BMP test is not suitable for predicting methane production kinetics for continuous digesters because it is conducted under diluted conditions, so preventing any inhibition response from being observed. Nevertheless, Jensen et al. (2009) found that the batch test was slightly conservative in terms of estimating degradability and rate, when applied to slowly degradable substrates such as waste activated sludge. Fannin et al. (1987) concluded that the maximum theoretical methane yield determination was useful to evaluate digester performance and to provide basis for experimental work. On the other hand, biodegradation tests performed sequentially in batch reactors using a slightly different protocol than the one used in BMP tests (Ganesh et al. 2013) were shown to be very informative in assessing the biodegradation kinetics of a broad spectrum of biowaste (García-Gen et al. 2015).

*2.2.2.2 More rapid prediction of methane potential* Over the years, several authors developed relationships between the organic matter composition and the methane production or the anaerobic biodegradability. Static models are correlations (obtained by linear regression or partial least square (PLS) regression) where the parameters of interest are expressed as a function of one or more variables based on some analytical composition of the given substrate. Static implies neither kinetic equation nor variation over time. Three kinds of static models appeared in the literature to predict biodegradability of solid organic waste. Table 1 summarizes the comparative analysis, including benefits and drawbacks, of the different characterization methodologies involved in the integrative tools.

*Initial biogas production modelling* Some authors used the initial rate of biogas production modelling in order to predict the final value of BMP (Donoso-Bravo et al. 2011; Strömberg et al. 2015). For example, based on a database, Strömberg et al. (2015) proposed an algorithm to predict the BMP value from incubation

experimental data operated during 6 days with an error less than 10 %. Donoso-Bravo et al. (2011) used similar technique with incubation during 3–4 days. However, the modelled methane production of a continuous digester was underestimated by 20 % with these parameters.

*Organic matter characterization* Over the last two decades, several authors also tried to build other static integrative tools based on organic matter characterization but they were mainly applied to municipal solid waste (Buffiere et al. 2006), kitchen, fruits and vegetables wastes (Gunaseelan 2007, 2009). Few studies dealt with municipal sludge although the methodologies used on solid waste can be transposed to sludge. The most recent publications have been presented by Mottet et al. (2010), Appels et al. (2011) and Jimenez et al. (2014).

First, the theoretical BMP obtained from the empirical formula has been calculated since 1930 using the Buswell equation (Neave and Buswell 1930). This stoichiometric equation is based on the elemental composition ( $\text{C}_n\text{H}_a\text{O}_b$ ) where organic matter is reduced to methane and oxidized into carbon dioxide, with the assumption of a total conversion. However, these relationships remain theoretical and they assume that organic matter is fully converted. They did not consider (i) the fraction of substrate used for bacterial growth, (ii) the refractory organic matter (such as lignin) contained in the substrate, (iii) the fraction of the organic matter remains inaccessible due to binding within particles and (iv) the limitation of nutrients (Angelidaki and Sanders 2004). Several authors showed that biodegradability was overestimated using this technique (Shanmugam and Horan 2009, Labatut et al. 2011). Additionally, when applied to municipal solid waste, Davidsson et al. (2007) showed that theoretical methane potential is more realistic when the calculation is based on biochemical composition (lipids, carbohydrates, proteins) rather than on elemental composition analysis.

From Table 1, correlations obtained depend on the nature of different waste molecules. For example, fiber characterization would be more suitable for lignocellulose-like substrates such as green wastes, fruits and vegetables wastes (Buffiere et al. 2006) than for sewage sludge. Indeed, Mottet et al. (2010) applied the Van Soest fractionation (Van Soest 1963) to characterize organic matter from municipal sludge in order to build a biodegradability indicator. The error for the

**Table 1** Summary of the different methodologies used in integrative tools found in the literature

Integrative tools	Characterization methods	Benefits	Drawbacks	References
Static model	Biochemical characterization	Analytical simple and rapid methods	Model validation not yet achieved	Mottet et al. (2010)
PLS, correlations	Proteins, carbohydrates, lipids		Based on one type of sludge (secondary)	
Stoichiometric reaction	COD/TOC, TOC soluble		Care to be taken of the accuracy of methods used	
			Not take into account complexity and accessibility	
	CHNOS elemental analysis	Fast and practical method	Consideration of the whole organic matter degradation: the biodegradable fraction is not used	Shanmugam and Horan (2009)
			Over-estimation of BMP tests	
	Van Soest and fibers analysis	Faster and practical method	Not suitable for sewage sludge in terms of protocol (porosity)	Chandler et al. (1980)
		Validation on several solids wastes	Model validation not conclusive	Gunaseelan (2007)
		Accessibility taking into account with growing extraction power		Mottet et al. (2010)
	Aerobic respiration rate	Faster than a BMP test (4 days instead of 21–30 days)	Only readily substrate taken into account	Cossu and Raga (2008)
		Promising on solid wastes	No accessibility taken into account	
			Assumption on the same biodegradability under aerobic and AD	Scaglia et al. (2010)
	Initial rate technique	Faster method than BMP	Extrapolation in continuous digester underestimate methane production	Donoso-Bravo et al. (2011)
		Maximum production rate and affinity constant determined	Not information on substrate bioaccessibility	Strömberg et al. (2015)
	Biochemical characterization	Bioaccessibility taken into account	Necessity of long batch test for fractions assessment	Yasui et al. (2006, 2008)
	Bioaccessibility compartment	Biochemical fractions calculated from practical analysis		Mottet et al. (2010)
	NIRS	Biodegradability assessment	Necessity of drying and freezing the sample	Lesteur et al. (2010)
		Fast	Bioaccessibility not taken into account	Doublet et al. (2013)
		Various type of substrates		
	3D fluorescence spectroscopy combined with accessibility characterization	Bioaccessibility taken into account	Calibrated on sludge-like samples	Jimenez et al. (2014)
		Both biodegradability and bioaccessibility predicted		
		Fast method		

validation of the Partial Least Square (PLS) model was about 35 %. Van Soest fractionation targets fibers and carbohydrates (i.e., cellulose, hemicellulose, lignin) but sewage sludge are also composed of proteins, humic acids and lipids (Jimenez et al. 2013). In the second part of their work, the authors found a better correlation between anaerobic biodegradability and the specific biochemical fractions of organic matter, such as proteins, carbohydrates, lipids and the degree of oxidation of organic molecules. Only Gunaseelan (2007, 2009) considered fibers, carbohydrates, lipids and proteins.

Concerning biomolecules characterization, several methods exist and are summarized in the Table 2. Initially conceived to analyze proteins, lipids and carbohydrates in serum samples, colorimetric methods have been applied in environmental engineering to

characterize organic fractions. They are now coupled with analytical improvements such as organic matter extraction techniques (Park and Novak 2007; Ras et al. 2008). Table 2 summarizes some of the available methods used to determine the main components of organic matter. Depending on the nature of the substrate (total sludge or EPS solubilized in an extracting agent) the methods are more or less adequate (Jimenez et al. 2013). Recently, several reported works used a more advanced methodology: gas chromatography with mass spectroscopy (GC/MS) was used in order to determine the detailed composition of carbohydrates, proteins and lipids present in the sample. Huang et al. (2010) used this technology for wastewater characterization.

*Aerobic tests* Indirect correlations between aerobic activity tests and anaerobic tests such as BMP are also

**Table 2** Analytical protocols for biochemical compounds determination

Organic fraction	Method type	Concentration (mg/L)	Reagent used	Standard	Reference
Proteins	Colorimetric	0–200	Folin reagent Copper sulfate 0.5 % (w/w)	Bovine albumin serum	Lowry et al. (1951) Frølund et al. (1996)
	Colorimetric	0–200	Bicinchonic acid		Smith et al. (1985)
	Colorimetric	0–100	Gornall biuret reagent and NaCl		Gornall et al. (1949)
	Colorimetric	2–120	Coomassie brilliant blue G-250 reagent		Bradford (1976)
	Standard method for TKN assesement	N content × 6.25 g proteins/gN	Mineralisation and ammonia dosage	None	Kjeldahl (1883)
Humic acids like	Colorimetric	0–200	Folin reagent	Humic acids (Aldrich)	Frølund et al. (1996)
Polysaccharides	Colorimetric	0–100	Phenol 5 % (w/w) Sulfuric acid 95 %	Glucose	Dubois et al. (1956)
	Colorimetric	0–100	Anthrone 0.125 % (w/v) Sulfuric acid 95 %		Dreywood (1946) Raunkjær et al. (1994)
Fibers	Extractions	–	Weende method Van Soest	None	Henneberg and Stohmann, (1860) Van Soest (1963)
Lipids	Colorimetric	0–1000	Vanillin 0.6 % (w/w) Phosphoric acid 85 % Sulfuric acid 95 %	Commercial olive oil	Frings and Dunn (1970)
	Extraction	–	CCl <sub>4</sub> , Uvasol, Al <sub>2</sub> O <sub>3</sub> , Na <sub>2</sub> SO <sub>4</sub> , HCL 6M	Cornoil	APHA (2005)
	Infrared spectroscopy				
	Extraction Gravimetry		Organic solvent	–	APHA (2005)

often proposed. Aerobic tests are less time consuming than anaerobic tests and they can be easier from a practical point of view (e.g., no need for anaerobic conditions and precautions working in an air environment). Although the respirometric test takes less time than the BMP test, there are some limitations in using it to determine the BMP. First, only the readily biodegradable organic matter is considered (the more complex organic matter, such as cellulose, are degraded more slowly and are not measured in the short-term test) (Lesteur et al. 2010). The second limitation is the assumption that the organic matter in sludge presents the same biodegradability under aerobic and anaerobic conditions (Ekama et al. 2007). Buendía et al. (2008) used long anaerobic and aerobic batch tests in order to estimate readily and slowly biodegradable fractions and found a good correlation between the anaerobic and the aerobic readily biodegradable fraction. However, the slowly biodegradable fraction was underestimated by the aerobic batch testing. In the same way, Park et al. (2008) showed some proteins bound to divalent cations were bioaccessible only under aerobic conditions but were not bioaccessible under anaerobic conditions. Higher volatile solids removal was observed under aerobic conditions (48 %) compared to AD (39 %).

*2.2.2.3 Emerging techniques for organic matter characterization* Progress in analytical chemistry has led to the development of new instruments and techniques to characterize organic matter. Among them, NIRS and 3D fluorescence spectroscopy are the most promising for instrumentation and biodegradability measurement.

Recently, NIRS is used for BMP assessment following two different approaches. The first approach is to determine the composition of the input material using NIRS and to calculate the BMP value by regression using static models. The second approach to predict the biodegradability uses directly the spectra through a dedicated calibration. Jacobi et al. (2012) used both approaches for the determination of the biogas production from maize, which is commonly used in Germany. The calibration allowed errors for volatile solids of 0.74 % fresh matter and for biogas production of 5.26–11.14 l/kg fresh matter. Application of the technique for off-line prediction of continuously gathered data allowed, together with

first order degradation kinetics, the prediction of the biogas production of a full-scale biogas plant over several months. Zhang et al. (2009) succeeded in building PLS models between NIRS results and ethanol, acetate, propionate and butyrate concentrations in a H<sub>2</sub> producing reactor fed on synthetic wastewater. Lignin concentration has also been correlated to NIRS measurement by Brinkmann et al. (2002). However, so far NIRS has not yet found its way into practical implementation at biogas plants. One obstacle seems to be the transfer of calibrations of a given sample set to new samples and the reliability of the predicted values.

Lesteur et al. (2011), Doublet et al. (2013) and Triolo et al. (2011) have successfully developed PLS models for BMP prediction of different waste organic matter BMP values using Near InfraRed Spectroscopy (NIRS). Lesteur et al. (2011) and Doublet et al. (2013) found a direct correlation between the NIRS analysis and the biodegradability provided by the BMP tests for municipal solid waste. The prediction demonstrated good accuracy (standard deviation of 28 mLCH<sub>4</sub>/gVS and relative error of 13 % respectively). However, NIRS measurement for biodegradability assessment is still performed on dried-frozen samples and does not consider accessibility of the organic matter.

Another promising technique is the fluorescence spectroscopy. Fluorescence allows the characterization of the analyzed organic material in both liquid and solid phases. The technique gives a topographic map of the organic matter complexity. Identification of molecular-like groups is possible based on the excitation and emission wavelength coordinates (Jimenez et al. 2014). It is indeed a selective and sensitive method since fluorescence characteristics are related to the structure and the functional groups in the molecules. Some studies have revealed the potential of fluorescence spectroscopy to link to the complexity of a substrate and its biodegradability (Tartakovsky et al. 1996; Reynolds and Ahmad 1997) and results on establishing a link between complexity, sludge stabilization degree and accessibility, were encouraging (He et al. 2011; Wan et al. 2012). Recently, Jimenez et al. (2014) proposed a sewage sludge characterization methodology to assess both biodegradability and bioaccessibility needed for modified ADM1 input variables and thus for further optimization of AD plants. These authors combined basic chemical extractions with 3D fluorescence spectroscopy in a

5 days long methodology and predicted successfully both parameters using a PLS regression model. A wide range of biodegradability (0–60 %) and of readily/slowly biodegradable fractions (0–46 %), representing bioaccessibility, were predicted with errors of 6 % for both. However, this technique was specific to sewage sludge, as far as proteins compose the main part of the organic matter in this organic waste.

### 2.3 Dynamical models and software sensors

As previously presented, static models have been proposed as an alternative solution to predict biodegradability with several kind of organic matter characterization as explicative variables. However, all the static models were not able to predict simultaneously the bioaccessibility and the biodegradability as the digester dynamics.

Dynamical models accounts for evolution in kinetic equation and biomasses. This leads to more complex models generally based on ordinary differential equations representing mass balance within the process. The first dynamical AD digestion models were proposed in the mid-sixties by Andrews and Pearson (1965) and Andrews and Graef (1971). Only a single stage was considered gathering acidogenesis and methanogenesis. A Haldane kinetic equation was proposed to account for acetoclastic methanogenesis inhibition at high concentration of acetate. Mosey (1983) and Hobson (1985) extended the model with hydrogenotrophic methanogenesis. The models were then extended depending on the different substrates (wastewater, sludge or manure). More than 10 years ago, the IWA Task Group on Mathematical Modelling of Anaerobic Digestion Processes proposed the Anaerobic Digestion Model No1 (ADM1), as a consensual modelling of anaerobic digestion (Batstone et al. 2002). The biochemical reactions represented in the model describe: (i) an extracellular disintegration step converting composite particulate matter into carbohydrates, lipids, proteins and inert compounds, (ii) an extracellular enzymatic hydrolysis step that converts the degradation products into their chemical building blocks, i.e., LCFA, monosaccharides and amino acids, (iii) acidogenesis or fermentation into hydrogen, acetate and VFA, (iv) acetogenesis of VFA into acetate and (v) acetoclastic and hydrogenotrophic methanogenesis. The extracellular reactions are assumed to be of first-order, while the intracellular biochemical

reactions use Monod-type kinetics for substrate uptake and biomass growth. Variants to the ADM1 model given by Batstone et al. (2002) are available for plant wide modelling (Rosén and Jeppsson 2006; Grau et al. 2007; De Gracia et al. 2009; Barat et al. 2012). Many applications of the ADM1 model have been published for a wide variety of substrates (see e.g., Batstone et al. 2009; Lauwers et al. 2013) and some models account for both the biodegradability and the bioaccessibility of the waste (Mottet et al. 2013; García-Gen et al. 2015). On the other hand, simpler models have been developed, more suitable to support monitoring or control strategies. For example, the model of Bernard et al. (2001a) includes two reactions and turns out to approximate efficiently the ADM1 model (Bernard et al. 2005b) for modeling AD processes treating industrial wastewater.

In many occasions, on-line or off-line measurements are not enough to evaluate and to assess the operating conditions of AD plants but, when combined with dynamical models, these measurements can lead to very useful additional information about non measured variables. This methodology leads to the so-called “software sensors”. It is possible to distinguish the approaches based on data sets, those founded on expert knowledge (in the broad sense of the term) and those founded upon an analytical—mathematical—description of the system. In this section, we focus particularly on the estimation for the efficient development and implementation of state estimation schemes. These estimation schemes are called estimators, state observers, software sensors, or simply observers, and they can be used for design or optimization strategies in a wide class of biochemical processes. As underlined, these algorithms are able to estimate both state variables, that are normally not measured, and unknown parameters from the available measurements. In biological processes, observers are mainly useful in on-line estimations for control purposes. The most popular approaches used in the past have been the well-known classical extended Kalman filters (EKF) and extended Luenberger observers (ELO). One of the reasons for the popularity of EKF/ELO is that they are easy to implement since the algorithms can be directly derived from the state space model. However, since these estimators are based on a linearized model of the process, the stability and convergence properties are essentially local; it is difficult to guarantee its stability over a wide

operating range. As a matter of fact, very few works deal with the observability of nonlinear biochemical processes (e.g., Gauthier and Kupka 1994) and they are usually concerned with particular process applications. Another problem is that the theory for EKF/ELO is developed assuming a perfect knowledge of the system model and parameters, in particular of the process kinetics, and as a consequence, it is difficult to develop error bounds to take into account the large uncertainty of these parameters.

In order to overcome these drawbacks, several other approaches have been proposed from the early seventies (Misawa and Hedrick 1989; Perrier et al. 2000; Dochain 2003; Alcaraz-González and González-Álvarez 2007). For example, adaptive observers (Bastin and Dochain 1990; Dochain 2003) belong to the class of observers allowing the estimation of both kinetic parameters and states. As in the EKF, the poorly known (or unknown) parameters are considered to be extra states with no dynamics. One of the original features of the adaptive observer is to consider a nominal process model, i.e., a model with nominal values of the poorly known parameters (Chen 1990). The design of nonlinear observers in general has been a very active research area. Most of the nonlinear approaches are placed in the category of ‘high gain’ observers (HGO) since they tend to split the dynamics into a linear part and a nonlinear part and to choose the gain of the observer so that the linear part dominates the nonlinear one (Gauthier et al. 1992; Gauthier and Kupka 1994; Dochain 2003).

Several linearization methods also have been proposed (Baumann and Rugh 1986). Nevertheless, like EKF/ELO, only local behavior can be guaranteed as they miss practical results on performance and stability. Other approaches are sliding observers based on the theory of variable structure systems (Xiong and Mehrdad 2003) but their design involve conditions that must be assumed a priori or that are usually hard to verify (Misawa and Hedrick 1989). All these approaches solve some of the problems described above but in most of the cases, the complexity of the resulting estimating algorithms is a limitation for real time computation. Indeed, monitoring algorithms can prove to be efficient if they are able to incorporate the important well-known information on the process while being able to deal with the missing information in a robust way. They include the lack of on-line measurements and the uncertainty on the process dynamics.

Two relatively new robust nonlinear observers have found a wide acceptance in biological process, including of course anaerobic digestion. Such robust observers are capable of coping simultaneously with the aforementioned problems while remaining easy to implement with a minimum number of straightforward conditions to verify. The first one, the asymptotic observer (Bastin and Dochain 1990; Alcaraz-González and González-Álvarez 2007), although requiring the knowledge of the process inputs, has the main advantage that it permits the exact cancellation of the nonlinear terms of the systems, and so facilitates its design, stability analysis and implementation. The second one, the interval observer, allows for the reconstruction of a guaranteed interval on the unmeasured states instead of reconstructing their precise numerical values assuming that only guaranteed lower and upper limits on the process inputs and model parameters are available (Gouzé et al. 2000; Alcaraz-González et al. 2005a; Rapaport and Dochain 2005; Moisan et al. 2009).

The main disadvantage of the aforementioned asymptotic observer is that the process operational conditions (mainly the hydraulic retention time) establish its convergence properties and it is not possible to modify the convergence rate by choosing a gain like in the classical observers or the HGO. However, adapting the design features of the HGO and adaptive observers, a Tunable Asymptotic Observer (TAO) has been proposed for AD processes (Bernard and Gouzé 2004, Alcaraz-González et al. 2005b). Furthermore, in a more diverse sense, super-twisting observers have also been demonstrated recently to be very useful in achieving a very fast convergence without loss of robustness, (Sbarciog et al. 2012).

Concerning the drawback of influent uncertainty—very common in AD plants—the general problem of simultaneous estimation of unmeasured state variables and inputs for nonlinear systems has been addressed from a number of different robust approaches. With respect to AD processes, Theilliol et al. (2003) proposed a simultaneous input-and-state concentrations observer that required the full knowledge of the process kinetics. Also, Aceves-Lara et al. (2010) simultaneously estimated state space variables and the input concentrations in a biohydrogen production process in which input and state estimations were performed using a state transformation and an asymptotic observer. More recently, Jáuregui-Medina et al.

(2009) proposed an observer-based estimator, named the “Virtually Controlled Observer” (VCO) because one of the observer’s inputs (the hypothetical—unmeasured—influent substrate concentration) is updated by a feedback control that regulates the estimation error of a measured output. In a fixed bed configuration, several of these approaches have also been applied to distributed parameter systems (see e.g., Delattre et al. 2004; Aguilar-Garnica et al. 2009).


### 3 Control of anaerobic digestion processes

Because of the inherent complexity and necessity for safety in biotechnological processes, efficient monitoring and decision support systems are required in order to optimize their operation. Indeed, even in normal operational conditions, several types of disturbances may occur with serious consequences in the performance of the process. Fluctuations in the influent to be treated is an illustration and a typical example would be an integrated dairy producing 100 different products that, over the course of a week, result in a wastewater stream with flow/total COD/TSS/FOG/temperature variations of  $20 \times 10 \times 5 \times 3 \times 1.5 \times$ , some of these changes taking place in a matter of hours. Hence, the last two decades have seen an increasing interest to improve the operation of AD processes by applying advanced control schemes.

Optimized and stable performances are indeed required to be guaranteed consistently and this has major consequences for instrumentation, control and automation (Huntington 1998; Olsson and Newell 1998). Two main factors (which can be interpreted as both, incentives and constraints) have contributed to this new paradigm: (1) the need for optimally controlled plants due to environmental regulatory norms and (2) the need to reduce cost. In order to fulfill these requirements, the optimal control of AD processes faces important uncertainties arising from the intrinsic complexity of plant design. Among others, the main disturbances that can be observed are the following: acidification, inhibition and toxicant exposure (McCartney and Oleszkiewicz 1991, 1993; O’Flaherty et al. 1998; Hao 2003; Appels et al. 2008; Chen et al. 2008; Cirne et al. 2008), overload (Waewsak et al. 2010; Wijekoon et al. 2011), alkalinity, variability of inputs, water content and rheology, foaming, stirring and mixing problems (McMahon 2001; Dalmau et al. 2010) and lack of macro- and micro-nutrients (Speece 2008).

By far, the most developed control laws in the literature use the dilution rate as manipulated variable (see Fig. 1) but it is mainly in simulation and only few full-scale applications are available. Manipulating the dilution rate is indeed difficult in practice and AD processes are facing the problem of the lack of actuators. Examples for other manipulated variables

**Fig. 1** Percentage distribution of manipulated variable (121 publications), size of digester (134 publications) and substrates (109 publications) of the reviewed publications

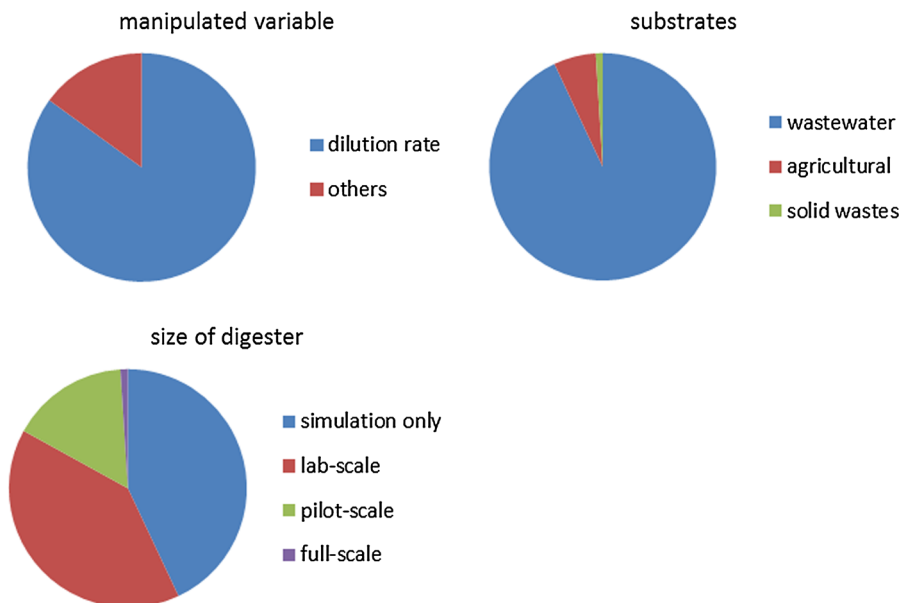

are liquid recirculation rates and the addition of bases to stabilize the process. In case of a co-digestion plant, only one substrate or a constant substrate mix is usually controlled using the dilution rate as manipulated variable. The other substrates then must be calculated based on boundary conditions such as hydraulic retention time, organic loading rate or restrictions defined by funding schemes (Zhou et al. 2012).

Whilst experimentation is required for the tuning of regulators, either on the plant itself or within a simulation environment, design techniques have been developed that allow devising the optimal controller for a particular process model and performance index. Certain constraints imposed on the control action, such as a minimization of the control effort, can be accommodated during the design.

### 3.1 Classical control in AD

PID and on/off controllers belong to classical control methods. Table ESM.1 and ESM.2 in Online Resource 1 illustrates some examples of application of these control methodologies in AD.

The first application of on/off control in AD was reported in the 70 s (see Table ESM.1 in Online Resource 1), which aimed at setting the manipulated variable to a binary value depending on predefined threshold values. They were followed by PID controls including P, PI, and PID controls. For instance, Marsili-Libelli and Beni (1996) applied PID control for stabilising alkalinity and pH by manipulating the addition of bicarbonate. On the other hand, von Sachs et al. (2003) proposed a PI structure for controlling biogas flow rate by modifying the dilution rate in a two-phase AD system.

PID cascade controls (see Table ESM.2 in Online Resource 1) are a simple but effective approach for feed control. Their advantages are that two possibly conflictive set-points can be simultaneously controlled whilst the set-point of the master loop can be set by an expert system. Approaches such as Liu et al. (2004a, b), Alferes et al. (2008), and Alferes and Irizar (2010) are dedicated to control biogas production at a given set-point or to operate the digester at high organic load. Therefore, these approaches try to maximize the economical benefit of the digester, whereas the set-point is established in order to avoid digester overloads.

As regards adaptive control, Zhou et al. (2012), for instance, proposed a PID aimed at controlling the methane flow rate based on measurements of VFA and VFA/TA.

Another control strategy lies on minimizing the COD or VFA content in the effluent (see e.g., Alvarez-Ramirez et al. 2002; Mu et al. 2007). The key goal of control strategies of this type is to stabilize digester performance whilst maximizing COD degradation. On the other hand, García-Diéguez et al. (2011) proposed an approach capable to maximize methane flow rate whilst tracking a set-point for effluent VFAs.

### 3.2 Advanced control in AD

Since classical PID controllers are usually limited to single-input-single-output control loops and to linear, simple cases, different advanced control approaches have been theoretically analyzed and experimentally validated in order to control AD processes.

#### 3.2.1 Expert systems

Expert systems can be classified in rule-based and fuzzy systems (Tables ESM.3 and ESM.4 in Online Resource 1) and systems extended with a surrogate model such as an artificial neural network or special fuzzy systems (Table ESM.5 in Online Resource 1).

Applying nonlinear control methods comes quite natural since biogas plants are nonlinear processes. Such expert systems are quite popular for AD control because of: (1) their intuitive design based on rules, and (2) their non-linearity coping with the non-linearity of the plant. The first approach is performed by rule-based systems such as the well-known fuzzy control, whilst the latter one is performed by the use of neural networks. Furthermore, expert systems can easily incorporate all measured variables and are easily extensible if an additional process value is measured in the future.

Fuzzy logic is a problem-solving tool that can achieve a definite conclusion from imprecise information, allowing intermediate values rather than simple yes/no evaluations (García-Gen 2015). The main benefit of this approach is that it can be used to control non-linear systems. A fuzzy-logic controller (Zadeh 1965) is indeed capable of optimizing different kinds of processes under dynamic operating and



loading conditions by applying valuable expert knowledge (Verbruggen and Bruijn 1997). Moreover, fuzzy-logic control does not require a large amount of data and/or a rigorous mathematical model, and allows for the development of multiple-input-multiple-output control schemes. Hence, fuzzy logic is a powerful tool for AD control (Olsson et al. 2005).

Different examples of rule-based and fuzzy-logic-based systems for AD control can be found in literature (see Tables ESM.3 and ESM.4). For instance, Pullammanappallil et al. (1991, 1998) developed an expert system aimed to control methane production by switching between different control strategies (set-point control, constant yield control, batch operation and constant dilution rate) based on a  $t$  test. Puñal et al. (2003) proposed a PI-based fuzzy logic system for monitoring the effluent VFA concentration in anaerobic wastewater treatment plants, using the dilution rate as manipulated variable. Murnleitner et al. (2002) and Grepmeier (2002) proposed expert systems based on fuzzy theory for overload avoidance in AD process. Different inputs were used for such purpose:  $H_2$  concentration,  $CH_4$  concentration, biogas flow rate, pH, and filling level of the buffer tank.

Table ESM.5 in Online Resource 1 summarises different examples of expert systems for AD control consisting of neural networks and special fuzzy systems. For instance, Steyer et al. (1997) proposed a hierarchical fuzzy control for VFA concentration which used the control error of pH, temperature and biogas flow rate as input variables. Holubar et al. (2002, 2003) used a neural network to maximize methane production and COD degradation by modifying OLR on the basis of different inputs: pH, VFA, and biogas production and composition. Carlos-Hernandez et al. (2007) developed a fuzzy supervisory controller to optimise process performance by regulating the addition of base and the dilution rate; whilst this control system was later modified (Carlos-Hernandez et al. 2010) following a neural fuzzy structure for estimating methanogenic biomass performance.

### 3.2.2 Model-based and linearizing control

Linearizing approach is popular for feed control purposes in AD (see Table ESM.6 in Online Resource 1). Moreover, much effort has been applied to develop new model-based control laws that will achieve suitable process performances (Méndez-Acosta et al.

2010). In this context, simple models like AM2 (Bernard et al. 2001b) are preferred to more complex ones like ADM1 (Batstone et al. 2002).

Linearizing control is based on a non-linear controller, which is precisely designed to achieve linear closed-loop dynamics (Isidori 1989; Ignatova et al. 2008). The main aim of linearizing control is to take advantage of available mathematical models. They allow controlling very efficiently the functioning of a plant and may allow the achievement of finer actions than those controllers that decide only upon the difference between measurements and set points (Olsson et al. 2005). Linearizing controllers are designed by a two-step procedure (Kurtz and Henson 1997). First, a non-linear process model is used in order to synthesize the non-linear state feed-back controller that linearizes the map between a “new” manipulated input and the controlled output. In the second step, a linear pole placement controller is designed for the feed-back linearized system. However, due to the strongly non-linear relationships existing between both inlet and outlet of an anaerobic process, linearizing controllers only attain proper results when the process dynamics are bounded by a defined linear zone (Simeonov and Queinnec 2006).

Applications of adaptive linearizing control have been presented for anaerobic digestion (Renard et al. 1988). However, an important problem with adaptive control systems is the necessity for on-line identification of the process model while the plant is in closed-loop operation. An approach to deal with the identification problem consists of considering that the process model belongs to a bounded class of possible models with fixed parameters. The identification is then reduced to the choice of the correct model, or, as in the Model Weighting Adaptive Control (MWAC) approach (Gendron et al. 1993), by weighting the different models into a composite process model.

Another method in this category is the interval-based approach. Concerning Interval Observers, a recent control approach that uses the partial information provided by this kind of observers has been designed to exponentially stabilize a regulated variable in a neighborhood of a predetermined set-point (Rapaport and Harmand 2002). As for observers, these approaches have been also applied to distributed parameter systems applied to fixed-bed bioreactors (e.g., Dochain et al. 1997; Babary et al. 1999; Antoniadis and Christofides 2001; Aguilar-Garnica et al. 2009).

Some other recent approaches for control of this kind of processes have been derived from the theory based on differential geometry (Isidori 1989; Henson and Seborg 1997). Control approaches based on differential geometry allow for the transformation of a nonlinear system into a partially or totally linear one, by means of a nonlinear state transformation, which is obtained from directional derivatives of the output. It is important to remark that geometric control differs totally from the linear approximation of dynamics by calculation of the Jacobian. Either state-space (Hunt and Su 1983) or input–output linearization (Méndez-Acosta et al. 2004, 2005, 2008) have been employed.

More recently, sliding mode approaches have been also used mainly to control Anaerobic Sequential Batch Reactors (ASBR), (Vargas et al. 2008), as well as in continuous bioreactors (Lara-Cisneros et al. 2015). In general, the sliding mode approaches are widely used due to robustness with respect to uncertainties.

### 3.2.3 Other advanced controllers

Table ESM.7 in Online Resource 1 summarizes other advanced control approaches, including, for instance, disturbance monitoring, non-linear, adaptive, and robust control.

A nonlinear adaptive control law for bioreactors which is robust in the face of unknown kinetics has been proposed recently for the global stabilization of bioreactors and then applied to the regulation of anaerobic digestion processes (Mailleret et al. 2004). Similar to linearizing control, different interval-based approaches have been used to exponentially stabilize a regulated variable in a neighborhood of a predetermined set-point (Alcaraz-González et al. 2005a).

On the other hand, most of the controllers reviewed before were developed to regulate known set-points or to track well defined trajectories. However, in AD operation, the control objective could be to optimize a criterion that is dependent of unknown parameters in order to keep a performance criterion at its optimal value. Also, it is well known that the explicit form of the performance function in AD processes is highly uncertain (e.g., the growth rate of methanogenesis or growth rate of acidogenesis) (Lara-Cisneros et al. 2015). Extremum-Seeking-Control (ESC) and probing control are two techniques to handle these kinds of dynamic optimization problems (Dochain et al. 2011; Guay et al. 2004; Liu et al. 2006; Marcos et al. 2004a,

b; Steyer et al. 1999). The goals of ESC schemes and probing control is to find the operating setpoints, a priori unknown, such that a performance function reaches its extremum value. Steyer et al. (1999) developed a probing control approach based on the analysis of disturbances added on purpose to the influent flow rate. By increasing the influent flow rate for a short period of time, the increased biogas yield was compared to the expected one. Overloading or inhibition could be interpreted as a negative effect of the disturbance (i.e., an unsatisfactory gas yield). Liu et al. (2006) developed a cascade controller system that is embedded into a rule-based supervisory system based on ESC. This controller was applied to intensify biogas production in an anaerobic up-flow fixed bed reactor at laboratory scale and achieved good performance, especially during the early startup and during rejection of disturbances. In particular, the process was operated at maximum productivity and had safety margins adequate to ensure reliable operation, react fast on disturbances and avoid unstable process conditions. Lara-Cisneros et al. (2015) proposed an ESC scheme with sliding mode to achieve the dynamic optimization of methane outflow rate in anaerobic processes. The control law was designed to regulate VFA concentration at the optimal value whilst maximizing methane production. However, only numerical experiments illustrated the performance and robustness of the proposed control approach.

Concerning the need of sensors for control purposes, even if there now exists a large variety of devices for measuring almost all key variables, they still remain relatively expensive for medium and small enterprises, mainly in developing countries. In this sense, the challenge to control AD processes is to do it with a minimum of information, even if it is obtained off-line. In this context, discrete control approaches are beginning to be used (Méndez-Acosta et al. 2011).

### 3.3 Control in anaerobic co-digestion (AcoD)

Anaerobic co-digestion (AcoD) presents higher potential energy recovery than conventional single substrate AD. Therefore, high effort has been focussed on AcoD in order to: (1) enhance process performance thus maximising biogas production; (2) navigate into the use of new co-substrates; and (3) increase process feasibility by the application of digestates for agricultural purposes (Mata-Alvarez et al. 2014).

For instance, biogas production has been classically improved by co-digesting manure and organic waste (see, for instance, Ahring et al. 1992; Tafdrup 1994). Since manures are often associated with poor methane yields, AcoD of manure with other organic wastes has been identified as a cost-effective alternative for improving process efficiency (Mata-Alvarez et al. 2011; Frigon et al. 2012; Astals et al. 2013b). This co-digestion process is usually optimised when biogas yield is above 30 m<sup>3</sup> biogas per m<sup>3</sup> biomass treated, which normally requires a 25 % organic waste ratio (Boe 2006). Nevertheless, lower ratios may be enough when treating concentrated wastes (Gregersen 2003).

Other classical AcoD process is the co-digestion of sewage sludge with the organic fraction of municipal solid waste (OFMSW). Besides the biowaste composition (food waste, market waste, etc.), biogas production during the co-digestion of sewage sludge and biowaste highly depends on several factors such as sewage sludge composition (primary, secondary or mixed), OLR, reactor configuration, operating temperature or mixing conditions (Mata-Alvarez et al. 2011). For instance, Silvestre et al. (2015) assessed the effect of OFMSW loading rate and particulate size on sewage sludge mesophilic anaerobic co-digestion in a CSTR operating at 20 days of SRT. This study revealed that sewage-sludge–OFMSW mixture composed by 54 % of inlet volatile solids (OLR of 3.1 kg COD m<sup>-3</sup> day<sup>-1</sup>; 1.9 kg VS m<sup>-3</sup> day<sup>-1</sup>) resulted in an increased in volumetric methane production and methane yield of up to 200 and 59 %, respectively.

Recent literature has reported increasing interest by the scientific community on the applicability of AcoD to new biowastes. For instance, co-digesting sewage sludge and microalgae is considered one promising technology for energy production, whilst representing a key step for recycling nutrients for algal cultivation (Ward et al. 2014). Recent research has shown that AcoD can increase anaerobic degradability of algae by improving substrate composition. Nevertheless, further research is needed since the quantity and quality of the produced biogas vary considerably depending on anaerobic inocula, waste composition and operating conditions (Ajeej et al. 2015).

The control of AcoD processes can be addressed following the same strategies used for classical AD processes. However, it is crucial to characterise comprehensively the co-substrates and to choose adequately the blend of substrates to be treated (García-Gen 2015).

Alvarez et al. (2010) developed a methodology for optimising feed composition in AcoD of agro-industrial wastes. This optimisation protocol was based on a linear programming method aimed to set up different blends for maximising the total substrate biodegradation potential ( $L_{\text{CH}_4}$  kg<sup>-1</sup> substrate) or the biokinetic potential ( $L_{\text{CH}_4}$  kg<sup>-1</sup> substrate day<sup>-1</sup>). To this aim, the controller defined restrictions on several characteristics of the mixture, such as NH<sub>4</sub><sup>+</sup>, lipids or C/N ratio. The methodology was validated using three types of agro-industrial biowaste: pig manure, fish waste and biodiesel waste. Validation results were related to the mixture of biowaste to be feed to the AcoD process in order to maximise biodegradation potential and methane production. Linear programming was proved to be a powerful, useful and easy-to-use tool to estimate methane production in co-digestion units where different substrates can be fed (Alvarez et al. 2010).

Wang et al. (2012) proposed optimizing the feeding composition and the carbon/nitrogen (C/N) ratio for improving methane yield during AcoD of multi-component substrates (dairy, chicken manure and wheat straw). The results showed that co-digestion performed better than individual digestion in terms of methane potential. Maximum methane productions were achieved with a dairy/chicken manure ratio of 40:60 and a C/N ratio of 27:1 (after optimization using response surface methodology). The results suggested therefore that better performance of AcoD can be fulfilled by optimizing feeding composition and C/N ratio.

Wang et al. (2013a) evaluated two statistical methods for optimizing feeding composition in AcoD systems. To this aim, a simplex-centroid mixture design (SCMD) and central composite design (CCD) were evaluated using methane potential as response variable. Each co-substrate (dairy manure, chicken manure, swine manure and rice straw) served as an independent variable in SCMD and CCD, involving two factors: the manure and C/N ratios together with the C/N ratio of the blend. Experiments demonstrated that co-digestion of three-component substrates resulted in higher methane potentials, as well as on better fitted models to predict the response based on selected variables. In response surface plots, SCMD showed the interactions among each component in the co-substrates and CCD presented the interaction between the ratio of manures and the C/N ratio.

SCMD and CCD were both suitable methods for optimizing feeding composition during anaerobic co-digestion.

Jiménez et al. (2014) optimised methanogenic activity using the response surface methodology during the AcoD of agriculture and industrial wastes. This optimisation accounted for microbial community performance, taking into account the effect of each substrate concentration and their interactive effects on specific methanogenic activity and microbial community diversity. The results showed a significant interaction among the substrates and an enhancement of the methane production and specific methanogenic activity. The optimization allowed identifying substrate interaction effects in a concentration range with a reduced number of experiments. The model validation proved to be useful for defining optimal combination of wastes in AcoD systems.

García-Gen et al. (2015) proposed a control strategy for optimising AcoD in terms of methane productivity, digestate quality and process stability. To this aim, a linear programming approach was adopted to calculate the feeding of multiple substrates for maximum methane productivity, taking into account restrictions based on experimental and heuristic knowledge. Alkalinity ratio measurements against reference values were used for quantitatively assessing process stability by using an empirical diagnosis function. A second empirical diagnosis function was defined to compare methane flow rate measurements against a reference value of maximum capacity. The quantitative change applied to the most active constraint of the substrate blend optimisation problem (leading to a new set-point of feeding substrates blend) was calculated by a variable-gain control function derived from the previously commented diagnosis functions. This closed-loop control architecture was successfully validated in a 1 m<sup>3</sup> hybrid Upflow Anaerobic Sludge Blanket-Anaerobic Filter (UASB-AF) reactor, treating blends of substrates (gelatine, glycerine and pig manure supernatant) at OLR values between 0.71 and 6.33 gCOD L<sup>-1</sup> day<sup>-1</sup>. The proposed controller was capable to increase methane productivity whilst recovering the system from transient acidifications.

### 3.4 Sulphide control

Different control strategies can be applied to minimize problems related to sulphide in the system (Cirne et al.

2008). The monitoring of sulphate in the influent cannot be considered as a realistic option since sulphate concentration in the influent cannot be predicted nor monitored. Final removal of sulphide (e.g., desulphuration of biogas) is based on the application of different physico-chemical or biological techniques sometimes requiring additional treatment units:

- Selective inhibition of SRB using compounds such as nitrite, antibiotics, or molybdate. However, these actions are not very effective when operating continuous AD processes and they also present a negative effect on MA.
- pH increase in order to move the H<sub>2</sub>S/HS<sup>-</sup> equilibrium towards less toxic HS<sup>-</sup>.
- Sulphur precipitation using organic or inorganic compounds (mainly iron salts). The main drawbacks of this technique are the reagent cost, the increase in sludge production and possible pipes obstructions from precipitates.
- H<sub>2</sub>S stripping by high stirring in the reactor, recycling the produced biogas after scrubber or other H<sub>2</sub>S removal technologies.
- Oxidation of sulphide with oxygen or nitrate using chemical or biological processes. This process consists of introducing small amounts of these compounds without affecting process performance (van der Zee et al. 2007; Cirne et al. 2008; Fdz-Polanco et al. 2009a, b).

### 3.5 Control of anaerobic membrane bioreactors (AnMBR)

Several operating strategies to control membrane fouling in anaerobic or aerobic membrane reactors have been experimentally validated. For example, Jeison and van Lier (2006) developed an on-line cake-layer management protocol that monitored critical flux constantly and prevented excessive cake-layer from building up on the membrane surface; Smith et al. (2006) developed a control system to optimize back-flushing which reduced the water needed for back-flushing by up to 40 %; Vargas et al. (2008) established a control algorithm for fouling prevention which regulated back-flushing and Park et al. (2010) studied how membrane fouling could be reduced by successively increasing and decreasing membrane gas sparging intensities, and recorded the effectiveness in reducing membrane fouling.

Anaerobic membrane bioreactors (AnMBR) can be very efficiently used to treat urban wastewater but they require more sophisticated process control systems than for aerobic MBR systems or other conventional anaerobic systems—such as up-flow anaerobic sludge blanket (UASB); expanded granular sludge blanket (EGSB); or anaerobic filters (AF). For example, Robles et al. (2014) implemented a model-based supervisory controller to optimize filtration in an AnMBR demonstration plant. Energy savings of up to 25 % were achieved when using gas sparging to scour membranes and the downtime for physical cleaning was about 2.4 % of operating time. The operating cost of the AnMBR system after implementing the proposed supervisory controller was about €0.045/m<sup>3</sup>, 53.3 % of which were energy costs. In another application, Robles et al. (2013, 2015) obtained similar results using a 2-layer control system measuring the treatment flow rate (controlling the HRT), the sludge wasting volume (controlling the SRT), the temperature, and the gas sparging intensity in the anaerobic reactor and controlling the permeate flow rate, the trans-membrane pressure (TMP), the sludge flow-rate recycled through the membrane tanks, and the gas sparging intensity in the membrane tanks.

#### 4 What is next?

Many ideas and many perspectives arise from all the above details about current scientific and technical achievements.

##### 4.1 Instrumentation

With respect to instrumentation, it is indeed believed that (1) more and more advanced sensors will be soon available (2) confidence index associated to the measurements will provide human operators with the ability to decide on the best actions based on the quality of the measurements (3) sensors network will allow the human operator to anticipate future problems, (4) software sensors and (5) use of large data base and all of this will improve by far the information content currently retrieved from AD plants. The simultaneous use of a sensor network (Steyer et al. 2004) and of numerical models will clearly help in extending and qualifying the available measurements.

As pointed out earlier in the paper, the analysis of individual VFA species has often been proposed as an important measurement parameter for the diagnosis, optimisation and control of anaerobic processes. Most of this information is today collected off-line and are mainly based on either GC or HPLC analysis and have been benchmarked comprehensively in Raposo et al. (2013). As off-line monitoring of VFAs is likely to have a significant lag in measuring VFA and inputting the data into a feedback control loop would have significant draw backs due to the time delay in analysis and inputting the data. There is a significant challenge to overcome in producing an instrument for on-line or at-line species specific VFA analysis that is relatively easy to operate at low capital and operational cost. There has been a significant amount of activity directed automating off-line techniques in particular GC headspace techniques (Boe et al. 2007; Boe et al. 2008) but there has been limited uptake for this method beyond the initial publications. An alternative approach has been the use of Near Infra Red Spectroscopy (NIRS) for acetate, propionate and TVFA analysis but the NIR analyser despite requiring relatively little maintenance was found to have a too high error of prediction for accurate quantification (Ward et al. 2011). An alternative approach to the traditional analytical techniques of GC, HPLC or IR spectroscopy may be to use biosensors as the measurement system. This offers the potential of a relatively low cost sensor system, with high specificity and sensitivity and no requirement for continuous supply of a chemical or gaseous mobile phase as required by GC or HPLC techniques. An approach based on microbial fuel cells (Kaur et al. 2013, 2014) and genetically engineered light emitting bacteria (Li and Yu 2015) have been proposed as possible solutions to develop a more effective on-line VFA instrument. A microbial fuel cell based biosensor was able to discriminate between acetate, propionate and butyrate, with a response time of 1–2 min with a sensitivity of 5 mg L<sup>-1</sup> when cyclic voltammetry analysis was utilised (Kaur et al. 2013). The sensor linearity was limited to 5–40 mg L<sup>-1</sup> but this could be addressed with appropriate sample dilution. An alternate biosensor approach using a genetically engineered *E. coli* based biosensor with light emitting response to propionate has been demonstrated with a linear response of 1–10 mM (Li and Yu 2015), however other VFAs such as acetate and butyrate are

important species in anaerobic digestion require measurement. Despite a number of innovative approaches taken to measuring individual VFA species, an effective and low cost instrument for the on-line or at line measurement has yet to be identified.

In the first section dedicated to the instrumentation, the lack of “sensors” for monitoring biodegradability and bioaccessibility has been highlighted. As pointed out by the substrate evolution, agricultural and municipal solid wastes are more and more used. This kind of complex substrates need long HRT and the off-line option can be acceptable in order to drive their digestion or co-digestion.

Despite the fact that several tools are promising like NIRS for biodegradability prediction, this technique is, until now, applied on dried-frozen samples and the impact of drying samples on the BMP values obtain with not prepared sample has not been studied. As previously mentioned, NIRS technology has a great potential as sensor, and work has to be followed to develop a probe able to predict BMP value on raw samples. However, this technique does not give bioaccessibility or biodegradation rate parameters. In the case of co-digestion for example, these parameters are crucial. Other study does it in a faster way than BMP test (for example, Jimenez et al. 2014) but it needs advanced knowledge of the methodology used and advanced and expensive material (i.e., 3D fluorescence spectroscopy). Therefore, more efforts have to be done on how to transpose these promising but complex techniques into a cheap and practical “sensors”. For example, research on multi-excitation wavelength fluorescence probes would be done, and, associated with an optimized chemical extraction protocol would be able to predict both biodegradability and bioaccessibility. These kinds of information would be very valuable in order to predict the optimal mixture to do during co-digestion for example.

As previously mentioned, spectroscopic on-line sensors are of particular interest to the AD industry and research as they allow the on-line monitoring of crucial process variables. Nevertheless, high prices and complex calibration routines hinder commercial success. Newly developed tunable Micro-Electronic-Mechanical-System (MEMS) based Fabry-Pérot interferometers for the UV/vis, NIR and MIR wavelength ranges provide a very promising solution. Not only are these spectrometers on a chip very small  $5 \times 10$  cm but also relatively cheap, if manufactured in big

numbers. Currently, two different system designs exist. Neumann et al. (2010) introduced a tunable MEMS interferometer for the middle- and long-infrared range using a pyro-detector. The different wavelengths can be generated by two bragg reflectors whose distance can be changed by a spring suspension. Although, the presented performance results are good, the spring suspension is considered to be a weakness as it makes the spectrometer sensitive to vibration and wear. Therefore, the Technical Research Centre of Finland (VTT) developed an interferometer design with piezo-effect based tuning of the gap between the reflectors (Antila et al. 2014; Mäkynen et al. 2014). In general, these MEMS systems allow for completely new probe designs where the spectrometer is directly integrated into the probe so that the fibre length can be reduced significantly, increasing the S/N ratio. Thus, not only the sensitivity of a sensor is increased but also the size of the whole sensor system is reduced. This particularly important for MIR sensors where a short fibre length is crucial to guarantee a high S/N ratio. Malinen et al. (2014) gives a broad overview of the possibilities in various applications. In high quantities, prices for MEMS spectrometers are expected to drop to 70-100€ per piece, which makes spectroscopic sensors attractive for the use in AD plants.

Confidence indexes are information about the way measurements are obtained. One important lesson from applying ICA in AD plants is that some sensor technologies are more useful than other ones. Indeed, if all on-line sensors provide numerical values of the measured variables, some (e.g., spectrometer or titrimeter) also provide information on how the measurements have been obtained (Steyer et al. 2006). This information can then be used as a confidence index on the measurement and is of great help to decide – in a closed loop context—if a control law can rely or not on the obtained measurements. In order to guarantee a safe operation of the plant, the controller can indeed be turned off in case of sensor fouling or any other dysfunctioning in the instrument.

However, this increase in complexity in the management of the sensor data and the automation of the process may involve dedicated highly qualified operators for permanently recalibrating and adapting the complex implemented algorithms. Indeed, most of the monitoring, diagnosis or control advanced strategies which are described on Table ESM (cf. attachment to the manuscript) have been tested (when they have

been experimented) on short time periods (generally less than a few weeks), with a precalibrated set of parameters and initial conditions. These additional degrees of freedom, which are rarely clearly stated, must be managed on the long term for operational perspectives. Better accounting for such degrees of freedom, automating these aspects to reach robust autoadaptive algorithms, or allowing a remote expert to manage them (Bernard et al. 2005a, b) is thus a challenge for the future years.

#### 4.2 Models and virtual sensors

Even if modeling AD has been an active research topic these last two decades, improving the models supporting monitoring and control strategies is also very challenging. Due to the increasing complexity of the substrates, hydrolysis was considered as the limiting step introducing the notion of bioaccessibility. Based on the degradation kinetics of the sludge, new variables appeared by taking into account the bioaccessibility of the substrate. A better knowledge of the sludge composition indeed leads to more realistic although more complex models. However, despite the techniques described in the literature until now, input variables of ADM1 are still difficult to characterize. Advanced analytical techniques could provide a higher degree of information on the composition of any given substrate. Promising new tools can be used for direct measurement, such as NIRS, 3D-EEM SPF and LIF probes in order to describe the biodegradability of a waste. However, with the biodegradability, the bioaccessibility is a key concept of the model input variables characterization. Some studies proposed bioaccessibility assessment specific to sewage sludge. Further investigations need to be performed in order to find a relevant and rapid tool for organic matter characterization of more solid wastes in order to obtain reliable parameters for the biological processes models. ADM1 is sensitive to the substrate composition, and a methodology providing characterization rules based on substrate type using either upstream knowledge, chemical analysis (for simple substrates), or biochemical testing would greatly improve the predictability potential of the models (Batstone 2013), and then their further efficiency in monitoring and control strategies.

A more accurate description of the physicochemical models, and especially of the precipitation related

to calcium and phosphorus (Batstone et al. 2012) is a difficult yet necessary step to better understand the cycle of phosphorus. Even if it may strongly increase the model complexity, considering sulfur reduction and oxidation processes are also challenges for the future. Also, the spatial distribution of the chemicals and biomasses within the reactor should now be accounted for and integrated in the models. These points should be seen in a larger context than AD, and a plant wide approach (see e.g., Olsson et al. 2014) must prevail. For example, physicochemical models must describe phosphate speciation and release under aerobic and anaerobic conditions, while micropollutants must be tracked along the full treatment plant.

Soft sensing or virtual sensing is the use of models to predict process parameters that are expensive or difficult to measure from more accessible process measurements. They are an effective method of providing in-line estimates of quantities that are difficult to measure on-line, and as such offer the possibility of providing enhanced monitoring of processes, both in terms of providing additional process information and acting as a reference for sensor fault detection. They have previously been demonstrated for estimating parameters such as alkalinity, chemical oxygen demand, inorganic carbon, and volatile fatty acids in waste water treatment plants (Bernard 2011) and more recently for total alkalinity in biogas plants (Ward et al. 2011). However, development and updating of soft sensor models requires expert knowledge due to the complex modeling techniques required and the need for tailored training data, putting them beyond the research of most small scale biogas plant operators. Newly developed powerful Machine Learning methods facilitate soft sensor development because of their ability to learn vastly complex and nonlinear relationships (Gaida et al. 2012). Further research in this area is necessary to tap the full potential of the existing methods with regard to AD processes.

#### 4.3 Control

With respect to both observer and control design, one may also expect the development of high power computation capacity will fundamentally change our way of thinking. Modern control techniques usually necessitate the use of a limited order model to be able to guarantee stability and performance robustness. Techniques based on particulate filters [Cf. for

instance Goffaux and Van de Wouwer (2005) and Benyahia et al. (2012) for applications to chemostat models] coupled with the use of nonlinear optimal controllers present the advantage of being able to use complex model while dealing with uncertainty. Of course, the price to pay is a relatively less degree of guarantee but the higher the on-line computer capabilities, the higher the state space to be investigated and the lower the probability to push the process towards a dangerous functioning zone. Another promising route concerns the use of innovative passive control approaches in which control objectives are considered at the initial conception step of the process. In terms of performances, it is for instance well known that series of reactors perform better than single processes. However, this design may penalize both investment costs and the stability of the process since reducing the size of the first reactor. The introduction of alternative configurations of the different reactors and the judicious choice for their respective volumes may lead to a more robust global system with respect to specific uncertainty and disturbances (if compared to a single tank reactor), cf. for instance the work by Rapaport et al. (2014) on the stabilization of chemostats with substrate-inhibited kinetics.

It is usually expected that a controller using a more complex model would lead to better performances. Assuming the on-line computation capability is available, it may be true. But the use of very simple models from which a control may “really” be optimal with respect to a given performance index, from a mathematical viewpoint, may be helpful to think of new control strategies. For instance, the work by Sbarciog et al. (2010) allowed us to propose a new control strategy able to guarantee sub-optimal performances while preserving the stability of the whole process (Rodriguez et al. 2013).

Microbial management of bioprocesses is another emerging topic with a great potential. This is particularly true for AD which involves a huge biodiversity (Carballa et al. 2015). Thanks to the development of molecular analytical tools (denaturing gradient gel electrophoresis, single-strand conformation polymorphism...), the anaerobic microbiome has been more and more characterized (Vanwonterghem et al. 2014, Sundberg et al. 2013). Considering the biodiversity can give raise to a new paradigm for the control and optimization of AD. Until now, the principal objective of control was to stabilize the digester. Nonetheless, a

stable process tends to reduce the biodiversity through the selection of the fittest species in the imposed environment. Although this selection process could increase the steady-state performance, it could seriously alter the resilience of the process (Ramirez et al. 2009). Dynamical feeding has been proposed in order to select a microbiome with a high ability to adapt to disturbances (De Vrieze et al. 2013). Bioaugmentation have been also applied, in particular in response to stress (e.g., Schauer-Gimenez et al. 2010; Tale et al. 2011). Concerning the model-based control laws, most of them are designed assuming one population for one function. Recently, Mairet and Bernard (2014) have proposed to evaluate the performances of such control laws when several species are present. Using the control law proposed by Mailleret et al. (2004) as an example, they have shown that a slow-growing species can lead to reactor shutdown. This framework can be used to design robust control laws which better tame biodiversity. Rapaport and Harmand (2002) also proposed a “biocontrol” strategy using biotic microbial ecosystem capabilities to select certain species. Although attractive, these approaches remain studied in simulations only. The control of the microbiome involved in AD is an exciting challenge for the future, but the lack of on-line instrumentation for biodiversity monitoring can limit process implementation. Recently, on-line flow cytometers have been proposed for AD (Koch et al. 2014) and can open new directions for closed-loop microbial control strategies.

Recently, novel potential actuators emerged to control methanogenic pathways (Liu et al. 2013; Lin et al. 2013). Indeed, methanogenic pathways (i.e., acetoclastic or hydrogenotrophic) have been analyzed using stable carbon isotope signature. This analysis is made on the biogas phase and thanks to an isoprime mass spectrometer linked with a gas chromatography, a carbon fractionation can be performed. This information is very valuable because it points out the contribution of the different methanogenic pathways producing methane and carbon dioxide. For example, Liu et al. (2013) made cartography of the methanogens type depending on ammonium and acetate high concentrations. In the same way, Lin et al. (2013) showed the impact of the addition of bicarbonate on the methanogenic biodiversity. This kind of information would be very valuable in order to drive a digester in case of acid or/and ammonia inhibition, without loose energetic performance.



The balance between the synergistic production and consumption of VFA intermediates in the AD with respect to process stability is important and has been outlined in Sect. 3.1. Disaggregation of the trophic groups in the AD process by physically separating them into an acidogenic stage reactor and a methanogenic stage reactor is not a new idea. Two stage AD, often with the intention of improving hydrolytic processes, has been studied by many researcher over the last 40 years e.g., Ghosh et al. (1975). However, increased scope for control actuation may be available by such stage separation especially with the ability to monitor and manage microbial populations more effectively in recent years. Furthermore, the stages can be integrated with each other and other processes to improve gas yields as reported by Massanet-Nicolau et al. (2013). Guwy et al. (2011) described how the integration of multi stage bioprocesses can be used to extract or utilize the products. The extraction of VFAs for example may simultaneously deliver valuable chemicals and controlled supply of substrate for methanogenesis to a subsequent stage. This VFA extraction may be achieved by conventional electro-dialysis, as proposed by Jones et al. (2015) in an acidogenic stage also generating hydrogen. VFAs are also an appropriate substrate for bioelectrochemical systems as has been demonstrated by many researchers and reviewed by Pant et al. (2010). The application of multivariable control strategies as described in this paper may deliver optimal system performance, although control of each of the stages or sub-processes may be independently controllable under a system level supervisory regime.

The capacity of ADs to utilize additional CO<sub>2</sub> was demonstrated by several authors, which could provide a potential solution for on-site sequestration of CO<sub>2</sub> streams while enhancing methane production by CO<sub>2</sub> sparging. CO<sub>2</sub> could then become an efficient actuator to improve AD performances. Few studies have indeed considered the potential of CO<sub>2</sub> biological conversion in anaerobic processes, reporting benefits both in terms of carbon uptake and renewable energy production (Salomoni and Petazzoni 2006; Salomoni et al. 2011). Interestingly, microorganisms operating under CO<sub>2</sub> saturated conditions continue to synthesize CH<sub>4</sub>. Alimahmoodi and Mulligan (2008) stated a 69–86 % CO<sub>2</sub> uptake when dissolving this gas in the influent of an upflow anaerobic sludge blanket (UASB) reactor. Francioso et al. (2010) and Salomoni

et al. (2011) further confirmed the potential of CO<sub>2</sub> biological conversion in two phase anaerobic digestion (TPAD), and observed 25 % methane (CH<sub>4</sub>) yield enhancement when sparging CO<sub>2</sub> into the first stage. Moreover, the net production of CO<sub>2</sub> in CO<sub>2</sub>-recirculating AD units can be reduced by a factor of 4. Fernández et al. (2014) addressed the reduction of CO<sub>2</sub> emissions and enhancement of biogas production associated with CO<sub>2</sub> enrichment of anaerobic digesters (ADs). The benefits of CO<sub>2</sub> enrichment were examined by injecting CO<sub>2</sub> at 0, 0.3, 0.6 and 0.9 M fractions into batch ADs treating food waste or sewage sludge. Daily specific methane (CH<sub>4</sub>) production increased 11–16 % for food waste and 96–138 % for sewage sludge. Potential CO<sub>2</sub> reductions of 8–34 % for sewage sludge and 3–11 % for food waste were estimated. Mohd Yasin et al. (2015) used CO<sub>2</sub> as the substrate to generate methane by enriched methanogens after anaerobic enrichment of waste activated sludge (WAS) and they demonstrated that methanogens from WAS have significant potential for converting the greenhouse gas CO<sub>2</sub> into the fuel methane. Moreover, methane production was increased 70 fold by active methanogens in the enriched methanogens culture after 3 days in the presence of H<sub>2</sub> and CO<sub>2</sub>.

Indeed, the addition of H<sub>2</sub> into an anaerobic digestion has been performed in several studies (Luo et al. 2012; Luo and Angelidaki 2013; Wang et al. 2013b; Díaz et al. 2015) in order to remove CO<sub>2</sub> from biogas while methane production increased, through the hydrogenotrophic pathway. For example, Luo et al. (2012) showed that increasing both hydrogen partial pressure and mixing intensity would give 22 % of methane production. One main barrier highlighted was the gas–liquid mass transfer of H<sub>2</sub> because of the low solubility of this gas.

## 5 Conclusions and perspectives

Over the years, knowledge on anaerobic digestion has increased and several instruments are now available to monitor efficiently the AD processes. Global parameters for organic matter characterization can indeed be used and biodegradability, bioavailability and bioaccessibility of complex solid substrates can be assessed. Modelling, especially through the development and consolidation of the ADM1 model, has successfully proven its ability to translate the biological steps

occurring in the AD. Since its creation, many improvements have been carried out, and ADMI has been tailored to a broad variety of substrates. But there are still progresses to be accomplished to better manage the influent composition, and further represent physicochemical processes such as precipitation. There is still a gap between these more and more accurate models, but also involving higher degrees of freedoms, and simpler models which support most of the monitoring, diagnosis and control algorithms. Bridging this gap, combining these theoretical approaches with information provided by innovative sensors, and reducing expert needs to run these algorithms will probably significantly improve the attractiveness of the approach together with its efficiency.

These developments will also contribute to improve emerging processes such as thermophilic and ultra-high rate processes (Ge et al. 2011), or supporting co-digestion strategies (Mata-Alvarez et al. 2011). Modelling, monitoring and control are also expected in the objective of recovering nutrients (Mehta and Batstone 2013) and for tracking micropollutants, trace organics, pathogens and recalcitrant (Fountoulakis et al. 2008).

**Acknowledgments** The authors acknowledge the financial support of INRA (the *French National Institute for Agricultural Research*), the *French National Research Agency* (ANR) for the “Phycover” project (project ANR-14-CE04-0011) and ADEME for Inter-laboratory assay financial support.

## References

- Aceves-Lara CA, Latrille E, Steyer JP (2010) Optimal control of hydrogen production in a continuous anaerobic fermentation bioreactor. *Int J Hydrogen Energ* 35:10710–10718
- Aguado D, Montoya T, Ferrer J, Seco A (2006) Relating ions concentration variations to conductivity variations in a sequencing batch reactor operated for enhanced biological phosphorus removal. *Environ Modell Softw* 21:845–851
- Aguilar-Garnica E, Dochain D, Alcaraz-González V, González-Álvarez V (2009) A multivariable control scheme in a two-stage anaerobic digestion system described by partial differential equations. *J Process Contr* 19:1324–1332
- Ahring BK, Angelidaki I, Johansen K (1992) Anaerobic treatment of manure together with industrial waste. *Water Sci Technol* 25:311–318
- Ajeej A, Thanikal JV, Narayanan CM, Senthil Kumar R (2015) An overview of bio augmentation of methane by anaerobic co-digestion of municipal sludge along with microalgae and waste paper. *Renew Sustain Energy Rev* 50:270–276
- Alcaraz-González V, González-Álvarez V (2007) Selected topics in dynamics and control of chemical and biological processes. Springer, Berlin
- Alcaraz-González V, Harmand J, Rapaport A, Steyer JP, González-Álvarez V, Pelayo-Ortiz C (2005a) Robust interval-based regulation for anaerobic digestion processes. *Water Sci Technol* 52:449–456
- Alcaraz-González V, Salazar-Peña R, González-Alvarez V, Gouzé JL, Steyer JP (2005b) A tunable multivariable nonlinear robust observer for biological systems. *CR Biol* 328:317–325
- Alferes J, Irizar I (2010) Combination of extremum-seeking algorithms with effective hydraulic handling of equalization tanks to control anaerobic digesters. *Water Sci Technol* 61:2825–2834
- Alferes J, García-Heras JL, Roca E, García C, Irizar I (2008) Integration of equalisation tanks within control strategies for anaerobic reactors. Validation based on ADMI simulations. *Water Sci Technol* 57:747–752
- Alimahmoodi M, Mulligan CN (2008) Anaerobic bioconversion of carbon dioxide to biogas in an upflow anaerobic sludge blanket reactor. *J Air Waste Manage Assoc* 58:95–103
- Alvarez JA, Otero L, Lema JM (2010) A methodology for optimising feed composition for anaerobic co-digestion of agro-industrial wastes. *Bioresour Technol* 101:1153–1158
- Alvarez-Ramirez J, Meraz M, Monroy O, Velasco A (2002) Feedback control design for an anaerobic digestion process. *J Chem Technol Biotechnol* 77:725–734
- Anderson GK, Yang G (1992) Determination of bicarbonate and total volatile acid concentration in anaerobic digesters using a simple titration. *Water Environ Res* 64:53–59
- Andrews JF, Graef SP (1971) Dynamic modelling and simulation of the AD process. *Advances in chemistry series no. 105, Anaerobic Biological Treatment Processes*. American Chemical Society, Washington, DC, p 126
- Andrews JF, Pearson EA (1965) Kinetics and characteristics of volatile acid production in anaerobic fermentation processes. *Air Water Pollut* 9:439–461
- Angelidaki I, Sanders W (2004) Assessment of the anaerobic biodegradability of macropollutants. *Rev Environ Sci Biotechnol* 3:117–129
- Antila J, Tuohiniemi M, Rissanen A, Kantojärvi U, Lahti M, Viherkanto K, Kaarre M, Malinen J (2014) MEMS- and MOEMS-based near-infrared spectrometers. *Encycl Anal Chem* 1–36. doi:10.1002/9780470027318.a9376
- Antoniades CD, Christofides P (2001) Integrating nonlinear output feedback control and optimal actuator/sensor placement for transport-reaction processes. *Chem Eng Sci* 56:4517–4535
- APHA (2005) American Public Health Association/American Water Works Association/Water Environmental Federation, Standard methods for the Examination of Water and Wastewater, 21st edn. Washington, DC, USA
- Appels L, Baeyens J, Degève J, Dewil R (2008) Principles and potential of the anaerobic digestion of waste-activated sludge. *Prog Energ Combust* 34:755–781
- Appels L, Lauwers J, Gins G, Degreve J, Van Impe J, Dewil R (2011) Parameter identification and modeling of the biochemical methane potential of waste activated sludge. *Environ Sci Technol* 45:4173–4178
- Aquino SF, Chernicharo CAL, Soares H, Takemoto SY, Vazoller RF (2008) Methodologies for determining the

- bioavailability and biodegradability of sludges. *Environ Technol* 29:855–862
- Astals S, Esteban-Gutiérrez M, Fernández-Arévalo T, Aymerich E, García-Heras JL, Mata-Alvarez J (2013a) Anaerobic digestion of seven different sewage sludges: a biodegradability and modelling study. *Water Res* 47:6033–6043
- Astals S, Nolla-Ardèvol V, Mata-Alvarez J (2013b) Thermophilic co-digestion of pig manure and crude glycerol: process performance and digestate stability. *J Biotechnol* 166:97–104
- Babary JP, Julien S, Nihtilä MT et al (1999) New boundary conditions and adaptive control of fixed-bed bioreactors. *Chem Eng Process Intensif* 38:35–44
- Barat R, Serralta J, Ruano MV, Jiménez E, Ribes J, Seco A, Ferrer J (2012) Biological nutrient removal model No 2 (BNRM2): a general model for wastewater treatment plants. *Water Sci Technol* 67:1481–1489
- Bastin G, Dochain D (1990) On-line estimation and adaptive control of bioreactors. Elsevier Science, Amsterdam
- Batstone DJ (2013) Modelling and control in anaerobic digestion: achievements and challenges. 13th IWA World Congress on Anaerobic Digestion (AD 13), pp 1–6
- Batstone DJ, Keller J, Angelidaki I et al (2002) Anaerobic digestion model No. 1. (ADM1). IWA Scientific and Technical Report No. 13. IWA
- Batstone DJ, Tait S, Starrenburg D (2009) Estimation of hydrolysis parameters in full-scale anaerobic digesters. *Biotechnol Bioeng* 102:1513–1520
- Batstone DJ, Amerlinck Y, Ekama G et al (2012) Towards a generalized physicochemical framework. *Water Sci Technol* 66:1147–1161
- Baumann WT, Rugh WJ (1986) Feedback control of nonlinear systems by extended linearization. *IEEE Trans Automat Contr* AC-31:40–46
- Benyahia B, Campillo F, Cherki B, Harmand J (2012) Particle filtering for the chemostat. In: MED'12, Barcelone, Spain
- Bernard O (2011) Hurdles and challenges for modelling and control of microalgae for CO<sub>2</sub> mitigation and biofuel production. *J Process Control* 21:1378–1389
- Bernard O, Gouzé JL (2004) Closed loop observers bundle for uncertain biotechnological models. *J Process Control* 14:765–774
- Bernard O, Hadj-Sadok Z, Dochain D et al (2001a) Dynamical model development and parameter identification for an anaerobic wastewater treatment process. *Biotechnol Bioeng* 75:424–438
- Bernard O, Polit M, Hadj-Sadok Z, Pengov M, Dochain D, Estabén M, Labat P (2001b) Advanced monitoring and control of anaerobic wastewater treatment plants: software sensors and controllers for an anaerobic digester. *Water Sci Technol* 43:175–182
- Bernard O, Chachuat B, Hélias A, Rodriguez J (2005a) Can we assess the model complexity for a bioprocess? Theory and example of the anaerobic digestion process. *Water Sci Technol* 53:85–92
- Bernard O, Chachuat B, Hélias A, Le Dantec B, Sialve B, Steyer JP, Lavigne JF (2005b) An integrated system to remote monitor and control anaerobic wastewater treatment plants through the internet. *Water Sci Technol* 52:457–464
- Björnsson L, Hörnsten EG, Mattiasson B (2001a) Utilization of a palladium–metal oxide semiconductor (Pd-MOS) sensor for on-line monitoring of dissolved hydrogen in anaerobic digestion. *Biotechnol Bioeng* 73:35–43
- Björnsson L, Murto M, Jantsch TG, Mattiasson B (2001b) Evaluation of new methods for the monitoring of alkalinity, dissolved hydrogen and the microbial community in anaerobic digestion. *Water Res* 35:2833–2840
- Boe K (2006) Online monitoring and control of the biogas process. Technical University of Denmark
- Boe K, Batstone D, Angelidaki I (2007) An innovative online VFA monitoring system for the anaerobic process, based on headspace gas chromatography. *Biotechnol Bioeng* 96:712–721
- Boe K, Steyer JP, Angelidaki I (2008) Monitoring and control of the biogas process based on propionate concentration using online VFA measurement. *Water Sci Technol* 57:661–766
- Boe K, Batstone DJ, Steyer JP, Angelidaki I (2010) State indicators for monitoring the anaerobic digestion process. *Water Res* 44:5973–5980
- Bradford MM (1976) A rapid and sensitive method for the quantitation of microgram quantities of protein utilizing the principle of protein-dye binding. *Anal Biochem* 72:248–254
- Brinkmann K, Blaschke L, Polle A (2002) Comparison of different methods for lignin determination as a basis for calibration of near-infrared reflectance spectroscopy and implications of lignoproteins. *J Chem Ecol* 28:2483–2501
- Buendía IM, Fernández FJ, Villaseñor J, Rodríguez L (2008) Biodegradability of meat industry wastes under anaerobic and aerobic conditions. *Water Res* 42:3767–3774
- Buffiere P, Loisel D, Bernet N, Delgenes JP (2006) Towards new indicators for the prediction of solid waste anaerobic digestion properties. *Water Sci Technol* 53:233–241
- Cao Y, Pawlowski A (2012) Sewage sludge-to-energy approaches based on anaerobic digestion and pyrolysis: brief overview and energy efficiency assessment. *Renew Sust Energy Rev* 16:1657–1665
- Carballa M, Regueiro L, Lema JM (2015) Microbial management of anaerobic digestion: exploiting the microbiome-functionality nexus. *Curr Opin Biotechnol* 33:103–111
- Carlos-Hernandez S, Beteau JF, Sanchez EN (2007) Intelligent control strategy for an anaerobic fluidized bed reactor. In: Michel P (ed) *Computer applications in biotechnology*, vol 1. Cancun, Mexico, pp 73–78
- Carlos-Hernandez S, Sanchez EN, Bueno JA (2010) Neurofuzzy control strategy for an abattoir wastewater treatment process. In: Banga JR, Bogaerts P, Van Impe J, Dochain D, Smets I (eds) *11th International symposium on computer applications in biotechnology*. Leuven, Belgium, pp 84–89
- Chandler JA, Jewell WJ, Gossett JM (1980) Predicting methane fermentation biodegradability. *Biotechnol Bioeng Symp* 10:93–107
- Chen YH (1990) Adaptive robust observers for non-linear uncertain systems. *Int J Syst Sci* 21:803–814
- Chen Y, Cheng JJ, Creamer KS (2008) Inhibition of anaerobic digestion process: a review. *Bioresour Technol* 99:4044–4064
- Chynoweth DP, Turick CE, Owens JM, Jerger DE, Peck MW (1993) Biochemical methane potential of biomass and waste feedstocks. *Biomass Bioenerg* 5:95–111
- Cirne DG, van der Zee FP, Fernandez-Polanco M, Fernandez-Polanco F (2008) Control of sulphide during anaerobic

- treatment of S-containing wastewaters by adding limited amounts of oxygen or nitrate. *Rev Environ Sci Biotechnol* 7:93–105
- Colombié S, Latrille E, Sablayrolles JM (2007) Online estimation of assimilable nitrogen by electrical conductivity measurement during alcoholic fermentation in enological conditions. *J Biosci Bioeng* 103:229–235
- Cord-Ruwisch R, Merz TI, Hoh CY, Strong GE (1997) Dissolved hydrogen concentration as an on-line control parameter for the automated operation and optimization of anaerobic digesters. *Biotechnol Bioeng* 56:626–634
- Cossu R, Raga R (2008) Test methods for assessing the biological stability of biodegradable waste. *Waste Manage* 28:381–388
- Cresson R, Pommier S, Béline F et al (2014) Etude interlaboratoires pour l'harmonisation des protocoles de mesure du potentiel bio-méthanogène des matrices solides hétérogènes—Final report (in French) ADEME
- Dalmau J, Comas J, Rodríguez-Roda I, Pagilla K, Steyer JP (2010) Model development and simulation for predicting risk of foaming in anaerobic digestion systems. *Bioresour Technol* 101:4306–4314
- Davidsson A, Gruvberger C, Christensen TH, Hansen TL, Jansen J (2007) Methane yield in source-sorted organic fraction of municipal solid waste. *Waste Manage* 27:406–414
- De Baere L (2000) Anaerobic digestion of solid waste: state-of-the-art. *Water Sci Technol* 41:283–290
- De Baere L (2008) Partial stream digestion of residual municipal solid waste. *Water Sci Technol* 57:1073–1077
- De Gracia M, Grau P, Huete E et al (2009) New generic mathematical model for WWTP sludge digesters operating under aerobic and anaerobic conditions: model building and experimental verification. *Water Res* 43:4626–4642
- De Vrieze J, Verstraete W, Boon N (2013) Repeated pulse feeding induces functional stability in anaerobic digestion. *Microb Biotechnol* 6:414–424
- Delattre C, Dochain D, Winkin J (2004) Observability analysis of nonlinear tubular (bio)reactor models: a case study. *J Process Control* 14:661–669
- Di Pinto AC, Limoni N, Passino R, Rozzi A, Tomei MC (1990) Instrumentation, control and automation of water and wastewater treatment and transport systems. In: Proceedings of the 5th IAWPRC workshop, pp 51–58
- Díaz I, Pérez C, Alfaro N, Fdz-Polanco F (2015) A feasibility study on the bioconversion of CO<sub>2</sub> and H<sub>2</sub> to biomethane by gas sparging through polymeric membranes. *Bioresour Technol* 185:246–253
- Dochain D (2003) State and parameter estimation in chemical and biochemical processes: a tutorial. *J Process Control* 13:801–818
- Dochain D, Tali-Maamar N, Babary JP (1997) On modelling, monitoring and control of fixed bed bioreactors. *Comput Chem Eng* 21:1255–1266
- Dochain D, Perrier M, Guay M (2011) Extremum seeking control and its application to process and reaction systems: a survey. *Math Comput Simulat* 82:369–380
- Donoso-Bravo A, Garcia G, Pérez-Elvira S, Fernandez-Polanco F (2011) Initial rates technique as a procedure to predict the anaerobic digester operation. *Biochem Eng J* 53(3):275–280
- Doublet J, Boulanger A, Ponthieux A, Laroche C, Poitrenaud M, Cacho Rivero JA (2013) Predicting the biochemical methane potential of wide range of organic substrates by near infrared spectroscopy. *Bioresour Technol* 128:252–258
- Dreywood R (1946) Qualitative test for carbohydrate material. *Industrial & Engineering Chemistry Analytical Edition*. Am Chem Soc 18:499
- Dubois M, Gilles KA, Hamilton JK, Rebers PA, Smith F (1956) Colorimetric method for determination of sugars and related substances. *Anal Chem* 28:350–356
- Ekama GA, Sotemann SW, Wentzel MC (2007) Biodegradability of activated sludge organics under anaerobic conditions. *Water Res* 41:244–252
- Ellison WJ, Pedarros-Caubet F, Caubet R (2007) Automatic and rapid measurement of microbial suspension growth parameters: application to the evaluation of effector agents. *J Rapid Meth Aut Mic* 15:369–410
- Fang HHP (2012) Bioenergy production from waste and wastewater in China. In: Technical proceedings of the 2012 NSTI nanotechnology conference and expo, NSTI-nanotech 2012, pp 381–383
- Fannin KF, Chynoweth DP, Isaacson R (1987) Start-up, operation, stability, and control. *Anaerob Dig Biomass* 171–196
- Fdz-Polanco M, Díaz I, Pérez SI, Lopes AC, Fdz-Polanco F (2009a) Hydrogen sulphide removal in the anaerobic digestion of sludge by micro-aerobic processes: pilot plant experience. *Water Sci Technol* 60:3045–3050
- Fdz-Polanco M, Pérez-Elvira SI, Díaz I, García L, Torío R, Acevedo AF (2009b) Eliminación de H<sub>2</sub>S en digestión anaerobia de lodos por procesos microaerofílicos: experiencia en planta piloto. *Tecnol del Agua* 29:58–64
- Feitkenhauer H, von Sachs J, Meyer U (2002) On-line titration of volatile fatty acids for the process control of anaerobic digestion plants. *Water Res* 36:212–218
- Fernández YB, Soares A, Villa R, Vale P, Cartmell E (2014) Carbon capture and biogas enhancement by carbon dioxide enrichment of anaerobic digesters treating sewage sludge or food waste. *Bioresour Technol* 159:1–7
- Fountoulakis MS, Stamatelatos K, Lyberatos G (2008) The effect of pharmaceuticals on the kinetics of methanogenesis and acetogenesis. *Bioresour Technol* 99:7083–7090
- Francioso O, Rodriguez-Estrada MT, Montecchio D, Salomoni C, Caputo A, Palenzona D (2010) Chemical characterization of municipal wastewater sludges produced by two-phase anaerobic digestion for biogas production. *J Hazard Mater* 175:740–746
- Frigon JC, Roy C, Guiot SR (2012) Anaerobic co-digestion of dairy manure with mulched switchgrass for improvement of the methane yield. *Bioprocess Biosyst Eng* 35:341–349
- Frings CS, Dunn RT (1970) A colorimetric method for determination of total serum lipids based on the sulfo-phosphovanillin reaction. *Am J Clin Pathol* 53:89–91
- Frølund B, Palmgren R, Keiding K, Nielsen PH (1996) Extraction of extracellular polymers from activated sludge using a cation exchange resin. *Water Res* 30:1749–1758
- Gaida D, Wolf C, Meyer C, Stuhlsatz A, Lippel J, Bäck T, Bongards M, McLoone S (2012) State estimation for anaerobic digesters using the ADM1. *Water Sci Technol* 66:1088–1095
- Ganesh R, Torrijos M, Sousbie P et al (2013) Anaerobic co-digestion of solid waste: effect of increasing organic

- loading rates and characterization of the solubilised organic matter. *Bioresource Technol* 130:559–569
- García-Diéguez C, Molina F, Roca E (2011) Multi-objective cascade controller for an anaerobic digester. *Process Biochem* 46:900–909
- García-Gen (2015) Modelling, optimisation and control of anaerobic co-digestion processes (2015), Ph.D. Thesis, Universidad de Santiago de Compostela, Departamento de Ingeniería Química
- García-Gen S, Sousbie P, Rangaraj G et al (2015) Kinetic modelling of anaerobic hydrolysis of solid wastes, including disintegration processes. *Waste Manag* 35:96–104
- Gauthier JP, Kupka IAK (1994) Observability and observers for nonlinear systems. *SIAM J Control Optim* 32:975–994
- Gauthier JP, Hammouri H, Othman S (1992) A simple observer for nonlinear systems applications to bioreactors. *Autom Control IEEE Trans* 37:875–880
- Ge H, Jensen PD, Batstone DJ (2011) Increased temperature in the thermophilic stage in temperature phased anaerobic digestion (TPAD) improves degradability of waste activated sludge. *J Hazard Mater* 187:355–361
- Gendron S, Perrier M, Barrett J, Legault N (1993) Adaptive control of brightness: the model weighting approach. Annual meeting—technical section, Canadian Pulp and Paper Association, Preprints. Publ by Canadian Pulp & Paper Assoc
- Ghosh S, Conrad JR, Klass DL (1975) Anaerobic acidogenesis of waste activated sludge, WPCF 47
- Goffaux G, Van de Wouwer A (2005) *Bioprocess state estimation: some classical and less classical approaches*. Springer, Berlin
- Gornall AG, Bardawill CJ, David MM (1949) Determination of serum proteins by means of the biuret reaction. *J Biochem Chem* 177:751–766
- Gouzé JL, Rapaport A, Hadj-Sadok MZ (2000) Interval observers for uncertain biological systems. *Ecol Model* 133:45–56
- Grau P, de Gracia M, Vanrolleghem PA, Ayesa E (2007) A new plant-wide modelling methodology for WWTPs. *Water Res* 41:4357–4372
- Gregersen KH (2003) Økonomien i biogasfællesanlæg, Udvikling og status medio (2002) Report no. 150. Institute of Food and Resource Economic, Rolighedsvej 25, DK 1958, Frederiksberg C, Denmark
- Grepmeier M (2002) Experimentelle Untersuchungen an einer zweistufigen fuzzy-geregelten anaeroben Abwasserreinigungsanlage mit neuartigem Festbettmaterial. TU Munich
- Guay M, Dochain D, Perrier M (2004) Adaptive extremum seeking control of continuous stirred tank bioreactors with unknown growth kinetics. *Automatica* 40:881–888
- Gunaseelan VN (2007) Regression models of ultimate methane yields of fruits and vegetable solid wastes, sorghum and napiergrass on chemical composition. *Bioresour Technol* 98:1270–1277
- Gunaseelan VN (2009) Predicting ultimate methane yields of *Jatropha curcus* and *Morus indica* from their chemical composition. *Bioresour Technol* 100:3426–3429
- Guwy AJ, Hawkes FR, Wilcox SJ, Hawkes DL (1997) Neural network and on-off control of bicarbonate alkalinity in a fluidised-bed anaerobic digester. *Water Res* 31:2019–2025
- Guwy AJ, Dinsdale RM, Kim JR et al (2011) Fermentative biohydrogen production systems integration. *Bioresour Technol* 102:8534–8542
- Hao OJ (2003) Sulphate-reducing bacteria. In: Mara D, Horan N (eds) *Handbook of water and wastewater microbiology*. Academic Press Inc, London, pp 459–468
- Harremoës P, Capodaglio AG, Hellström BG, Henze M, Jensen KN, Lynggaard-Jensen A, Otterpohl R, Søbørg H (1993) Wastewater treatment plants under transient loading – performance, modelling and control. *Water Sci Technol* 27(12):71–115
- Hawkes FR, Guwy AJ, Rozzi AG, Hawkes DL (1993) A new instrument for on-line measurement of bicarbonate alkalinity. *Water Res* 27:167–170
- Hawkes FR, Guwy AJ, Hawkes DL, Rozzi AG (1994) On-line monitoring of anaerobic digestion: application of a device for continuous measurement of bicarbonate alkalinity. *Water Sci Technol* 30:1–10
- He XS, Xi BD, Wei ZM, Jiang YH, Yang Y, Cao JL, Liu HL (2011) Fluorescence excitation-emission matrix spectroscopy with regional integration analysis for characterizing composition and transformation of dissolved organic matter in landfill leachates. *J Hazard Mater* 190:293–299
- Henneberg W, Stohmann F (1860) Beiträge zur Begründer einer rationellen. Fütterung Der Wiederkäer I & II. Braunschweig
- Henson MA, Seborg DE (1997) Adaptive input-output linearization of a pH neutralization process. *Int J Adapt Control Signal Process* 11:171–200
- Hobson PN (1985) A model of anaerobic bacterial degradation of solid substrates in a batch digester. *Agric Wastes* 14:255–274
- Hoffmann F, Schmidt M, Rinas U (2000) Simple technique for simultaneous on-line estimation of biomass and acetate from base consumption and conductivity measurements in high-cell density cultures of *Escherichia coli*. *Biotechnol Bioeng* 70:358–361
- Holm-Nielsen JB, Lomborg CJ, Oleskowicz-Popiel P, Esbensen KH (2008) On-line near infrared monitoring of glycerol-boostered anaerobic digestion processes: evaluation of process analytical technologies. *Biotechnol Bioeng* 99:302–313
- Holubar P, Zani L, Hager M, Fröschl W, Radak Z, Braun R (2002) Advanced controlling of anaerobic digestion by means of hierarchical neural networks. *Water Res* 36:2582–2588
- Holubar P, Zani L, Hager M, Fröschl W, Radak Z, Braun R (2003) Start-up and recovery of a biogas-reactor using a hierarchical neural network-based control tool. *J Chem Technol Biot* 78:847–854
- Huang M, Li Y, Gu G (2010) Chemical composition of organic matters in domestic wastewater. *Desalination* 262:36–42
- Huete E, de Gracia M, Ayesa E, Garcia-Heras JL (2006) ADM1-based methodology for the characterisation of the influent sludge in anaerobic reactors. *Water Sci Technol* 54:157–166
- Hunt LR, Su R (1983) Linear approximations of nonlinear systems. In: *Proceedings of the IEEE conference on decision and control*. IEEE, pp 122–125
- Huntington R (1998) Twenty years development of ICA in a water utility. *Water Sci Technol* 37:27–34

- Ignatova MN, Lyubenova VN, García MR, Vilas C, Alonso AA (2008) Indirect adaptive linearizing control of a class of bioprocesses—estimator tuning procedure. *J Process Control* 18:27–35
- Imhoff K (1938) Sedimentation and digestion in Germany, in modern sewage disposal. Lancaster Press, Lancaster, PA, USA
- Isidori A (1989) Nonlinear control systems: an introduction, 2nd edn. Springer, New York
- ISO 11734 (1995) Evaluation of the “ultimate” anaerobic biodegradability of organic compounds in digested sludge—method by measurement of the biogas
- Jacobi HF, Moschner CR, Hartung E (2009) Use of near infrared spectroscopy in monitoring of volatile fatty acids in anaerobic digestion. *Water Sci Technol* 60:339–346
- Jacobi HF, Ohl S, Hartung E (2012) NIRS-aided monitoring and prediction of biogas yields from maize silage at a full-scale biogas plant applying lumped kinetics. *Bioresour Technol* 103:162–172
- Jáuregui-Medina EA, Alcaraz-González V, Méndez-Acosta HO, González-Alvarez V (2009) Observer-based input estimation in continuous anaerobic wastewater treatment processes. *Water Sci Technol* 60:805–812
- Jeison D, van Lier JB (2006) On-line cake-layer management by trans-membrane pressure steady state assessment in Anaerobic Membrane Bioreactors for wastewater treatment. *Biochem Eng J* 29:204–209
- Jensen PD, Hardin MT, Clarke WP (2009) Effect of biomass concentration and inoculum source on the rate of anaerobic cellulose solubilization. *Bioresour Technol* 100:5219–5225
- Jimenez J, Vedrenne F, Denis C, Mottet A, Déléris S, Steyer JP, Cacho Rivero JA (2013) A statistical comparison of protein and carbohydrate characterisation methodology applied on sewage sludge samples. *Water Res* 47:1751–1762
- Jimenez J, Gonidec E, Cacho Rivero JA, Latrille E, Vedrenne F, Steyer JP (2014) Prediction of anaerobic biodegradability and bioaccessibility of municipal sludge by coupling sequential extractions with fluorescence spectroscopy: towards ADM1 variables characterization. *Water Res* 50:359–372
- Jiménez J, Guardia-Puebla Y, Romero-Romero O, Cisneros-Ortiz ME, Guerra G, Morgan-Sagastume JM, Noyola A (2014) Methanogenic activity optimization using the response surface methodology, during the anaerobic co-digestion of agriculture and industrial wastes. *Microbial community diversity. Biomass Bioenerg* 71:84–97
- Jones RJ, Massanet-Nicolau J, Guwy AJ, Premier GC, Dinsdale RM, Reilly M (2015) Removal and recovery of inhibitory volatile fatty acids from mixed acid fermentations by conventional electrodialysis. *Bioresour Technol* 189:279–284
- Kaur A, Kim JR, Dinsdale RM, Guwy AJ (2013) Microbial fuel cell type biosensor for volatile fatty acid with an acclimated bacterial community. *Biosens Bioelectron* 47:50–55
- Kaur A, Ibrahim S, Pickett C, Michie I, Kim JR, Dinsdale RM, Guwy AJ, Premier GC (2014) Anode modification to improve the performance of a microbial fuel cell volatile fatty acid biosensor. *Sensor Actuat B Chem* 47:50–55
- Kayhanian M (1995) Biodegradability of the organic fraction of municipal solid waste in a high-solids anaerobic digester. *Waste Manage Res* 13:123–136
- Kjeldahl J (1883) A new method for the determination of nitrogen in organic matter. *Z Anal Chem* 22:366
- Kleerebezem R, van Loosdrecht MCM (2006) Waste characterization for implementation in ADM1. *Water Sci Technol* 54:167–174
- Koch C, Müller S, Harms H, Harnisch F (2014) Microbiomes in bioenergy production: from analysis to management. *Curr Opin Biotechnol* 27:65–72
- Krapf LC, Heuwinkel H, Schmidhalter U, Gronauer A (2013) The potential for online monitoring of short-term process dynamics in anaerobic digestion using near-infrared spectroscopy. *Biomass Bioenerg* 48:224–230
- Kurtz MJ, Henson MA (1997) Input-output linearizing control of constrained nonlinear processes. *J Process Contr* 7:3–17
- Labatut RA, Angenent LT, Scott NR (2011) Biochemical methane potential and biodegradability of complex organic substrates. *Bioresour Technol* 102:2255–2264
- Lara-Cisneros G, Aguilar-López R, Femat R (2015) On the dynamic optimization of methane production in anaerobic digestion via extremum-seeking control approach. *Comput Chem Eng* 75:49–59
- Lauwers J, Appels L, Thompson IP, Degrève J, Van Impe JF, Dewil R (2013) Mathematical modelling of anaerobic digestion of biomass and waste: power and limitations. *Prog Energ Combust* 39:383–402
- Lesteur M, Bellon-Maurel V, Gonzalez C, Latrille E, Roger JM, Junqua G, Steyer JP (2010) Alternative methods for determining anaerobic biodegradability: a review. *Process Biochem* 45:431–440
- Lesteur M, Latrille E, Maurel VB, Roger JM, Gonzalez C, Junqua G, Steyer JP (2011) First step towards a fast analytical method for the determination of Biochemical Methane Potential of solid wastes by near infrared spectroscopy. *Bioresour Technol* 102:2280–2288
- Li YF, Yu Z (2015) Construction and evaluation of a genetic construct for specific detection and measurement of propionate by whole-cell bacteria. *Biotechnol Bioeng* 112:280–287
- Lin Y, Lü F, Shao L, He P (2013) Influence of bicarbonate buffer on the methanogenic pathway during thermophilic anaerobic digestion. *Bioresour Technol* 137:245–253
- Liu J, Olsson G, Mattiasson B (2004a) Control of an anaerobic reactor towards maximum biogas production. *Water Sci Technol* 50:189–198
- Liu J, Olsson G, Mattiasson B (2004b) Monitoring and control of an anaerobic upflow fixed-bed reactor for high-loading-rate operation and rejection of disturbances. *Biotechnol Bioeng* 87:43–53
- Liu J, Olsson G, Mattiasson B (2006) Extremum-seeking with variable gain control for intensifying biogas production in anaerobic fermentation. *Water Sci Technol* 53:35–44
- Liu X, Li R, Ji M, Han L (2013) Hydrogen and methane production by co-digestion of waste activated sludge and food waste in the two-stage fermentation process: substrate conversion and energy yield. *Bioresour Technol* 146:317–323
- Lowry OH, Rosebrough NJ, Farr AL, Randall RJ (1951) Protein measurement with the Folin phenol reagent. *J Biol Chem* 193:265–275
- Luo G, Angelidaki I (2013) Co-digestion of manure and whey for in situ biogas upgrading by the addition of H<sub>2</sub>: process

- performance and microbial insights. *Appl Microbiol Biotechnol* 97:1373–1381
- Luo G, Johansson S, Boe K, Xie L, Zhou Q, Angelidaki I (2012) Simultaneous hydrogen utilization and in situ biogas upgrading in an anaerobic reactor. *Biotechnol Bioeng* 109:1088–1094
- Madsen M, Holm-Nielsen JB, Esbensen KH (2011) Monitoring of anaerobic digestion processes: a review perspective. *Renew Sust Energ Rev* 15:3141–3155
- Mailleret L, Bernard O, Steyer JP (2004) Nonlinear adaptive control for bioreactors with unknown kinetics. *Automatica* 40:1379–1385
- Mairet F, Bernard O (2014) Robustness of closed-loop control to biodiversity: a didactic example. In: Proceedings of the 19th IFAC world congress. Cape Town, South Africa
- Mäkynen JH, Tuohiniemi M, Näsilä A, Mannila R, Antila JE (2014) MEMS Fabry-Perot interferometer-based spectrometer demonstrator for 7.5  $\mu\text{m}$  to 9.5  $\mu\text{m}$  wavelength range. MOEMS and miniaturized systems XIII. SPIE Proc 8977:1–8
- Malinen J, Rissanen A, Saari H, Karioja P, Karppinen M, Aalto T, Tukkiemi K (2014) Advances in miniature spectrometer and sensor development. Next-generation spectroscopic technologies VII. SPIE proceedings (9101)
- Marcos NI, Guay M, Dochain D (2004a) Output feedback adaptive extremum seeking control of a continuous stirred tank bioreactor with Monod's kinetics. *J Process Control* 14:807–818
- Marcos NI, Guay M, Dochain D, Zhang T (2004b) Adaptive extremum-seeking control of a continuous stirred tank bioreactor with Haldane's Kinetics. *J Process Control* 14:317–328
- Marsili-Libelli S, Beni S (1996) Shock load modelling in the anaerobic digestion process. *Ecol Modell* 84:215–232
- Massanet-Nicolau J, Dinsdale R, Guwy A, Shipley G (2013) Use of real time gas production data for more accurate comparison of continuous single-stage and two-stage fermentation. *Bioresour Technol* 129:561–567
- Mata-Alvarez J, Macé S, Llabres P (2000) Anaerobic digestion of organic solid wastes. An overview of research achievements and perspectives. *Bioresour Technol* 74:3–16
- Mata-Alvarez J, Dosta J, Macé S, Astals S (2011) Codigestion of solid wastes: a review of its uses and perspectives including modelling. *Crit Rev Biotechnol* 31:99–111
- Mata-Alvarez J, Dosta J, Macé S, Romero-Güiza MC, Fonoll X, Peces M, Astals S (2014) A critical review on anaerobic codigestion achievements between 2010 and 2013. *Renew Sust Energ Rev* 36:412–427
- Mathiot S, Escoffier Y, Ehlinger F, Couderc JP, Leyris JP, Moletta R (1992) Control parameter variations in an anaerobic fluidised bed reactor subjected to organic shockloads. *Water Sci Technol* 25:93–101
- McCartney DM, Oleszkiewicz JA (1991) Sulfide inhibition of anaerobic degradation of lactate and acetate. *Water Res* 25:203–209
- McCartney DM, Oleszkiewicz JA (1993) Competition between methanogens and sulfate reducers: effect of COD:sulfate ratio and acclimation. *Water Environ Res* 65:655–664
- McCarty PL (1964) Anaerobic waste treatment fundamentals. *Public Works* 95:91–99
- McMahon K (2001) Anaerobic codigestion of municipal solid waste and biosolids under various mixing conditions—II: microbial population dynamics. *Water Res* 35:1817–1827
- Mehta CM, Batstone DJ (2013) Nutrient solubilization and its availability following anaerobic digestion. *Water Sci Technol* 67:756–763
- Méndez-Acosta HO, Femat R, Campos-Delgado DU (2004) Improving the performance on the chemical oxygen demand regulation in anaerobic digestion. *Ind Eng Chem Res* 43:95–104
- Méndez-Acosta HO, Campos-Delgado DU, Femat R, González-Alvarez V (2005) A robust feedforward/feedback control for an anaerobic digester. *Comput Chem Eng* 29:1613–1623
- Méndez-Acosta HO, Palacios-Ruiz B, Alcaraz-González V, Steyer JP, González-Álvarez V, Latrille E (2008) Robust control of volatile fatty acids in anaerobic digestion processes. *Ind Eng Chem Res* 47:7715–7720
- Méndez-Acosta HO, Palacios-Ruiz B, Alcaraz-González V, González-Álvarez V, García-Sandoval JP (2010) A robust control scheme to improve the stability of anaerobic digestion processes. *J Process Control* 20:375–383
- Méndez-Acosta HO, García-Sandoval JP, González-Álvarez V, Alcaraz-González V, Jáuregui-Jáuregui JA (2011) Regulation of the organic pollution level in anaerobic digesters by using off-line COD measurements. *Bioresour Technol* 102:7666–7672
- Misawa EA, Hedrick JK (1989) Nonlinear observers—a state-of-the-art survey. *J Dyn Syst Meas Control Trans ASME* 111:344–352
- Mohd Yasin NH, Maeda T, Hu A, Yu CP, Wood TK (2015) CO<sub>2</sub> sequestration by methanogens in activated sludge for methane production. *Appl Energy* 142:426–434
- Moisan M, Bernard O, Gouzé JL (2009) Near optimal interval observers bundle for uncertain bioreactors. *Automatica* 45:291–295
- Mosey FE (1983) Mathematical modelling of the anaerobic digestion process: regulatory mechanisms for the formation of short-chain volatile acids from glucose. *Water Sci Technol* 15:209–232
- Motte JC, Escudé R, Beaufile N et al (2014) Morphological structures of wheat straw strongly impacts its anaerobic digestion. *Ind Crops Prod* 52:695–701
- Mottet A, François E, Latrille E, Steyer JP, Deléris S, Vedrenne F, Carrère H (2010) Estimating anaerobic biodegradability indicators for waste activated sludge. *Chem Eng J* 160:488–496
- Mottet A, Ramirez I, Carrère H et al (2013) New fractionation for a better bioaccessibility description of particulate organic matter in a modified ADM1 model. *Chem Eng J* 228:871–881
- Mu SJ, Zeng Y, Tartakovsky B, Wu P (2007) Simulation and control of an upflow anaerobic sludge blanket (UASB) reactor using an ADM1-based distributed parameter model. *Ind Eng Chem Res* 46:1519–1526
- Murnleitner E, Becker TM, Delgado A (2002) State detection and control of overloads in the anaerobic wastewater treatment using fuzzy logic. *Water Res* 36:201–211
- Neave SL, Buswell AM (1930) The anaerobic oxidation of fatty acids. *J Am Chem Soc* 52:3308–3314
- Neumann N, Ebermann M, Gittler E, Meinig M, Kurth S, Hiller K (2010) Uncooled IR sensors with tunable MEMS Fabry-P. IEEE sensors conference, pp 2383–2387

- Nghiem LD, Manassa P, Dawson M, Fitzgerald SK (2014) Oxidation reduction potential as a parameter to regulate micro-oxygen injection into anaerobic digester for reducing hydrogen sulphide concentration in biogas. *Bioresour Technol* 173:443–447
- Nielfa A, Cano R, Vinot M et al (2015) Anaerobic digestion modeling of the main components of organic fraction of municipal solid waste. *Process Saf Environ Prot* 94:180–187
- O'Flaherty V, Mahony T, O'Kennedy R, Colleran E (1998) Effect of pH on growth kinetics and sulphide toxicity thresholds of a range of methanogenic, syntrophic and sulphate-reducing bacteria. *Process Biochem* 33:555–569
- Olsson G, Newell R (1998) Reviewing, assessing and speculating. *Water Sci Technol* 37:397–401
- Olsson G, Nielsen MK, Yuan Z, Lynggaard-Jensen A, Steyer JP (2005) Instrumentation, control and automation in wastewater systems. IWA Publishing, London
- Olsson G, Carlsson B, Comas J et al (2014) Instrumentation, control and automation in wastewater—from London 1973 to Narbonne 2013. *Water Sci Technol* 69:1373–1385
- Owen WF, Stuckey DC, Healy J, Young LY, McCarty PL (1979) Bioassay for monitoring biochemical methane potential and anaerobic toxicity. *Water Res* 13:485–492
- Pant D, Van Bogaert G, Diels L, Vanbroekhoven K (2010) A review of the substrates used in microbial fuel cells (MFCs) for sustainable energy production. *Bioresour Technol* 101:1533–1543
- Park C, Novak JT (2007) Characterization of activated sludge exocellular polymers using several cation-associated extraction methods. *Water Res* 41:1679–1688
- Park C, Novak JT, Helm RF, Ahn YO, Esen A (2008) Evaluation of the extracellular proteins in full-scale activated sludges. *Water Res* 42:3879–3889
- Park HD, Lee YH, Kim HB et al (2010) Reduction of membrane fouling by simultaneous upward and downward air sparging in a pilot-scale submerged membrane bioreactor treating municipal wastewater. *Desalination* 251:75–82
- Pauss A, Nyns E-J (1993) Past, present and future trends in anaerobic digestion applications. *Biomass Bioenerg* 4:263–270
- Perrier M, de Azevedo SF, Ferreira EC, Dochain D (2000) Tuning of observer-based estimators: theory and application to the on-line estimation of kinetic parameters. *Control Eng Pract* 8:377–388
- Pind PF, Angelidaki I, Ahring BK, Stamatelatou K, Lyberatos G (2003) Monitoring and control of anaerobic reactors. *Adv Biochem Eng Biot* 82:135–182
- Pratt S, Yuan Z, Gapes D et al (2003) Development of a novel titration and off-gas analysis (TOGA) sensor for study of biological processes in wastewater treatment systems. *Biotechnol Bioeng* 81:482–495
- Pratt S, Liew D, Batstone DJ, Werker G, Morgan-Sagastume F, Lant P (2012) Inhibition by fatty acids during fermentation of pre-treated waste activated sludge. *J Biotechnol* 159:38–43
- Provenzano MR, Malerba AD, Pezzolla D, Gigliotti G (2014) Chemical and spectroscopic characterization of organic matter during the anaerobic digestion and successive composting of pig slurry. *Waste Manag* 34:653–660
- Pullammanappallil P, Harmon J, Chynoweth DP, Lyberatos G, Svoronos SA (1991) Avoiding digester imbalance through real-time expert system control of dilution rate. *Appl Biochem Biotech* 28–29:33–42
- Pullammanappallil PC, Svoronos SA, Chynoweth DP, Lyberatos G (1998) Expert system for control of anaerobic digesters. *Biotechnol Bioeng* 58:13–22
- Puñal A, Palazzotto L, Bouvier JC, Conte T, Steyer JP (2003) Automatic control of volatile fatty acids in anaerobic digestion using a fuzzy logic based approach. *Water Sci Technol* 48:103–110
- Purser BJJ, Thai SM, Fritz T et al (2014) An improved titration model reducing over estimation of total volatile fatty acids in anaerobic digestion of energy crop, animal slurry and food waste. *Water Res* 61:162–170
- Ramirez I, Volcke EIP, Rajinikanth R, Steyer JP (2009) Modeling microbial diversity in anaerobic digestion through an extended ADM1 model. *Water Res* 43:2787–2800
- Rapaport A, Dochain D (2005) Interval observers for biochemical processes with uncertain kinetics and inputs. *Math Biosci* 193:235–253
- Rapaport A, Harmand J (2002) Robust regulation of a class of partially observed nonlinear continuous bioreactors. *J Process Contr* 12:291–302
- Rapaport A, Haidar I, Harmand J (2014) Global dynamics of the buffered chemostat for a general class of response functions. *J Math Biol* 71:69–98
- Raposo F, De la Rubia MA, Fernandez-Cegri V, Borja R (2011) Anaerobic digestion of solid organic substrates in batch mode: an overview relating to methane yields and experimental procedures. *Renew Sust Energ Rev* 16:861–877
- Raposo F, Borja R, Cacho JA et al (2013) Review—First international comparative study of volatile fatty acids in aqueous samples by chromatographic techniques: evaluating sources of error. *Trends Anal Chem* 51:127–144
- Ras M, Girbal-Neuhauser E, Paul E, Sperandio M, Lefebvre D (2008) Protein extraction from activated sludge: an analytical approach. *Water Res* 42:1867–1878
- Raunkjær K, Hvitved-Jacobsen T, Nielsen PH (1994) Measurement of pools of protein, carbohydrate and lipid in domestic wastewater. *Water Res* 28:251–262
- Reilly M, Dinsdale R, Guwy A (2015) Enhanced biomethane potential from wheat straw by low temperature alkaline calcium hydroxide pre-treatment. *Bioresour Technol* 189:258–265
- Renard P, Dochain D, Bastin G, Naveau H, Nyns EJ (1988) Adaptive control of anaerobic digestion processes—a pilot-scale application. *Biotechnol Bioeng* 31:287–294
- Reynolds DM, Ahmad SR (1997) Rapid and direct determination of wastewater BOD values using a fluorescence technique. *Water Res* 31:2012–2018
- Ripley LE, Boyle WC, Converse JC (1985) Improved alkalimetric monitoring for anaerobic digestion of poultry manure. In: *Proceedings of the industrial waste conference*, pp 141–149
- Robles A, Ruano MV, Ribes J, Ferrer J (2013) Advanced control system for optimal filtration in submerged anaerobic MBRs (SAnMBRs). *J Membrane Sci* 430:330–341
- Robles A, Ruano MV, Ribes J, Seco A, Ferrer J (2014) Model-based automatic tuning of a filtration control system for submerged anaerobic membrane bioreactors (AnMBR). *J Membrane Sci* 465:14–26



- Robles A, Durán F, Ruano MV, Ribes J, Rosado A, Seco A, Ferrer J (2015) Instrumentation, control, and automation for submerged anaerobic membrane bioreactors. *Environ Technol* 36:1795–1806
- Rodríguez CER, Latriille E, Harmand J, Alcaraz González V, González Álvarez V, Steyer JP (2013) A switching control strategy based on alkalinity to optimize biogas outflow in the startup of an anaerobic digester, IWA ICA2013, September 18–20. Narbonne, France
- Rosén C, Jeppsson U (2006) Aspects on ADM1 Implementation within the BSM2 Framework. Lund University
- Ruiz G, Castellano M, González W et al (2005) European symposium on computer-aided process engineering-15, 38th european symposium of the working party on computer aided process engineering. Elsevier, New York
- Ryhiner G, Dunn IJ, Heinzle E, Rohani S (1992) Adaptive on-line optimal control of bioreactors: application to anaerobic degradation. *J Biotechnol* 22:89–105
- Ryhiner GB, Heinzle E, Dunn IJ (1993) Modeling and simulation of anaerobic wastewater treatment and its application to control design: case whey. *Biotechnol Progr* 9:332–343
- Salomoni C, Petazzoni E (2006) Capture de co<sub>2</sub> et utilisation dans la digestion de matière organique en vue de la production de méthane. Patent WO 2006108532:A1
- Salomoni C, Caputo A, Bonoli M et al (2011) Enhanced methane production in a two-phase anaerobic digestion plant, after CO<sub>2</sub> capture and addition to organic wastes. *Bioresour Technol* 102:6443–6448
- Sarraguça MC, Paulo A, Alves MM, Dias AMA, Lopes JA, Ferreira EC (2009) Quantitative monitoring of an activated sludge reactor using on-line UV-visible and near-infrared spectroscopy. *Anal BioAnal Chem* 395:1159–1166
- Sbarciog M, Loccufier M, Noldus E (2010) Determination of appropriate operating strategies for anaerobic digestion systems. *Biochem Eng J* 51:180–188
- Sbarciog M, Moreno JA, Vande Wouwer A (2012) A biogas-based switching control policy for anaerobic digestion systems. In: Vinay K (ed) *Advanced control of chemical processes vol 8*. Furama Riverfront, Singapore, pp 603–608
- Scaglia B, Confalonieri R, D'Imporzano G, Adani F (2010) Estimating biogas production of biologically treated municipal solid waste. *Bioresour Technol* 101:945–952
- Schauer-Gimenez AE, Zitomer DH, Maki JS, Struble CA (2010) Bioaugmentation for improved recovery of anaerobic digesters after toxicant exposure. *Water Res* 44:3555–3564
- Shanmugam P, Horan NJ (2009) Simple and rapid methods to evaluate methane potential and biomass yield for a range of mixed solid wastes. *Bioresour Technol* 100:471–474
- Silvestre G, Bonmatí A, Fernández B (2015) Optimisation of sewage sludge anaerobic digestion through co-digestion with OFMSW: effect of collection system and particle size. *Waste Manag* 43:137–143
- Simeonov I, Queinnec I (2006) Linearizing control of the anaerobic digestion with addition of acetate (control of the anaerobic digestion). *Control Eng Pract* 14:799–810
- Smith PK, Krohn RI, Hermanson GT et al (1985) Measurement of protein using bicinchoninic acid. *Anal Biochem* 150:76–85
- Smith PJ, Vigneswaran S, Ngo HH, Ben-Aim R, Nguyen H (2006) A new approach to backwash initiation in membrane systems. *J Membrane Sci* 278:381–389
- Spanjers H, van Lier JB (2006) Instrumentation in anaerobic treatment—research and practice. *Water Sci Technol* 53:63–76
- Spanjers H, Bouvier JC, Steenweg P, Bisschops I, van Gils W, Versprille B (2006) Implementation of in-line infrared monitor in full-scale anaerobic digestion process. *Water Sci Technol* 53:55–61
- Speece RE (2008) *Anaerobic biotechnology and odor/corrosion control for municipalities and industries*. Archae Press, Nashville, TN, USA
- Steyer JP, Rolland D, Bouvier JC, Moletta R (1997) Hybrid fuzzy neural network for diagnosis—application to the anaerobic treatment of wine distillery wastewater in a fluidized bed reactor. *Water Sci Technol* 36:209–217
- Steyer JP, Buffière P, Rolland D, Moletta R (1999) Advanced control of anaerobic digestion processes through disturbances monitoring. *Water Res* 33:2059–2068
- Steyer JP, Bouvier JC, Conte T, Gras P, Harmand J, Delgenes JP (2002) On-line measurements of COD, TOC, VFA, total and partial alkalinity in anaerobic digestion processes using infra-red spectrometry. *Water Sci Technol* 45:133–138
- Steyer JP, Lardon L, Bernard O (2004) Sensors network diagnosis in anaerobic digestion processes using evidence theory. *Water Sci Technol* 50:21–29
- Steyer JP, Bernard O, Batstone DJ, Angelidaki I (2006) Lessons learnt from 15 years of ICA in anaerobic digesters. *Water Sci Technol* 53:25–33
- Strömberg S, Nistor M, Liu J (2015) Early prediction of biochemical methane potential through statistical and kinetic modelling of initial gas production. *Bioresour Technol* 176:233–241
- Sundberg C, Al-Soud WA, Larsson M (2013) 454 pyrosequencing analyses of bacterial and archaeal richness in 21 full-scale biogas digesters. *FEMS Microbiol Ecol* 85:612–626
- Szarka N, Scholwin F, Trommler M et al (2013) A novel role for bioenergy: a flexible, demand-oriented power supply. *Energy* 61:18–26
- Tafdrup S (1994) Centralized biogas plants combine agricultural and environmental benefits with energy production. *Water Sci Technol* 30:133–141
- Tale VP, Maki JS, Struble CA, Zitomer DH (2011) Methanogen community structure-activity relationship and bioaugmentation of overloaded anaerobic digesters. *Water Res* 45:5249–5256
- Tartakovsky B, Lishman LA, Legge RL (1996) Application of multi-wavelength fluorometry for monitoring wastewater treatment process dynamics. *Water Res* 30:2941–2948
- Theilliol D, Ponsart JC, Harmand J et al (2003) On-line estimation of unmeasured inputs for anaerobic wastewater treatment processes. *Control Eng Pract* 11:1007–1019
- Triolo JM, Sommer SG, Møller HB, Weisbjerg MR, Jiang XY (2011) A new algorithm to characterize biodegradability of biomass during anaerobic digestion: influence of lignin concentration on methane production potential. *Bioresour Technol* 102:9395–9402
- Val Del Rio MA, Morales N, Isanta E, Mosquera-Corral A, Campos JL, Steyer JP, Carrère H (2011) Thermal pre-treatment of aerobic granules, impact on anaerobic biodegradability. *Water Res* 45:6011–6020

- Van der Zee FP, Villaverde S, García PA, Fdz-Polanco F (2007) Sulfide removal by moderate oxygenation of anaerobic sludge environments. *Bioresour Technol* 98:518–524
- Van Ginkel S, Logan BE (2005) Inhibition of biohydrogen production by undissociated acetic and butyric acids. *Environ Sci Technol* 39:9351–9356
- van Lier JB (2008) High-rate anaerobic wastewater treatment: diversifying from end-of-the-pipe treatment to resource-oriented conversion techniques. *Water Sci Technol* 57:1137–1148
- Van Soest PJ (1963) Use of detergents in the analysis of fibrous feeds. II. A rapid method for the determination of fiber and lignin. *J Assoc Off Anal Chem* 46:829–835
- Vanwonterghem I, Jensen PD, Ho DP et al (2014) Linking microbial community structure, interactions and function in anaerobic digesters using new molecular techniques. *Curr Opin Biotechnol* 27:55–64
- Vargas A, Moreno-Andrade I, Buitrón G (2008) Controlled backwashing in a membrane sequencing batch reactor used for toxic wastewater treatment. *J Membrane Sci* 320:185–190
- Varley J, Brown AK, Boyd JWR, Dodd PW, Gallagher S (2004) Dynamic multi-point measurement of foam behaviour for a continuous fermentation over a range of key process variables. *Biochem Eng J* 20:61–72
- Vavilin VA, Rytov SV, Lokshina LY (1997) A description of hydrolysis kinetics in anaerobic degradation of particulate organic matter. *Bioresour Technol* 56:229–237
- Verbruggen HB, Bruijn PM (1997) Fuzzy control and conventional control: what is (and can be) the real contribution of Fuzzy Systems? *Fuzzy Set Syst* 90:151–160
- Von Sachs J, Meyer U, Rys P, Feitkenhauer H (2003) New approach to control the methanogenic reactor of a two-phase anaerobic digestion system. *Water Res* 37:973–982
- Waewsak C, Nopharatana A, Chaiprasert P (2010) Neural-fuzzy control system application for monitoring process response and control of anaerobic hybrid reactor in wastewater treatment and biogas production. *J Environ Sci* 22:1883–1890
- Wan S, Xi B, Xia X, Li M, Lv D, Wang L, Song C (2012) Using fluorescence excitation-emission matrix spectroscopy to monitor the conversion of organic matter during anaerobic co-digestion of cattle dung and duck manure. *Bioresour Technol* 123:439–444
- Wang X, Yang G, Feng Y, Ren G, Han X (2012) Optimizing feeding composition and carbon-nitrogen ratios for improved methane yield during anaerobic co-digestion of dairy, chicken manure and wheat straw. *Bioresour Technol* 120:78–83
- Wang X, Yang G, Li F, Feng Y, Ren G, Han X (2013a) Evaluation of two statistical methods for optimizing the feeding composition in anaerobic co-digestion: mixture design and central composite design. *Bioresour Technol* 131:172–178
- Wang W, Xie L, Luo G et al (2013b) Performance and microbial community analysis of the anaerobic reactor with coke oven gas biomethanation and in situ biogas upgrading. *Bioresour Technol* 146:234–239
- Ward AJ, Bruni E, Lykkegaard MK, Feilberg A, Adamsen APS, Jensen AP, Poulsen AK (2011) Real time monitoring of a biogas digester with gas chromatography, near-infrared spectroscopy, and membrane-inlet mass spectrometry. *Bioresour Technol* 102:4098–4103
- Ward AJ, Lewis DM, Green FB (2014) Anaerobic digestion of algae biomass: a review. *Algal Res* 5:204–214
- Wijekoon KC, Visvanathan C, Abeynayaka A (2011) Effect of organic loading rate on VFA production, organic matter removal and microbial activity of a two-stage thermophilic anaerobic membrane bioreactor. *Bioresour Technol* 102:5353–5360
- Wolf C, Gaida D, Stuhlsatz A, Ludwig T, McLoone S, Bongards M (2013) Predicting organic acid concentration from UV/vis spectrometry measurements—a comparison of machine learning techniques. *T I Meas Control* 35:5–15
- Wolf C, Gaida D, Bongards M (2014) Online monitoring of AD processes using a fully automated, low maintenance middle-infrared (MIR) measurement system. *Conf Proc Int Sci Conf Biogas Sci* 2014:24–25
- Xiong Y, Mehrdad S (2003) Unknown disturbance inputs estimation based on a state functional observer design. *Automatica* 39:1389–1398
- Yasui H, Sugimoto M, Komatsu K, Goel R, Li YY, Noike T (2006) An approach for substrate mapping between ASM and ADM1 for sludge digestion. *Water Sci Technol* 54:83–92
- Yasui H, Goel R, Li YY, Noike T (2008) Modified ADM1 structure for modelling municipal primary sludge hydrolysis. *Water Res* 42:249–259
- Zadeh LA (1965) Fuzzy sets. *Inf Control* 8:338–353
- Zhang ML, Sheng GP, Mu Y, Li WH, Yu HQ, Harada H, Li YY (2009) Rapid and accurate determination of VFAs and ethanol in the effluent of an anaerobic H<sub>2</sub>-producing bioreactor using near-infrared spectroscopy. *Water Res* 43:1823–1830
- Zhou H, Li H, Wang F (2012) Anaerobic digestion of different organic wastes for biogas production and its operational control performed by the modified ADM1. *J Environ Sci Health A Toxic Hazard Subst Environ Eng* 47:84–92
- Zumbusch PV, Meyer-Jens T, Brunner G, Märkl H (1994) Online monitoring of organic substances with high-pressure liquid chromatography (HPLC) during the anaerobic fermentation of waste-water. *Appl Microbiol Biotechnol* 42:140–146