



# Investigation of ultrasound pretreatment time and microwave power level on drying and rehydration kinetics of green olives

Alev Yüksel AYDAR<sup>1\*</sup>

## Abstract

In this study, the effect of ultrasound (US) combined microwave (MW) drying of green olive slices was studied. Olive samples were exposed to ultrasound (5 and 10 minutes; 32 KHz) at room temperature before dried at microwave at 3 different power level (180W, 450 W and 800 W). The drying and rehydration characteristics and quality parameters of olives were determined by comparing with obtained by non-ultrasound pretreated MW dried samples. Midilli et al. and Diffusion models were the most suitable models for US-MW drying with the highest  $R^2$ , and lowest RMSE and chi square values. Total phenolic compounds (TPC) of olive slices reduced during drying in all treatments, however TPC of ultrasound pretreated samples were relatively higher those non treated samples dried at same microwave. Increasing of microwave level and ultrasound time decreased the total drying time up to %42.5. This study showed that US-MW can be a useful combine drying method for olive slices which decreased the drying time and improved the qualitative properties of olives.

**Keywords:** ultrasound; microwave; drying; olive; kinetic model; rehydration.

**Practical Application:** Ultrasound combined microwave drying of olives can be used as a new drying method in food industry.

## 1 Introduction

Olive (*Olea Europea*) is one of the most consumed fruits in Mediterranean countries with its superior properties such as high concentration of vitamin E and phenolic compounds including oleuropein, tyrosol and hydroxytyrosol (Aydar et al., 2017a). It is evaluated and consumed mostly as table olive and olive oil after harvesting. Fresh olives are high in nutrients but can be easily spoiled due to high water activity until processing (Kailis, 2016).

Drying is a widely applied method which aims reducing water activity ( $a_w$ ) of foods to storage for long-term as well as to lower the weight of food and volume to reduce shipping costs (Antal et al., 2017). Hot air drying is one of the commonly used methods for drying of fruits and vegetables, but, it has many disadvantages, such as long drying time, loss in nutritional content, undesirable product deterioration and low energy efficiency (Horuz et al., 2017). Freeze drying obtains high quality products, however it associates with high energy consumption and long drying time. Microwave drying or radio frequency are also used by many researchers to replace conventional drying and shortened the drying time and improved product quality, but they still have drawbacks over conventional hot air drying such as their non-uniform heating characteristics and unstable temperature control (Rodríguez et al., 2007; Tang et al., 2005; Yildiz & İzli, 2019). Therefore it is necessary to develop new combine drying methods or pretreatments to attain improved drying process and enhanced product quality (Rawson et al., 2011).

Ultrasound is a novel technology has been used in many food processing and applications such as dairy and beverage technology (Ahmad et al., 2019; Guimarães et al., 2018, 2019a, b), oil extraction (Aydar et al., 2017b; Jiménez et al., 2007) and as a

pretreatment in drying of foods (Huang et al., 2019). Ultrasound pretreatment accelerates the mass transfer in drying mainly due to breakdown of cells and formation of micro channels (Sun, 2014). In the last decade, ultrasound has been applied as a pretreatment in hot air drying of many fruits and vegetables such as tomato (Horuz et al., 2017), kiwifruit (Wang et al., 2019), okra (Sunil et al., 2017), garlic (Bozkir et al., 2018), apple (Fijalkowska et al., 2016) and mushroom (Zhang et al., 2016). However there is no study investigated the combined effect of ultrasound and microwave drying on quality characteristics and drying parameters of green olive slices. Therefore, in this study different minutes of sonication was applied as a pretreatment to the microwave drying of olive slices to describe the effect of ultrasound process on enhancement of the microwave drying and rehydration process.

## 2 Materials and methods

### 2.1 Olive samples

Fresh olives (Domat variety) were acquired in a local olive company (Aydar Inc, Akhisar, Manisa) and processed at the same day. In order to confirm the sample uniformity, olives which has  $20 \text{ mm} \pm 2$  of diameter were chosen for this study and the olives were cut in slices of 5 mm thickness.

### 2.2 Ultrasound treatment

The green olive slices were put in a 250-mL glass beaker. The distilled water was used as the medium and the ratio of olive slices to water was 1:5 (w/w). The 5 and 10 minutes of ultrasound

Received 08 Apr., 2020

Accepted 05 May, 2020

<sup>1</sup>Department of Food Engineering, Manisa Celal Bayar University, Manisa, Turkey

\*Corresponding author: [alevyuksel.aydar@cbu.edu.tr](mailto:alevyuksel.aydar@cbu.edu.tr)

were applied to samples using ultrasonic bath (AlexMachine, PR-6711, Turkey, 150 kW and ultrasonic frequency 25 KHz; Tank volume 4.5 L) in this study. An infrared thermometer (Benetech, GM300, China) was used to measure the surface temperature of the olive slices and ultrasonic bath for 1 minute intervals during sonication process. The temperature inside the bath and surface of olive slices did not exceed to 25 °C during sonication.

### 2.3 Microwave drying

A microwave oven (GE83X, Samsung, Turkey, 2450 MHz and 23 L capacity) was used for drying of green olive slices. 5 g of sliced olives were weighed and put on a glass drying tray (10 cm diameter). Then they were left to dry at 180, 450, and 800 W microwave power levels. The weight of olive slices were recorded in every 1 min during microwave drying until the final moisture content of samples reached approximately %10 (w/w). The experiments were performed in triplicate.

### 2.4 Mathematical fitting

Both drying and rehydration kinetics of all samples, with the different treatments, were evaluated using the appropriate mathematical models. In order to determine the best model for describing the drying kinetics behavior, four empirical mathematical models (Table 1) were evaluated. These were selected considering its simplicity and expressive use in the literature (Wang et al., 2019).

The moisture ratio (MR) of green table olive slices was calculated from Equation 1 (Wang et al., 2019)

$$MR = \frac{M_t - M_e}{M_0 - M_e} \quad (1)$$

Where  $M_t$  is the moisture at a specific time (w/w),  $M_0$  is the initial moisture content (w/w),  $M_e$  is the equilibrium moisture content (w/w). When moisture at a specific time and initial moisture content are compared with equilibrium moisture content,  $M_e$  value approaches to a very small number. Therefore, MR is simplified by many researchers and MR of green table olive slices were calculated as this simplified Equation 2 (Midilli et al., 2002):

$$MR = \frac{M_t}{M_0} \quad (2)$$

Drying rates of different drying processes were computed according to Equation 3 (Akpınar et al., 2003):

$$DR = \frac{M_{t1} - M_{t2}}{t_2 - t_1} \quad (3)$$

Where  $t_1$  and  $t_2$  are the different drying times and  $M_{t1}$  and  $M_{t2}$  are the moisture contents of olive slices at time  $t_1$  and  $t_2$ , respectively.

Henderson and Pabis, Logarithmic, Wang and Sing, and Diffusion models have been applied to describe the changes in moisture content and physicochemical degradation of olive slices during drying are shown Table 2 (Aregbesola et al., 2015; Simal et al., 2005; Wang et al., 2019). A graph of moisture ratio (MR) and drying rates (DR) against time (t) at the different microwave

**Table 1.** Mathematical models evaluated for the microwave drying of green olive slices with and without ultrasonic pre-treatment.

Model name	Model	References
Henderson & Pabis	$MR = a \exp(-kt)$	(Akpınar et al., 2003)
Wang & Singh	$MR = 1 + at + bt^2$	(Yildiz & İzli, 2019)
Midilli et al.	$MR = a \exp(-kt) + bt$	(Midilli et al., 2002)
Diffusion	$MR = a \exp(-kt) + (1-a) \exp(-kbt)$	(Yaldiz et al., 2001)

**Table 2.** Codes for treatments.

Treatment	Ultrasound pretreatment time (min)	Microwave Power (Watt)
180W	-	180
450W	-	450
800W	-	800
5US+180W	5	180
5US+450W	5	450
5US+800W	5	800
10US+180W	10	180
10US+450W	10	450
10US+800W	10	800

power levels and ultrasound times was plotted. Drying data of the green olive slices were fitted to four thin drying models (Table 2). SAS 9.4. (SAS Institute Inc., Cary, NC) was used to perform regression analyses. To identify the goodness of fit coefficient of determination ( $R^2$ ),  $\chi^2$  (reduced chi-square parameter) and root mean square error (RMSE) between the predicted and experimental values were applied (Akpınar et al. 2003).

The rehydration kinetics of olive slices dried at different microwave power levels were investigated by Peleg's model which is calculated with the Equation 4:

$$X' = 1 \pm \frac{t}{K_1 + K_2 t} \quad (4)$$

Where  $X_0$  is initial moisture content (g water/g dry matter) and  $X$  is the moisture content at time  $t$ ,  $t$  is time,  $K_1$  is the Peleg rate constant, and  $K_2$  is the Peleg capacity constant. When process is an absorption/adsorption  $\pm$  turns '+' if the process is drying/desorption,  $\pm$  turns to '-' (Planinić et al., 2005). Root mean square error (RMSE), reduced chi-squared value ( $\chi^2$ ) and coefficient of determination ( $R^2$ ) were calculated to evaluate the goodness of model fitting.

### 2.5 Effective diffusivity

Effective diffusivity of olive slices was calculated by using the Fick's second diffusion law for slab geometry which is shown in Equation 5:

$$\frac{\partial M}{\partial t} = D_{\text{eff}} \nabla^2 M \quad (5)$$

Where  $D_{\text{eff}}$  is the effective moisture diffusivity ( $\text{m}^2/\text{s}$ ),  $M$  is the moisture content (dry basis),  $t$  is the time(s) (Yağcıoğlu et al., 2014). Fick's second diffusion law presumes that moisture removal is caused by diffusion, temperature, shrinkage and constant diffusion coefficients (Aregbesola et al., 2015; Sun, 2014)

$$MR = \frac{M_t - M_e}{M_0 - M_e} = \frac{8}{\pi^2} \sum_{n=0}^{\infty} \frac{1}{(2n+1)^2} \exp\left[-\frac{(2n+1)^2 \pi^2 D_{\text{eff}}}{4L^2} t\right] \quad (6)$$

Where  $t$  is time (s),  $L$  is half thickness of samples (m) and  $n$  is a positive integer. For longer drying times, Equation 6 can be converted to a further formula shown in Equation 7 consisting of only the first set of terms without significant influence on the correctness of the supposition.

$$MR = \frac{8}{\pi^2} \exp\left[-\frac{\pi^2 D_{\text{eff}}}{4L^2} t\right] \quad (7)$$

$$\ln(MR) = \ln\left(\frac{8}{\pi^2}\right) - \left[\frac{\pi^2 D_{\text{eff}}}{4L^2} t\right] \quad (8)$$

From Equation 8, moisture effective diffusivity can be determined by plotting  $\ln(MR)$  versus drying time ( $t$ ); which provides a linear line and the slope of this line is explained as Equation 9:

$$\text{Slope} = \left[-\frac{\pi^2 D_{\text{eff}}}{4L^2}\right] \quad (9)$$

## 2.6 Total Phenolic Content (TPC)

Total phenolic compounds of green olive slices were determined using Folin-Ciocalteu method (İcier et al., 2015). According to this method, 2 gr of olive slices extracted in a 50 mL of methanol solution (80:20), then extract was filtered. 50  $\mu\text{L}$  of filtered extract was reacted by 250  $\mu\text{L}$  Folin-Ciocalteu reagent for 5 minutes. After 750  $\mu\text{L}$  of  $\text{Na}_2\text{CO}_3$  was added the volume was completed with 3.95 ml of distilled water. Final solution was kept at 2 h in dark and the absorbance value was measured using an UV-VIS spectrophotometer at 760 nm.

## 2.7 Color parameters

The color parameters of green olive slices was measured with a Chroma Meter (Konica Minolta, CR 300 Model, VA) based on 5 color coordinates ( $L^*$ ,  $a^*$ ,  $b^*$ ,  $C$ ,  $h^\circ$ ). After the calibration

of colorimeter against a standard white surface and green one, six replicate measurements were performed for each sample. To illustrate the color changes between control sample and samples after drying treatments total color variance ( $\Delta E$ ) values were calculated by using the formula shown in Equation 10:

$$\Delta E = \left[ (\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2 \right]^{1/2} \quad (10)$$

Where:  $\Delta L^*$ ,  $\Delta a^*$ , and  $\Delta b^*$  are the differences of these values between the control sample and samples after drying treatment

## 2.8 Statistical analysis

The data was shown as means  $\pm$  standard deviation (SD). SAS 9.4. (SAS Institute Inc., Cary, NC, USA) was used to determine the effect of the microwave power level and ultrasound time on the qualitative parameters of olive samples by one-way ANOVA. Tukey's honestly significant differences (HSD) test ( $\alpha = 0.05$ ) was applied as post-hoc test. Coefficient of determination ( $R^2$ ),  $\chi^2$  (reduced chi-square parameter) and root mean square error (RMSE) were calculated to interpret the adequacy of each model.

## 3 Results and discussions

### 3.1 Drying kinetics

Figure 1 shows the moisture ratios of green olives during drying at different microwave power levels and ultrasound pretreatment times. The total drying time for olive slices was 849 second at microwave level of 180W and when 10 minutes of sonication applied before drying at 800W microwave level it was reduced to 488 seconds. This demonstrates that increasing of microwave level and ultrasound exposure time decreases the total drying time up to % 42.5.

Horuz et al. (2017) also observed that application of ultrasound pre-treatment reduced the drying time of tomato slices by 7.38% when they were dried at 120 W microwave power. It was also determined by the researcher that ultrasound pretreatment caused shorter drying times (Bozkir et al., 2018; Rodrigues & Fernandes, 2007; Seidi Damyeh et al., 2016).

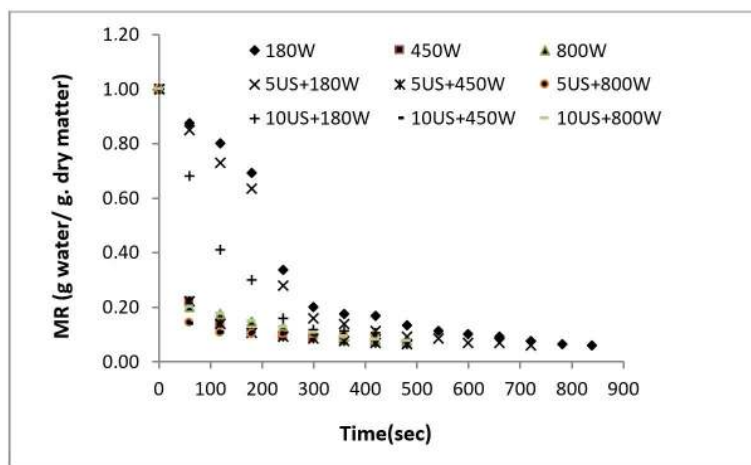


Figure 1. Moisture ratios(MR) of green olives during microwave drying.

The results of nonlinear analysis of the fitting of four selected models to the rying data of green olive slices at the different ultrasound pretreatment times (5 and 10 min.) and microwave power levels (180, 450 and 800 W) are shown in Table 3. According to the evaluation criteria ( $R^2$ ,  $\chi^2$  and RMSE), most of models well fitted with the thin layer drying characteristics ( $R^2 > 0.9746$ ,  $RMSE < 0.0773$  and  $\chi^2 < 0.0065$ ) of olive slices which are subjected to 5 minute of ultrasound before being dried at 180 W power level in microwave.

Wang & Sing and Midilli et al., were the best fitted models in describing the thin layer drying characteristics of olive slices which are not pretreated with ultrasound with the lowest RMSE and  $X^2$  values and highest  $R^2$  values. 0.9767, 0.9954 and 0.9999 were found the highest  $R^2$  values for 180W, 450W and 800 W microwave dried olive samples, respectively. In a similar study by İzli et al. (2019), Page and Midilli et al. models were best fitted in describing the thin layer microwave drying kinetics of lime slices (Izli et al., 2019). In ultrasound

combined microwave drying conditions Wang & Sing model did not well described the drying characteristics, however Henderson & Pabis, Distribution and Midilli et al. models well fitted the experimental data with  $R^2$  values higher than 0.9954, RMSE and  $\chi^2$  values lower than 0.0792 and 0.0077, respectively.

**3.2 Effective diffusivities and rehydration kinetics**

Table 4 demonstrates the effective moisture diffusivity ( $D_{eff}$ ) values for each treatment. Among all samples,  $D_{eff}$  value observed highest at 10 min ultrasound pretreated 800 W microwave drying ( $2.21 \times 10^{-8} \text{ m}^2/\text{s}$ ) and lowest at 180 W microwave drying ( $9.13 \times 10^{-9} \text{ m}^2/\text{s}$ ).

A higher  $D_{eff}$  value demonstrated that the moisture removal rate in the green olive slices was greater, which would reduce the drying time to obtain the final moisture content. It was observed that the  $D_{eff}$  values increased with increase in both with ultrasound pretreatment time and microwave power

**Table 3.** Coefficients of drying kinetics of green olive slices for different treatments.

Model	Treatment	Model Coefficients	$R^2$	RMSE	$X^2$
<b>Henderson &amp; Pabis</b>	180W	a:1.091 k:0.0040	0.9732	0.0198	0.0059
	450W	a:0.988 k:0.0046	0.9911	0.0241	0.0052
	800W	a:0.979 k:0.0193	0.9789	0.0324	0.0094
	5US+180W	a:1.083 k:0.0046	0.9742	0.0778	0.0066
	5US+450W	a:0.996 k:0.0269	0.9953	0.0543	0.0040
	5US+800W	a:0.999 k:1.8402	0.9988	0.0991	0.0112
	10US+180W	a:1.001 k:0.0069	0.9559	0.0128	0.0040
	10US+450W	a:1.000 k:1.8402	0.9989	0.0409	0.0117
	10US+800W	a:1.000 k:0.4805	<b>0.9992</b>	0.0310	0.0077
	<b>Wang &amp; Singh</b>	180W	a:-0.0028 k:-2.1x10 <sup>-6</sup>	<b>0.9767</b>	0.0707
450W		a:-0.0086 k:1.8x10 <sup>-5</sup>	0.5954	0.1317	0.1378
800W		a:-0.0073 k:1.3x10 <sup>-5</sup>	0.7992	0.1633	0.0501
5US+180W		a:-4.3x10 <sup>-9</sup> k:-2.7x10 <sup>-6</sup>	0.7445	0.3690	0.1485
5US+450W		a:-0.0090 k:1.9x10 <sup>-5</sup>	0.8016	0.1555	0.0591
5US+800W		a:-0.0069 k:1.2x10 <sup>-5</sup>	0.8313	0.1999	0.0457
10US+180W		a:-0.0050 k:-0.0001	0.9965	0.0271	0.0008
10US+450W		a:-0.0089 k:-1.9x10 <sup>-5</sup>	0.6901	0.1783	0.0371
10US+800W		a:-0.0079 k:-1.5x10 <sup>-5</sup>	0.8334	0.1984	0.0449
Midilli et al.		180W	a:1.0905 b:-4.3X10 <sup>-6</sup> k: 0.5129 n:0.0078	0.9733	0.0768
	450W	a:0.9948 b: 0.0002 k: 1.2273 n:0.0188	<b>0.9954</b>	0.0347	0.0014
	800W	a:0.9917 b: 0.0002 k: 1.2288 n:0.0189	<b>0.9999</b>	0.0564	0.0036
	5US+180W	a:1.0772 b:3.2X10 <sup>-5</sup> k: 0.019 n:0.2322	<b>0.9746</b>	0.0773	0.0065
	5US+450W	a:0.9985 b: 0.0002 k: 1.1623 n:0.0252	0.9977	0.0184	0.0005
	5US+800W	a:0.9986 b: 0.0003 k: 0.7841 n:0.0420	0.9959	0.0231	0.0008
	10US+180W	a:1.0127 b: 0.0001 k: 1.6932 n: 0.0044	<b>0.9972</b>	0.0170	0.0004
	10US+450W	a:0.9989 b: 0.0003 k: 0.9837 n:0.0339	0.9961	0.0309	0.0011
	10US+800W	a:0.9992 b: 0.0002 k: 1.0290 n:0.0356	0.9879	0.0226	0.0008
	Diffusion	180W	a:-6.4668 b:1.0593:k:0.0024	0.9725	0.0811
450W		a: -19.0371 b:1.0001:k:0.0207	0.9916	0.0725	0.0060
800W		a: -12.5001 b:1.0000:k:0.0197	0.9802	0.0976	0.0108
5US+180W		a: 0.1471 b:20.4320:k:0.0018	0.9748	0.0047	$2.59 \times 10^{-4}$
5US+450W		a: 0.1104 b:118.9220:k:0.0004	<b>0.9998</b>	0.0026	$8.00 \times 10^{-5}$
5US+800W		a:-5.8901 b:1.0824 k:0.0024	<b>0.9999</b>	0.0792	0.0068
10US+180W		a:-1.0748 b:0.9999 k:0.0068	0.9962	0.0292	0.0010
10US+450W		a:0.1180 b:80.7682 k:0.0007	<b>0.9999</b>	0.0013	$2.11 \times 10^{-6}$
10US+800W		a:0.1011 b:86.0857 k:0.0007	0.9802	0.0013	$1.48 \times 10^{-6}$



level. Since, high microwave power levels cause an increase in the water molecule activity at elevated drying temperatures, moisture diffusion increases in samples.

Highest drying rates were observed in microwave drying at 800 W power level when combined with sonication 10 and 5 minutes, respectively. The drying rate of ultrasound non-treated samples was lower in comparison to pretreated samples and effective diffusion coefficients were increased as ultrasound time increased at same power level.

Figure 2 demonstrates rehydration curves of olive slices dried at different microwave powers combined by ultrasound. As it can be seen in this figure, the when microwave power increased in drying procedure the rehydration ratio decreased during time. The smaller values for  $k_2$  values of rehydration demonstrates better water absorption properties was confirmed for olives dried at lower microwave power levels. It was also resulted that increasing microwave power up to 800 W and ultrasound induced lower rehydration capacity of dried samples. Although ultrasound pretreatment forms micro channels which promotes a faster dehydration, microwave drying cause irreversible cell rupture in fruit tissue that reduces the water absorption at higher microwave power levels. Rehydration kinetics of olive slices calculated by Peleg's model were fitted in all drying treatments


( $R^2 > 0.9979$ ,  $RMSE < 0.0252$  and  $\chi^2 < 0.0063$ ) are demonstrated in Table 4. It was found that both  $k_1$  and  $k_2$  values increased as ultrasound time and microwave power have risen. Horuz et al. (2017) observed that  $k_1$  value of dried tomato slices increases and  $k_2$  value of dried tomato slices decreases as ultrasound time increases. Differences in rehydration behavior in this study may result from being studied at higher microwave power levels and lower ultrasound times.

### 3.3 Color parameters and total phenolic content

$L^*$  (lightness) values of olive slices dried at 180 W, 450 W and 800 W power level were not significantly different from control sample however they were lower than control sample in all 3 treatment which can be explained by non-enzymatic oxidation reaction. However, the decrease in  $L^*$  value was not observed in most samples which ultrasound applied. In most of these drying conditions which are pretreated by ultrasound,  $L^*$  value was higher than control except the 5 and 10 minute ultrasound pretreated microwave dried olive samples at 180W power. Bozkır et al., also studied the ultrasound pretreatment effect on quality and drying parameters found that lightness was lowest at microwave dried samples and highest at hot air dried samples (Bozkır et al., 2018).

**Table 4.** Effective diffusivities of different drying experiments and coefficients of rehydration kinetics calculated by Peleg's Model.

Treatment	Moisture Effective Diffusivity ( $m^2/s$ )	Coefficients of rehydration kinetics				
		$K_1$	$K_2$	$R^2$	RMSE	$\chi^2$
180W	$9.13 \times 10^{-09}$	0.2382	0.1557	0.9991	0.0196	0.0038
450W	$1.12 \times 10^{-08}$	0.2849	0.1778	0.9980	0.0252	0.0063
800W	$1.17 \times 10^{-08}$	0.3373	0.1894	0.9986	0.0190	0.0036
5US+180W	$1.09 \times 10^{-08}$	0.2475	0.1513	0.9989	0.0167	0.0028
5US+450W	$1.22 \times 10^{-08}$	0.3009	0.1749	0.9979	0.0236	0.0056
5US+800W	$2.10 \times 10^{-08}$	0.3538	0.1837	0.9986	0.0123	0.0015
10US+180W	$1.45 \times 10^{-08}$	0.2706	0.1659	0.9984	0.0246	0.0060
10US+450W	$2.05 \times 10^{-08}$	0.3483	0.1820	0.9988	0.0183	0.0033
10US+800W	$2.21 \times 10^{-08}$	0.3579	0.2239	0.9997	0.0069	0.0004

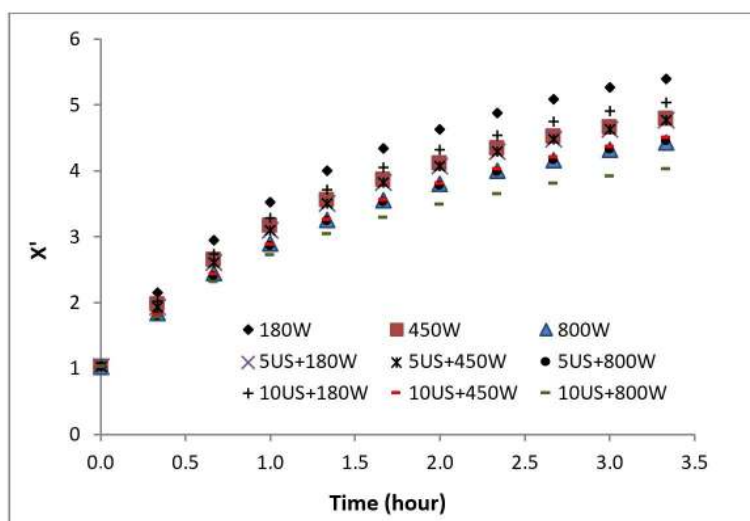

**Figure 2.** Rehydration ratio-time profiles for ultrasound pretreated microwave dried olive slices.

**Table 5.** Color parameters and total phenolic contents of olives.

Treatments	L*	a*	b*	ΔE	C	H°	Total Phenolic Content (mg GA/ 100 g dry matter)
Control	47.93 ± 0.18 <sup>bcd</sup>	0.99 ± 0.03 <sup>abc</sup>	10.56 ± 0.17 <sup>a</sup>	-	10.63 ± 0.19 <sup>a</sup>	84.70 ± 0.28 <sup>cd</sup>	92.06 ± 1.17 <sup>a</sup>
180W	43.13 ± 1.04 <sup>d</sup>	0.82 ± 0.28 <sup>abc</sup>	10.35 ± 2.31 <sup>a</sup>	1.32 ± 0.06 <sup>e</sup>	11.66 ± 0.93 <sup>a</sup>	85.73 ± 1.07 <sup>bc</sup>	73.25 ± 5.96 <sup>bc</sup>
450W	46.67 ± 1.40 <sup>bcd</sup>	0.88 ± 0.59 <sup>abc</sup>	10.78 ± 3.29 <sup>a</sup>	4.87 ± 0.47 <sup>cde</sup>	13.53 ± 0.96 <sup>a</sup>	85.10 ± 0.53 <sup>bcd</sup>	64.01 ± 1.10 <sup>cde</sup>
800W	45.36 ± 0.95 <sup>dc</sup>	0.48 ± 0.03 <sup>bc</sup>	13.45 ± 0.69 <sup>a</sup>	9.22 ± 0.16 <sup>b</sup>	13.45 ± 0.66 <sup>a</sup>	88.00 ± 0.20 <sup>a</sup>	46.56 ± 2.84 <sup>fg</sup>
5US+180W	47.61 ± 0.32 <sup>bcd</sup>	0.89 ± 0.06 <sup>abc</sup>	12.21 ± 0.41 <sup>a</sup>	1.26 ± 0.17 <sup>e</sup>	12.23 ± 0.41 <sup>a</sup>	85.95 ± 0.15 <sup>b</sup>	76.91 ± 2.52 <sup>b</sup>
5US+450W	54.45 ± 5.29 <sup>a</sup>	0.37 ± 0.06 <sup>c</sup>	13.93 ± 2.52 <sup>a</sup>	16.83 ± 1.93 <sup>a</sup>	13.93 ± 2.52 <sup>a</sup>	88.53 ± 0.06 <sup>a</sup>	66.54 ± 3.42 <sup>cde</sup>
5US+800W	51.45 ± 1.83 <sup>abs</sup>	1.35 ± 0.08 <sup>a</sup>	12.51 ± 1.95 <sup>a</sup>	6.02 ± 1.61 <sup>bcd</sup>	14.00 ± 1.16 <sup>a</sup>	84.10 ± 0.20 <sup>d</sup>	56.14 ± 2.81 <sup>efg</sup>
10US+180W	47.20 ± 1.42 <sup>bcd</sup>	0.94 ± 0.21 <sup>abc</sup>	9.84 ± 2.68 <sup>a</sup>	3.04 ± 0.21 <sup>de</sup>	10.91 ± 1.34 <sup>a</sup>	84.70 ± 0.10 <sup>cd</sup>	69.24 ± 2.67 <sup>bcd</sup>
10US+450W	52.14 ± 2.50 <sup>ab</sup>	1.33 ± 0.27 <sup>a</sup>	14.10 ± 1.54 <sup>a</sup>	18.23 ± 1.72 <sup>a</sup>	14.16 ± 1.54 <sup>a</sup>	84.30 ± 0.20 <sup>d</sup>	60.02 ± 2.02 <sup>def</sup>
10US+800W	49.32 ± 2.38 <sup>abcd</sup>	1.14 ± 0.23 <sup>ab</sup>	12.71 ± 2.01 <sup>a</sup>	7.44 ± 0.46 <sup>bc</sup>	12.75 ± 2.03 <sup>a</sup>	84.83 ± 0.32 <sup>bcd</sup>	49.63 ± 2.27 <sup>fg</sup>

Lowest a\* (redness-greenness) value observed in 5 minute ultrasound pretreated microwave dried olive samples at 450W power among all treatments. a\* values of microwave dried samples were not significantly different ( $p > 0.05$ ). It was also found that ultrasound pretreatment did not make significant differences in b\* (yellowness-blueness) and c\* values of all samples ( $p > 0.05$ ). While total color difference ( $\Delta E$ ) values of ultrasound treated olive slices were between 1.26-18.23, it was 1.32-9.22 for non treated samples. Horuz et al. (2017) reported that  $\Delta E$  values of all microwave drying conditions combined by ultrasound was not higher than 10 in tomato samples. It was found that the color of olive slices differed significantly in ultrasound pretreated olives dried at 450 W compared to control sample. The changes in L\* value of olive slices were more clearly observed than in Hue angle (Table 5).

Total phenolic contents of green table olive slices reduced significantly in all microwave and ultrasound pretreated drying treatments compared to control sample ( $p < 0.05$ ). The decrease in phenolic compounds might be related to deterioration of these compounds by electromagnetic waves of the microwave. In addition, microwave power induced to the internal temperature of food to rise due to the friction of the water molecules. Thus, thermal degradation and irreversible oxidative reactions caused phenolic compounds to be damaged during drying. Total phenolic compounds of olive slices obtained by ultrasound pretreatment were slightly higher when compared to those samples were not ultrasound pretreated. The degradation could be due to sonochemical and oxidation reactions, increased interaction with free radicals during sonication. It can be seen from Table 4 ultrasound pretreated samples preserved phenolics better compared to non-treated samples at each microwave power levels. Highest loss in phenolic compounds were observed when samples were dried at 800 W microwave power level. When olive slices were dried at 800 W microwave power, total phenolic compounds were decreased from 92.06 ± 1.17 mg GA/100g olive to 46.56 ± 2.84 mg GA/100g olive. However when samples subjected to 5 and 10 minutes of sonication before microwave drying at 800 W, the phenolic contents were 56.14 ± 2.81 mg GA/100g olive and 49.63 ± 2.27 mg GA/ 100g olive, respectively. Deterioration of phenolic compounds was also lower in ultrasound pretreated olives dried at 450 W and 180 W microwave levels when compared to non pretreated olives dried at same power levels.

## 4 Conclusions

This study concluded that ultrasound application as a pretreatment for microwave drying of green olive slices is a feasible method which reduced the drying time and enhanced the quality of product. Effective diffusion coefficients of 10 min ultrasound pretreatments were higher than those 5 min ultrasound pretreated and non-ultrasound treated samples. Rehydration ratios were higher for with and without ultrasound-pretreated olive slices dried at 180W microwave power. Midilli et al. and Wang & Singh models well explained the drying characteristics of MW dried samples ( $R^2 > 0.9767$ ), on the other hand Diffusion, Henderson & Pabis and Midilli et al. models described US-MW combined drying process more successfully ( $R^2 > 0.9746$ ). Rehydration ratios were higher for with and without ultrasound-pretreated olive slices dried at 180W microwave power than samples dried at 450 and 800 W microwave power. US-MW drying obtained acceptable olive quality with high lightness, and phenolic compounds. It was determined that ultrasound was a promising pretreatment in microwave drying method for green olive slices.

## References

- Ahmad, T., Butt, M. Z., Muhammad, R., Inam-ur-raheem, M., Balthazar, C. F., Rocha, R. S., & Cruz, A. G. (2019). Impact of nonthermal processing on different milk enzymes. *Drying Technology*, 72, 481-495.
- Akpinar, E. K., Bicer, Y., & Yildiz, C. (2003). Thin layer drying of red pepper. *Journal of Food Engineering*, 59(1), 99-104. [http://dx.doi.org/10.1016/S0260-8774\(02\)00425-9](http://dx.doi.org/10.1016/S0260-8774(02)00425-9).
- Antal, T., Tarek, M., Tarek-Tilistyák, J., & Kerekes, B. (2017). Comparative effects of three different drying methods on drying kinetics and quality of Jerusalem Artichoke (*Helianthus tuberosus* L.). *Journal of Food Processing and Preservation*, 41(3), e12971. <http://dx.doi.org/10.1111/jfpp.12971>.
- Aregbesola, O. A., Ogunsina, B., Sofolahan, A. E., & Chime, N. N. (2015). Mathematical modeling of thin layer drying characteristics of dika (*Irvingia gabonensis*) nuts and kernels. *Nigerian Food Journal*, 33(1), 83-89. <http://dx.doi.org/10.1016/j.nifoj.2015.04.012>.
- Aydar, A., Öncü Öner, T., & Ücok, E. F. (2017a). *Effects of Hydroxytyrosol on Human Health*, 11, 147-157.
- Aydar, A. Y., Bağdatlıoğlu, N., & Köseoğlu, O. (2017b). Effect of ultrasound on olive oil extraction and optimization of ultrasound-assisted extraction of extra virgin olive oil by response surface methodology (RSM). *Grasas y Aceites*. 68(2), 189.

- Bozkir, H., Rayman Ergün, A., Tekgül, Y., & Baysal, T. (2018). Ultrasound as pretreatment for drying garlic slices in microwave and convective dryer. *Food Science and Biotechnology*, 28(2), 347-354. <http://dx.doi.org/10.1007/s10068-018-0483-1>. PMID:30956846.
- Fijalkowska, A., Nowacka, M., Wiktor, A., Witrowa-Rajchert, D., & Sledz, M. (2016). Ultrasound as a pretreatment method to improve drying kinetics and sensory properties of dried apple. *Journal of Food Process Engineering*, 39(3), 256-265.
- Guimarães, J. T., Silva, E. K., Alvarenga, V. O., Costa, A. L. R., Cunha, R. L., Sant'Ana, A. S., Freitas, M. Q., Meireles, M. A. A., & Cruz, A. G. (2018). Physicochemical changes and microbial inactivation after high-intensity ultrasound processing of prebiotic whey beverage applying different ultrasonic power levels. *Ultrasonics Sonochemistry*, 44, 251-260. <http://dx.doi.org/10.1016/j.ultsonch.2018.02.012>. PMID:29680610.
- Guimarães, J. T., Balthazar, C. F., Scudino, H., Pimentel, T. C., Esmerino, E. A., Ashokkumar, M., Freitas, M. Q., & Cruz, A. G. (2019a). High-intensity ultrasound: a novel technology for the development of probiotic and prebiotic dairy products. *Ultrasonics Sonochemistry*, 57, 12-21. <http://dx.doi.org/10.1016/j.ultsonch.2019.05.004>. PMID:31208607.
- Guimarães, J. T., Silva, E. K., Ranadheera, C. S., Moraes, J., Raices, R. S. L., Silva, M. C., Ferreira, M. S., Freitas, M. Q., Meireles, M. A. A., & Cruz, A. G. (2019b). Effect of high-intensity ultrasound on the nutritional profile and volatile compounds of a prebiotic soursoy whey beverage. *Ultrasonics Sonochemistry*, 55, 157-164. <http://dx.doi.org/10.1016/j.ultsonch.2019.02.025>. PMID:30853535.
- Horuz, E., Jaafar, H. J., & Maskan, M. (2017). Ultrasonication as pretreatment for drying of tomato slices in a hot air – microwave hybrid oven. *Drying Technology*, 35(7), 849-859. <http://dx.doi.org/10.1080/07373937.2016.1222538>.
- Huang, D., Men, K., Li, D., Wen, T., Gong, Z., Sundén, B., & Wu, Z. (2019). Application of ultrasound technology in the drying of food products. *Ultrasonics Sonochemistry*, 63, 104950. <http://dx.doi.org/10.1016/j.ultsonch.2019.104950>. PMID:31952007.
- İcier, F., Baysal, T., Taştan, Ö., & Özkan, G. (2015). Microwave drying of black olive slices : effects on total phenolic contents and colour. *Gıda/The Journal of Food*, 39(6), 323-330. <http://dx.doi.org/10.15237/gida.GD14030>.
- Izli, N., Taskin, O., & Izli, G. (2019). Drying of lime slices by microwave and microwave combined convective methods. *Italian Journal of Food Science*, 31(3), 487-500.
- Jiménez, A., Beltrán, G., & Uceda, M. (2007). High-power ultrasound in olive paste pretreatment. Effect on process yield and virgin olive oil characteristics. *Ultrasonics Sonochemistry*, 14(6), 725-731. <http://dx.doi.org/10.1016/j.ultsonch.2006.12.006>. PMID:17275391.
- Kailis, S. G. (2016). Olives. *Encyclopedia of Applied Plant Sciences*, 3, 236-245.
- Midilli, A., Kucuk, H., & Yapar, Z. (2002). A new model for single-layer drying. *Drying Technology*, 20(7), 1503-1513. <http://dx.doi.org/10.1081/DRT-120005864>.
- Planinić, M., Velić, D., Tomas, S., Bilić, M., & Bucić, A. (2005). Modelling of drying and rehydration of carrots using Peleg's model. *European Food Research and Technology*, 221(3-4), 446-451. <http://dx.doi.org/10.1007/s00217-005-1200-x>.
- Rawson, A., Tiwari, B. K., Tuohy, M. G., O'Donnell, C. P., & Brunton, N. (2011). Effect of ultrasound and blanching pretreatments on polyacetylene and carotenoid content of hot air and freeze dried carrot discs. *Ultrasonics Sonochemistry*, 18(5), 1172-1179. <http://dx.doi.org/10.1016/j.ultsonch.2011.03.009>. PMID:21486706.
- Rodrigues, S., & Fernandes, F. A. N. (2007). Use of ultrasound as pretreatment for dehydration of melons. *Drying Technology*, 25(10), 1791-1796. <http://dx.doi.org/10.1080/07373930701595409>.
- Rodríguez, R., Lombrana, J. I., & Lombrana, J. I. (2007). Moisture diffusivity analysis in a microwave drying process under different operating conditions moisture diffusivity analysis in a microwave drying process under different operating conditions. *Journal Drying Technology an International Journal*, 25(11), 1875-1883.
- Seidi Damyeh, M., Niakousari, M., & Saharkhiz, M. J. (2016). Ultrasound pretreatment impact on Prangos ferulacea Lindl. and Satureja macrosiphonia Bornm. essential oil extraction and comparing their physicochemical and biological properties. *Industrial Crops and Products*, 87, 105-115. <http://dx.doi.org/10.1016/j.indcrop.2016.04.025>.
- Simal, S., Femenia, A., Garau, M. C., & Rosselló, C. (2005). Use of exponential, Page's and diffusional models to simulate the drying kinetics of kiwi fruit. *Journal of Food Engineering*, 66(3), 323-328. <http://dx.doi.org/10.1016/j.jfoodeng.2004.03.025>.
- Sun, D.-W. (2014). *Emerging technologies for food processing* (2nd ed.). Dublin: Elsevier Inc.
- Sunil, C. K., Kamalapreetha, B., Sharathchandra, J., Aravind, K. S., & Rawson, A. (2017). Effect of ultrasound pre-treatment on microwave drying of okra. *Journal of Applied Horticulture*, 19(1), 58-62. <http://dx.doi.org/10.37855/jah.2017.v19i01.09>.
- Tang, X., Cronin, D. A., & Brunton, N. P. (2005). The effect of radio frequency heating on chemical, physical and sensory aspects of quality in turkey breast rolls. *Food Chemistry*, 93(1), 1-7. <http://dx.doi.org/10.1016/j.foodchem.2004.08.037>.
- Wang, J., Xiao, H. W., Ye, J. H., Wang, J., & Raghavan, V. (2019). Ultrasound Pretreatment to Enhance Drying Kinetics of Kiwifruit (Actinidia deliciosa) Slices: Pros and Cons. *Food and Bioprocess Technology*, 12(5), 865-876. <http://dx.doi.org/10.1007/s11947-019-02256-4>.
- Yağcıoğlu, A., Demir, V., & Günhan, T. (2014). Effective moisture diffusivity estimation from drying data. *Tarım Makinaları Bilimi Dergisi*, 3(4), 249-256.
- Yaldiz, O., Ertekin, C., & Uzun, H. I. (2001). Mathematical modeling of thin layer solar drying of sultana grapes. *Energy*, 26(5), 457-465. [http://dx.doi.org/10.1016/S0360-5442\(01\)00018-4](http://dx.doi.org/10.1016/S0360-5442(01)00018-4).
- Yildiz, G., & İzli, G. (2019). Influence of microwave and microwave-convective drying on the drying kinetics and quality characteristics of pomelo. *Journal of Food Processing and Preservation*, 43(6), 1-11. <http://dx.doi.org/10.1111/jfpp.13812>.
- Zhang, Z., Liu, Z., Liu, C., Li, D., Jiang, N., & Liu, C. (2016). Effects of ultrasound pretreatment on drying kinetics and quality parameters of button mushroom slices. *Drying Technology*, 15(34), 1791-1800. <http://dx.doi.org/10.1080/07373937.2015.1117486>.