



**\$1.50 PER COPY**  
**75¢ TO ASME MEMBERS**  
\$2.00 PER COPY  
**25¢ TO ASME MEMBERS**

The Society shall not be responsible for statements or opinions advanced in papers or in discussion at meetings of the Society or of its Divisions or Sections, or printed in its publications.

*Discussion is printed only if the paper is published in an ASME journal or Proceedings.*

Released for general publication upon presentation  
Copyright © 1969 by ASME

## Low-Noise Propulsion Systems for Subsonic Transports

**JAMES J. KRAMER**  
**BRUCE R. LEONARD**  
**CHARLES E. FEILER**

NASA-Lewis Research Center,  
Cleveland, Ohio

The authors present a brief review of the preliminary design studies that led to a definition of specifications for a low-noise output turbofan engine for use on long-range subsonic transport aircraft. Data on low-speed fans, with and without acoustic treatment in the fan ducting, indicate that overall noise output of four-engine long-range transport aircraft can be reduced 20 perceived noise decibels by appropriate fan design and the use of nacelle acoustic treatment.

Contributed by the Gas Turbine Division of The American Society of Mechanical Engineers for presentation at the ASME Winter Annual Meeting, November 16-20, 1969, Los Angeles, Calif. Manuscript received at ASME Headquarters August 1, 1969.

Copies will be available until September 1, 1970.

Downloaded from <http://asmedigitalcollection.asme.org/GT/proceedings-pdf/WA1969-GT/Papers/80050/V001T01A003/2569239/W001101a003-69-wa-gt-7.pdf> by guest on 20 August 2022

# Low-Noise Propulsion Systems for Subsonic Transports

JAMES J. KRAMER

BRUCE R. LEONARD

CHARLES E. FEILER

## INTRODUCTION

In 1967, NASA initiated a research program to find out how to reduce the noise output of subsonic transport aircraft. A major element in this effort is directed at building and testing an experimental engine called the "Quiet Engine." The amount of quieting desired was the maximum possible, but noise levels at least 15-20 PNdB (perceived noise decibels) lower than the levels generated by today's jet fleet were the objectives. In order to compare levels, it is necessary to use certain reference locations for observation of noise generated by over-flying aircraft. At the time these studies were begun, the popular reference locations were under the flight path three statute miles from brake release on takeoff and one statute mile from touchdown on approach (Fig. 1). The current four-engine aircraft (707 and DC-8) generate about 120 PNdB of noise at these locations when taking off in a fully-loaded condition and during landing. Thus, the study searched for an installed propulsion system that would generate no more than 100-105 PNdB when used on four-engine aircraft. It was planned that this decrease in noise would be obtained through changes in the engine design and through the use of acoustically treated inlet and exhaust ducts. Throughout the study, the use of power cutbacks to reduce the noise level during climb-out was not considered.

The prime noise sources considered were the fan and the exhaust jet. In the case of the fan, the noise is generated within the engine envelope. Thus, not only can the noise generated be reduced by appropriate design, but also the noise can be suppressed after it is generated and before it is radiated away from the engine by the use of absorptive liners in the ducting upstream and downstream of the fan.

In the case of the jet, the noise is generated as the high velocity exhaust flow mixes with the surrounding atmosphere. This mixing process occurs outside the engine envelope. Experiments on jet suppressors of reasonable size attached to the engine have shown only a limited effect on this mixing process and hence their noise reduction capability is limited. In order to achieve

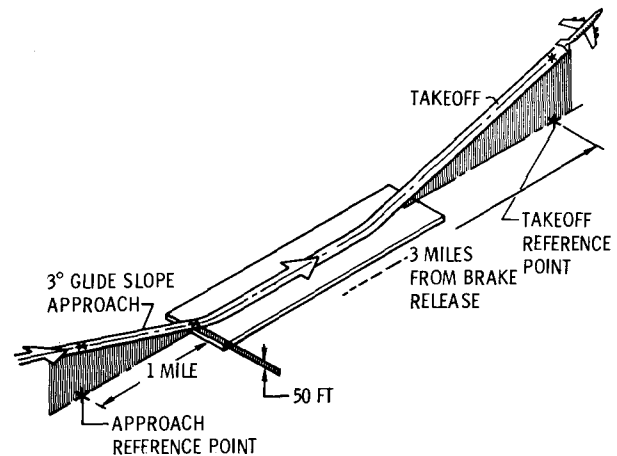


Fig.1 Reference locations for flyover noise observation

the noise levels desired for the Quiet Engine, the engine cycle was selected so as to result in sufficiently low jet velocity levels that the desired jet noise levels could be achieved without suppression.

In this paper, the Quiet Engine design studies will be reviewed. Some overall results of experiments to determine the acoustic behavior of fans and suppressors appropriate for use with a Quiet Engine will be presented.

## EXPERIMENTAL QUIET ENGINE

The low jet noise levels dictated the use of a moderately high-bypass-ratio turbofan engine. The choice of bypass ratio and other specific engine design and cycle parameters is discussed in references (1) and (2).<sup>1</sup> These characteristics, were developed during the preliminary design studies, references (3) and (4), for the Quiet Engine and are listed in Table 1. The thrust level of the engine was determined as that compatible with use on the 707/DC-8 type aircraft. Studies

<sup>1</sup> Numbers in parentheses designate References at end of paper.

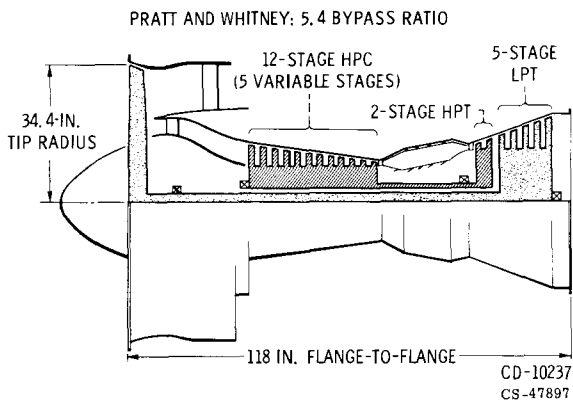


Fig. 2 Cross section of preliminary design version of quiet engine by Pratt and Whitney Division of United Aircraft Corp.

of the use of this engine on the DC-8 were conducted by McDonnell-Douglas and reported in reference (5). The study engines designed by Pratt & Whitney Division of United Aircraft Corporation and Allison Division of General Motors Corporation are shown in Figs. 2 and 3.

Both engines employ single-stage fans operating at tip speeds of the order of 1000 fps at takeoff power. These fans are driven by five-stage turbines. The compressor in the P&W engine is a single-spool 12-stage device with five vane rows variable. The Allison compressor has 16 stages on two spools with no variable vanes. Estimated engine weights are comparable in the neighborhood of 5000 lb.

The fan noise output of these engines is estimated to be such that a four-engine transport would produce about 105 PNdB during takeoff and landing for observers at the reference locations. These values are for engines installed in the aircraft without nacelle acoustic treatment. These engines are designed such that the noise levels are less than 95 PNdB at the reference locations. This jet noise floor will therefore dictate the level to which the fan noise can be reduced with added benefit for observers. Thus, the fan noise can be reduced an additional 10 PNdB by design of the fan or by the use of absorptive liners without encountering the jet noise floor.

Following the preliminary design studies, NASA requested proposals for the detailed design, fabrication, test, and delivery of experimental engines satisfying the design constraints of Table 1. A contract was let with the General Electric Co. in July, 1969. The General Electric engine, shown in Fig. 4, makes use of the core of the CF-6 engine. This engine is now being detail designed. The design will be reviewed at the end of 1969.

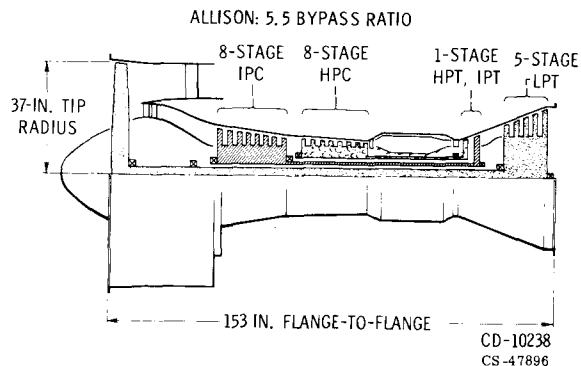


Fig. 3 Cross section of preliminary design version of quiet engine by Allison Division of General Motors

If the option to proceed into the engine fabrication and test phase is exercised, component testing will begin in 1970 leading to engine testing in 1971. A test engine will be delivered to NASA in mid-1972. At that time, the engine will be mated with an acoustically designed nacelle to result in a propulsion system incorporating the best available noise control technology.

#### FAN NOISE RESEARCH

In order to make the engine indeed quiet, it is necessary to demonstrate that the predicted fan noise levels can be achieved or made even lower. Thus, acoustic research on fans appropriate for use on a Quiet Engine is an important part of the total Quiet Engine program.

Both single-stage and two-stage fans are being examined in the fan noise research program. The single-stage fans are more attractive from the standpoint of minimum engine weight and size. However, it is feasible to use two-stage fans in engines designed for this application as discussed in references (3) and (4). Therefore, both types of fans are being investigated for possible acoustic advantages. The single-stage fans are being tested with both untreated and acoustically treated inlet and exhaust ducts.

#### Two-Stage Fans

In order to determine the acoustic performance of a two-stage fan of the size and pressure ratio required for use in an engine of the general character considered in references (3) and (4), a General Electric TF-39 engine was modified and its acoustic performance determined. Details of this fan are presented in reference (6). In brief, the fan tested as part of the engine was a well-developed two-stage machine designed to produce an overall pressure ratio of approximately 1.5 at a

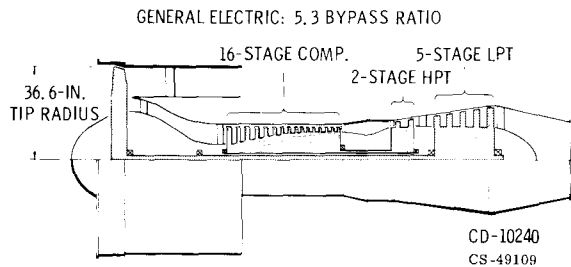


Fig. 4 Cross section of preliminary design version of quiet engine by General Electric Co.

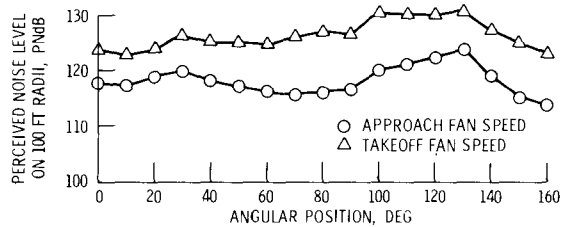


Fig. 5 Perceived noise level as function of angular position (100-ft radius) of modified TF-39 engine with two-stage low-tip-speed fan

tip speed of 1000 fps. The blade loading on both stages was moderate, well within current state-of-the-art design limits. Blade rows were spaced at least one chord length apart for noise considerations. The noise results are reported in detail in reference (6). Perceived noise levels as a function of angular position about the engine are shown in Fig. 5 for two rotative speed conditions corresponding to takeoff and approach power settings. Overall equivalent four-engine aircraft flyover noise levels at the reference locations were calculated from these data as 112 PNdB during takeoff and 116 PNdB during approach. These levels are significantly higher than the desired levels for the quiet Engine.

#### Single-Stage Fans

In order to determine the acoustic performance of single-stage fans, a fan acoustic test facility was designed, built and is now in operation at the Lewis Research Center. The purpose of this facility is to obtain basic fan noise information and to establish the fan configuration for a Quiet Engine.

The facility is located adjacent to the main drive motor building of the Lewis 10x10 Supersonic Wind Tunnel. A drive shaft is coupled to the drive motors, penetrates the building wall, goes through a 4.25 - 1 speed increaser, and extends 47 ft beyond the building to the research fan rig. The drive shaft and research rig are supported on a concrete viaduct which is 3 ft wide and the center

Table 1 Quiet Engine Design Characteristics

Engine	
Bypass ratio . . . . .	5 to 6
Cruise thrust, lb . . . . .	4900
Takeoff thrust, lb . . . . .	22 000
Fan	
Number of stages . . . . .	1
Inlet guide vanes . . . . .	none
Spacing between rotor and stators . . . . .	2 rotor chords
Tip speed, takeoff; ft/sec . . . . .	1000
Tip speed, cruise; ft/sec . . . . .	1100
Pressure ratio, cruise . . . . .	1.5 to 1.6
Compressor	
Rotors . . . . .	1 or 2
Maximum pressure ratio per rotor . . . . .	12.5
Turbine	
Inlet temperature, takeoff; °F . . . . .	2000
Inlet temperature, cruise; °F . . . . .	1775

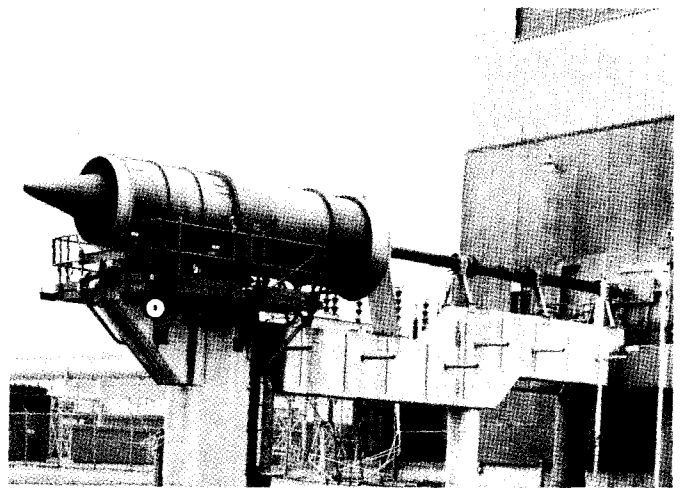


Fig. 6 Large-scale fan acoustic test facility

line of the rig is 18 ft above grade level to reduce ground effect (Fig. 6).

An array of 16 microphones is used to gather acoustic data. They are 18 ft above grade, the same elevation as the rig centerline. Microphones are placed at 10 deg intervals, with the first microphone in front of the fan inlet and on a line which forms a 10 deg angle with the shaft centerline (Fig. 7). It was desired that all microphones be on 100 ft radii with the terminus at the center of the fan rig, as are microphones 7 through 17. However, microphones 1 through 6 are at 10 deg intervals on a straight line perpendicular to the drive shaft and 31.5 ft in front of the fan. This arrangement was necessary because of the location of the drive motor building relative to the microphones. The readings from these microphones are

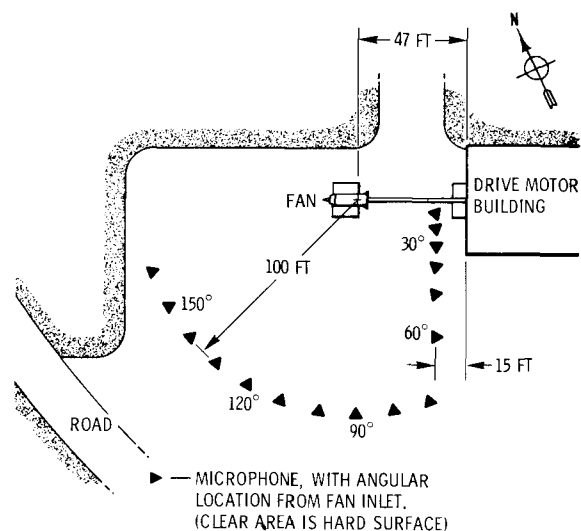


Fig. 7 Microphone locations for large-scale fan acoustic test facility

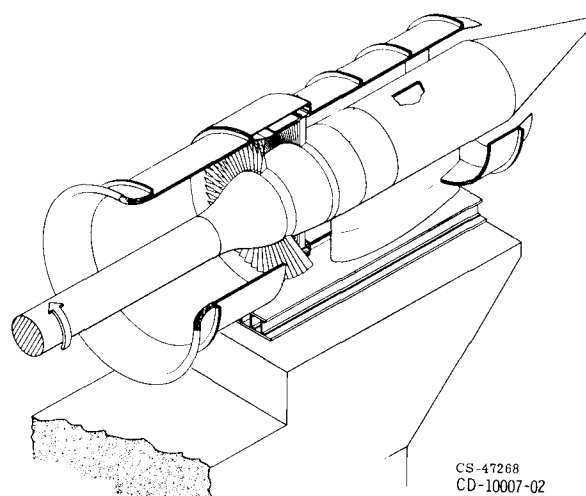


Fig. 9 Cross-sectional sketch of large-scale fan acoustic test facility

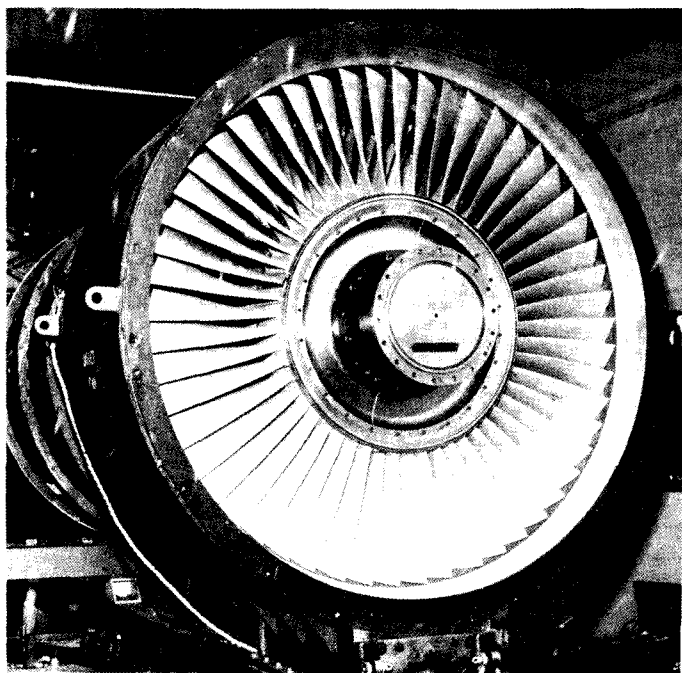


Fig. 8 72-in-dia single-stage fan rotor

corrected to 100-ft radii. The drive motor building wall has been treated with 6 in. of open-cell polyurethane foam to reduce the reflected noise to acceptable levels. The treatment can be seen on the lower half of the wall in Fig. 6. Signals from the microphones are simultaneously amplified and recorded on magnetic tape from which are obtained total sound power levels, one-third octave and narrow-band spectral data.

The first fan model (Fig. 8) to be tested has

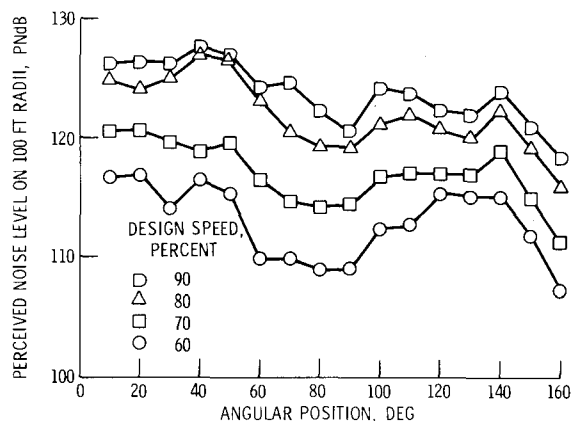


Fig. 10 Perceived noise level as function of angular position (100-ft radius) about a single-stage fan

a single-stage rotor, 6 ft in dia, designed to absorb 23,000 hp at a cruise design corrected speed of 3533 rpm. At its cruise design point, the fan should produce a pressure ratio of 1.54 with air flow of 873 lb/sec. There are 53 rotor blades made from T651 aluminum, which are 18 in. long (hub-to-tip radius ratio of 0.5) with a mean chord of 5.5 in.

The rig was designed, for acoustic reasons, with no inlet guide vanes and with approximately four rotor chord lengths spacing between the rotor blades and exit stator vanes (Fig. 9). There are no part-span dampers on the rotor blades. The rotor tip speed at the cruise design point was selected to be 1110 fps. This value was a compromise between considerations of good noise performance (lower speed) and good aerodynamic performance (higher speed). This low tip speed requires a high blade loading in order to maintain the desired

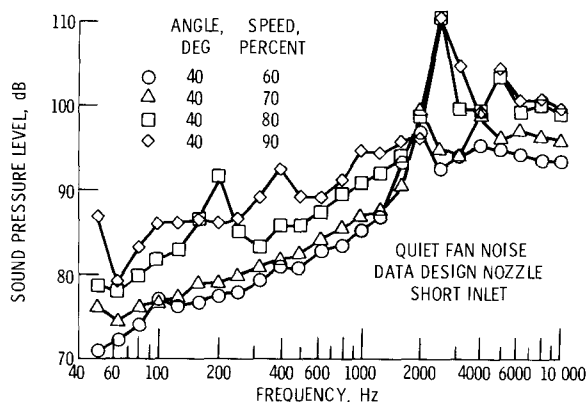


Fig. 11 Sound pressure level as function of frequency (one-third octave bands) for single-stage fan, 100-ft radius, 40-deg location (front quadrant)

pressure ratio. The pressure ratio was selected to be a constant 1.54:1 along the blade span and the diffusion factor increases from 0.46 at the hub to a maximum of 0.54 at three-quarter span and then decreases to 0.44 at the tip. The blade camber line turns 19.9 deg past axial at the hub. The mean aspect ratio of the rotor blades is 3.1. The rotor solidity varies from 2.49 at the hub to 1.34 at the tip.

The number of stator vanes is 112, slightly greater than twice the number of rotor blades. The material is 17-4 stainless steel and the length of the vanes is 13.9 in. with a chord of 2.67 in. The mean aspect ratio of the stator vanes is 5.2. The stator solidity varies from 2.39 at the root to 1.40 at the tip.

Base line data for the hard or untreated nacelle were obtained during the first test series. The fan was operated with both a long (101 in.) and short (60 in.) inlet cylindrical section and with exhaust nozzles with flow areas equal to 1895, 2150, and 2435 sq in. The 1895-sq-in. area nozzle was the standard calculated for the design point weight flow. Results presented in this paper are for short inlet with the 1895-sq-in. flow area nozzle.

The variation in perceived noise level as a function of angular position about the fan is shown in Fig. 10. The data are shown for the fan operating at various speeds from 60-90 percent of design speed. These data were corrected to a 100-ft radius and standard day conditions. The maximum levels occur at the 40-deg position in the front quadrant and at the 140 deg position in the rear quadrant.

In Figs. 11 and 12, the frequency spectra observed at these angular positions are displayed. Sound power levels as a function of one-third octave band center frequency are shown for 60, 70,


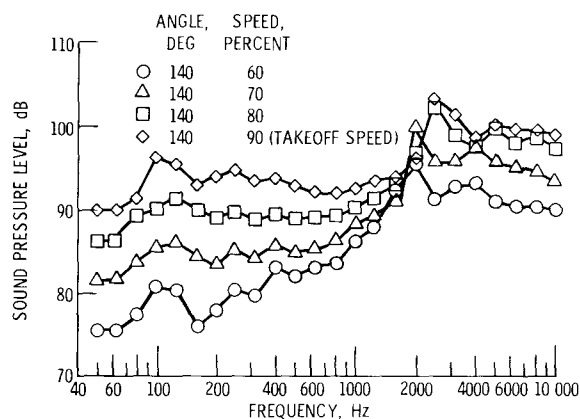


Fig. 12 Sound pressure level as function of frequency (one-third octave bands) for single-stage fan, 100-ft radius, 140-deg location (rear quadrant)

80, and 90 percent speeds. These data are for the same test configurations as the data of Fig. 10. For the 60 and 70 percent speed conditions, the blade passing frequency falls in the one-third octave band with a 2000 Hz center frequency. For the 80 and 90 percent speed conditions, the blade passing frequency moves to the next higher one-third octave band centered at 2500 Hz. The peak corresponding to the first harmonic of the blade passing frequency is clearly discernible as the relatively high reading one octave above the blade passing frequency. The lower frequency readings are consistently higher for the 140 deg position than for the 40 deg position. The low frequency levels are a consequence of the fan exhaust jet mixing with the atmosphere. Above 1000 Hz, the levels are determined by the fan generated noise. The levels above 1000 Hz observed in the front quadrant (40 deg) are higher than those in the rear quadrant (140 deg). This result was entirely unexpected. Most observers report higher readings in the rear quadrant. The difference in levels as reported by others is caused primarily by the convective effect on the sound of the overall air flow. In the LeRc fan test facility, the flow into the inlet bell-mouth is distorted by the presence of the concrete support structure and the shaft and its bearing pedestals. Various tests are in process to improve the inlet flow conditions in order to check the validity of the hypothesis that this distorted inlet flow is the cause of the higher than expected noise levels in the front quadrant.

If the takeoff fan speed (90 percent of design speed) data are used to calculate a four-engine aircraft flyover noise level at the expected altitude over the 3-mi point (1000 ft), a value of 105 PNdB is obtained. The corresponding value

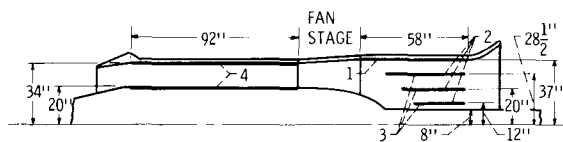

	OPEN AREA RATIO, PERCENT	PLATE THICKNESS, IN.	HOLE DIA., IN.	BACKING DEPTH, IN.	HONEYCOMB
1	2.5	0.020	0.032	0.88	3/8 IN. HEX
2	2.5		.032	.20	
3	2.5		.032	.68	
4	8.0		.050	.88	

Fig.13 Cross-sectional sketch of acoustically treated inlet and exhaust ducts for large-scale fan

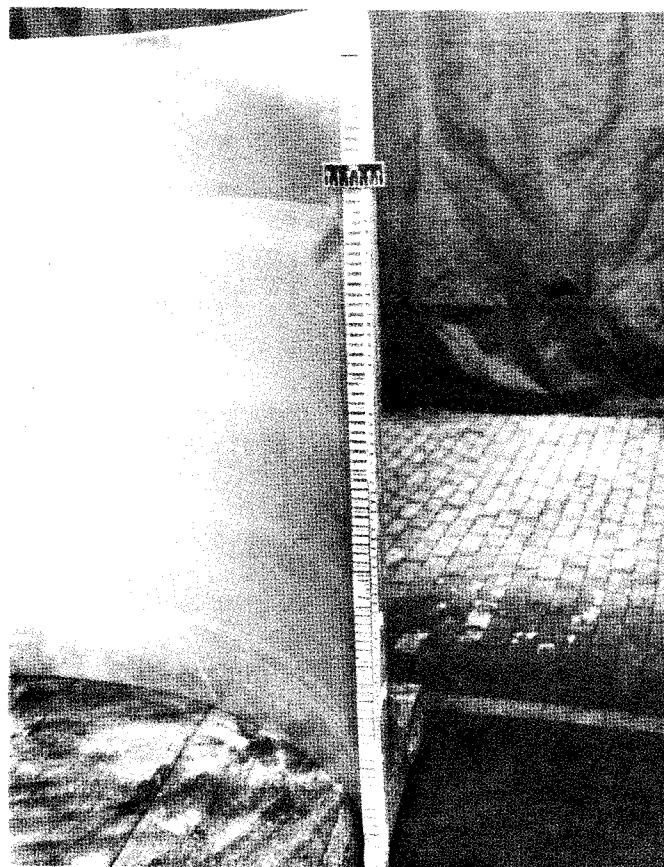


Fig.14 Acoustic treatment on both sides of inlet splitter ring

for approach conditions (60 percent of design speed, 370-ft altitude) is 106 PNdB.

#### Fan Noise Suppressors

As discussed previously, fan noise output can be reduced by proper fan design and by the use of absorptive liners in the inlet and exhaust ducting. The fan noise test facility previously described will be used to test a series of suppressors suitable for use in the fan inlet and exhaust



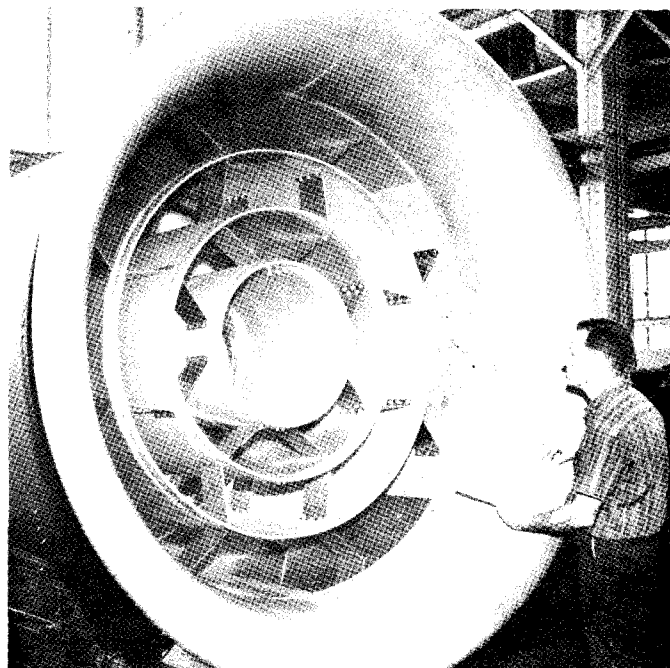


Fig.15 Inlet duct with acoustic treatment


ducting of high bypass ratio engines such as the Quiet Engine. The first such model in this series has been designed, built and tested. The inlet and exhaust duct suppressors were designed according to the theory described in reference (7). This theory predicts the effects of wall impedance and duct passage height and length on sound attenuation. Input information needed for the design calculation are the sound pressure level and frequency spectrum produced by the fan. The suppressors were designed before the acoustic test results on the single-stage fan model were available. Therefore, these data were estimated for the fan using the correlations of reference (8). The wall impedance required for a desired amount of attenuation with a specified duct passage height and length and noise source characteristics were determined by the method of reference (7). After establishing the impedance characteristics desired for the wall, it is necessary to translate these characteristics into a material-cavity arrangement that will provide them. The perforated plate-backing cavity combination used can be described as an array of Helmholtz resonators. The backing cavity is partitioned by an aluminum honeycomb into 3/8-in. hexagonal cells. There are correlations available in the literature that enable the impedance of such an array to be calculated. The important parameters describing the impedance are the hole diameter, plate thickness, open area ratio and backing cavity depth. The overall suppressor geometry is shown in Fig.13 along with the values

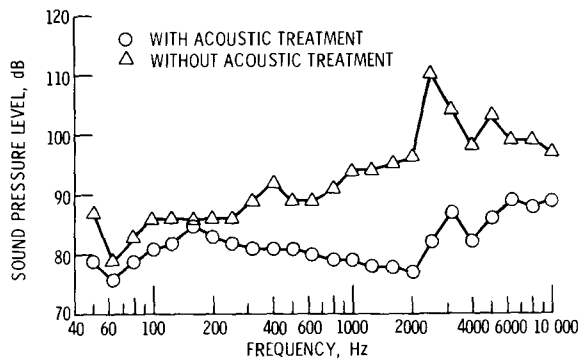


(a) Front quadrant (40 deg), takeoff fan speed

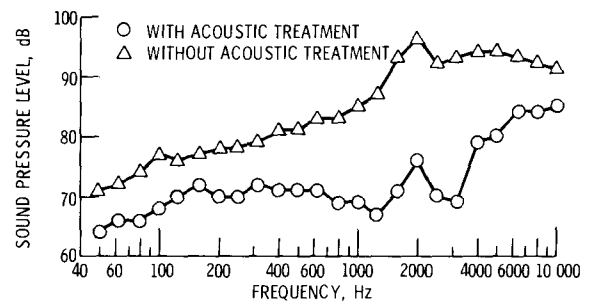

(c) Front quadrant (40 deg), approach fan speed

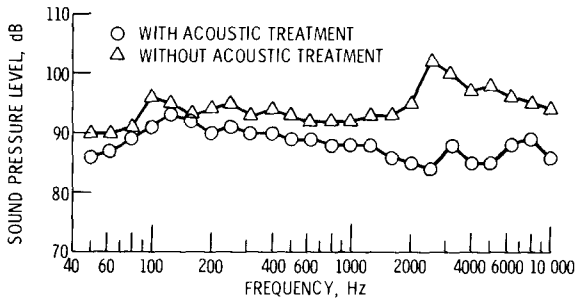

(b) Rear quadrant (140 deg), takeoff fan speed

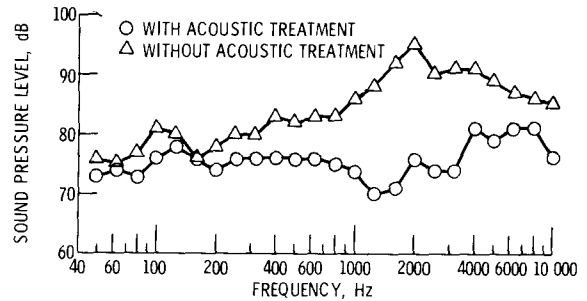

(d) Rear quadrant (140 deg), approach fan speed

Fig.16 Sound pressure level as function of frequency (one-third octave bands) for single-stage fan with/without acoustic treatment, 100-ft radius

of the design parameters for each treated surface. As shown in the figure, opposing passage walls are treated differently. The intent of this design was to obtain attenuation over a broader frequency range than would be possible with the same treatment on each wall. A cross-sectional view of one of the splitter rings having this dual treatment is shown in the photograph of Fig.14. The assembled inlet suppressor is shown in Fig.15.

Due to the shape of the fan drive shaft housing, the length of the splitter rings decreases as the radius decreases. The passage heights and lengths were chosen such that the passages should provide about equal attenuation. The passage height and, therefore, the number of rings were selected such that the ratio of passage height to wavelength of the peak frequency was approximately two. The total treated surface area in the inlet is 254 sq ft. The overall length-to-diameter ratio of the inlet duct is approximately 0.8. The inlet rings were cylindrical surfaces. No attempt was made to optimize the shape of the rings for aerodynamic purposes except at the leading and trailing edges.

Both the outer and inner walls of the exhaust duct were treated. The considerations entering into the design of the exit duct were the same

as those in the inlet duct. This configuration of the exhaust duct had 216 sq ft of treatment.

In Fig.16, results indicating the performance of the acoustic treatment are presented. Maximum sound pressure levels without acoustic treatment were observed at the 40 and 140 deg angular positions. Frequency spectra of the noise at these locations are shown with and without the acoustic treatment for two fan speeds, 90 and 60 percent of design speed. These percentage speeds correspond to the fan speeds during takeoff and approach conditions.

For the takeoff fan speed conditions (90 percent of design speed), substantial reductions occur at frequencies above 300 Hz and continue through the audible range of 10 kHz. At the 40 deg location where the jet mixing noise is not significant, significant attenuation is observed below 100 Hz. The overall perceived noise level is reduced from 126 to 110 PNdB at the 40 deg location on a 100-ft radius and from 122 to 113 PNdB at the 140 deg location. The corresponding maximum levels of fan noise for a four-engine airplane takeoff flyover at the 3-mi point are 105 PNdB untreated and 91 PNdB with acoustic treatment.

With the fan operating at a speed typical of approach conditions (60 percent of design speed),



similar trends are observed. The perceived noise levels are reduced 14 PNdB at the 40 deg location and 11 PNdB at the 140 deg location. For a simulated four-engine aircraft on landing approach over the 1-mi point, the fan noise level will be 91 PNdB based on these data.

#### CONCLUDING REMARKS

Preliminary engine design studies have been completed for a low noise output turbofan engine. Experimental engines are now in the process of detailed design. Experimental results on single-stage fans of the character required for a Quiet Engine indicate acoustic performance close to that predicted in the preliminary design studies. In addition, noise-suppressing liners for fan inlet and exhaust ducts have been tested which result in at least 10 PNdB decrements in fan noise along a sideline. Based on the test results to date, it is expected that these engines will have acoustic performance such that four-engine aircraft will generate less than 100 PNdB for ground observers at the 3-mi point during takeoff and at the 1-mi point during landing.

#### REFERENCES

1 McBride, J. F., "Quiet Engine Program

Preliminary Design and Aircraft Integration," Progress of NASA Research Relating to Noise Alleviation of Large Subsonic Jet Aircraft, NASA SP-189, 1968, pp. 263-272.

2 Kramer, J. J., "Quiet Engine Program Detailed Engine Designs," Progress of NASA Research Relating to Noise Alleviation of Large Subsonic Jet Aircraft, NASA SP-189, 1968, pp. 273-285.

3 Lewis, J. H., III, "Quiet Engine Definition Program," Pratt and Whitney Aircraft Report PWA-3516, Vols. 1-5 (NASA CR-72457, Vols. 1-5), Oct. 4, 1968.

4 Anon., "Quiet Engine Definition Program," General Motors Corp. Report FDR-5996 (NASA CR-72458), Sept. 1968.

5 Pendlay, R. E., "The Integration of Quiet Engines with Subsonic Transport Aircraft," NASA CR-72548, Apr. 1969.

6 Motsinger, R. E., et al., "Low Tip Speed Fan Noise Demonstration Program," General Electric Co. Report R68AEG482 (NASA CR-72456), 1968.

7 Rice, E. J., "Attenuation of Sound in Soft Walled Circular Ducts," presented at the Symposium on Aerodynamic Noise, Toronto, Canada, May 20-21, 1968.

8 Smith, J. T., and House, M. E., "Internally Generated Noise from Gas Turbine Engines, Measurements and Predictions," ASME Paper No. 66-GT/N-43, 1966.