

Mesoscopic modeling of a two-phase flow in the presence of boundaries: the Contact Angle

R. Benzi¹, L. Biferale¹, M. Sbragaglia^{1,2}, S. Succi³ and F. Toschi^{3,4}

¹ Dipartimento di Fisica, Università “Tor Vergata”, and INFN, Via della Ricerca Scientifica 1, I-00133 Roma, Italy.

² Department of Applied Physics, University of Twente, P.O. Box 217, 7500 AE Enschede, The Netherlands.

³IAC-CNR, Viale del Policlinico 137, I-00161 Roma, Italy.

⁴INFN, Sezione di Ferrara, via G. Saragat 1, I-44100 Ferrara, Italy.

January 10, 2022

Abstract

We present a mesoscopic model, based on the Boltzmann Equation, for the interaction between a solid wall and a non-ideal fluid. We present an analytic derivation of the contact angle in terms of the surface tension between the liquid-gas, the liquid-solid and the gas-solid phases. We study the dependency of the contact angle on the two free parameters of the model, which determine the interaction between the fluid and the boundaries, i.e. the equivalent of the wall density and of the wall-fluid potential in Molecular Dynamics studies.

We compare the analytical results obtained in the hydrodynamical limit for the density profile and for the surface tension expression with the numerical simulations. We compare also our two-phase approach with some exact results obtained by Lauga & Stone (2003) and Philip (1972a,b) for a pure hydrodynamical incompressible fluid based on Navier-Stokes equations with boundary conditions made up of alternating slip and no-slip strips. Finally, we show how to overcome some theoretical limitations connected with the discretized Boltzmann scheme proposed by Shan & Chen (1994) and we discuss the equivalence between the surface tension defined in terms of the mechanical equilibrium and in terms of the Maxwell construction.

1 Introduction

The physics of molecular interactions at fluid-solid interfaces is a very active research area with a significant impact on many emerging applications in material science, chemistry, micro/nanoengineering, biology and medicine, see Whitesides & Stroock (2001); Gad-el’Hak (1999); Ho & Tai (1998). Many problems require the spreading of a liquid on a solid that may either be a simple flat and clean surface or present some degree of roughness contaminated by compounds with different chemical-

effects, fluid-solid interactions become particularly important for micro- and nano-devices, whose physical behavior is largely affected by high surface/volume ratios (Tabeling (2003); Karniadakis & Beskok (2002)) whose direct consequence is the enhancement of capillary phenomena with respect to bulk properties (De Gennes (2003); Rowlinson & Widom (1982)). On the theoretical side, very little is known because of the difficulties to match the classical infinite-volume thermodynamics description with surface effects. From the experimental side the study of the surface properties for the flow-solid interactions is much more difficult than the solid-vacuum case (Bico *et al.* (1999); Craig *et al.* (2001); Ou *et al.* (2004); Maurer *et al.* (2004); Onda *et al.* (1996); Pit *et al.* (2000); Vinogradova & Yabukov (2003); Zhu & Granick (2001, 2002); Cheng & Giordano (2002); Choi *et al.* (2003)).

In most cases, to reach quantitative results on specific problems, one is forced to rely on numerical simulations, especially in presence of complex boundary conditions. To date, two major approaches dominate this field from the numerical side. The first one is based on a pure hydrodynamical description, with the interaction between the flow and the solid fully renormalized in terms of *ad hoc* boundary conditions for the hydrodynamical fields (Cottin-Bizonne *et al.* (2004); Philip (1972a,b); Priezjev *et al.* (2005); Lauga & Stone (2003)). The main drawback is represented by the difficulty to describe a variety of different solid properties, with complex roughness landscape and chemical-physical attributes. The main advantage is that one can directly focus on spatial and frequency variations up to the typical hydrodynamical scales.

The second approach attacks the problem from an atomistic description, by integrating the Newton equations for a set of molecules interacting via a Lennard-Jones potential. This is the basic idea behind Molecular Dynamics (MD), which requires an additional *ad hoc* tuning of the free parameters entering the potential between liquid-liquid molecules and between liquid-solid molecules (Bocquet & Barrat (1993); Cieplak *et al.* (2001); Priezjev *et al.* (2005); Thompson & Robbins (1989, 1990); Thompson & Troian (1997)). These parameters are fine tuned by comparison with the experiments and are mainly of two types: the overall strength of the interactions and the typical interacting distance (fixed by the relative weight between the attractive and repulsive terms). The main drawback is here represented by the congenital scale separation between this method and continuum phenomena (see Brenner and Ganesan (2000)) and consequently the inability to describe spatial fluctuations on scales which are much larger than the inter-molecular interactions and temporal fluctuations larger than a few milliseconds. The advantage is given by its apparent "ab-initio" nature, although to be of any practical use, the method needs to be supplemented with experimental data (Koplik & Banavar (1991); Rapaport (1995)).

In this paper we follow a third route, focusing on a mesoscopic modeling of the solid-liquid interaction based on Kinetic Theory of dense fluids (Cercignani (1991); Chapman and Cowling (1970)).

The method, known as Lattice Boltzmann equation (LBE), directly accesses spatial and temporal fluctuations at the hydrodynamical level with the extra bonus of a large flexibility in the description of the chemical and physical properties of the boundary conditions (see McNamara & Zanetti (1998); Higuera & Jimenez

Benzi *et al.* (1992)). With respect to the MD approach, one pays the price to move the matching with the experimental data to the level of bulk interaction between Boltzmann distribution function (the equivalent of liquid-liquid MD potential) and to the boundary conditions imposed on the Boltzmann equation (the equivalent of the solid-liquid potential in the MD). Ideally one would supply the infinite BBGKY hierarchy (Mohling (1982); Kirkwood (1950)) typical of any kinetic description, with atomistic information, thereby closing the problem without any approximation. In most cases, a more practical approach is taken: in order to derive useful kinetic description, some educated guess on the many-body BBGKY hierarchy are proposed and tested a-posteriori.

In this paper, we shall focus on surface effects in presence of phase coexistence between a liquid and its saturated vapor. In particular, we aim at investigating how to develop an effective mesoscopic description of the surface tension between the liquid-gas, γ_{lg} , the liquid-solid, γ_{ls} the gas-solid γ_{gs} phases and, more practically of the contact angle θ (Rowlinson & Widom (1982); De Gennes (2003)) that can be defined from the above surface tensions:

$$\cos(\theta) = \frac{\gamma_{gs} - \gamma_{ls}}{\gamma_{lg}}. \quad (1)$$

We will perform an analytical and numerical study within the *mean field* method proposed by Shan & Chen (1993, 1994), based on a Lattice Boltzmann equation with an effective *two-body potential* described only in terms of local, single molecule, properties of the fluid (see next section for a detailed description of the method). The model provides, to our opinion, the simplest coherent description of the many-body interaction typical of dense fluids within the Lattice Boltzmann Equation framework for non-ideal fluids (Shan & Chen (1993, 1994); Swift *et al.* (1995); He & Doolen (2002); Kwok (2004)).

In this paper, we review first the method as defined by Shan & Chen (1993, 1994) for bulk flows (no boundaries) and we extend it to include the interaction with a given solid surface by the introduction of suitable boundary conditions. This defines a theoretical scheme able to incorporate non-ideal effects (phase transitions) triggered by the presence of the solid boundary and complex fluid properties connected to the actual density profiles (contact lines, contact angle, capillary phenomena, surface tensions, etc...). The main result of the first part is an *exact analytical expression* of the contact angle in terms of the surface tensions derived from the hydrodynamical limit of the Boltzmann equations. In the second part, we perform a systematic study of the contact angle dependency on the boundary properties and we compare our two-phase approach with some exact results obtained for a pure hydrodynamical single-phase fluid based on Navier-Stokes equations with suitable boundary conditions (Lauga & Stone (2003); Philip (1972a,b)). We also show how to overcome some theoretical limitations connected with the discretized Boltzmann scheme here utilized, proposed in Shan & Chen (1994), and we discuss the equivalence between the surface tension defined in terms of the mechanical equilibrium or in terms of the thermodynamical “Maxwell construction” (Stanley (1971); Huang (1987)). Finally, we discuss the possible application of this method to describe non-stationary flows in micro-channel, the apparent slip phenomenon and the

2 The Shan-Chen (SC) approach to non-ideal fluids: the inclusion of boundaries.

As soon as one goes beyond the “ideal gas” description, allowing for phase transition and for density and temperature variations inside the flow, the correct way to approach the kinetic problem is to start from the BBGKY formalism (Kirkwood (1950)). Phase transitions are triggered by critical dependency of the thermodynamic variables on small variations in the local density, temperature and pressure fields. In order to describe such phenomena, one needs to go beyond the description based on the probability density to observe a single molecule with a given velocity, \mathbf{v}_1 , at position \mathbf{r}_1 and at time t , $f_1(\mathbf{r}_1, \mathbf{v}_1, t)$. In particular, one needs to consider at least the two-particle distribution, $f_{1,2}(\mathbf{r}_1, \mathbf{v}_1, \mathbf{r}_2, \mathbf{v}_2, t)$, which explicitly enters in the Boltzmann equation via the collisional term, Ω :

$$\partial_t f_1 + \mathbf{v}_1 \cdot \partial_{\mathbf{r}_1} f_1 + \mathbf{K}_1 \cdot \partial_{\mathbf{v}_1} f_1 = \Omega \quad (2)$$

where \mathbf{K}_1 is an external body force and

$$\Omega = - \int d\mathbf{v}_2 d\mathbf{r}_2 \partial_{\mathbf{v}_1} f_{1,2} \partial_{\mathbf{r}_1} V(r_{12}) \quad (3)$$

with $V(r_{12}) = V(|\mathbf{r}_1 - \mathbf{r}_2|)$ being the inter-particle potential. The BBGKY hierarchy prescribes the evolution of $f_{1,2}$ in terms of the three particle densities, $f_{1,2,3}$, the evolution of $f_{1,2,3}$ in terms of the four-particles density and so on. The simplest closure which takes into account the two-particles interaction consists in adopting a “mean field” approach for the collisional terms. This approach starts by rewriting $f_{1,2}$ in the equivalent form:

$$f_{1,2}(\mathbf{r}_1, \mathbf{v}_1, \mathbf{r}_2, \mathbf{v}_2) = f_1(\mathbf{r}_1, \mathbf{v}_1) f_2(\mathbf{r}_2, \mathbf{v}_2) g(\mathbf{r}_1, \mathbf{r}_2, \mathbf{v}_1, \mathbf{v}_2)$$

where we have introduced the two particles correlation function, $g(\mathbf{r}_1, \mathbf{r}_2, \mathbf{v}_1, \mathbf{v}_2)$. To proceed further one needs to make some approximation on the two-body correlation function $g(\mathbf{r}_1, \mathbf{r}_2, \mathbf{v}_1, \mathbf{v}_2)$. The celebrated “molecular chaos” assumption of Boltzmann gives $g = 1$, i.e. absence of both velocity and spatial correlations (Cercignani (1991)). In the less restrictive case where only velocity correlations vanish, one has:

$$g(\mathbf{r}_1, \mathbf{r}_2, \mathbf{v}_1, \mathbf{v}_2) = g(\mathbf{r}_1, \mathbf{r}_2)$$

and the collisional term can be (see also Martys (1999)) rewritten as:

$$\Omega = -\partial_{\mathbf{v}_1} f_1 \int d\mathbf{r}_2 \rho(\mathbf{r}_2) g(\mathbf{r}_1, \mathbf{r}_2) \partial_{\mathbf{r}_1} V(r_{12}) \quad (4)$$

where we have used the definition of the local density as

$$\rho(\mathbf{r}, t) = \int d\mathbf{v} f(\mathbf{r}, \mathbf{v}, t). \quad (5)$$

The approximation (4) is at the core of many Lattice Boltzmann description of

$\Omega \propto \mathbf{K}_1 \cdot \partial_{\mathbf{v}_1} f_1$, and may be seen as a renormalization of the local pressure tensor via the introduction of non-ideal terms in the equation of state (Chen & Doolen (1998); He *et al.* (2002)).

More quantitatively, if we start from equation (2) and together with (5) we define the local momentum as

$$\rho \mathbf{u}(\mathbf{r}, t) = \int d\mathbf{v} f(\mathbf{r}, \mathbf{v}, t) \mathbf{v} \quad (6)$$

we obtain (see Martys (1999); Kirkwood (1950)) conservative equations for the two local fields:

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{u}) = 0 \quad (7)$$

$$\partial_t (\rho \mathbf{u}) + \nabla \cdot \left(\int d\mathbf{v} f \mathbf{v} \mathbf{v} \right) = \int d\mathbf{v} \Omega \mathbf{v} = -\nabla \cdot \overleftrightarrow{W} \quad (8)$$

where the tensor \overleftrightarrow{W} is directly related to the interaction potential $V(r_{12})$:

$$W_{i,j} = -\frac{1}{2} \int d\mathbf{r}_1 d\mathbf{v}_1 d\mathbf{v}_2 d\mathbf{r}_2 f_1 f_2 g \delta(\mathbf{r} - \mathbf{r}_1) V'(r_{12}) r_{12}^{-1} (r_{12})_i (r_{12})_j. \quad (9)$$

The previous equations are clearly locally conservative for density and globally conservative for momentum (Kirkwood (1950)).

In the realm of Boltzmann Equations, a popular way to simplify the collisional integral is to write it as a simple relaxation term (with characteristic time τ) towards a suitable local equilibrium. This is the celebrated BGK approximation given by Bhatnagar *et al.* (1954) and one may wonder which is the simplest BGK description consistent with equations (7,8). By consistent BGK description, we mean a single time relaxation collisional term of the form:

$$\Omega_{BGK} = -\frac{1}{\tau} (f - f^{(M)}) \quad (10)$$

where the equilibrium distribution $f^{(M)}$ is the local maxwellian in D dimensions:

$$f^{(M)} = \frac{\rho'}{(2\pi K T')^{D/2}} \exp \left\{ -\frac{(\mathbf{v} - \mathbf{u}')^2}{2K T'} \right\} \quad (11)$$

and the parameters $\rho'(\mathbf{r}, t)$, $\mathbf{u}'(\mathbf{r}, t)$, $T'(\mathbf{r}, t)$ can be chosen in such a way to be consistent with global balance equations. In particular straightforward Gaussian integration yields to $\rho'(\mathbf{r}, t) = \rho(\mathbf{r}, t)$ and

$$\mathbf{u}'(\mathbf{r}, t) = \mathbf{u}(\mathbf{r}, t) - \frac{1}{\tau \rho} \nabla \cdot \overleftrightarrow{W}(\mathbf{r}, t) \quad (12)$$

which means a space-time dependent shift of the mean-value of the local Maxwellian. The Shan-Chen model (Shan & Chen (1993, 1994)) is precisely equivalent to such an approach with the assumption

$$\nabla \cdot \overleftrightarrow{W}(\mathbf{r}, t) = -\mathcal{C} \int_{\Omega}^{s_{max}} d\mathbf{e} \int d\Omega \phi(\mathbf{r}, t) \phi(\mathbf{r} + \hat{\mathbf{e}} \mathbf{e}, t) \hat{\mathbf{e}} \quad (13)$$

where with $d\Omega_v$ we denote the integration over the angular dependency of the unit vector, $\hat{\mathbf{v}}$ and where $\psi(\mathbf{r}, t)$ is a mean field potential which depends on \mathbf{r} and t only through the local density, i.e. $\psi(\mathbf{r}, t) \equiv \psi(\rho(\mathbf{r}, t))$. In the above, $|s_{max}\hat{\mathbf{v}}|$ represents the range of the interactions and \mathcal{G}_b a coupling constant, something like an inverse temperature for the model.

In principle, the temperature $T'(\mathbf{r}, t)$ in (11) should also be changed on account of thermodynamics consistency and total energy conserving dynamics (potential plus kinetic). However, being interested in isothermal phenomena, we keep $KT' = c_s^2$, c_s^2 being the sound speed velocity (for a possible extension of the model to include also temperature fluctuations see Martys (1999)).

Upon discretization of the approximation described before, we derive immediately the (Lattice) Boltzmann Equations (Succi (2001); Wolf-Gladrow (2000)) as follows:

$$f_\alpha(\mathbf{x} + \mathbf{c}_i\Delta t, t + \Delta t) - f_\alpha(\mathbf{x}, t) = -\frac{\Delta t}{\tau} [f_\alpha(\mathbf{x}, t) - f_\alpha^{(eq)}(\rho(\mathbf{x}, t), \mathbf{u}'(\mathbf{x}, t))] \quad (14)$$

where \mathbf{x} runs on a two (or three) dimensional Lattice and $\Delta t = 1$ is the time stepping in the numerical scheme. The LHS of (14) is the molecular free streaming of a discrete set ($\mathbf{c}_\alpha, \alpha = 0, \dots, N$) of velocities whereas the right-hand side represents molecular collisions via a simple relaxation towards the local equilibrium $f_\alpha^{(eq)}$ (the local Maxwellian expanded to second order in the Mach number) in a time lapse of the order of τ . This relaxation time fixes the fluid kinematic viscosity as $\nu = c_s^2(\tau - 1/2)$ where $c_s = 1/\sqrt{3}$ in the present work (see Wolf-Gladrow (2000)). The fluid density and momentum are given by

$$\rho = \sum_\alpha f_\alpha \quad \mathbf{u} = \frac{1}{\rho} \sum_\alpha f_\alpha \mathbf{c}_\alpha$$

and can be shown to evolve according to the Navier-Stokes equations of fluid-dynamics, Wolf-Gladrow (2000):

$$\begin{cases} \rho[\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}] = -\nabla \cdot \overleftrightarrow{P}_0 + \mathbf{F} + \nabla \cdot (\nu \rho \nabla \mathbf{u}) \\ \partial_t \rho + \nabla \cdot (\rho \mathbf{u}) = 0 \end{cases} \quad (15)$$

being \overleftrightarrow{P}_0 the ideal pressure tensor given by the perfect-gas equation of state: $\overleftrightarrow{P}_0 = \overleftrightarrow{I} c_s^2 \rho$, where \overleftrightarrow{I} is the unit tensor. Non-ideal effects are modeled through the self-consistent body force term (13) that can be discretized as:

$$\mathbf{F}(\mathbf{x}, t) = -\mathcal{G}_b \psi(\mathbf{x}, t) \sum_\alpha w_\alpha \psi(\mathbf{x} + \mathbf{c}_\alpha \Delta t, t) \mathbf{c}_\alpha \quad (16)$$

where $\psi(\mathbf{x}, t)$ is the lattice version of the mean field potential previously used and w_α are normalization weights (see Appendix A for more technical details). Due to this body force at each time step we consistently re-define the velocity \mathbf{u}' in the equilibrium distribution $f^{(eq)}$ as:

which in turns implies a non-diagonal pressure tensor \overleftrightarrow{P} deduced from the condition:

$$-\nabla \overleftrightarrow{P} - \nabla \overleftrightarrow{P}_0 = \mathbf{F}. \quad (17)$$

By expanding in Taylor series the inter-particle potential one gets (see Appendix A) in the case $\Delta t = 1$:

$$P_{ij} = \left[c_s^2 \rho + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2 + \frac{1}{2} c_s^4 \mathcal{G}_b \psi \Delta \psi + \frac{\mathcal{G}_b c_s^4}{4} |\nabla \psi|^2 \right] \delta_{ij} - \frac{1}{2} c_s^4 \mathcal{G}_b \partial_i \psi \partial_j \psi. \quad (18)$$

Let us notice that there is always a certain degree of arbitrariness in deriving the full expression of the pressure tensor in the continuum limit Rowlinson & Widom (1982). The most reasonable way to do it is to impose that the constraint (17) is verified up to the second order in the Taylor expansion of both pressure and forcing expression. We stop at second order because Navier-Stokes equations are obtained from the LBE at the second order in the Chapman Enskog expansion. The above expression for the pressure tensor is different from the one proposed in equation (19) of Shan & Chen (1994). The reason is that in Shan & Chen (1994) the constraint (17) is verified only up to the first order in Taylor expansion. This difference is important for the thermodynamic consistency of isothermal flow as it will be described in section 2.4, see also He & Doolen (2002).

The first two terms in the diagonal part of (18) describe the bulk homogeneous phase transition by the non-ideal equation of state:

$$P_b(\rho) = c_s^2 \rho + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2(\rho). \quad (19)$$

with a typically used functional form:

$$\psi(\rho) = (1 - e^{-\rho/\rho_0}) \quad (20)$$

with ρ_0 a reference density.

Now, we will consider a general background that is independent of the functional forms of ψ , given for granted that, for a quantitative agreement with MD and experiments, one can choose different functional forms and/or different inter-particle interactions. We will be back on the importance of the functional form later on in section (2.4), where we investigate the Maxwell construction in the (P, V) diagram of the model. Let us only discuss for the moment the qualitative behavior imposed on the ρ , dependency of $\psi(\rho)$ by two physical constraints. First, for small densities ρ we need to recover the equation of state of an ideal gas, which requires that:

$$\psi(\rho) \propto \rho \quad \rho \rightarrow 0.$$

Second, for large local densities, the interacting potential must saturate:

$$\psi(\rho) \rightarrow \text{const.} \quad \rho \gg \rho_0$$

a requirement meant to mimic the hard-core properties of real molecules which prevent unphysical density accumulations. Any smooth functional form which satisfies the two previous requirements leads to a phase transition as soon as \mathcal{G}_b becomes smaller than a critical value \mathcal{G}_c (with \mathcal{G}_c being negative), where the fluid start to exhibit two coexisting phases with the same pressure. All the other terms in eq. (18), which depend explicitly on the density variations, describe the development of an interface profile with its own surface tension (as soon as the isotropy of the pressure

2.1 SC model without boundaries

For the sake of completeness, let us summarize again the steps needed to calculate the density profile in presence of a liquid-gas interface in an unbounded domain as shown for the first time by Shan & Chen (1994). This calculation will be used later on to implement the expression of the contact angle in presence of boundaries.

In order to calculate the density profile we need to use the general expression of the pressure tensor (18) and insert it in to the mechanical equilibrium condition:

$$\nabla \overleftrightarrow{P}(\mathbf{x}) = 0, \quad (21)$$

with the appropriate boundary conditions $\rho(-\infty) = \rho_g$ and $\rho(+\infty) = \rho_l$ for a planar interface between liquid and gas. Let us suppose that the interface develops along the y coordinate. Under this geometry, the pressure tensor becomes anisotropic with a mismatch between the transverse components, $P_{xx}(y) = P_{zz}(y)$ and the normal component $P_{yy}(y)$. The condition that the interface does not move, (21), implies that the normal component remains constant and equal to the value in the bulk, P_{bulk} , throughout the interface:

$$P_{yy}(y) \equiv P_{bulk} = c_s^2 \rho + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2 + \frac{1}{2} c_s^4 \mathcal{G}_b \psi \partial_{yy} \psi - \frac{\mathcal{G}_b c_s^4}{4} |\partial_y \psi|^2. \quad (22)$$

The density shape is now fully determined by solving (22) with the requirement that the liquid and gas phase share the same value of the bulk pressure:

$$P_{bulk} = c_s^2 \rho_g + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2(\rho_g) = c_s^2 \rho_l + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2(\rho_l). \quad (23)$$

By making the change of variables $(d\rho/dy)^2 = z$, one may rewrite the mechanical equilibrium as an ordinary differential equation for the inter-particle potential where only derivatives with respect to the density ρ appear:

$$P_{bulk} = c_s^2 \rho + \frac{\mathcal{G}_b}{2} c_s^2 \psi^2 + \frac{\mathcal{G}_b c_s^4}{2} \left[\frac{1}{2} \frac{\psi^2}{\psi'} \frac{d}{d\rho} \left(\left(\frac{d\rho}{dy} \right)^2 \left(\frac{d\psi}{d\rho} \right)^2 \frac{1}{\psi} \right) \right]. \quad (24)$$

The above differential equation can be integrate explicitly to give:

$$z(\rho) = \frac{4\psi}{\mathcal{G}_b c_s^4 (\psi')^2} \int_{\rho_g}^{\rho} \left(P_{bulk} - c_s^2 \rho - \frac{\mathcal{G}_b}{2} c_s^2 \psi^2 \right) \frac{\psi'}{\psi^2} d\rho \quad (25)$$

with $\psi' = \partial\psi/\partial\rho$. If the two extremes of the integral are chosen inside the bulk phases we get: $z(\rho) = 0$ for $\rho = \rho_l$ and $\rho = \rho_g$. It is easy to realize that in order to be compatible with the latter boundary conditions, we must require:

$$\int_{\rho_l}^{\rho_g} \left[P_{bulk} - c_s^2 \rho - \frac{c_s^2 \mathcal{G}_b}{2} \psi(\rho)^2 \right] \frac{\psi'}{\psi^2} d\rho = 0 \quad (26)$$

which fixes, together with (23), the two densities ρ_l and ρ_g as shown by Shan & Chen (1994).

The whole profile can be obtained by inverting (25) or by directly numerically solving (24) starting from the inside of one bulk phase and making a small initial spatial perturbation on the constant density profile. Let us notice that equations (22,25,26) are different from equations (21,24,25) of Shan & Chen (1994) because of the different requirements imposed here in the derivation of the pressure tensor as

2.2 Surface tension and Contact Angle

Following Rowlinson & Widom (1982), we define the Liquid-Gas surface tension, γ_{lg} , as the integral along the coordinate normal to the interface of the mismatch between normal and transverse components of the above tensor. More precisely, assuming that the only dependence is in the y coordinate, the local increment of the surface tension is:

$$P_{yy} - P_{xx} = \frac{d\gamma_{lg}}{dy} = -\frac{1}{2}c_s^4 \mathcal{G}_b |\partial_y \psi|^2. \quad (27)$$

Upon integration from $-\infty$ to $+\infty$, the surface tension is readily calculated:

$$\gamma_{lg} = -\frac{1}{2}c_s^4 \mathcal{G}_b \int_{-\infty}^{+\infty} |\partial_y \psi|^2 dy. \quad (28)$$

This implies the existence of transverse stresses that would result in pressure drop for spherical interfaces and in the most general Laplace law for a curved surface:

$$\Delta p = \gamma_{lg} \left(\frac{1}{R_1} + \frac{1}{R_2} \right) \quad (29)$$

being R_1 and R_2 the local principal radii of curvature of the surface, see Rowlinson & Widom (1982); De Gennes (2003); Shan & Chen (1994). Let us now discuss how to generalize the previous results to the case of a solid boundary. In our language, mechanical equilibrium between multi-phase systems (say liquid, gas and solid) can be formulated as a more general problem. We want to study the mechanical equilibrium by imposing that the density profile must match some given value at the boundary position:

$$\begin{cases} \nabla \cdot \vec{P}(\mathbf{x}) = 0 \\ \psi(\rho(\mathbf{x}_w)) = \psi(\rho_w) \end{cases} \quad (30)$$

where the solid wall is at position \mathbf{x}_w . Equation (30) is nothing but the mechanical equilibrium of a multiphase system in the presence of a boundary condition. The value of the inter-particle potential at the wall, $\psi(\rho_w)$, is a free parameter in the model, and it is not meant to be related with the “true” density of the solid phase. It will be used to tune different wall properties.

Focusing, for the sake of simplicity, on two-dimensional systems (see figure 12 in Appendix B) the mechanical equilibrium equation translates into

$$\partial_x P_{xx} + \partial_y P_{xy} = 0 \quad (31)$$

or equivalently ($\partial_x P_{xy} + \partial_y P_{yy} = 0$), whose meaning is that the flux over an arbitrary contour (Green’s theorem) of the vector (P_{xx}, P_{xy}) is zero. With reference to figure 12 in Appendix B we notice that for such a calculation we need to specify the pressure tensor along a solid-gas interface and liquid-solid interface. If we choose the rectangular contour shown in figure 12 and impose the flux of the above vector exactly to zero (details are given in the Appendix B) we obtain:

$$\cos(\theta) = \frac{\int_{sg} |\partial_y \psi|^2 dy - \int_{sl} |\partial_y \psi|^2 dy}{\int_{sg} |\partial_y \psi|^2 dy + \int_{sl} |\partial_y \psi|^2 dy} \quad (32)$$

where $\int_{sl} |\partial_y \psi|^2 dy$, $\int_{sg} |\partial_y \psi|^2 dy$, $\int_{lg} |\partial_y \psi|^2 dy$ indicate the positive integrals calculated along the solid-liquid, solid-gas and liquid-gas interfaces.

From the above relation (32), which fully determines the contact angle in our LBE scheme, one naturally extracts the definition of the surface tensions:

$$\gamma_{\alpha,\beta} = -\frac{1}{2} c_s^4 \mathcal{G}_b \int_{\alpha,\beta} |\partial_y \psi|^2 dy \quad (33)$$

where with α, β we mean any two among the liquid, gas and solid phases. Notice that, rigorously speaking, the surface tensions between liquid-solid and between gas-solid are defined only modulo an additive constant, being operationally defined in terms of the contact angle which depends only on their difference (De Gennes (2003)). The above definition is consistent with the requirement to have $\gamma_{ls} = 0$ when the wall has the same density of the liquid (perfect wetting). Correspondingly, one may also imagine a situation when the gas phase perfectly matches the wall properties, $\rho_g = \rho_w$, where we have $\gamma_{sg} = 0$ and consequently a complete dewetting.

2.3 Analytical and Numerical results

From the mechanical equilibrium condition (30), we may calculate the density variation along an interface between any two of the three phases, generalizing the calculation made by Shan & Chen (1994) for the gas-liquid interface only. To accomplish this, we must integrate the equation for the normal component of the pressure tensor (22) imposing the boundary conditions at the solid, $\rho(y = y_w) = \rho_w$, and $\rho(\infty) = \rho_\beta$ where with β we denote either the liquid or the gas phase (see also section 2.4 for more details). In figure 1 we show two such profiles. In our first case at the center of the channel there is only liquid and the gas phase cannot develop, i.e. the averaged density is larger than the liquid density at coexistence, while in the second case the averaged density is chosen such that a gas phase can develop between the liquid and the wall.

Once the density profile is known, it is easy to obtain the corresponding surface tension by plugging the density profile into the expression (33). For example, in figure 2, we show the surface tensions, $\gamma_{ls}, \gamma_{lg}, \gamma_{sg}$ at a given temperature (\mathcal{G}_b) and by changing ρ_w , i.e. by varying the wetting properties of the surface. Of course, only the first two will depend on ρ_w and, accordingly to our previous discussion, they must satisfy $\gamma_{ls} = 0$ for $\rho_w = \rho_l$ (perfect wetting) and $\gamma_{gs} = 0$ for $\rho_w = \rho_g$.

Given the surface tensions for a fixed temperature one may readily calculate the contact angle which describes the macroscopic properties of the surface as a function of the mesoscopic boundary condition imposed on $\psi(\mathbf{x}_w) = \psi(\rho_w)$. This is the first important methodological result of this paper, i.e. we provide a mesoscopic way to parametrize the hydrodynamical behavior of fluid in the proximity of a surface (with different contact angles) as a function of the tunable free parameter $\psi(\rho_w)$.

In figure 3 we show the analytical results obtained by inserting the density profile from (24) into (32-33). In the same figure we also show the numerical results obtained by running the LBE code and with the estimate of the contact angle obtained with a goniometer as shown in figure 4. As one can see from figure 3, the method is

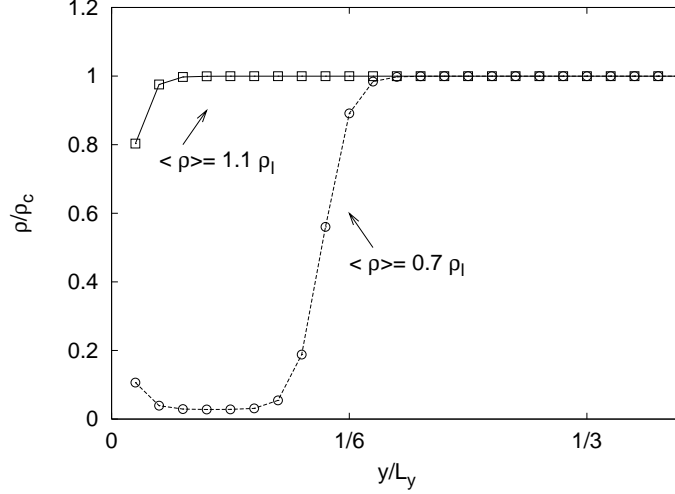


Figure 1: The stationary state configuration for the density field as a function of the relative distance from the wall. We present the density field normalized to the center channel density for two different values of the average density of the system: $\langle \rho \rangle = 1.1\rho_l$ (\square) and $\langle \rho \rangle = 0.7\rho_l$ (\circ). In both cases we integrate numerically the Lattice Boltzmann Equation with $\tau = 1$ in a $2d$ channel with two walls (bottom and lower) and periodic boundary condition in the stream-wise direction. The dimensions of the channel are $L_x \times L_y = 80 \times 45$ and $\mathcal{G}_b = -6.0$, being $\mathcal{G}_c = -4.0$ the critical point of the system. The liquid and gas density for this value are respectively $\rho_l = 2.65$ and $\rho_g = 0.07$ in Lattice Boltzmann units. Notice that the density tends to match a given value at the wall (for $y/L_y = 0$) which is different from both liquid and gas values, this is because of the chosen boundary condition, $\psi(\rho_w = 0.5)$.

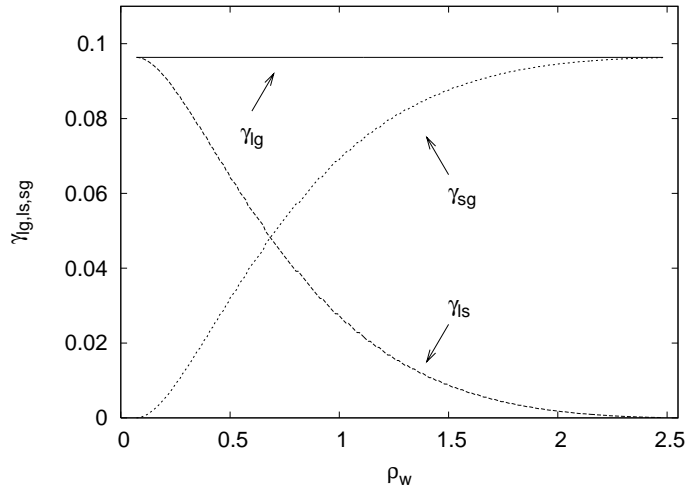


Figure 2: Surface tensions in a 3 phase system for $\mathcal{G}_b = -6.0$ as a function of ρ_w . The horizontal line represents the surface tension between liquid and gas (γ_{lg}). The surface tension between solid and gas (γ_{sg}) is zero for $\rho_w = \rho_g = 0.07$ and equal to γ_{lg} for $\rho_w = \rho_l = 2.65$. The surface tension between liquid and solid (γ_{ls}) reflects the opposite behavior.

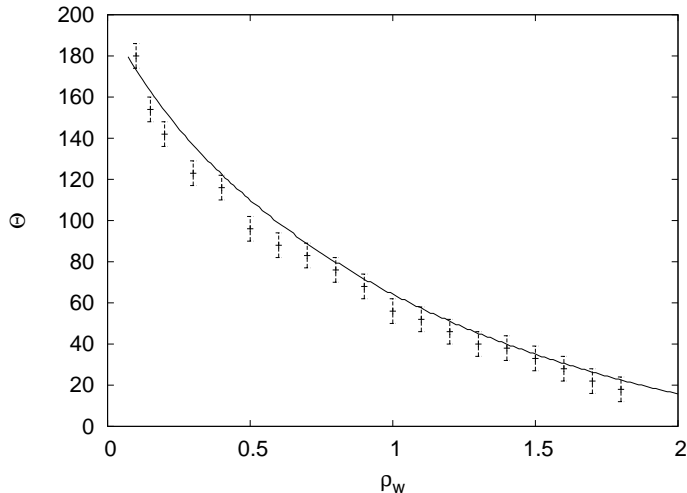


Figure 3: Contact angle for the case $\mathcal{G}_b = -6.0$ as a function of ρ_w . The analytical estimate is compared with the experimental results of Lattice Boltzmann simulations (+). The Lattice Boltzmann simulations are carried out in a $2d$ domain periodic along the stream-wise direction and with two walls (upper and lower wall). The grid mesh used is $L_x \times L_y = 80 \times 45$ and the relaxation time chosen is $\tau = 1$. To produce the steady state with a drop of liquid the system has been initialized with a non-homogeneous condition with a square spot of liquid on the lower wall.

$\theta \sim 0^\circ$, the latter case is obtained when ρ_w is chosen equal to the liquid density at the given temperature. All numerical results are obtained by using the shape (20) for the inter-particle potential. This is the first study, to our knowledge, where a systematic analytical procedure to derive the contact angle in Lattice Boltzmann models with interparticle potentials has been proposed. Other important attempts were already published by Briant *et al.* (2003) concerning a lattice transcription of mean field thermodynamic boundary conditions (Cahn (1977)) in the framework of free-energy multiphase methods (see Swift *et al.* (1995)). Numerical investigations of the contact angle within a LBE approach were also presented by Kwok (2003, 2004) but without any analytical control on the links with the surface tension as proposed here.

The production of a rarefaction zone close to the wall is also important to determine the slippage properties in the case when a constant external pressure drop is applied on the system (Poiseuille flow). For instance, the formation of a gas layer is believed to be the most probable cause of the *apparent* slip length measured in many experimental micro-channels (see Tretheway & Meinhardt (2002)). The idea is that the rarefaction layer leads to two feedback on the bulk fluid velocity. First, it allows for the fluid to slide on it without touching the boundary. Second, it gives an effective reduction on the channel width seen by the fluid, leading to an overall increase of the mass throughput for a given pressure drop. Once the density profile is determined, one may solve the equations for the stream-wise velocity (15) profile in presence of a unitary external pressure gradient, ∇P_{ext} , and a unitary kinematic

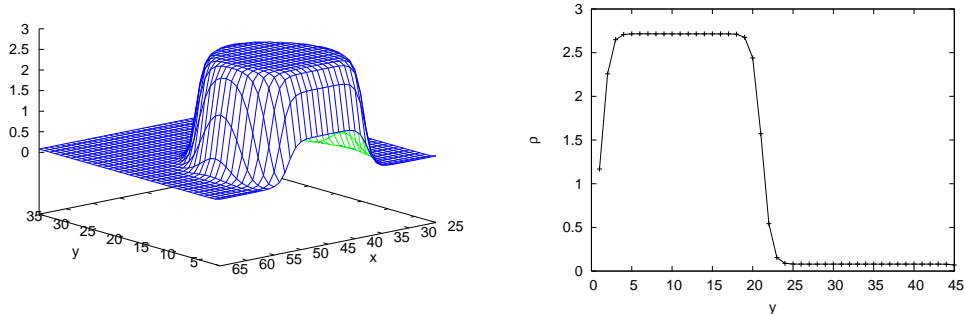


Figure 4: Left: typical density profile from which we extract the contact angle. The contact angle in the numeric is extracted by estimating the angle made by the surface where the density profile is equal to the average value $(\rho_l - \rho_g)/2$ being $\rho_l = 2.65$ and $\rho_g = 0.07$ for the present case with $\mathcal{G}_b = -6.0$. The computational parameters are the same used for figure 3. To produce the three phases equilibrium the system has been initialized to a non-homogeneous condition with a square spot of liquid in contact with the lower wall. Right: a vertical snapshot of the left panel for $x = 45$.

viscosity, ν , in the Stokes approximation:

$$\partial_y(\rho \partial_y u_x) = \frac{\nabla P_{ext}}{\nu} = 1. \quad (34)$$

In figure 5 we show a few examples of the velocity profile at changing the contact angle. All data have been obtained by imposing that the flow has the fluid density (ρ_l) at the center of the channel and that it ends with a density (ρ_w) at the boundary. Notice that, by increasing the hydrophobic property of the surface (increasing θ), the rarefaction layer becomes more and more singular, i.e. the velocity profile develops higher and higher shear rates at the boundary.

To quantify this effect, one usually introduces an *apparent slip length*, λ_s , defined as the length were the bulk, Poiseuille-like, velocity profile extrapolates to zero away from the wall, see figure 6. A simple phenomenological estimate of λ_s for small density variations has been proposed previously in Benzi *et al.* (2006) where the authors show that the apparent slip length can be estimated as:

$$\lambda_s \sim \frac{\Delta \rho}{\rho_w} \delta \quad (35)$$

where with $\Delta \rho$ we mean the density jump from the bulk to the wall values and with δ is proportional to the rarefaction layer, for a similar study see also Harting *et al.* (2005). Another important quantity is the *mass flow rate gain*, i.e. the ratio between the actual mass flow rate and the mass flow rate obtained assuming a perfect Poiseuille-like profile in the whole channel section:

$$\int dy (\rho u_x)$$

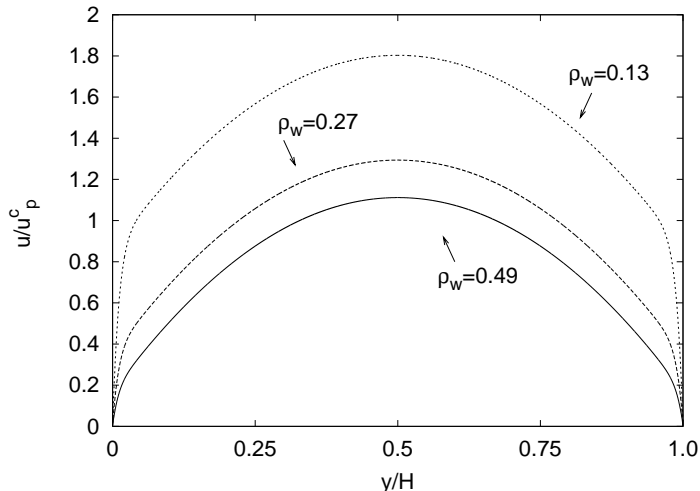


Figure 5: Velocity profiles for pressure driven Stokes flow. Profiles are obtained integrating numerically the Stokes equation for unit pressure drop and kinematic viscosity (34) in a homogeneous (in the stream wise direction) channel with an height $L = 50$ grid points. The profiles are then normalized with respect to the center channel velocity of the Poiseuille flow (u_c^p) for the same geometry. From top to bottom we show different values of ρ_w corresponding to different contact angles: $\rho_w = 0.13$ ($\theta = 166^\circ$), $\rho_w = 0.27$ ($\theta = 145^\circ$), $\rho_w = 0.49$ ($\theta = 110^\circ$).

where L is the total channel height. The mass flow rate is the only quantity which can be easily measured in microdevices experiments. It therefore plays an important role as a benchmark for many modeling methods. In figure 6 we show the results for the mass flow rate gain of our mesoscopic model as a function of the contact angle. Notice that one can easily gain a factor of the order of $4 \div 5$ times larger for the case of high hydrophobic boundaries. In the same figure (right panel) we also show the phenomenological estimate for the mass flow rate gain obtained by using the expression (35) with $\Delta\rho/\rho = (\rho_l - \rho_w)/\rho_w$ and δ estimated as the distance (starting from the wall) needed to reach the 98% of the center channel density (again ρ_l).

2.4 Consistency with Thermodynamics

In this section, we want to discuss a few issues on the thermodynamics consistency of the SC model here studied. Let us first start from the simple case of a liquid-gas interface in absence of boundaries. Up to now, in order to get the whole density profile, we have used the mechanical equilibrium condition supplied with the appropriate boundary conditions for the densities in the two phases, see eqs. (22–26). Next, we investigate the relation between this mechanical condition and the thermodynamic conditions on both the density values and on the density profile (i.e. on the surface tension expression). The Maxwell construction which determines the thermodynamics consistency (see also Callen (1985)) in the (P, V) diagram of the liquid-gas interfaces is built in terms of the requirement that: $\int_{\rho_g}^{\rho_l} [P_{bulk} - P_b(\rho)] dV = 0$ where $V \propto 1/\rho$. It is easy to realize that this condition leads to the following integral

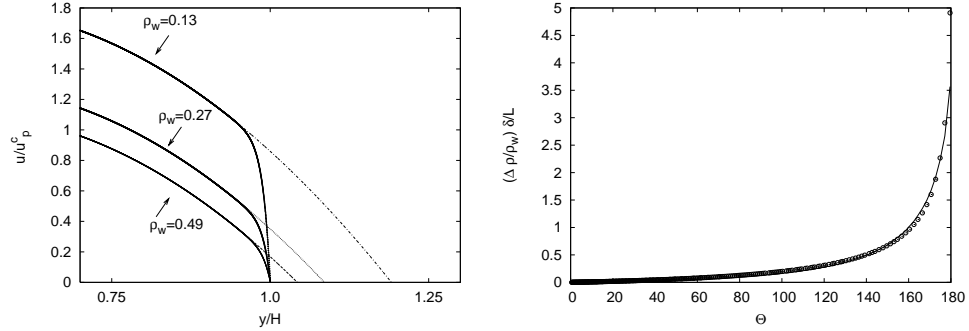


Figure 6: Slip length for the profiles in the Stokes approximation. In the left panel we show an extrapolation of the profiles showed in the previous figure. The slip length is obtained extrapolating to zero the parabolic profile obtained as a best fit in the bulk region of the channel. In the right panel we show the slip length estimated indirectly from the mass flow rate gain with respect to the Poiseuille profile for different contact angles (\circ) and compare the with the phenomenological result (35), solid line. The good agreement is obtained with a prefactor in (35) fixed to be 1.2.

constraint for the two densities, ρ_l, ρ_g , at phase coexistence:

$$\int_{\rho_l}^{\rho_g} \left[P_{bulk} - c_s^2 \rho - \frac{c_s^2 \mathcal{G}_b}{2} \psi^2(\rho) \right] \frac{1}{\rho^2} d\rho = 0 \quad (37)$$

which coincides with (26) only if $\psi(\rho) \propto \rho$. This is the indication that the SC choice $\psi(\rho) = (1 - \exp(-\rho/\rho_0))$ is thermodynamically inconsistent, although one may notice that the discrepancy are extremely small in all realistic cases. For instance in figure 7 we show the good agreement of the liquid and gas density values obtained by using the mechanical equilibrium equation (26) and the Maxwell construction (37) for different temperatures (\mathcal{G}_b).

Another problem using the SC approach to describe the interface shape consists in the expression for the surface tension (28) which is proportional to $(\partial_y \psi)^2$ instead of being proportional to $(\partial_y \rho)^2$ as required by thermodynamical arguments (see Rowlinson & Widom (1982)). Also in this case, however, the situation is quite encouraging. In fact, let us notice that starting from (20) and the expression of the bulk pressure (19), the critical point of the system is identified by the relations:

$$\frac{\partial P_b(\rho)}{\partial \rho} = 0; \quad \frac{\partial^2 P_b(\rho)}{\partial \rho^2} = 0. \quad (38)$$

These are equivalent to

$$(\psi')^2 = -\psi\psi''; \quad \psi\psi' = -\frac{1}{\mathcal{G}_b}. \quad (39)$$

Using the functional form $\psi(\rho) = (1 - \exp(-\rho/\rho_0))$ it is readily checked that:

$$\psi\psi'' = -\frac{1}{\rho_0} \psi\psi'. \quad (40)$$

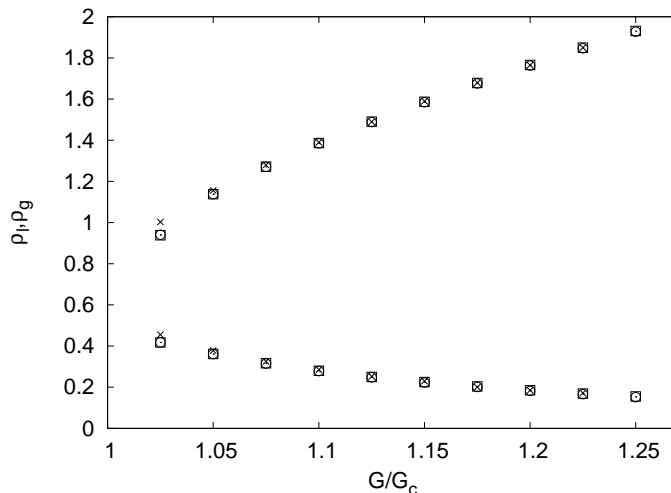


Figure 7: Results obtained from the mechanical stability conditions (26), \square , and thermodynamic coexistence curve (37), \circ , for liquid and gas densities. The results of numerical simulation are also reported (\times). The numerical simulations are carried out in a fully periodic $2d$ setup with grid mesh $L_x \times L_y = 90 \times 90$ and a relaxation time $\tau = 1$. The system is then initiated to have a flat interface along the x direction. The top branch refer to the liquid density, ρ_l , while the bottom branch to the gas density, ρ_g .

Now, using (38,39,40) we obtain

$$(\psi')^2 = -\psi\psi'' = \frac{1}{\rho_0}\psi\psi' = -\frac{1}{\rho_0\mathcal{G}_b}. \quad (41)$$

Since $\psi' = \partial\psi/\partial\rho$, this suggests the following scaling relation

$$|\partial_y\psi|^2 \sim -\frac{1}{\mathcal{G}_b\rho_0}|\partial_y\rho|^2 \quad (42)$$

which in turn would imply that the correct matching

$$\gamma_{lg} = -\frac{1}{2}c_s^4\mathcal{G}_b \int_{-\infty}^{+\infty} |\partial_y\psi|^2 dy \sim \frac{c_s^4}{2\rho_0} \int_{-\infty}^{+\infty} |\partial_y\rho|^2 dy. \quad (43)$$

The previous argument, although exact at the critical point ($\mathcal{G}_b = \mathcal{G}_c$), is semi-quantitatively correct for $|\mathcal{G}_b| > |\mathcal{G}_c|$. In fact, in figure 8 we show the comparison between the surface tension measured in our LBE approach and the one defined by (43). The agreement is quite satisfactory for all values of temperature, showing that the model is not far from being consistent also on that side.

2.5 Two-phase mesoscopic model vs. Navier-Stokes equations

In this section we discuss the interplay between the mesoscopic two-phase approach

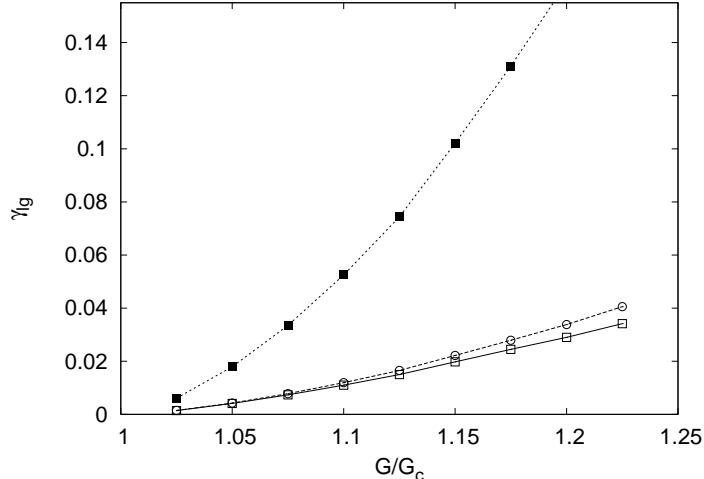


Figure 8: Surface tension as a function of the interaction parameter \mathcal{G}_b . The surface tension calculated using both expressions in equation (43), the case with $\partial_y \rho$ (\circ) and the case with $\partial_y \psi$ (\square). To show the importance of the normalization factor (42) we also show the surface tension calculated by simply replacing $\partial_y \psi \rightarrow \partial_y \rho$ in (28), (filled squares).

description at the hydrodynamical level with ad-hoc boundary conditions. A similar study has already been proposed by Priezjev *et al.* (2005) where a comparison between microscopic MD and macroscopic Stokes flows with slip boundary conditions was presented. In our case, we focus on two analytical results obtained for Navier-Stokes equations in a channel with longitudinal or transverse (with respect to the flow direction) free-slip strips, i.e. the case when some inhomogeneous material is deposited at the surface so as to drastically change the boundary conditions of the Navier-Stokes field from no-slip, $\mathbf{u}_{\parallel} = 0$, to free-slip, $\partial_n \mathbf{u}_{\parallel} = 0$. Here \mathbf{u}_{\parallel} stands for the velocity component along the surface and ∂_n is the derivative along the surface normal direction.

This problem can be attacked at a purely hydrodynamical level, bypassing completely the chemical-physical reactions at the wall which generates these two different boundary conditions and focusing only on the bulk liquid incompressible phase. Using conformal mapping on plane surfaces made up of longitudinal strips, (Philip (1972a,b)) proposed an exact analytical solution for the Stokes problem and only very recently a similar calculation has been proposed for transverse strips (Lauga & Stone (2003)). In a previous paper we have shown that the same analytical results can be obtained within the realm of LBE for single flows, but with properly modified boundary conditions (Benzi *et al.* (2006)). The motivations were very close to the Navier-Stokes continuum approach: neglect microscopic details very close to the boundary, including the possible presence of a rarefaction layer and try to mimic the bulk profile by *renormalizing* the fluid-wall interactions into a suitable *wall function*. Next we show that indeed one can recover both the analytical results of Lauga & Stone (2003) and Philip (1972a,b) and the numeric of the single phase LBE, by using the present two-phase model. In this way, we fill the

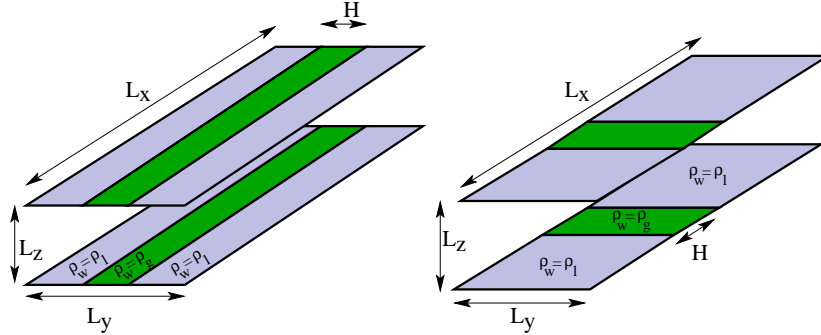


Figure 9: Schematic configurations for the simulations of laminar flows with boundary conditions of free shear and no slip. The alternating pattern of longitudinal (left) and transverse (right) strips of free shear is produced by varying the boundary density from complete wetting ($\rho_w = \rho_l$, contact angle 0° , no slip) and perfect dewetting in a strip H ($\rho_w = \rho_g$, contact angle 180° , free shear). With these setups the 'slip' probability is $\xi = H/L$ being $L = L_x(L_y)$ for transverse (longitudinal) strips. All the details of numerical simulations are give in figure 10.

chemically active wall and we are able to follow also the dynamics inside this latter layer. To accomplish this goal, we performed LBE simulations of the SC model in a channel where $\psi(\rho_w)$ had a periodic structure with alternating strips of hydrophobic ($\rho_w = \rho_g$, local contact angle 180°) and hydrophilic ($\rho_w = \rho_l$, local contact angle 0°) materials. In figure 10 (left panel) we show the analytical results for the effective slip length λ_s obtained (for both longitudinal and transverse strips) by means of the NS approach and by the present LBE-SC method. The agreement between the two is very good. In the right panel, in order to capture the meaning of local boundary conditions obtained using alternating patterns of wetting and non wetting strips, we compare our multiphase mesoscopic approach with the integration of the incompressible lattice Boltzmann Equation with alternating strips of no-slip and free shear (Benzi *et al.* (2006)). As we can see, while the non wetting strips simply reduce to a parabolic Poiseuille profile, the presence of the non wetting strips acts as a free shear zone where, due to the presence of the gas, the liquid can slide away producing the local free-shear condition.

2.6 Interaction with the wall: the role of the density gradient

Up to now we have modeled the wall properties using a single parameter, $\psi(\rho_w)$, which fixes the density of the flow at the boundary. These parameters can be intended as the counterpart of the interaction energy between solid-liquid molecules in an atomistic approach. In principle, also the typical interaction length may play a crucial role, the existence of a characteristic distance is the result of the interplay between attractive and repulsive terms in the Lennard-Jones potential. In order to mimic this effect, it has been proposed to enrich the mesoscopic LBE by assuming that the interaction with the wall is supplemented by another external force F_{\dots}

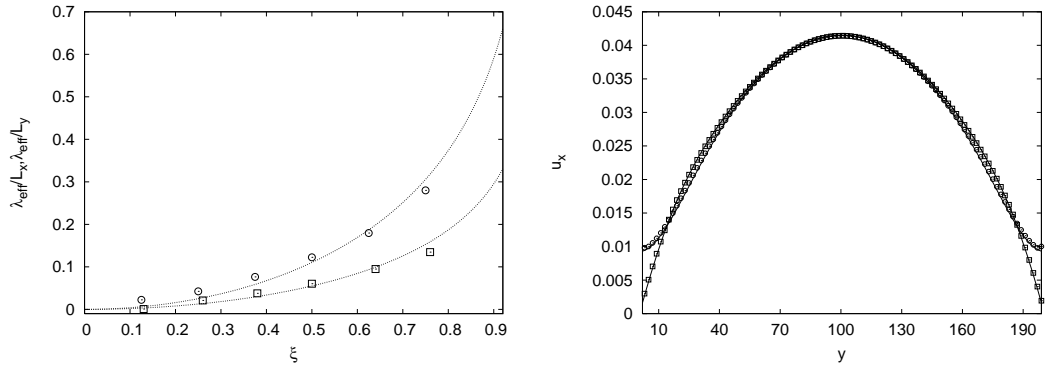


Figure 10: Effective slip length as a function of the free shear percentage (ξ) in multiphase approach with alternating strips of wetting and non-wetting properties. The numerical simulations are carried out in 3D setups with $L_x \times L_y \times L_z = 64 \times 64 \times 200$ with periodic boundary conditions in the stream-wise (x) and span-wise directions (y). The interaction parameter is $\mathcal{G}_b = -6.0$ and the relaxation time is $\tau = 1$. The corresponding liquid and gas densities ($\rho_l = 2.65, \rho_g = 0.07$) are used to mimic no slip and free shear respectively. Then, the steady state effective slip lengths for transverse (\square) and longitudinal (\circ) strips normalized to the pattern dimension (L_x for transverse and L_y for longitudinal) are compared with exact analytical estimates given for Stokes flow with alternating non slip and free shear (lines). Right panel: The velocity profile in the inlet of the channel and in the middle of a free shear strip from the integration of the incompressible lattice Boltzmann equation with mixed boundary conditions (straight lines) are compared with the results of the mesoscopic multiphase approach (\square in the inlet and \circ in the middle of free shear strip). The incompressible Lattice Boltzmann equation has been used with the same relaxation time and an average density equal to the one of the mesoscopic approach. Both simulation have been forced with a constant pressure gradient so as to reproduce a center channel velocity equal to $u_c = 0.04$ in LB units.

normal to the wall and decaying exponentially (Kwok (2004); Sullivan (1981)):

$$F_w(\mathbf{x}) = \mathcal{G}_w \rho(\mathbf{x}) e^{-|\mathbf{x}-\mathbf{x}_w|/\eta} \quad (44)$$

where \mathbf{x}_w is a vector running along the wall location and η the typical length-scale of the fluid-wall interaction, also known as the Kac range parameter (Sullivan (1981)). Equation (44) has been previously used in literature in connection with a slightly different LBE scheme, to show numerically how the wetting angle depends on the ratio $\mathcal{G}_w/\mathcal{G}_b$ in the presence of phase coexistence between vapor and liquid (Kwok (2004)).

The introduction of an external force, exponentially damped in the bulk of the flow, allows the model to control also the gradient of the density profile at the wall. This is a two parameter model able to fit with high accuracy the value of the density at the wall, through ρ_w , and the derivative of the density at the wall, $\partial_y \rho$, through the \mathcal{G}_w term in (44).

For the case with \mathcal{G}_w , one must modify the structure of the pressure tensor as follows

$$P_{ij} = \left[c_s^2 \rho + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2 + \frac{1}{2} c_s^4 \mathcal{G}_b \psi \Delta \psi + \frac{1}{4} \mathcal{G}_b c_s^4 |\nabla \psi|^2 \right] \delta_{ij} - \frac{1}{2} c_s^4 \mathcal{G}_b \partial_i \psi \partial_j \psi + \delta_{iy} \mathcal{G}_w \int_0^y \rho(s) e^{-s/\eta} ds. \quad (45)$$

The off diagonal term, P_{xy} , remains the same, while the mismatch between the pressure tensor parallel to the interface, P_{xx} and the pressure term perpendicular to the interface, P_{yy} is changed to:

$$P_{xx} = P_{yy} - \frac{c_s^4}{4} \mathcal{G}_b \psi \partial_y \partial_y \psi - \mathcal{G}_w \int_0^y \rho(s) e^{-s/\eta} ds. \quad (46)$$

This implies that the previous estimate (32) of the contact angle must be replaced by:

$$\cos(\theta) = \frac{\int_{sg} \left(|\partial_y \psi|^2 - \frac{2\mathcal{G}_w}{\mathcal{G}_b c_s^4} \int_0^y \rho(s) e^{-s/\eta} ds \right) dy - \int_{sl} \left(|\partial_y \psi|^2 - \frac{2\mathcal{G}_w}{\mathcal{G}_b c_s^4} \int_0^y \rho(s) e^{-s/\eta} ds \right) dy}{\int_{lg} |\partial_y \psi|^2 dy}. \quad (47)$$

The physics at the boundary now depends on two parameters, which may change the contact angle and the density profile independently. Unfortunately it is very difficult to make any quantitative measurement of the density profile in experiments or MD simulations. It is therefore difficult to assess in a systematic way the potential of the LBE model. In figure 11 we show the contact angle that can be measured and calculated using (47) in our LBE approach. In the same figure (right panel) we also show the variation in the density profile for a few values of the couple (\mathcal{G}_w, ρ_w) leading to the same contact angle. As one can see, the model is very sensitive to different choices of the two free parameters, which makes it potentially useful to describe physical situations with large variations in the density profiles in the

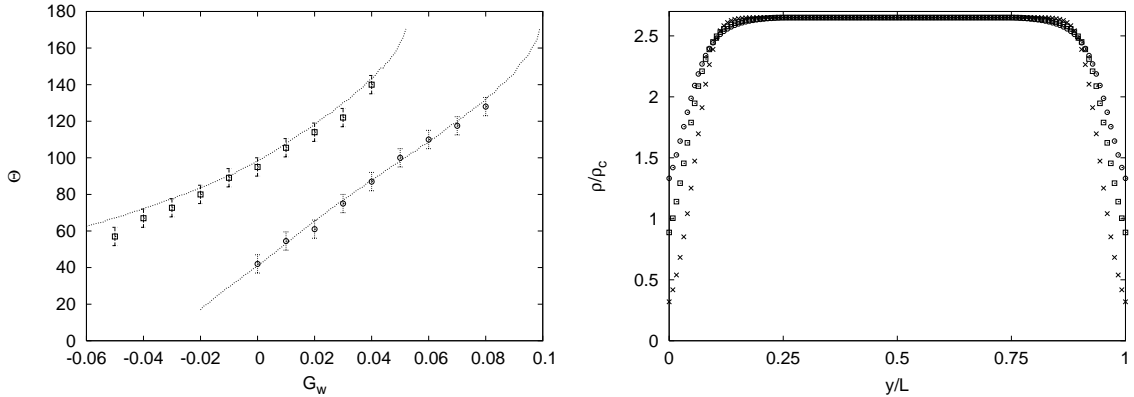


Figure 11: Contact angle for a two parameter model. Left panel: for a given value of ρ_w we show the contact angle for different values of G_w : $\rho_w = 1.3$ (\circ), $\rho_w = 0.6$ (\square). The analytical estimate using the mechanical stability is compared with lattice Boltzmann simulations. The details of the numerical simulations are the same of figure 3 with the introduction of a wall-fluid force as in (44). Left panel: for the same contact angle (130°) we report different profiles obtained for different choices of the parameters (ρ_w, G_w). In particular the value of ρ_w chosen is: $\rho_w = 1.3$ (\circ) $\rho_w = 0.85$ (\square) $\rho_w = 0.3$ (\times) and the corresponding value of G_w has been chosen to reproduce the same contact angle of 130° estimated from (47).

3 Conclusions and perspectives

We have presented a mesoscopic model, based on the Boltzmann Equations, for the interaction between a solid wall and a non-ideal fluid. The model is an extension of the SC model for dense fluids in unbounded domains. We have first derived an analytical expression for the *contact angle* and for the surface energy between any two of the liquid, solid and vapor phase, by introducing a parameter, $\psi(\rho_w)$ which fixes the density value of the Boltzmann molecules at the solid wall. We have shown how in this way one can cover the whole range of contact angles, from a super-hydrophobic surface $\theta \sim 180^\circ$ to a condition of perfect wettability $\theta \sim 0^\circ$. Concerning the thermodynamic consistency of the model we have shown that although not formally verified it does not introduce any systematic error in the results for the surface tension and for the liquid-gas density variations at changing the system temperature (Maxwell construction). We have discussed the connection between the rarefaction layer in the proximity of the wall and the production of an *apparent slip* phenomenon. We have also presented a comparison between the results obtained within the realm of our two-phase mesoscopic model and some analytical expression for the slip length calculated within a Navier-Stokes approach of a single phase fluid with alternating boundary conditions formed of free shear and no-slip strips. We have shown that the LBE approach is able to reproduce *quantitatively* the analytical results, supporting the statement that slip phenomena at the macroscopic Navier-Stokes level can be interpreted by an apparent slip induced by gas accumulation close to the boundary. We have also studied the effects on the contact angle and on the density profiles of the use of a second free parameter, G_w connected to the wall-force decaying exponentially inside the bulk of the flow. This second parameter plays an important role

if one wants to control both the value of the density at the wall and its gradient. An important outcome of this study is the possibility to fully integrate the two-phase approach with complex geometries (see also Verberg *et al.* (2004)). For instance, recent MD studies Cottin-Bizonne *et al.* (2004) have demonstrated the existence of a wetting/dewetting transition in micro-channel with grooves. The effect is driven by capillarity forces which may expel the liquid out of the corrugation leading to an increase of the *effective* slip length and of the mass flow rate. The mesoscopic model here presented is fully capable to reproduce the same effects. Moreover, it may also implement more complex surface patterns (different corrugations) than those possible with MD simulations maintaining a control on the spatial and temporal fluctuations at the macroscopic scale. Results on this direction will be reported elsewhere (Benzi *et al.* (2006)).

We acknowledge useful discussion with D. Lohse who suggested to perform the comparison with the Navier-Stokes equations in the case of longitudinal and transverse free-slip strips. We also thank X. Shan for stimulating discussion.

4 Appendix A

In this appendix we detail the calculation needed to perform the continuum limit for the nonideal pressure term. Let us first notice that the value of Δt just enters the discretized LBE equation (14) as a normalizing factor with respect to the relaxation time τ . Changing Δt just means to redefine τ .

Now, if we start from the expression for the i component of the interparticle force:

$$F_i(\mathbf{x}, t) = -\mathcal{G}_b \psi(\mathbf{x}) \sum_{\alpha} w_{\alpha} \psi(\mathbf{x} + \mathbf{c}_{\alpha} \Delta t, t) c_{\alpha}^i \quad (48)$$

assuming a stationary state ($\mathbf{F}(\mathbf{x}, t) = \mathbf{F}(\mathbf{x})$) and Taylor expanding up to the third order we obtain:

$$\begin{aligned} F_i(\mathbf{x}) = & -\mathcal{G}_b \psi(\mathbf{x}) \left[\sum_{\alpha} w_{\alpha} c_{\alpha}^i \psi(\mathbf{x}) + \Delta t \sum_{\alpha, j} w_{\alpha} c_{\alpha}^i c_{\alpha}^j \partial_j \psi(\mathbf{x}) + \right. \\ & \left. \frac{(\Delta t)^2}{2} \sum_{\alpha, j, k} w_{\alpha} c_{\alpha}^i c_{\alpha}^j c_{\alpha}^k \partial_j \partial_k \psi(\mathbf{x}) + \frac{(\Delta t)^3}{6} \sum_{\alpha, j, k, l} w_{\alpha} c_{\alpha}^i c_{\alpha}^j c_{\alpha}^k c_{\alpha}^l \partial_j \partial_k \partial_l \psi(\mathbf{x}) \right]. \end{aligned}$$

If we choose the weights w_{α} to satisfy the following tensor relations

$$\begin{aligned} \sum_{\alpha} w_{\alpha} c_{\alpha}^i &= 0 \\ \sum_{\alpha} w_{\alpha} c_{\alpha}^i c_{\alpha}^j &= c_s^2 \delta_{ij} \\ \sum_{\alpha} w_{\alpha} c_{\alpha}^i c_{\alpha}^j c_{\alpha}^k &= 0 \\ \sum_{\alpha} w_{\alpha} c_{\alpha}^i c_{\alpha}^j c_{\alpha}^k c_{\alpha}^l &= c_s^4 (\delta_{ij} \delta_{kl} + \delta_{ik} \delta_{jl} + \delta_{il} \delta_{jk}) \end{aligned}$$

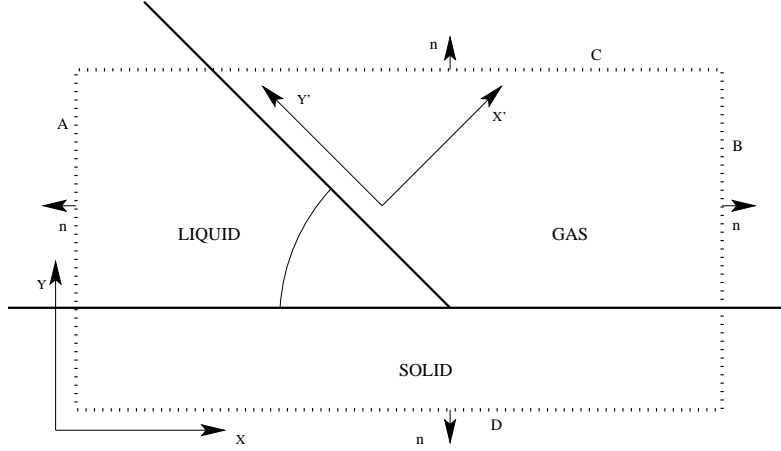


Figure 12: The schematic figure of the contact angle setup.

we end up with the following expression for the i -component of \mathbf{F} :

$$F_i = \mathcal{G}_b \psi \frac{\Delta t}{2} c_s^2 \partial_i \psi + \mathcal{G}_b \psi \frac{(\Delta t)^3}{2} c_s^4 \partial_i \Delta \psi. \quad (49)$$

being Δ the Laplacian operator. The above expression for the interparticle force can be easily translated into an excess pressure with respect to the ideal gas expression ($c_s^2 \rho$) using the definition:

$$-\partial_j P_{i,j} - \partial_i (c_s^2 \rho) = F_i \quad (50)$$

and therefore we end up with a pressure tensor of the form:

$$P_{ij} = \left[c_s^2 \rho + \frac{\Delta t}{2} c_s^2 \mathcal{G}_b \psi^2 + \frac{(\Delta t)^3}{2} c_s^4 \mathcal{G}_b \psi \Delta \psi + \frac{\mathcal{G}_b c_s^4 (\Delta t)^3}{4} |\nabla \psi|^2 \right] \delta_{ij} - \frac{(\Delta t)^3}{2} c_s^4 \mathcal{G}_b \partial_i \psi \partial_j \psi. \quad (51)$$

An important remark is now in order. The continuum expression just derived depends explicitly on the interparticle potential range, here of the order of $c_s \Delta t$. The limit $\Delta t \rightarrow 0$ would therefore imply a vanishing interaction range, i.e. the ideal gas limit, $P_{ij} = c_s^2 \rho \delta_{ij}$.

5 Appendix B

In this appendix we will detail the calculation of the contact angle used throughout the text. Starting from the pressure tensor (for $\Delta t = 1$)

$$P_{ij} = \left[c_s^2 \rho + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2 + \frac{1}{2} c_s^4 \mathcal{G}_b \psi \Delta \psi + \frac{1}{4} \mathcal{G}_b c_s^4 |\nabla \psi|^2 \right] \delta_{ij} - \frac{1}{2} c_s^4 \mathcal{G}_b \partial_i \psi \partial_j \psi. \quad (52)$$

in the coordinate system of figure (12) we make the following change of variables

$$\begin{cases} x' = +x \sin(\theta) + y \cos(\theta) \\ y' = -x \cos(\theta) + y \sin(\theta) \end{cases}$$

being y' aligned with the separation line between liquid and gas.

$$\begin{cases} \frac{\partial}{\partial x} = \frac{\partial x'}{\partial x} \frac{\partial}{\partial x'} + \frac{\partial y'}{\partial x} \frac{\partial}{\partial y'} = \sin(\theta) \frac{\partial}{\partial x'} - \cos(\theta) \frac{\partial}{\partial y'} \\ \frac{\partial}{\partial y} = \frac{\partial x'}{\partial y} \frac{\partial}{\partial x'} + \frac{\partial y'}{\partial y} \frac{\partial}{\partial y'} = \cos(\theta) \frac{\partial}{\partial x'} + \sin(\theta) \frac{\partial}{\partial y'} \end{cases} \quad (54)$$

If we assume only the x' dependence we can write

$$\psi(x, y) = \psi(x') \quad (55)$$

$$\begin{cases} \frac{\partial}{\partial x} = \sin(\theta) \frac{\partial}{\partial x'} \\ \frac{\partial}{\partial y} = \cos(\theta) \frac{\partial}{\partial x'} \end{cases} \quad (56)$$

$$\int dx \rightarrow \frac{1}{\sin(\theta)} \int dx' \quad (57)$$

which clearly imply

$$dx = \sin(\theta) dx' \quad (58)$$

and

$$\int (\partial_x \psi)(\partial_y \psi) dx = \frac{1}{\sin(\theta)} \int dx' \sin(\theta) \cos(\theta) (\partial_{x'} \psi)(\partial_{x'} \psi) = \int dx' \cos(\theta) (\partial_{x'} \psi)(\partial_{x'} \psi). \quad (59)$$

By imposing a zero flux out of the boundaries of the vector (P_{xx}, P_{xy}) we obtain the mechanical definition of the contact angle. To this purpose, let us notice that based on the definition of the pressure tensor, we can write:

$$P_{xx} = P_{yy} + \frac{c_s^4}{2} \mathcal{G}_b \partial_y \psi \partial_y \psi \quad (60)$$

$$P_{xy} = \frac{c_s^4}{2} \mathcal{G}_b \psi \partial_x \partial_y \psi \quad (61)$$

with P_{yy} constant along the solid-liquid and solid-gas interface (segments A, B of figure 12). This, together with (59) implies

$$- \int_{sl} \frac{c_s^4}{2} \mathcal{G}_b \partial_y \psi \partial_y \psi dy + \int_{sg} \frac{c_s^4}{2} \mathcal{G}_b \partial_y \psi \partial_y \psi dy - \cos(\theta) \int_{lg} \frac{c_s^4}{2} \mathcal{G}_b \partial_{x'} \psi \partial_{x'} \psi dx' = 0 \quad (62)$$

and

$$\cos(\theta) = \frac{- \int_{sl} |\partial_y \psi|^2 dy + \int_{sg} |\partial_y \psi|^2 dy}{\int_{lg} |\partial_{x'} \psi|^2 dx'}. \quad (63)$$

For the case with \mathcal{G}_w , the previously used pressure tensor must be slightly modified due to the presence of a normal (say along the y direction) force between the fluid and the wall:

$$P_{ij} = \left[c_s^2 \rho + \frac{1}{2} c_s^2 \mathcal{G}_b \psi^2 + \frac{1}{2} c_s^4 \mathcal{G}_b \psi \Delta \psi + \frac{1}{4} \mathcal{G}_b c_s^4 |\nabla \psi|^2 \right] \delta_{ij} - \frac{1}{2} c_s^4 \mathcal{G}_b \partial_i \psi \partial_j \psi + \delta_{iy} \mathcal{G}_w \int_0^y \rho(s) e^{-s/\eta} ds.$$

Then relations (60) and (61) should be slightly modified since P_{xy} gives the same result but for P_{xx} we have

$$P_{xx} = P_{yy} - \frac{c_s^4}{2} \mathcal{G}_b \partial_y \psi \partial_y \psi - G_w \int_0^y \rho(s) e^{-s/\eta} ds \quad (65)$$

that imply the following estimate for the contact angle:

$$\cos(\theta) = \frac{- \int_{sl} \left(|\partial_y \psi|^2 - \frac{2G_w}{\mathcal{G}_b c_s^4} \int_0^y \rho(s) e^{-s/\eta} ds \right) dy + \int_{sg} \left(|\partial_y \psi|^2 - \frac{2G_w}{\mathcal{G}_b c_s^4} \int_0^y \rho(s) e^{-s/\eta} ds \right) dy}{\int_{lg} |\partial_{x'} \psi|^2 dx'} \quad (66)$$

Notice that the importance of wall effects appears only in relation to bulk terms in $\frac{2G_w}{\mathcal{G}_b c_s^4}$.

References

- BENZI, R., BIFERALE, L., SBRAGAGLIA, M., SUCCI, S. & TOSCHI, F. 2006 Mesoscopic two-phase model for describing apparent slip in micro-channel flows. *Europhys. Lett.* submitted.
- BENZI, R., BIFERALE, L., SBRAGAGLIA, M., SUCCI, S. & TOSCHI, F. 2006 Mesoscopic modelling of heterogeneous boundary conditions in micro-channel flows. *Jour. Fluid. Mech.* **548** 257.
- BENZI, R., BIFERALE, L., SBRAGAGLIA, M., SUCCI, S. & TOSCHI, F. 2006 Mesoscopic modelling of dewetting transitions on rough surfaces. *Nature Mat.*, submitted.
- BENZI, R., SUCCI, S. & VERGASSOLA, M. 1992 The lattice boltzmann equation: Theory and applications. *Phys. Rep.* **222**, 145.
- BHATNAGAR, P. L., GROSS, E. & KROOK, M. 1954 A model for collision process in gases. small amplitude processes in charged and neutral one-component systems. *Phys. Rev.* **94**, 511.
- BICO, J., MARZOLIN, C. & QUERE, D. 1999 Pearl drops. *Europhys. Lett.* **47**, 220.
- BOCQUET, L. & BARRAT, J.-L. 1993 Hydrodynamic boundary conditions and correlation functions of confined fluids. *Phys. Rev. Lett.* **70**, 2726-2729.
- BRENNER, H. & GANESAN, V. 2000 Molecular wall effects: are conditions at a boundary "Boundary conditions" ?. *Phys. Rev. E* **61**, 6879.
- BRIANT, A., WAGNER, A. J. & YEOMANS, J. M. 2003 Lattice Boltzmann Simulations of contact line motion. *Phys. Rev. Lett.* **69**, 031602.
- CAHN, J.W. 1977 Critical point wetting. *J.Chem.Phys.* **66**, 3667.

- CALLEN, H. B. 1985 *Thermodynamics and an introduction to Thermostatistics*. Wiley, New York.
- CERCIGNANI, C. 1991 *The Mathematical Theory on Non Uniform Gases: An Account of the kinetic Theory of Viscosity, Thermal Conduction and Diffusion in Gases*. Cambridge University Press.
- CERCIGNANI, C. & DANERI, A. 1963 Flow of rarefied gas between two parallel plates. *J. Appl. Phys.* **34**, 3509.
- CHEN, S. & DOOLEN, G. 1998 Lattice boltzmann methods for fluid flows. *Ann. Rev. Fluid Mech.* **30**, 329.
- CHENG, J.-T. & GIORDANO, N. 2002 Fluid flow through nanometer-scale channels. *Phys. Rev. E* **65**, 0312061.
- CHOI, C., K.JOHAN, A.WESTIN & BREUER, K. 2003 Apparent slip flows in hydrophilic and hydrophobic microchannels. *Phys. of Fluids* **15**, 2897-2902.
- CIEPLAK, M., KOPLIK, J. & BANAVAR, J. 2001 Boundary conditions at a fluid-solid interface. *Phys. Rev. Lett.* **86**, 803-806.
- COTTIN-BIZONNE, C., BARENTINE, C., CHARLAIX, E., BOCQUET, L. & BARRAT, J.-L. 2004 Dynamics of simple liquids at heterogeneous surfaces: Molecular dynamics simulations and hydrodynamic description. *Eur. Phys. J. E* **15**, 427-438.
- CRAIG, V., NETO, C. & WILLIAMS, D. 2001 Shear-dependent boundary slip in an aqueous newtonian liquid. *Phys. Rev. Lett.* **87**, 054504(1-4).
- P. G. DE GENNES 2003 *Capillarity and wetting phenomena: drops,bubbles,pearls,waves*. Springer.
- GAD-EL'HAK, M. 1999 The fluid mechanics of microdevices. *Fluid Eng.* **121**, 5-33.
- HE, X. & DOOLEN, G. 2002 Thermodynamic foundations of Kinetic Theory and Lattice Boltzmann Models for multiphase flows. *Jour, Stat. Phys.* **107** , 309.
- HE, X., SHAN, X. & DOOLEN, G. 1998 Discrete Boltzmann equation model for non ideal gases. *Phys. Rev. E.* **57** , R13.
- HARTING, J., KUNERT, C. & HERRMANN, H.J 2005 Lattice Boltzmann Simulations of apparent slip in hydrophobic microchannels *arXiv: physics/0509035*
- HIGUERA, F. & JIMENEZ, J. 1989 Boltzmann approach to lattice gas simulations. *Europhys. Lett.* **9**, 663.
- HIGUERA, F., SUCCI, S. & BENZI, R. 1989 Lattice gas dynamics with enhanced collisions. *Europhys. Lett.* **9**, 345.
- HO, C.-M. & TAI, Y.-C. 1998 Micro-electro-mechanical-systems (mems) and fluid

- HUANG, K. 1987 *Statistical mechanics*. Wiley.
- KARNIKADIS, G., BESKOK, A. 2002 *Microflows*. Springer-Verlag.
- IRVING J.H. AND KIRKWOOD J.G. 1950 The Statistical Mechanical theory of transport coefficients.IV.The equations of hydrodynamics *J. Chem. Phys.* **18** 817 (1950).
- KOPLIK, J. & BANAVAR, J. 1991 Continuum deductions from molecular hydrodynamics. *Annu. Rev. Fluid Mech.* **27**, 257.
- KWOK, D. 2003 Discrete boltzmann equation for microfluidics. *Phys. Rev. Lett.* **90**, 1245021.
- LAUGA, E. & STONE, H. 2003 Effective slip in pressure-driven stokes flow. *J. Fluid. Mech.* **489**, 55.
- MARTYS 1999 Energy conserving discrete Boltzmann equation for nonideal systems. *Int. Jour. Mod. Phys. C* **10**,1367-1382.
- MAURER, J., TABELING, P., JOSEPH, P. & WILLAIME, H. 2004 Second order slip laws in microchannels for helium and nitrogen. *Phys. Fluids* **15**, 2613.
- M McNAMARA, G. & ZANETTI, G. 1998 Use of the boltzmann equations to simulate lattice-gas automata. *Phys. Rev. Lett.* **61**, 2332.
- MOHLING, J. 1982 *Statistical mechanics: Methods and Applications*. John Wiley and sons., New York.
- ONDA, T., SHIBUICHI, S., SATOH, N. & TSUJII, K. 1996 Superhydrophobic fractal surfaces. *Langmuir* **12**, 2125-7.
- OU, J., PEROT, B. & ROTHSTEIN, J. 2004 Laminar drag reduction in microchannels using ultrahydrophobic surfaces. *Phys. Fluids* **16**, 4635.
- PHILIP, J. 1972a Flow satisfying mixed no-slip and no-shear conditions. *Z. Angew. Math. Phys.* **23**, 353-370.
- PHILIP, J. 1972b Integral properties of flows satisfying mixed no-slip and no-shear conditions. *Z. Angew. Math. Phys.* **23**, 960-968.
- PIT, R., HERVET, H. & LEGER, L. 2000 Direct experimental evidence of slip in hexadecane: Solid interfaces. *Phys. Rev. Lett.* **85**, 980-983.
- PRIEZJEV, N. V., DARHUBER, A. & TROIAN, S. 2005 The slip length of sheared liquid films subject to mixed boundary conditions: Comparison between continuum and molecular dynamics simulations. *Phys. Rev. E* **71** 041608 .
- RAPAPORT, D. 1995 *The Art of molecular Dynamics Simulations*. Cambridge University Press. Cambridge.
- ROWLINSON. J.S. & WIDOM. B. 1982 *Molecular theory of capillarity*. Clarendon.

- SBRAGAGLIA, M. & SUCCI, S. 2005 Analytical calculation of slip flow in lattice boltzmann models with kinetic boundary conditions. *Phys. FLuids* **17** 093602.
- SHAN, X. & CHEN, H. 1993 Lattice boltzmann model for simulating flows with multiple phases and components. *Phys. Rev E* **47**, 1815–1819.
- SHAN, X. & CHEN, H. 1994 Simulation of nonideal gases and liquid-gas transitions by the lattice boltzmann equation. *Phys. Rev E* **47**, 2941-2949.
- STANLEY, H. E. 1971 *Introduction to phase transitions and Critical Phenomena, International series of monographs on Physics*. Oxford University Press, Oxford.
- SUCCI, S. 2001 *The lattice Boltzmann Equation*. Oxford Science.
- SUCCI, S. 2002 Mesoscopic modeling of slip motion at fluid-solid interfaces with heterogeneous catalysis. *Phys. Rev. Lett.* **89**, 064502.
- ZHANG, J. & KWOK, D. 2004 Apparent slip over a solid-liquid interface with a no-slip boundary condition. *Phys. Rev. E* **70** 056701.
- SULLIVAN D.E. 1981 Surface tension and contact angle of a liquid solid interface. *J. Chem. Phys.* **74** 2604.
- SWIFT, M., OSBORN, W. & YEOMANS, J. 1995 Lattice boltzmann simulations of liquid-gas and binary fluid systems. *Phys. Rev. Lett.* **75**, 830–833.
- TABELING, P. 2003 *Introduction á la microfluidique*. Belin.
- CHAPMAN, P. 1970 *The Mathematical theory of non-uniform gases*. Cambridge University Press, London.
- THOMPSON, P. & ROBBINS, M. 1989 Simulations of contact-line motion: Slip and the dynamic contact angle. *Phys. Rev. Lett.* **63**, 766-769.
- THOMPSON, P. & ROBBINS, M. 1990 Shear flow near solids: Epitaxial order and flow boundary conditions. *Phys. Rev. A* **41**, 6830–6837.
- THOMPSON, P. & TROIAN, S. 1997 General boundary condition for liquid flow at solid surfaces. *Nature* **389**, 360-362.
- TRETHERWAY, D. & MEINHART, C. 2002 Apparent fluid slip at hydrophobic microchannel walls. *Phys. Fluids* **14**, L9-L12.
- VERBERG, R., POOLEY, C., YEOMANS, J. & BALAZS, A. 2004 Pattern formation in binary fluids confined between rough, chemically heterogeneous surfaces. *Phys. Rev. Lett.* **93**, 1845011.
- VINOGRADOVA, O. & YABUKOV, G. 2003 Dynamic effects on force measurements. lubrication and the atomic force microscopy. *Langmuir* **19**, 1227.
- WHITESIDES, G. & STROOCK, A. 2001 Flexible methods for microfluids. *Phys. Fluids* **13**, 42–49.

- WOLF-GLADROW, D. 2000 *Lattice-Gas Cellular Automata and Lattice Boltzmann Models*. Springer.
- ZHU, Y. & GRANICK, S. 2001 Rate-dependent slip of newtonian liquid at smooth surfaces. *Phys. Rev. Lett.* **87**, 096105.
- ZHU, Y. & GRANICK, S. 2002 Limits of the hydrodynamic no-slip boundary condition. *Phys. Rev. Lett.* **88**, 106102.