

# Methods of Measuring

# Soil Moisture in the Field

---

GEOLOGICAL SURVEY WATER-SUPPLY PAPER 1619-U



# Methods of Measuring Soil Moisture in the Field

By A. I. JOHNSON

CONTRIBUTIONS TO THE HYDROLOGY OF THE UNITED STATES

---

GEOLOGICAL SURVEY WATER-SUPPLY PAPER 1619-U

*Evaluates methods for measuring soil  
moisture and describes the equipment used*



U.S. DEPARTMENT OF THE INTERIOR

MANUEL LUJAN, Jr., *Secretary*

U.S. GEOLOGICAL SURVEY

Dallas L. Peck, *Director*

First printing 1962

Second printing 1963

Third printing 1992

Any use of trade, product, or firm names in this publication is for descriptive purposes only and does not imply endorsement by the U.S. Government

## CONTENTS

---

	Page
Abstract.....	U-1
Introduction.....	1
Methods.....	2
Gravimetric.....	2
Sample collection.....	2
Sampling augers.....	3
Sampling tubes or core barrels.....	4
Porter piston sampler.....	4
Pomona open-drive sampler.....	5
Johnson open-drive sampler.....	5
Electrical-resistance.....	6
Heat-diffusion.....	9
Absorption.....	10
Tensiometric.....	10
Penetration.....	12
Radioactive.....	12
Summary.....	14
Selected references.....	15
A. Gravimetric methods.....	15
B. Electrical-resistance methods.....	16
C. Heat-diffusion methods.....	19
D. Absorption methods.....	19
E. Tensiometric methods.....	20
F. Penetration methods.....	21
G. Radioactive methods.....	21
H. General methods.....	24

---

## ILLUSTRATIONS

	Page
FIGURE 1. Orchard auger.....	U-3
2. Porter piston sampler.....	4
3. Pomona open-drive sampler.....	5
4. Johnson open-drive sampler.....	6
5. Electrical-resistance soil-moisture blocks and meters.....	8
6. Tensiometers.....	11
7. Radioactive soil-moisture meter.....	13

CONTRIBUTIONS TO THE HYDROLOGY OF THE UNITED STATES

---

**METHODS OF MEASURING SOIL MOISTURE IN THE  
FIELD**

---

By **A. I. JOHNSON**

---

**ABSTRACT**

For centuries, the amount of moisture in the soil has been of interest in agriculture. The subject of soil moisture is also of great importance to the hydrologist, forester, and soils engineer.

Much equipment and many methods have been developed to measure soil moisture under field conditions. This report discusses and evaluates the various methods for measurement of soil moisture and describes the equipment needed for each method. The advantages and disadvantages of each method are discussed and an extensive list of references is provided for those desiring to study the subject in more detail.

The gravimetric method is concluded to be the most satisfactory method for most problems requiring onetime moisture-content data. The radioactive method is normally best for obtaining repeated measurements of soil moisture in place. It is concluded that all methods have some limitations and that the ideal method for measurement of soil moisture under field conditions has yet to be perfected.

**INTRODUCTION**

The subject of soil moisture has long been of interest in agriculture. For centuries the farmer has picked up and felt a handful of soil to determine the best time to plow his fields. The amount of moisture in the soil is also of great importance in hydrology, forestry, and soil-mechanics engineering. Consequently, much effort has been expended in the last 50 years in developing methods and equipment for measuring soil moisture under field conditions.

Determination of soil moisture is one of the most difficult measurements required in the field of hydrology. Measurement of soil moisture ranges from the method of feeling the soil to the use of complicated electronic equipment using radioactive substances. The development of equipment has been directed primarily toward instruments that continuously measure changes in moisture content at a single sampling point.

## METHODS

### GRAVIMETRIC

The gravimetric method involves collecting a soil sample, weighing the sample before and after drying it, and calculating its original moisture content. The gravimetric method is the oldest (other than the ancient method of feeling the soil) but still continues to be the most widely used method for obtaining data on soil moisture. Because it is the only direct way of measuring soil moisture, it is required for calibrating the equipment used in the other methods.

Russell (H, 1950)<sup>1</sup> reporting on work completed in 1843 and Whitney (A, 1894), describe some of the first scientific investigations of soil moisture using gravimetric methods. The Kirg tube, for collecting drive-core samples, was developed in 1890 and was modified and improved by Veihmeyer (A, 1929). Since that time many types of sampling equipment, as well as special drying ovens and balances, have been developed for use with the gravimetric method.

The disadvantage of the gravimetric method is the time and effort required to obtain data. It is time-consuming work to collect the samples, especially from depths greater than a few feet, and to oven dry and weigh the many samples required for most projects. For many problems, such as the study of evapotranspiration by grasses, the sampling procedure alters the area of experiment owing to trampling of the vegetation or the making of numerous holes. Under these conditions, the sampling may have to be done from platforms, and the holes may have to be refilled and packed. Soils are normally variable within an experimental area and, as two samples cannot be collected from the same point, slight variations of moisture content may be noticed.

### SAMPLE COLLECTION

For the best samples, the soil should be homogeneous, just moist enough to permit easy cutting by the sampling equipment, and free from roots, organic matter, and stones. Seldom are all these conditions met.

The technique and equipment used for sample collection should be such that the samples do not lose or gain moisture, or otherwise become altered or contaminated, during sampling and transportation. In sampling through a wet layer into a dry layer, care must be taken to keep the sampling equipment as dry as possible and to prevent water

<sup>1</sup> Letters refer to the center heads in "Selected References," as follows: A, Gravimetric method; B, Electrical-resistance method; C, Heat-diffusion method; D, Absorption method; E, Tensiometric method; F, Penetration method; G, Radioactive method; H, General method.

from running down the hole into the drier material. If there is free water in the soil, the moisture content as measured probably will be less than the correct value because some water will drip off as the sample is removed from the ground, or some may be squeezed out by compaction during sampling.

When dry hard fine-textured sediments are encountered, it is difficult to drive the core barrels or to rotate the augers. When dry, coarse-textured sediments are sampled, the sample may slide out the end of the core barrel or auger as it is withdrawn. Stony soils are very difficult to sample, especially volumetrically, owing to the danger of hitting a stone with the cutting edges of the equipment and because representative samples must be large. Soils that contain a considerable amount of roots and organic matter also present difficulty.

In soil-moisture sampling, it is essential that all sampling operations—the transfer of samples to moisture cans and the weighing of the moist samples—be done as rapidly as possible to prevent undue moisture losses. Many difficulties in the use of sampling equipment, whether augers or core samplers, may be overcome if all equipment is kept clean—that is, free of moisture, oil, rust, and dirt.

#### SAMPLING AUGERS

The simplest equipment for soil-moisture sampling is the hand auger. Hand augers, with shaft extensions of aluminum pipe, have been used in sampling to depths as great as 55 feet.

One of the most useful types of hand augers is the Orchard auger (fig. 1). It consists of a cylinder 3 inches in diameter and 9 inches

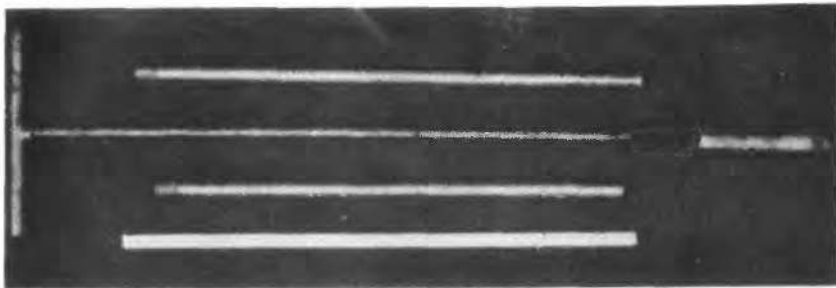


FIGURE 1.—Orchard auger.

long having a 4½-foot extension pipe on the top and two curved cutting teeth on the bottom. Because the barrel is a solid cylinder, the sample is not as likely to become contaminated from the side of the test hole as with the Iowan or the posthole auger. Thus, a good representative, but disturbed, sample is obtained by use of this equip-

ment. For ease in sampling at depths greater than 5 feet, 3-foot extensions of  $\frac{3}{4}$ -inch aluminum pipe are added as needed.

To obtain a sample by the hand-auger method, the auger is turned by its handle and forced downward into the material to be sampled. Usually about 3 inches of the material may be penetrated before the cylinder barrel is filled. The auger is then raised to the surface, and the sample is jarred loose from the auger barrel by hitting the barrel with a rubber hammer.

### SAMPLING TUBES OR CORE BARRELS

A soil-sampling tube, core barrel, or drive sampler of some type offers an advantage in soil-moisture sampling because volumetric samples can be obtained for calculating moisture content by volume. The King tube was developed in 1890, and Veihmeyer developed modified soil tubes in 1929. Since that time many people, including the writer, have developed variations of this type of sampling equipment. (See Hvorslev, A, 1949.)

Core samplers provide uncontaminated samples if the equipment is kept clean. Oil should never be used on the samplers, and they should be kept free of dirt, rust, and moisture. A two-man crew is normally recommended for deep sampling. Depths to 65 feet may be sampled.

#### PORTER PISTON SAMPLER

The Porter piston sampler (fig. 2) is one type of sampling equip-

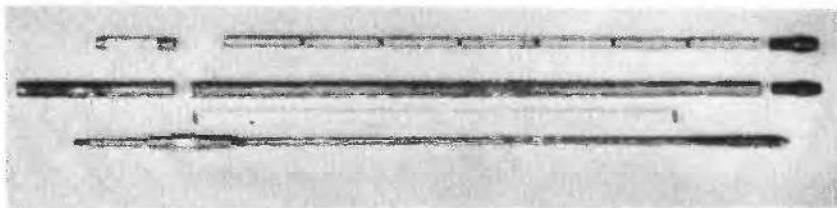


FIGURE 2.—Porter piston sampler.

ment that has been very useful, especially for sampling through loose or wet materials that tend to slough into the hole. This sampler is the retractable-piston drive-sampler type. By means of a hand-operated 25-pound drop hammer, a plugged sample section may be driven to the required depth by the addition of 5-foot extension rods. The plug is then retracted, the sampler is driven a maximum of 2 feet, and the soil core is retained in brass insert liners contained in the 4-foot sample section. Further retraction of the plug helps retain the sample by forming a partial vacuum above it. After extraction, the liners with the soil cores are removed from the sample tube and capped and sealed for laboratory testing. The liners are brass



cylinders, 1 inch in diameter and 6 inches in length. Two types of hardened-steel cutting points are available for use in different soils.

This sampler is made from high-strength steel and is rugged and dependable. However, reasonable care must be taken in its use and storage to insure efficient operation and long life.

#### POMONA OPEN-DRIVE SAMPLER

The Pomona open-drive sampler (fig. 3) consists of a core barrel 2

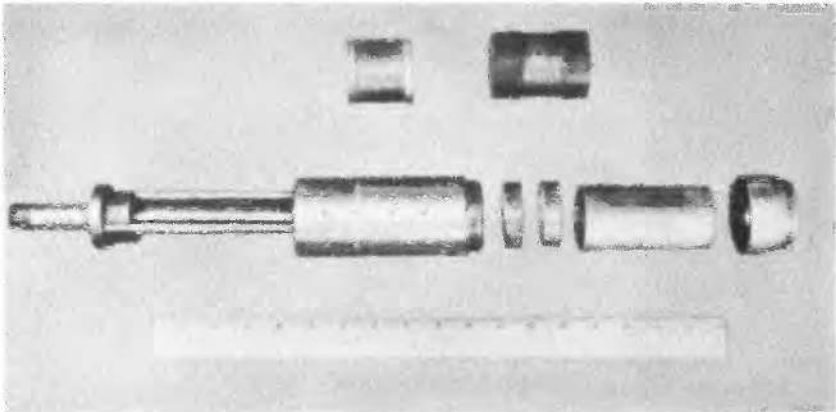


FIGURE 3.—Pomona open-drive sampler.

inches in inside diameter and 4 inches long, with extension tubes 1 inch in diameter and 5 feet long for sampling at depth. Brass cylinder liners, 2 inches in length, are used to retain the "undisturbed" core samples. The samples are removed from the core barrel by pushing a plunger.

A light drill rod or 1-inch pipe may be used for extensions. The cores are collected by use of a 25-pound drop hammer as described for the Porter sampler.

#### JOHNSON OPEN-DRIVE SAMPLER

A simple and economical sampler for obtaining volumetric core samples from shallow depths was designed by the writer in 1952. The sampler is easily constructed, and consists of a thin-walled brass tube 2 inches in diameter and 6 inches long mounted on the end of a 3-foot T-handle of  $\frac{3}{4}$ -inch pipe (fig. 4). Samples are collected by a downward thrust on the handle and are then pushed out of the core barrel by the central plunger. Because the inside diameter and area of the core barrel are known, volumetric samples may be easily obtained by cutting off a predetermined length of the core as it is removed from the sampler.

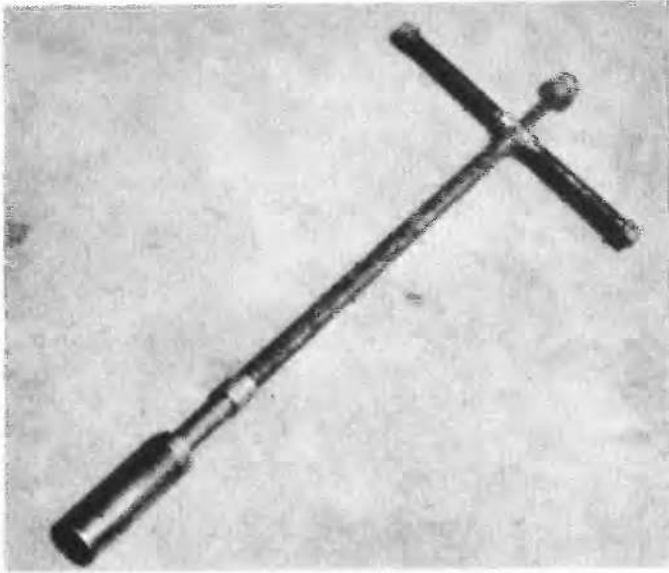


FIGURE 4.—Johnson open-drive sampler.

#### ELECTRICAL-RESISTANCE


The principle of electrical measurement of soil moisture was first reported by Whitney and others (B, 1897). However, many years passed before truly successful electrical units were developed by Bouyoucos and Mick (B, 1940a), Colman (B, 1946), Bouyoucos (B, 1949), and Youker and Dreibelbis (B, 1951).

The electrical-resistance "blocks" developed by those named above operate on the principle that resistance to the passage of an electrical current between two electrodes buried in the soil will depend upon the moisture content of the soil. Nylon or Fiberglas fabric or plaster of paris surrounding the electrodes permits uniform contact with the soil moisture. When buried in the soil, the porous material of the block readily absorbs moisture or gives it up so that the moisture content of the block tends to stay in equilibrium with the moisture content of the soil. These moisture-content changes cause changes in electrical resistance which are measured by a meter at the surface. The resistance read on the meter is converted to moisture-content values by means of a calibration chart. The calibration chart is prepared by correlation, either in the field or in the laboratory, of gravimetric moisture-content values and resistance readings for the soil in which the blocks are buried. Laboratory calibration consists of drying and intermittently weighing soil cores in which blocks have been inserted. Field calibration consists of taking gravimetric samples


as close as possible to blocks that have been buried in the field, and relating the moisture content of the sample to the measured resistance.

Two main types of blocks are in current use, the Fiberglas unit developed by Colman and Hendrix (B, 1949) and the plaster-of-paris or gypsum-block unit developed by Bouyoucos and Mick (B, 1940a). The Colman Fiberglas block is also available with an integrally installed thermistor so that soil temperatures may be measured, and resistance can be corrected to a common temperature. (Corrections for temperature are necessary for resistance blocks if accurate results are required.) Two general types of meters are used for reading the resistance values of the moisture blocks—the Colman meter (fig. 5A) and the Bouyoucos bridge (fig. 5B). The blocks may also be wired to a recorder for obtaining a continuous record (Korty and Kohnke, B, 1953).

The accuracy claimed by the developers of soil-moisture blocks is at best 1 percent by weight. All the types of blocks respond with equal rapidity to changes in soil moisture. Soil-moisture blocks are generally considered most dependable in the low-moisture-content range, below field capacity. Under these conditions, the Fiberglas blocks normally have a greater range of operation than the gypsum blocks. At higher moisture contents, between field capacity and saturation, the change in resistance per unit change in moisture content is small, thus reducing the sensitivity of the units. However, some of the apparent inaccuracies at the higher moisture contents may be due also to the loss of free water in sampling during the calibration.

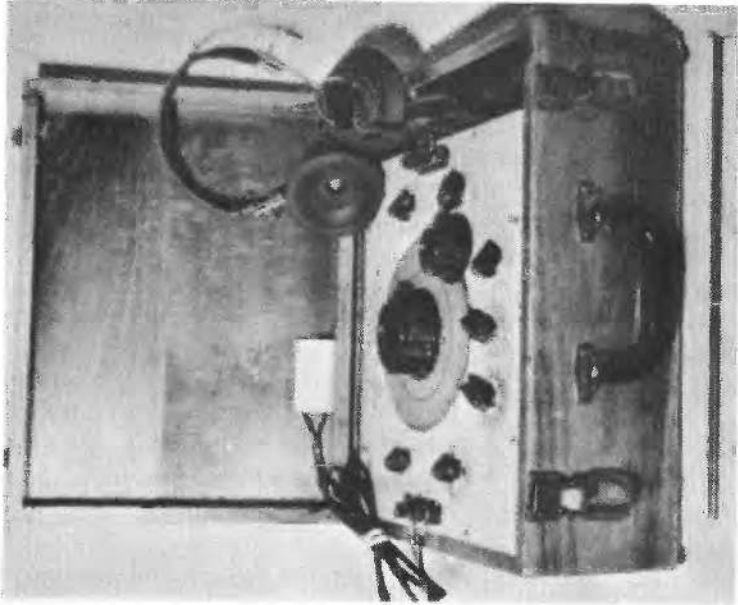

B. Bouroucos bridge and gypsum block.

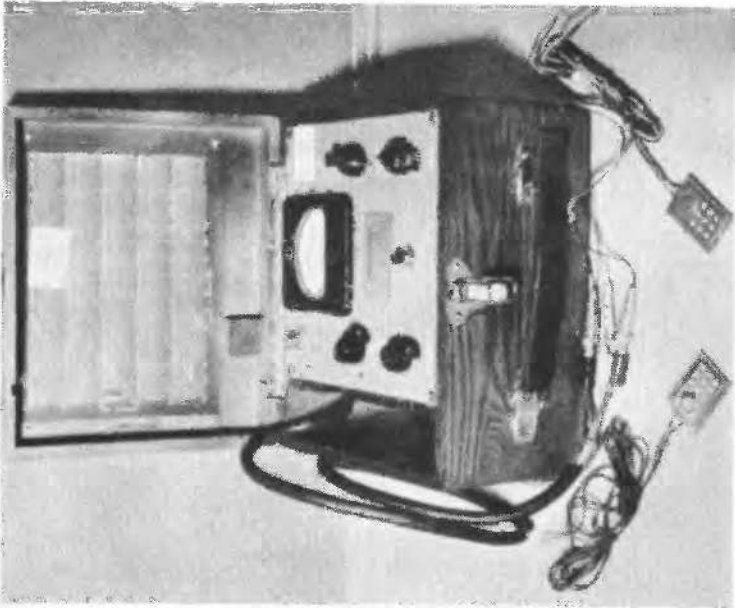

A. Colman meter and Fiberglass block.

FIGURE 5.—ELECTRICAL-RESISTANCE SOIL-MOISTURE BLOCKS AND METERS.

The salt concentration in the soil moisture will materially affect results obtained by use of soil-moisture blocks. A drop in resistance correlates with an increase in salt concentration, but the changes in salt concentration at any single site are generally negligible under most conditions.

Blocks require relatively little effort to install and can be speedily read. The Fiberglas blocks are easier to install because they are thinner and thus may be inserted into the soil without disturbing it much. The speed of taking readings is greatest with the Colman meter. In well-drained soils the blocks are fairly durable, and have a life of 3 to 4 years.

#### HEAT-DIFFUSION

The basic theory of heat-diffusion blocks or cells was reported by Patten (C, 1909). The design for a cell was suggested by Shaw and Bayer (C, 1939a). Kersten (C, 1948), Momin (C, 1947), and Aldous, Lawton, and Mainfort (C, 1952) tested several modifications of the design suggested by Shaw and Bayer.

The heat-diffusion method is based upon the principle that the heat conductivity of a soil varies with its moisture content. The temperature rise caused by an electrically activated heat source installed in the soil is measured by a sensitive temperature-measuring device and is correlated with moisture content. Wet soil will conduct heat rapidly away from the heat source in the cell and will thus have a smaller temperature rise than dry soil.

To date, three general types of heat-diffusion cells have been developed. These are described by Aldous, Lawton, and Mainfort (C, 1952) as a porous-block type in which the electrical elements are imbedded in a porous medium, a direct-contact type in which the electrical elements are directly in contact with the soil, and a modified direct-contact type (thermal-conductivity cell) in which the heater and the temperature-measuring elements are in contact with, but separated by, a portion of the soil being tested.

Use of heat-diffusion cells has indicated that the blocks are sensitive to minor variations in construction. The cells are unsatisfactory when used in soils at moisture contents above field capacity; in high-shrinkage soils, intimate contact between the cell and the soil is lost as the moisture content decreases and erratic results are obtained until the shrinkage limit is reached. The porous-block type of cell has been reported as entirely unsatisfactory because consistent correlation between soil moisture and cell measurements could not be obtained under different soil conditions. The thermal-conductivity cell has been the most satisfactory of the three types but needs further development.

Heat-diffusion cells require calibration for different soils and densities, but Shaw and Baver (C, 1939b) noted that salt concentrations from 100 to 10,000 ppm did not affect the readings. None of the types of cells can be easily installed at depths of more than 5 feet or in undisturbed soil. These cells have not received widespread use and are not presently available from commercial sources.

#### ABSORPTION

Livingston and Koketsu (D, 1920) developed porous points or blocks that would absorb moisture from the adjacent area when installed in the soil. The soil moisture was then estimated from the change in weight of the points or blocks. Wilson (D, 1927) and Stoeckeler (D, 1937) did additional work on the use of absorption blocks. Davis and Slater (D, 1942) used an absorption block consisting of a porous chamber that contained a close-fitting plug that could be removed for weighing. The plug overcame the disadvantage of having to disturb the installations in the soil each time the blocks were to be weighed. Dimbleby (D, 1954) developed a pencil-type absorption block which is stuck into the soil; the moisture contents are estimated from the color changes of the "pencil."

This method is more qualitative than quantitative and has considerable inherent error; it has never been used extensively.

#### TENSIOMETRIC

A tensiometer consists of a porous point or cup (usually ceramic) connected through a tube to a pressure-measuring device. The system is filled with water and the water in the point or cup comes into equilibrium with the moisture in the surrounding soil. Water flows out of the point as the soil dries and creates greater tension, or back into the point as the soil becomes wetter and has less tension. These changes in pressure, or tension, are indicated on a measuring device, usually a Bourdon-tube vacuum gage or a mercury manometer. (See fig. 6.) The tensiometer may also be attached to a pressure recorder (Richards and Gardner, E, 1936) or to an electronic pressure transducer to maintain a continuous record of tension changes. Tensiometers are available in lengths of 6 inches to 4 feet, but probably could be manufactured in longer lengths if desired. Specially constructed tensiometers have been installed to depths of 15 feet (Richards, L. A., E, 1942). Multiple tensiometers, for determining tension data at several depths by use of a single probe, were developed by L. A. Richards (E, 1954).

Tensiometers were probably most fully developed by L. A. Richards (E, 1942). They are most useful for measuring moisture content

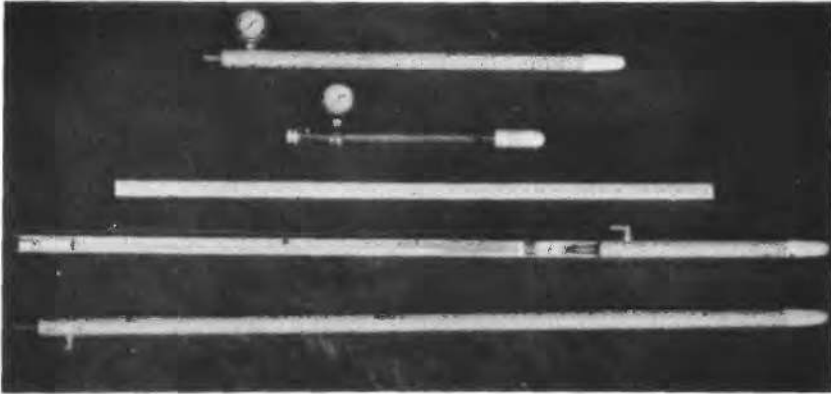


FIGURE 6.—Tensiometers. Top, vacuum-gage type. Bottom, mercury-manometer type.

of tensions below approximately 0.9 atmosphere. Such tensions will, on the average, correspond to a range in moisture content from slightly below field capacity to saturation. At the higher tensions found in drier soils, tensiometers become inoperative because air enters the system through the porous point. To determine the moisture content with a tensiometer, the relation between moisture tension and moisture content must be known. This relation may be found in the laboratory from a moisture-tension curve constructed by means of a pressure-membrane or porous-plate apparatus or by collecting soil samples in the area surrounding a tensiometer installation and relating the moisture content of the samples to the tensiometer reading obtained concurrently. L. A. Richards (E, 1949) noted that the vacuum-gage type of instrument will generally provide an accuracy within 2 percent, and the mercury-manometer type is even more accurate.

Tensiometers are affected by temperature. The temperature gradients between the porous point of the tensiometer and the soil may cause variations in the tension readings.

The salt concentration in the soil or in the pore water seems to affect tensiometric methods less than electrical methods. S. J. Richards (E, 1938) pointed out that tensiometers exhibit considerable hysteresis effect; they tend to give a higher soil-moisture tension during soil drying than during soil wetting. In 1949, L. A. Richards noted that this effect is not too serious a disadvantage because the wetting cycle is usually rather short in comparison with the drying cycle. Ewart and Bayer (B, 1950) reported a serious disadvantage because of the timelag in response to soil-moisture changes. Tensiometers have exhibited lags of half an hour to many hours in indicating changes in tension caused by changes in moisture content. Recent

studies by the hydrologic laboratory of the U.S. Geological Survey, Denver, Colo., showed that semipermeable plastic points provide much faster response than ceramic points.

The tensiometer is probably the easiest to install and the most rapidly read of all soil-moisture measuring equipment. However, at present, tensiometers are not suitable for installation at depths greater than about 20 feet.

#### PENETRATION

Moisture content may be estimated by relating it to the force required to push an instrument through the soil. Allyn and Work (F, 1941a) developed an instrument they called the "availameter" that measured the force required to drive a pair of needles into a soil core. Allyn (F, 1942) reported a newly developed soil probe with which he found moisture-content estimation possible within 0.5 percent. Many others, especially in the Netherlands, have developed equipment for measuring penetration resistance (Hvorslev, F, 1949).

Penetration equipment must be calibrated for each type of soil to obtain the relation between penetration resistance and moisture content. The method is very fast, although the equipment is difficult to use in gravelly or stony soils.

Penetration equipment designed by the Waterways Experiment Station, Corps of Engineers, Vicksburg, Miss., consists of a pipe with a point at the bottom and a T-handle containing a pressure-indicating device at the top. Depth of penetration is limited by the amount of force available.

#### RADIOACTIVE

Belcher, Cuykendall, and Sack (G, 1950) apparently introduced the radioactive method of measuring soil moisture in 1950. This method is based on the principle of measuring the slowing of neutrons emitted into the soil from a fast-neutron source. The energy loss is much greater in neutron collisions with atoms of low atomic weight and is proportional to the number of such atoms present in the soil. The effect of such collisions is to change a fast neutron to a slow neutron. Hydrogen, which is the principal element of low atomic weight found in the soil, is largely contained in the molecules of the water in the soil. The number of slow neutrons detected by a counter tube after emission of fast neutrons from a radioactive source tube is electronically indicated on a scaler.

The radioactive method indicates the amount of water per unit volume of soil. The dry density of the soil must be determined if moisture content in percent by weight is desired. The U.S. Corps of Engineers (G, 1955b) stated that the soil volume measured by this



method is bulb shaped and has a radius of 6 to 15 inches, according to the moisture content and density of the soil.

One type of equipment presently available is shown in figure 7.



FIGURE 7.—Radioactive soil-moisture meter.

It consists of: a portable battery-powered scaler having five glow-tube decade counters that can accumulate as much as 99,999 counts, and a spring-wound timer that has a time-counting range of  $\frac{1}{2}$  to 5 minutes and weighs approximately 35 pounds; and a depth moisture probe having a 5-millicurie fast-neutron source of radium 226 and finely ground beryllium (half-life, 1,620 years) within a probe 15 inches in length and  $1\frac{1}{2}$  inches in diameter and having a weight of 45 pounds when complete with a lead and paraffin shield 6 inches in diameter and 8 inches long. These meters have been used with as much as 200 feet of cable.

Most investigators have reported an accuracy within 1 to 2 percent by volume. However, to obtain this accuracy, it is recommended that the probe be calibrated in the type of soil to be tested and the type of casing into which the probe is to be lowered.

Salt concentration in the soil moisture does not materially affect the data obtained by the radioactive method. Temperature usually has been considered ineffective in the radioactive method, but there

is some evidence of a temperature effect. Readings close to the surface are affected by the position of the probe with respect to the air-soil interface; proximity of the interface causes lower counts than are characteristic for a particular moisture content at greater depth. Timing errors may be kept to a minimum by using a standard-count timing cycle of 2 minutes. Access tubes must be kept free of excess moisture, or erroneous readings will result. One must remember that the type and size of casing and the method of installation of the access tubes have a considerable effect on the readings, and new calibration curves should be obtained for each type of installation. Calibration may be done by means of gravimetric sampling in the area surrounding an access tube, by using large samples in the laboratory, and by use of boric-acid solutions of various concentrations.

There is some radioactive hazard from use of this equipment. The danger from exposure is proportional to the distance between the source and the operator and to the length of time of exposure. Thus, most of the danger can be minimized by proper handling of the equipment.

The radioactive method is time consuming, especially if the time required for calibration is considered. The equipment is heavy and delicate and equipment failures are likely. Considerable time is lost in repairs and in the recalibration needed after most repairs. The repair of the scaler may require the services of an electronics specialist.

#### SUMMARY

Of the methods described, only the gravimetric, electrical-resistance, tensiometric, and radioactive methods are used commonly. All methods have their disadvantages, as well as advantages, and the ideal method that will give accurate, reliable, and rapid measurements in place has yet to be developed.

The gravimetric method is considered the best for most soil-moisture-measurement problems requiring one-time moisture-content data. Because the gravimetric method provides data directly, the effort and possibility of error associated with the conversion of indirect readings (electrical-resistance, radioactive, and tensiometric) to moisture content are avoided. The gravimetric method requires less experience than the indirect methods, but also requires more effort under many conditions. Considerable gravimetric sampling is required for calibration even if one of the indirect methods is used. Some indirect method may have to be used if continuous or frequent moisture-content readings are necessary.

Radioactive methods are probably the best for obtaining repeated measurements of soil moisture in the field. Because of the delicate

equipment and the work of calibration, this method requires sufficient effort and expense that one must consider seriously whether gravimetric sampling would not be a satisfactory substitute.

## SELECTED REFERENCES

### A. GRAVIMETRIC METHODS

- Bethlahmy, Nedavia, 1952, A method for approximating the water content of soils: *Am. Geophys. Union Trans.*, v. 33, pt. 1, p. 699-706.
- Bidwell, G. L., and Sterling, W. F., 1925, Preliminary notes on the direct determination of moisture: *Assoc. Official Agr. Chemists Jour.*, v. 8, p. 295-301.
- Broadfoot, W. M., 1954a, Core vs. bulk samples in soil-moisture tension analysis: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 22-25.
- 1954b, Procedures and equipment for determining soil bulk density: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 2-11.
- Carter, C. E., 1938, A field method for determining soil moisture: *Australian Forestry*, v. 3, p. 15-16.
- Cline, M. G., 1944, Principles of soil sampling: *Soil Sci.*, v. 58, p. 275-285.
- Coile, T. S., 1936, Soil samplers: *Soil Sci.*, v. 42, p. 139-142.
- Davisson, B. S., and Sivaslian, G. K., 1918, The determination of moisture in soils: *Am. Soc. Agronomy Jour.*, v. 10, p. 198-204.
- Ferguson, E. R., and Duke, W. B., 1954, Devices to facilitate King-tube soil-moisture sampling: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 26-29.
- Henrie, J. O., 1950, A direct method of computing and correcting the equivalent depth of water: *Agr. Eng.*, v. 31, p. 290-291.
- Hoover, M. D., Olson, D. F., Jr., and Metz, L. J., 1954, Soil sampling for pore space and percolation: U.S. Dept. Agriculture, Southeastern Forest Expt. Sta. Occasional Paper 42.
- Hvorslev, M. J., 1949, Subsurface exploration and sampling of soils for civil engineering purposes—Am. Soc. Civil Engineers Research Project Rept.: U.S. Corps Engineers, Waterways Expt. Sta., 521 p.
- Lutz, H. J., 1944, Determination of certain physical properties of forest soils, pt. 1, Methods utilizing samples collected in metal cylinders: *Soil Sci.*, v. 57, p. 475-487.
- Noyes, H. A., and Trost, J. F., 1920, Determination of moisture in field samples of soil: *Assoc. Official Agr. Chemists Jour.*, v. 4, p. 95-97.
- Reed, J. F., and Rigney, J. A., 1947, Soil sampling from fields of uniform and nonuniform appearance and soil types: *Am. Soc. Agronomy Jour.*, v. 39, p. 26-40.
- Reinhart, K. G., 1954, Relation of soil bulk density to moisture content as it affects soil-moisture records: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 12-21.
- U.S. Bureau of Plant Industry, Soils, and Agricultural Engineering, 1951, *Soil Survey manual*: U.S. Dept. Agriculture Handb. 18, p. 327-338.
- Van Bavel, C. H. M., and Gilbert, M. J., 1954, Discussion of A method for approximating the water content of soils, by Nedavia Bethlahmy: *Am. Geophys. Union Trans.*, v. 35, p. 168-169.
- Velmeyer, F. J., 1929, An improved soil-sampling tube: *Soil Sci.*, v. 27, p. 147-152.

- Whitney, M. A., 1894, Instructions for taking samples of soil for moisture determination: U.S. Dept. Agriculture, Div. Soils Circ. 2.
- 1896, Methods of the mechanical analysis of soils and of the determination of the amount of moisture in soils in the field: U.S. Dept. Agriculture, Div. Soils Bull. 4, 24 p.

### B. ELECTRICAL-RESISTANCE METHODS

- Anderson, A. B. C., 1943, A method of determining soil-moisture content based on the variation of the electrical capacitance of soil, at a low frequency, with moisture content: *Soil Sci.*, v. 56, p. 29-41.
- Anderson, A. B. C., and Edlefsen, N. E., 1942a, Laboratory study of the response of 2- and 4-electrode plaster of paris blocks as soil-moisture content indicators: *Soil Sci.*, v. 53, p. 413-428.
- 1942b, The electrical capacity of the 2-electrode plaster of paris block as an indicator of soil-moisture content: *Soil Sci.*, v. 54, p. 35-42.
- Bethlahmy, Nedavia, 1951, An alinement chart for use with the Fiberglas soil-moisture instrument: *Soil Sci.*, v. 71, p. 377-380.
- Bouyoucos, G. J., 1949, Nylon electrical resistance unit for continuous measurement of soil moisture in the field: *Soil Sci.*, v. 67, p. 319-330.
- 1950, A practical soil moisture meter as a scientific guide to irrigation practices: *Agronomy Jour.*, v. 42, p. 104-107.
- 1951, The effect of fertilizers on the plaster of paris electrical resistance method for measuring soil moisture in the field: *Agronomy Jour.*, v. 43, p. 508-511.
- 1952, Improvements in the nylon method of measuring soil moisture in the field: *Agronomy Jour.*, v. 44, p. 311-314.
- 1953, More durable plaster of paris moisture blocks: *Soil Sci.*, v. 76, p. 447-451.
- 1954a, Electrical resistance methods as finally perfected for making continuous measurement of soil moisture content under field conditions: *Michigan Agr. Expt. Sta. Quart. Bull.*, v. 37, p. 132-149.
- 1954b, New type electrode for plaster of paris moisture blocks: *Soil Sci.*, v. 78, p. 339-342.
- Bouyoucos, G. J., and Crabb, G. A., Jr., 1949, Measurement of soil moisture by the electrical resistance method: *Agr. Eng.*, v. 30, p. 581-583.
- Bouyoucos, G. J., and Mick, A. H., 1939, A method for obtaining a continuous measurement of soil moisture under field conditions: *Science*, v. 89, p. 252.
- 1940a, An electrical resistance method for the continuous measurement of soil moisture under field conditions: *Michigan Agr. Expt. Sta. Tech. Bull.* 172, 38 p.
- 1940b, Comparison of absorbent materials employed in the electrical resistance method of making a continuous measurement of soil moisture under field conditions: *Soil Sci. Soc. America Proc.*, v. 5, p. 77-79.
- 1947, Improvements in the plaster of paris absorption block electrical resistance method for measuring soil moisture under field conditions: *Soil Sci.*, v. 63, p. 455-465.
- 1948a, A comparison of electrical resistance units for making continuous measurement of soil moisture under field conditions: *Plant Physiology*, v. 23, p. 532-543.
- 1948b, A fabric absorption unit for continuous measurement of soil moisture in the field: *Soil Sci.*, v. 66, p. 217-232.

- Briggs, L. J., 1899, Electrical instruments for determining the moisture, temperature, and soluble salt content of soils: U.S. Dept. Agriculture, Div. Soils Bull. 15, p. 1-35.
- Carlson, C. A., 1953, Moisture equilibration in natural cores during laboratory calibration of Fiberglas soil-moisture units: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 128, p. 31-39.
- 1954, Comparison of laboratory and field calibration of Fiberglas moisture units: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 34-42.
- Colman, E. A., 1946, The place of electrical soil-moisture meters in hydrologic research: Am. Geophys. Union Trans., v. 27, p. 847-853.
- 1950, Manual of instructions for use of the Fiberglas soil-moisture instrument: U.S. Dept. Agriculture, California Forest Range Expt. Sta., 20 p.
- Colman, E. A., and Hendrix, T. M., 1949, The Fiberglas electrical soil-moisture instrument: Soil Sci., v. 67, p. 425-438.
- Doss, B. D., and Broadfoot, W. M., 1954, Terminal panel for electrical soil-moisture instruments: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 30-31.
- Dreibelbis, F. R., and Youker, R. E., 1951, An improved soil-moisture measuring unit for hydrologic studies: Am. Geophys. Union Trans., v. 32, p. 447-449.
- Edlefsen, N. E., 1933, A glass wool cell for measuring aqueous vapor pressure of soils: Rev. Sci. Instruments, v. 4, p. 345-346.
- Edlefsen, N. E., and Anderson, A. B. C., 1941, The four-electrode resistance method for measuring soil-moisture content under field conditions: Soil Sci., v. 51, p. 367-376.
- Edlefsen, N. E., Anderson, A. B. C., and Marcum, W. B., 1942, Field study of the response of the electrical resistance of 2- and 4-electrode plaster of paris blocks to variations on soil moisture: Soil Sci., v. 54, p. 275-279.
- Ewart, G. Y., and Bayer, L. D., 1950, Salinity effects on soil moisture-electrical resistance relationships: Soil Sci. Soc. America Proc., v. 15, sec. 1, p. 56-63.
- Fletcher, J. E., 1939, A dielectric method for determining soil moisture: Soil Sci. Soc. America Proc., v. 4, sec. 1, p. 84-88.
- Gardner, F. D., 1898, The electrical method of moisture determination in soils: U.S. Dept. Agriculture, Div. Soils Bull. 12.
- Graf, F. H., and Johnson, R. H., 1930, Study of methods for determining moisture in sand: Am. Soc. Testing Materials Proc., pt. 1, p. 578.
- Haise, H. R., and Kelley, O. J., 1946, Relation of moisture tension to heat transfer and electrical resistance in plaster of paris blocks: Soil Sci., v. 61, p. 411-422.
- Hendrix, T. M., and Colman, E. A., 1951, Calibration of Fiberglas soil-moisture units: Soil Sci., v. 71, p. 419-427.
- Horton, J. S., 1955, Use of electrical soil-moisture units in mountain soils: Western Snow Conf. Proc., 23d Ann. Mtg., Portland, Oreg., 1955, p. 20-26
- Johnson, W. R., 1929, Comparison of methods of determining moisture in sands: Am. Concrete Inst. Proc., v. 25, p. 261.
- Kelley, O. J., 1944, A rapid method of calibrating various instruments for measuring soil moisture *in situ*: Soil Sci., v. 58, p. 433-440.
- Kirkham, Don, and Taylor, G. S., 1949, Some tests of a four-electrode probe for soil moisture measurement: Soil Sci. Soc. America Proc., v. 14, p. 42-46.
- Korty, B. L., and Kohnke, Helmut, 1953, Recording soil moisture automatically: Soil Sci. Soc. America Proc., v. 17, p. 307-310.

## U-18 CONTRIBUTIONS TO THE HYDROLOGY OF THE UNITED STATES

- LeCompte, S. B., Jr., 1952, An instrument for measuring soil moisture: New Jersey State Horticultural Soc., Horticultural News, v. 33, p. 2563, 2568, 2572.
- Mackanness, F. G., and Rowse, R. W., 1954, Equipment for installing gypsum moisture blocks: Agr. Eng., v. 35, p. 337.
- Mather, Bryant, 1945, Determination of surface moisture in fine aggregate: Eng. News-Record, v. 134, p. 402-403.
- McCorkle, W. H., 1931, Determination of soil moisture by the method of multiple electrodes: Texas Agr. Expt. Sta. Bull. 426.
- Musgrave, G. W., 1942, A modified resistance block for soil moisture measurement: Agronomy Jour., v. 34, p. 284-285.
- Palpant, E. H., 1953, An inserter for Fiberglas soil-moisture units: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 128, p. 16-20.
- Palpant, E. H., and Lull, H. W., 1953, Comparison of four types of electrical resistance instruments for measuring soil moisture: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 128, p. 2-15.
- Palpant, E. H., Thames, J. L., and Helmers, A. E., 1953, Switch shelters for use with soil-moisture units: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 128, p. 21-30.
- Reinhart, K. G., 1953, Installation and field calibration of Fiberglas soil-moisture units: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 128, p. 40-48.
- Remson, Irwin, and Fox, G. S., 1955, The displacement of calibration curves for electrical soil-moisture units: Am. Geophys. Union Trans., v. 36, p. 821-826.
- Rowland, E. F., Fagan, T. D., and Crabb, G. A., Jr., 1954, A slide rule for soil moisture determinations: Am. Soc. Agr. Engineers Jour., v. 35, p. 163-164.
- Slater, C. S., 1942, A modified resistance block for soil moisture measurement: Agronomy Jour., v. 34, p. 284-285.
- Southern Forest Experiment Station, 1953, Soil-moisture measurement with the Fiberglas instrument: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 128, 48 p.
- Stackhouse, J. M., and Youker, R. E., 1954, Evaluation of the accuracy of Fiberglas-gypsum blocks for measuring soil moisture changes: Agronomy Jour., v. 46, p. 405-407.
- Tanner, C. B., Abrams, E., and Zubriski, J. C., 1949, Gypsum moisture-block calibration based on electrical conductivity in distilled water: Soil Sci. Soc. America Proc., v. 13, p. 62-65.
- Tanner, C. B., and Hanks, R. J., 1953, Moisture hysteresis in gypsum moisture blocks: Soil Sci. Soc. America Proc., v. 16, p. 48-51.
- U.S. Corps of Engineers, 1958, Evaluation of electric meters for determining moisture content of fine aggregate: Waterways Expt. Sta. Tech. Rept. 6-476, 22 p.
- U.S. Weather Bureau, 1949, Installation and operation of a soil-moisture station: U.S. Dept. Commerce, Weather Bur., provisional, 17 p.
- Wallihan, E. F., 1945, Studies of the dielectric method of measuring soil moisture: Soil Sci. Soc. America Proc., v. 10, p. 39-40.
- Waters, C. R., 1944, New method to determine moisture content in sand: Eng. News-Record, v. 132, p. 341.
- Weaver, H. A., and Jamison, V. C., 1951, Limitations in the use of electrical resistance soil moisture units: Agronomy Jour., v. 43, p. 602-605.

- Whitney, Milton, Gardner, F. D., and Briggs, L. J., 1897, An electrical method of determining the moisture content of arable soils: U.S. Dept. Agriculture, Div. Soils Bull. 6, 26 p.
- 1898, An electrical method of determining the moisture content of arable soils: U.S. Dept. Agriculture, Div. Soils Bull. 12.
- Woods, Frank, and Hopkins, Walt, 1954, Phone-jack terminals for soil-moisture units: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, p. 32-33.
- Youker, R. E., and Dreibelbis, F. R., 1951, An improved soil-moisture measuring unit for hydrologic studies: Am. Geophys. Union Trans., v. 32, p. 447-449.

### C. HEAT-DIFFUSION METHODS

- Aldous, W. M., Lawton, W. L., and Mainfort, R. C., 1952, The measurement of soil moisture by heat diffusion: U.S. Civil Aeronautics Adm. Tech. Devel. Rept. 165, 17 p.
- Johnston, C. N., 1942, Water-permeable jacketed thermal radiators as indicators of field capacity and permanent wilting percentage in soils: Soil Sci., v. 54, p. 123-126.
- Kersten, M. S., 1948, The thermal conductivity of soils: Highway Research Board Proc., v. 28, p. 391-409.
- Momin, A. U., 1947, A new simple method of estimating the moisture content of soil *in situ*: Indian Jour. Agri. Sci., v. 17, pt. 2, p. 81-85.
- Patten, H. E., 1909, Heat transference in soils: U.S. Dept. Agriculture, Div. Soils Bull. 59, p. 3-54.
- Shaw, B. T., and Bayer, L. D., 1939a, An electrothermal method for following moisture changes of the soil *in situ*: Soil Sci. Soc. America Proc., v. 4, p. 78-83.
- 1939b, Heat conductivity as an index of soil moisture: Agronomy Jour., v. 31, p. 886-891.

### D. ABSORPTION METHODS

- Davidson, A. L. C., and Schofield, R. K., 1953, Measurement of the suction of soil water by Portland stone absorbers calibrated by a new method for determining vapour pressures near to saturation: Jour. Agr. Sci., v. 32, pt. 4, p. 413-427.
- Davis, W. E., and Slater, C. S., 1942, A direct weighing method for sequent measurements of soil moisture under field conditions: Agronomy Jour., v. 34, p. 285-287.
- Dimbleby, G. W., 1954, A simple method for the comparative estimation of soil water: Plant and Soil, v. 5, p. 143-154.
- Geffen, T. M., and Gladfelter, R. E., 1952, A note on the x-ray absorption method of determining fluid saturation in cores: Am. Inst. Mining Metall. Engineers, Petroleum Branch, Trans., v. 195, p. 322-323.
- Livingston, B. E., and Koketsu, Riichiro, 1920, The water-supplying power of the soil as related to the wilting of plants: Soil Sci., v. 9, p. 469-485.
- Livingston, B. E., and Wilson, J. D., 1932, Wilting and withering of grasses in greenhouse cultures as related to water-supplying power of the soil: Plant Physiology, v. 7, p. 1-35.
- Richards, L. A., and Weaver, L. R., 1943, The sorption block soil moisture meter and hysteresis effects related to its operation: Agronomy Jour., v. 35, p. 1002-1011.

- Stoeckeler, J. H., 1937, Measuring soil moisture in the forest nursery: U.S. Dept. Agriculture, Forest Service, Lake States Forest Expt. Sta. mimeo. rept., 4 p.
- Wilson, J. D., 1927, The measurement and interpretation of the water-supplying power of the soil with special references to lawn grasses and some other plants: *Plant Physiology*, v. 2, p. 385-440.

#### E. TENSIOMETRIC METHODS

- Ashcroft, G., and Taylor, S. A., 1953, Soil moisture tension as a measure of water removal rate from soil and its relation to weather factors: *Soil Sci. Soc. America Proc.*, v. 17, p. 171-174.
- Boynton, Damon, 1939, Capillary tension as a measure of the pore space unoccupied by water in some dense orchard soils: *Soil Sci.*, v. 47, p. 347-352.
- Colman, E. A., Hanawalt, W. B., and Burck, C. R., 1946, Some improvements in tensiometer design: *Agronomy Jour.*, v. 38, p. 455-458.
- Edlefsen, N. E., Hendrickson, A. H., and Veihmeyer, F. J., 1943, Use of tensiometers in measuring availability of water to plants: *Plant Physiology*, v. 18, p. 66-78.
- Haise, H. R., and Kelley, O. J., 1950, Causes of diurnal fluctuations of tensiometers: *Soil Sci.*, v. 70, p. 301-313.
- Hunter, A. S., and Kelley, O. J., 1946, Changes in construction of soil moisture tensiometers for field use: *Soil Sci.*, v. 61, p. 215-217.
- Kenworthy, A. L., 1945, Cup conductance, field and laboratory calibration of tensiometers employing inexpensive porous cups: *Soil Sci.*, v. 59, p. 397-404.
- Miller, R. D., 1951, A technique for measuring soil-moisture tensions in rapidly changing systems: *Soil Sci.*, v. 72, p. 291-301.
- Neal, O. R., Richards, L. A., and Russell, M. B., 1937, Observations on moisture conditions in lysimeters: *Soil Sci. Soc. America Proc.*, v. 2, p. 35-44.
- Richards, L. A., 1942, Soil moisture tensiometer materials and construction: *Soil Sci.*, v. 53, p. 241-248.
- 1949, Methods of measuring soil moisture tension: *Soil Sci.*, v. 68, p. 95-112.
- 1954, Multiple tensiometer for determining the vertical component of the hydraulic gradient in soil: *Soil Sci. Soc. America Proc.*, v. 18, p. 7-10.
- Richards, L. A., and Gardner, Willard, 1936, Tensiometers for measuring the capillary tension of soil water: *Agronomy Jour.*, v. 28, p. 352-358.
- Richards, L. A., and Huberty, M. R., 1941, Moisture studies under citrus using tensiometers: *Am. Soc. Horticultural Sci. Proc.*, v. 39, p. 73-79.
- Richards, L. A., and Neal, O. R., 1936, Some field observations with tensiometers: *Soil Sci. Soc. America Proc.*, v. 1, p. 71-91.
- Richards, L. A., Neal, O. R., and Russell, M. B., 1939, Observations on moisture conditions in lysimeters: *Soil Sci. Soc. America Proc.*, v. 4, sec. 1, p. 55-59.
- Richards, L. A., and Pearson, R. W., 1939, A soil moisture tensiometer with a compact manometer: *Agronomy Jour.*, v. 31, p. 986-989.
- Richards, L. A., and Wadleigh, C. H., 1952, Soil water and plant growth, in Shaw, B. T., ed., *Soil physical conditions and plant growth*: New York, Academic Press, p. 73-252.
- Richards, L. A., Russell, M. B., and Neal, O. R., 1937, Further developments on apparatus for field moisture studies: *Soil Sci. Soc. America Proc.*, v. 2, p. 55-64.
- Richards, S. J., 1938, Soil moisture content calculations from capillary tension records: *Soil Sci. Soc. America Proc.*, v. 3, sec. 1, p. 57-64.



- Richards, S. J., and Hagan, R. M., 1958, Soil moisture tensiometer: California Agr. Expt. Sta. Leaflet 100.
- Richards, S. J., and Lamb, John, Jr., 1937, Field measurements of capillary tension: *Agronomy Jour.*, v. 29, p. 772-780.
- Rogers, W. S., 1935, A soil moisture meter depending on the capillary pull of the soil: *Agr. Sci. Jour.*, v. 25, p. 326-343.
- Russell, M. B., Davis, F. E., and Blair, R. A., 1940, The use of tensiometers for following soil moisture conditions under corn: *Agronomy Jour.*, v. 32, p. 922-930.
- Schofield, R. K., 1935, The pF of the water in soil: *Internat. Cong. Soil Sci.*, 3d., *Trans.*, v. 2, p. 37-48.
- Scofield, C. S., 1945, The measurement of soil water: *Agr. Research Jour.*, v. 71, p. 375-402.
- Stoekeler, J. H., and Aamodt, Einar, 1940, Use of tensiometers in regulating watering in forest nurseries: *Plant Physiology*, v. 15, p. 589-607.
- Veihmeyer, F. J., Edlefsen, N. E., and Hendrickson, A. H., 1943, Use of tensiometers in measuring availability of water to plants: *Plant Physiology*, v. 18, p. 66-78.
- Wallihan, E. F., 1939, Use of tensiometers for soil moisture measurement in ecological research: *Ecology*, v. 20, p. 403-412.

#### F. PENETRATION METHODS

- Allyn, R. B., 1942, A calibrated soil probe for measuring field soil moisture: *Soil Sci.*, v. 53, p. 273-285.
- Allyn, R. B., and Work, R. A., 1941a, The avallameter and its use in soil moisture control, pt. 1, The instrument and its use: *Soil Sci.*, v. 51, p. 307-319.
- 1941b, The avallameter and its use in soil moisture control, pt. 2, Calibration methods: *Soil Sci.*, v. 51, p. 391-406.
- Hvorslev, M. J., 1949, Subsurface exploration and sampling of soils for civil engineering purposes—Am. Soc. Civil Engineers Research Project Rept.: U.S. Corps Engineers, Waterways Expt. Sta., p. 34-45.

#### G. RADIOACTIVE METHODS

- American Society for Testing Materials, 1952, Symposium on the use of radioisotopes in soil mechanics: *Am. Soc. Testing Materials Spec. Tech. Pub.* 134, 34 p.
- Belcher, D. J., Cuykendall, T. R., and Sack, H. S., 1950, The measurement of soil moisture and density by gamma ray scattering: U.S. Civil Aeronautics Adm. Tech. Devel. Rept. 127, 20 p.
- 1952, Nuclear meters for measuring soil density and moisture in thin surface layers: U.S. Civil Aeronautics Adm. Tech. Devel. Rept. 161, 8 p.
- 1953, Modifications and tests of radioactive probes for measuring soil moisture and density: U.S. Civil Aeronautics Adm. Tech. Devel. Rept. 194, 13 p.
- Belcher, D. J., Herner, R. C., Cuykendall, T. R., and Sack, H. S., 1953, Use of radioactive material to measure soil moisture and density: *Am. Soc. Testing Materials Spec. Tech. Pub.* 134, p. 10-22.
- Berdan, D., and Bernhard, R. K., 1950, Pilot studies of soil density measurements by means of X-rays: *Am. Soc. Testing Materials Proc.*, v. 50, p. 1328-1342.

U-22 CONTRIBUTIONS TO THE HYDROLOGY OF THE UNITED STATES

- Bernhard, R. K., and Chasek, M., 1955, Soil density determination by direct transmission of gamma rays; Am. Soc. Testing Materials Ann. Mtg., 58th, Atlantic City 1955, 18 p.
- Brocard, M. J., 1955, Application des isotopes radioactifs a la mesure de la densité et de la teneur en eau des matériaux et des sols: Inst. Tech. du Batiment et des Travaux Publics Ann., 8th, no. 89, p. 427-450.
- Burn, K. N., 1960, Design and calibration of a neutron moisture meter: Am. Soc. Testing Materials Spec. Tech. Pub. 293, p. 14-26.
- Carey, W. N., Jr., and Reynolds, J. F., 1958, Some refinements in measurement of surface density by gamma ray absorption: Highway Research Board Spec. Rept. 38, p. 1-23.
- Carey, W. N., Jr., Shook, J. F., and Reynolds, J. F., 1960, Evaluation of nuclear moisture-density testing equipment: Am. Soc. Testing Materials, Spec. Tech. Pub. 293, p. 55-78.
- Carlton, P. F., 1957, The application of radioisotopes to the measurement of soil moisture content and density, in *Advances in nuclear engineering*, v. 1: Nuclear Eng. Sci. Conf., 2d, Philadelphia 1957, Proc., p. 403-411.
- 1960, Application of nuclear soil meters to compaction control for airfield pavement construction: Am. Soc. for Testing Materials Spec. Tech. Pub. 293, p. 27-35.
- Church, G. R., and Smith, D. B., 1955, An instrument for the measurement of hydrogen content of soil and bulk material: Atomic Energy Research Establishment [Great Britain] Testing Rept., 8 p.
- Davidson, J. M., Nielsen, D. R., and Perrier, E. R., 1959, Influence of temperature on soil moisture neutron probes: Soil Sci. Soc. America Proc., v. 23, p. 251-252.
- Gardner, W. R., 1951, Determination of soil moisture by neutron scattering: Iowa State Coll., master's thesis, Ames, Iowa.
- Gardner, Wilford, and Kirkham, Don, 1952, Determination of soil moisture by neutron scattering: Soil Sci., v. 73, p. 391-401.
- Gnaedinger, J. P., 1960, Experiences with nuclear moisture and density surface probes on O'Hare Field project: Am. Soc. Testing Materials Spec. Tech. Pub. 293, p. 36-44.
- Goldberg, Irving, Trescony, L. J., Campbell, J. S., Jr., and Whyte, G. J., 1954, Measurement of moisture content and density of soil masses using radioactivity methods, in *Clays and clay minerals*: Natl. Conf. Clays and Clay Minerals, 3d, Houston 1954, Proc., p. 516-548.
- Guéron, Par J., 1954, Exemples d'applications industrielles de la radioactivité: Jour. Physique le Radium, v. 15, p. 65A-73A.
- Holmes, J. W., 1953, Methods of measuring soil water status: Australian Conf. Soil Sci., Adelaide, v. 2, p. 3.
- 1956a, Calibration and field use of the neutron scattering method of measuring soil water content: Australian Jour. Appl. Sci., v. 7, p. 45-58.
- 1956b, Measuring soil water content and evaporation by the neutron scattering method: Netherlands Jour. Agr. Sci. v. 4, p. 30-34.
- Hood, E. E., 1953, Determination of soil moisture content by measurement of neutron scattering: North Carolina State Coll., master's thesis, Raleigh, N.C., 50 p.
- Horonjeff, Robert, and Goldberg, Irving, 1953, Field measurements of soil moisture and density with radioactive materials: Highway Research Board Proc., 32d Ann. Mtg., Pub. 271, 1953, p. 500-511.

- Horonjeff, Robert, and Javete, D. F., 1955, Neutron and gamma-ray methods for measuring moisture content and density to control field compaction: Highway Research Board Bull. 122, p. 23-34.
- Horonjeff, Robert, Goldberg, Irving, and Trescony, L. J., 1954, The use of radioactive material for the measurements of water content and density of soil: California Univ. Street and Highway Conf., 6th Ann. Mtg., Berkeley 1954. Proc., p. 136-147.
- Huyghe, G., and Mortier, P., 1952, Mesure de la densité du béton par absorption du rayonnement gamma: Inst. Interuniversitaire Sci. Nucleaires [Brussels] Ann. Rept., p. 93-100.
- Jensen, W. E., 1953, Use of isotopes in soil testing: Military Engineer, v. 45, p. 275.
- Knight, A. H., and Wright, T. W., 1954, Soil moisture determination by neutron scattering: Oxford, 2d Radioisotope Conf. Proc., v. 2, p. 111-122.
- Krueger, P. G., 1950, Soil density by gamma-ray scattering: Cornell Univ., master's thesis, Ithaca, N.Y., 74 p.
- Kuhn, S. H., 1960, A new technique for compaction control: South African Council for Sci. and Indus. Research Trans., v. 2.
- 1961, A comparison of nuclear and conventional methods for the determination of the moisture content and density of soils: Am. Assoc. State Highway Officials, Denver, Colo., October 10, 11 p., 8 figs.
- Lane, D. A., Torchinsky, B. B., and Spinks, J. W. T., 1953, Determining soil moisture and density by nuclear radiations: Am. Soc. Testing Materials Spec. Tech. Pub. 134, p. 23-34.
- McGuinness, J. L., Dreibelbis, F. R., and Harrold, L. L., 1961, Soil moisture measurements with the neutron method supplement weighing lysimeters: Soil Sci. Soc. America Proc., v. 25, p. 339-342.
- Miles, M. E., 1953, Energy distribution of gamma rays scattered around a soil density probe: Cornell Univ., Eng. Physics Dept. Project Rept., 38 p.
- Mintzer, Sidney, 1960, Comparison of nuclear and sand-cone methods of density and moisture determinations for four New York State soils: Am. Soc. Testing Materials Spec. Tech. Pub. 293, p. 45-54.
- Mortier, P., DeBoodt, M., and DeLeenheer, L., 1952, Mesure de la teneur en eau du sol par diffusion de neutrons: Inst. Interuniversitaire Sci. Nucleaires [Brussels] Ann. Rept., p. 100-105.
- Mortier, P., and DeBoodt, M., 1956, Determination of soil moisture by neutron scattering: Netherlands Jour. Agr. Sci., v. 4, p. 111-113.
- Neville, O. K., and Van Zelst, T. W., 1960, Design and application of the Nuclear-Chicago d/M gauge: Am. Soc. Testing Materials Spec. Tech. Pub. 293, p. 3-13.
- Nielsen, D. R., Kirkham, Don, and Burrows, W. C., 1958, Solids-water-air space relations of some Iowa soils: Iowa State Coll. Jour. Sci., v. 33, p. 111-116.
- Phillips, R. E., Jensen, C. R., and Kirkham, Don, 1959, Use of radiation equipment for plow-layer density and moisture: Soil Sci., v. 89, p. 2-7.
- Pieper, G. F., Jr., 1949, The measurement of moisture content of soil by the slowing of neutrons: Cornell Univ., master's thesis, Ithaca, N.Y., 55 p.
- Roy, S. E., 1956, Nuclear radiation methods for the determination of density and moisture content of soils: Princeton Univ. Civil Eng. Dept. Spec. Rept. 1.
- Sharpe, J., 1953, Measurement of moisture content by neutron counting: British Jour. Appl. Physics, v. 4, p. 93-94.
- Spinks, J. W. T., Lane, D. A., and Torchinsky, B. B., 1951, A new method of moisture determination in soil: Canadian Jour. Technology, v. 29, p. 371-374.

## U-24 CONTRIBUTIONS TO THE HYDROLOGY OF THE UNITED STATES

- Stewart, G. L., and Taylor, S. A., 1957, Field experience with the neutron-scattering method of measuring soil moisture: *Soil Sci.*, v. 83, p. 151-158.
- Stone, J. F., 1955, A portable apparatus for measurement of soil moisture by neutron scattering: Iowa State Coll., master's thesis, Ames, Iowa, 25 p.
- Stone, J. F., Kirkham, Don, and Read, A. A., 1955, Soil moisture determination by a portable neutron scattering moisture meter: *Soil Sci. Soc. America Proc.*, v. 19, p. 419-423.
- Swanson, R. W., 1954, Instrumentation of a field survey meter for soil moisture determination: North Carolina State Coll., master's thesis, Raleigh, N.C., 58 p.
- Timblin, L. O., Jr., 1955, Measurement of subsurface soil density by gamma ray scattering: U.S. Bur. Reclamation, Chem. Eng. Lab. Rept. S1-6, 12 p.
- Underwood, Newton, Van Bavel, C. H. M., and Swanson, R. W., 1954, A portable slow neutron flux meter for measuring soil moisture: *Soil Sci.*, v. 77, p. 339-340.
- U.S. Corps of Engineers, 1955a, Application of nuclear soil meters to the study of seasonal variations in subgrade moisture and density at Lockbourne Air Force Base, Ohio: Ohio River Div. Lab., Mariemont, Ohio. Memo. Rept., 15 p.
- 1955b, Field tests of nuclear instruments for the measurement of soil moisture and density: U.S. Waterways Expt. Sta. Misc. Paper 3-117, 26 p.
- U.S. Department of Agriculture, 1958, Measurement of soil moisture content by the neutron method: U.S. Dept. Agriculture, Agr. Research Service 41-24, 29 p.
- Van Bavel, C. H. M., 1956, Neutron and gamma radiation as applied to measuring physical properties of soil in its natural state: *Internat. Cong. Soil Sci.*, 6th, Paris, 1956, Trans., v. B, p. 355-360.
- Van Bavel, C. H. M., Hood, E. E., and Underwood, Newton, 1954, Vertical resolution in the neutron method for measuring soil moisture: *Am. Geophys. Union Trans.*, v. 35, p. 595-600.
- Van Bavel, C. H. M., Underwood, Newton, and Swanson, R. W., 1956, Soil moisture measurement by neutron moderation: *Soil Sci.*, v. 82, p. 29-41.
- Vomocil, J. A., 1954, *In situ* measurement of soil bulk density: *Agr. Eng.*, v. 35, p. 651-654.
- Weeks, L. V., and Stolzy, J. H., 1958, Neutrons in water-use studies: *California Agriculture*, p. 8, December.
- Yates, E. P., 1950, Soil moisture determination by neutron scattering: Cornell Univ., master's thesis, Ithaca, N.Y., 45 p.

### H. GENERAL METHODS

- Baver, L. D., 1956, Soil water, in *Soil physics*, 3d ed.: New York, John Wiley & Sons, p. 224-303.
- Childs, E. C., 1940, Use of soil moisture characteristics in soil studies: *Soil Sci.*, v. 50, p. 239-252.
- Colle, T. S., 1953, Moisture content of small stones in soil: *Soil Sci.*, v. 75, p. 203-207.
- Conrad, J. P., and Velhmeyer, F. J., 1929, Root development and soil moisture: *Hilgardia*, v. 4, p. 113-134.
- Cummings, R. W., and Chandler, R. F., Jr., 1940, A field comparison of the electrothermal and gypsum block electrical resistance methods with the tensiometer method for estimating soil moisture *in situ*: *Soil Sci. Soc. America Proc.*, v. 5, sec. 1, p. 80-85.

- Jackson, M. L., and Weldon, M. D., 1939, Determination of the weight of water in a soil or subsoil mass in which the moisture content increases with distance from a plant or group of plants: *Agronomy Jour.*, v. 31, p. 116-127.
- Kelley, O. J., Hunter, A. S., Haise, H. R., and Hobbs, C. H., 1946, A comparison of methods of measuring soil moisture under field conditions: *Agronomy Jour.*, v. 38, p. 759-784.
- Kummer, F. A., and Cooper, A. W., 1945, Soil porosity determinations with the air pressure picnometer as compared with the tension method: *Agr. Eng.*, v. 26, p. 21-23.
- Lull, H. W., and Reinhart, K. G., 1955, Soil-moisture measurement: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 140, 56 p.
- Nikiforoff, C. C., 1948, Stony soils and their classification: *Soil Sci.*, v. 66, p. 347-363.
- Olson, D. F., Jr., and Hoover, M. D., 1954, Methods of soil moisture determination under field conditions: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Paper 38, 28 p.
- Page, J. B., 1948, Advantages of the pressure picnometer for measuring the pore space in soils: *Soil Sci. Soc. America Proc.*, v. 12, p. 81-84.
- Russell, E. J., 1950, Soil conditions and plant growth: Longmans, Green and Co., 635 p.
- Russell, J. C., 1939, The effect of surface cover on soil moisture losses by evaporation: *Soil Sci. Soc. America Proc.*, v. 4, p. 65-70, November.
- Russell, M. B., 1950, A simplified air-picnometer for field use: *Soil Sci. Soc. America Proc.*, 1949, v. 14, p. 73-76.
- Slater, C. S., and Bryant, J. C., 1946, Comparison of four methods of soil moisture measurement: *Soil Sci.*, v. 61, p. 131-155.
- Taylor, S. A., 1955, Field determinations of soil moisture: *Agr. Eng.*, v. 36, p. 654-659.
- U.S. Department of Agriculture, 1954, Some field, laboratory, and office procedures for soil-moisture measurement: U.S. Dept. Agriculture, Southern Forest Expt. Sta. Occasional Paper 135, 47 p.
- Van Bavel, C. H. M., Nielsen, D. R., and Davidson, J. M., 1961, Calibration and characteristics of two neutron moisture probes: *Soil Sci. Soc. America Proc.*, v. 25, p. 329-334.
- Woodruff, C. M., 1936, Linear changes in the Shelby loam profile as a function of soil moisture: *Soil Sci. Soc. America Proc.*, v. 1, p. 65-70.